

## Booster proton cavity with voltage reduction during the cycle

M. Plotkin

July 1987

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

BOOSTER PROTON CAVITY WITH  
VOLTAGE REDUCTION DURING THE CYCLE

AD  
*Booster Technical Note*  
No. 85

MARTIN PLOTKIN  
JULY 29, 1987

ACCELERATOR DEVELOPMENT DEPARTMENT  
*Brookhaven National Laboratory*  
Upton, N.Y. 11973

## BOOSTER PROTON CAVITY WITH VOLTAGE REDUCTION DURING THE CYCLE

Martin Plotkin

The specification for the Booster proton accelerating cavity, Cavity III, is a frequency range of 2.4 - 4.2 MHz and a system peak voltage of 90 KV. To achieve 90 KV in a single cavity presents numerous problems: voltage breakdown, space limitations, excessive losses in available ferrites, etc. It was decided to use two cavity stations, each station comprised of two cavities (two accelerating gaps) requiring, for parallel operation from the amplifier, only 22.5 KV peak voltage.

Even with the two stations, the best ferrite tested to date, Philips Ferroxcube 4M2, would be marginal in terms of power loss and amplifier power. But, more importantly, the amount of ferrite required had an inductance which would require gap capacitances to be below the amount required for beam stability.

With 90 KV peak volts at the beginning of the cycle the stable phase angle is about 17°. If we allow the voltage to fall to 70 KV peak at the end of the cycle the phase angle moves only to about 22°. This difference in stable phase is actually better in terms of matching the AGS admittance and, since the ferrite exhibits the highest losses at the end of the cycle, less ferrite is required due to the lower voltage.

Assume, for this system, a linear voltage drop from 90 KV/system at 2.4 MHz to 70 KV/system at 4.2 MHz. For two stations the total voltage per station is 45 KV at the beginning of the cycle and 35 KV at the end of the cycle.

The specification on duty cycle for the proton accelerating system is 50%. Water cooling is capable of handling about 250 - 300 mw/cc. From small sample data on Ferroxcube 4M2 we can design a cavity for the highest ferrite loss frequency, 4.2 MHz. The designs will be done for 400 mw/cc (200 mw/cc average for 50% duty factor) and for 500 mw/cc. From measured data (see Fig. I) 400 mw/cc corresponds to a flux density of 101 gauss at 4.2 MHz; 500 mw/cc corresponds to 110 gauss.

Using the relationship:

$$V = \omega BA \times 10^{-8}$$

$$B = 101 \text{ gauss (400 mw/cc)}$$

$$A = (r_2 - r_1) Nt$$

$$N = \text{number of rings}$$

$$t = 2.5 \text{ cm ring thickness}$$

$$r_2, r_1 = \text{outer and inner radii of the ferrite in cm.}$$

for 50 cm OD rings

23 cm ID rings

and  $V = 35000$  volts

$$N = 38.9$$

Since there are four ferrite stacks/station N must be a multiple of 4.  
Let  $N = 40$ .

Similarly, for 500 mw/cc and 110 gauss  $N = 35.8$  or 36. The actual flux density for 40 rings is  $B = 98$  gauss with a power loss of  $\approx 370$  mw/cc and for 36 rings  $B = 109$  gauss for a power loss of  $\approx 480$  mw/cc. We increase the number of rings for each case to build in a factor of safety  $40 \rightarrow 44$  and  $36 \rightarrow 40$  giving:

44 rings  $B = 89.2$  290 mw/cc  
 40 rings  $B = 98.3$  360 mw/cc

For each of these cases we can calculate the flux density at the low frequency end, 2.4 MHz. Since flux density varies inversely with frequency and directly with voltage, for 45 KV with 44 rings  $B = 201$  gauss with losses of 275 mw/cc and for 40 rings  $B = 221$  gauss with 420 mw/cc. We will assume an average power loss over the cycle which is weighted towards the 4.2 MHz end of the cycle, since the protons are relativistic. The average power losses are calculated here as  $1/3 (P_{2.4} + P_{4.2})$ . Using this averaging the loss during the cycle is 285 mw/cc for 44 rings and 380 mw/cc for 40 rings. Applying a factor of two for a 50% duty cycle the time average losses are:

143 mw/cc for 44 rings  
 190 mw/cc for 40 rings

If, inadvertently, 90 KV total voltage was used for the entire cycle the time averaged loss would be:

44 rings,  $B_{4.2} = 114.9$ ,  $P = 550$  mw/cc = Time average with duty cycle = 229 mw/cc.  
 40 rings,  $B_{4.2} = 126.4$ ,  $P = 800$  mw/cc = Time average with duty cycle = 237 mw/cc.

We have sufficient room in the cavities to provide, for each cavity (2 per station), 24 ferrite rings. With 48 rings and 45 KV per station we can recalculate the flux densities and losses for rings 50x23cm and for 50x25cm.

For 50 x 23 cm at 2.4 MHz  $V = 5.09BN$   
 at 4.2 MHz  $V = 8.9 BN$

For 50 x 25 cm at 2.4 MHz  $V = 4.71BN$   
 at 4.2 MHz  $V = 8.24BN$

Using 48 rings and  $V = 45,000$  (no reduction during cycle)

$d_1$	$f$	$B$	$P$
23 cm	2.4MHz	184 gauss	215 mw/cc
25	2.4	199	270
23	4.2	105	440
25	4.2	114	530

For 23 cm ID the time average over the cycle is 366 mw/cc and for 25 cm ID the time average is 443 mw/cc. Applying the duty factor of 50% these numbers become:

23 cm ID  $P = 183$  mw/cc  
 25 cm ID  $P = 222$  mw/cc

These numbers are even more favorable if we reduce the voltage at 4.2 MHz to 35 KV.

	$d_1$	f	B	P	
90 KV	23 cm	2.4 MHz	184 gauss	215 mw/cc	from previous table
90 KV	25	2.4	199	270	
70 KV	23	4.2	81.9	245	
70 KV	25	4.2	88.5	280	

For 23 cm ID the volume of 48 ferrite rings is 185,800 cc. Using the losses at 2.4 MHz and 4.2 MHz the power per station is

39950 watts at 2.4 MHz (supply V = 22.5 KV)  
 45520 watts at 4.2 MHz (supply V = 17.5 KV)

The impedance per station, from  $Z_{res} = V_{pk}^2/2P$ , is

$Z = 6336 \Omega$  at 2.4 MHz  
 $Z = 3364 \Omega$  at 4.2 MHz

For 25 cm ID the volume of ferrite is 176,715 cc. Using the losses from the table for 90 KV total voltage (22.5 KV supply) at 2.4 MHz and 70 KV total voltage (17.5 KV supply) at 4.2 MHz, the power per station is

47715 watts at 2.4 MHz,  $Z = 5305\Omega$   
 49480 watts at 4.2 MHz,  $Z = 3095\Omega$

For continuous 90 KV total voltage operation, the average losses, at either 23 cm or 25 cm ID, are acceptable but the amplifier power required increases considerably at 4.2 MHz.

23 cm ID P = 81752 Z = 3096 $\Omega$   
 25 cm ID P = 93660 Z = 2702 $\Omega$

We can calculate the amplifier supply current required for the ferrite losses only. The approximate Q is calculated, for a nominal  $\mu = 130$ , as

$$Q = \frac{Z_{res}}{\omega L}$$

For 23 cm ID:  $L/cav = 2 \mu t \ln \frac{d_2}{d_1} \times 10^{-3} \mu h$

where t = ferrite length = 24 x 2.5 cm/cavity.

At 2.4 MHz,  $\mu = 130$  and  $L = 260 \times 60 \ln \frac{50}{23} \times 10^{-3} = 12.1 \mu h$

The total inductance for 2 cavities is parallel is 6.06  $\mu h$ .

At 4.2 MHz,  $\mu = 42.45$  L = 1.98  $\mu h$   
 For 90 KV total, Q 2.4  $\approx 69$   
 For 70 KV total, Q 4.2  $\approx 64.4$

For 23 cm ID the peak feed current at 2.4 MHz, for 22.5 KV and  $Z = 6336\Omega$  is 3.55 amperes. Similarly, at 4.2 MHz and 17.5K the peak current is 5.2A. With

Q values calculated as 69 at 2.4 MHz and 64.4 at 4.2 MHz, the peak circulating currents are 245 amperes at 2.4 MHz and 335 amperes at 4.2 MHz.

Similarly, for 25 cm ID at 2.4 MHz, for 22.5 KV and  $Z = 5305$ ,  $I_{peak} = 4.24$  amps and at 4.2 MHz and 17.5 KV peak  $Z = 3095$  and  $I_{peak} = 5.65$  amperes. Corresponding L and Q values can be calculated as  $L_{2.4} = 10.8 \mu\text{h/cav}$  or  $5.4 \mu\text{h/station}$ , and  $L_{4.2} = 1.77 \mu\text{h/station}$ .

$$\begin{aligned} 90 \text{ KV total } Q_{2.4} &= 65.1 \\ 70 \text{ KV total } Q_{4.2} &= 66.3 \\ I_{pk}^{circ} = Q I_{pk} &= 276 \text{ A at } 2.4 \text{ MHz} \\ &= 375 \text{ A at } 4.2 \text{ MHz} \end{aligned}$$

For 90 KV total voltage at 4.2 MHz:

$$\begin{aligned} \text{ID} = 23 \text{ cm, } Z &= 3096\Omega, I_{pk} = 7.27\text{A, } Q = 59.3, I_{circ} = 431\text{A} \\ \text{ID} = 25 \text{ cm, } Z &= 2702\Omega, I_{pk} = 8.33\text{A, } Q = 57.8, I_{circ} = 481\text{A} \end{aligned}$$

See Table I for summary of results.

In summary, the advantages of decreasing the voltage to the end of the cycle are:

1. A more conservative ferrite design.
2. Lower power in the ferrite.
3. A greater gap capacitance.
4. Fewer ferrites required.
5. More axial space for gap clearance, cooling, valves, etc.
6. Almost uniform power in the ferrite over the cycle rather than the 2:1 increase over the cycle with uniform voltage.

## APPENDIX I

If we wish to use the old AGS cavity shells we are restricted to a maximum ring diameter of 45 cm. For 45 x 23 cm rings, with 70 KV at 4.2 MHz the flux density for 400 mw/cc is 103 gauss. As before N can be calculated as 23.4 and 24 rings would be used. The actual B = 100 gauss for a power loss of 360 mw/cc. The 90 KV, 2.4 MHz, flux density is B = 175 gauss, powerloss = 180 mw/cc. The time average loss is 270 mw/cc, or 135 mw/cc with 50% duty cycle.

L calculates to 5.24  $\mu$ h for the station or a resonant capacitance at 2.4 MHz of 420 pf.

The comparison between the 50 x 23 cm rings and the 45 x 23 cm rings (for the existing cavity shells) is:

	<u>50 x 23</u>	<u>45 x 23</u>
time avg. power loss	602 mc/cc	135 mw/cc
N/sta	44	48
L/sta	5.56 $\mu$ h	5.24 $\mu$ h
C/gap	396 pf	420 pf
Volume/sta	170,317 cc	141,000 cc
Total power at 4.2 MHz	49.4 KW	50.8 KW
Total length of ferrite	110 cm	120 cm

The two cases are very close with 50 x 23 cm rings allowing 30 cm for other uses, but the 45 x 23 could use the existing cavities. Mechanical design considerations must be closely investigated to determine the best choice.

2 RINGS: EACH 1.20 CM LONG  
 1.615 CM ID  
 2.77 CM OD

FXC

1 MILIPS (FERROXUBE)


4M2

DATA 4/21/87

4/20/87

$\uparrow \bar{P}_D/V$

(WATT/CM<sup>3</sup>)

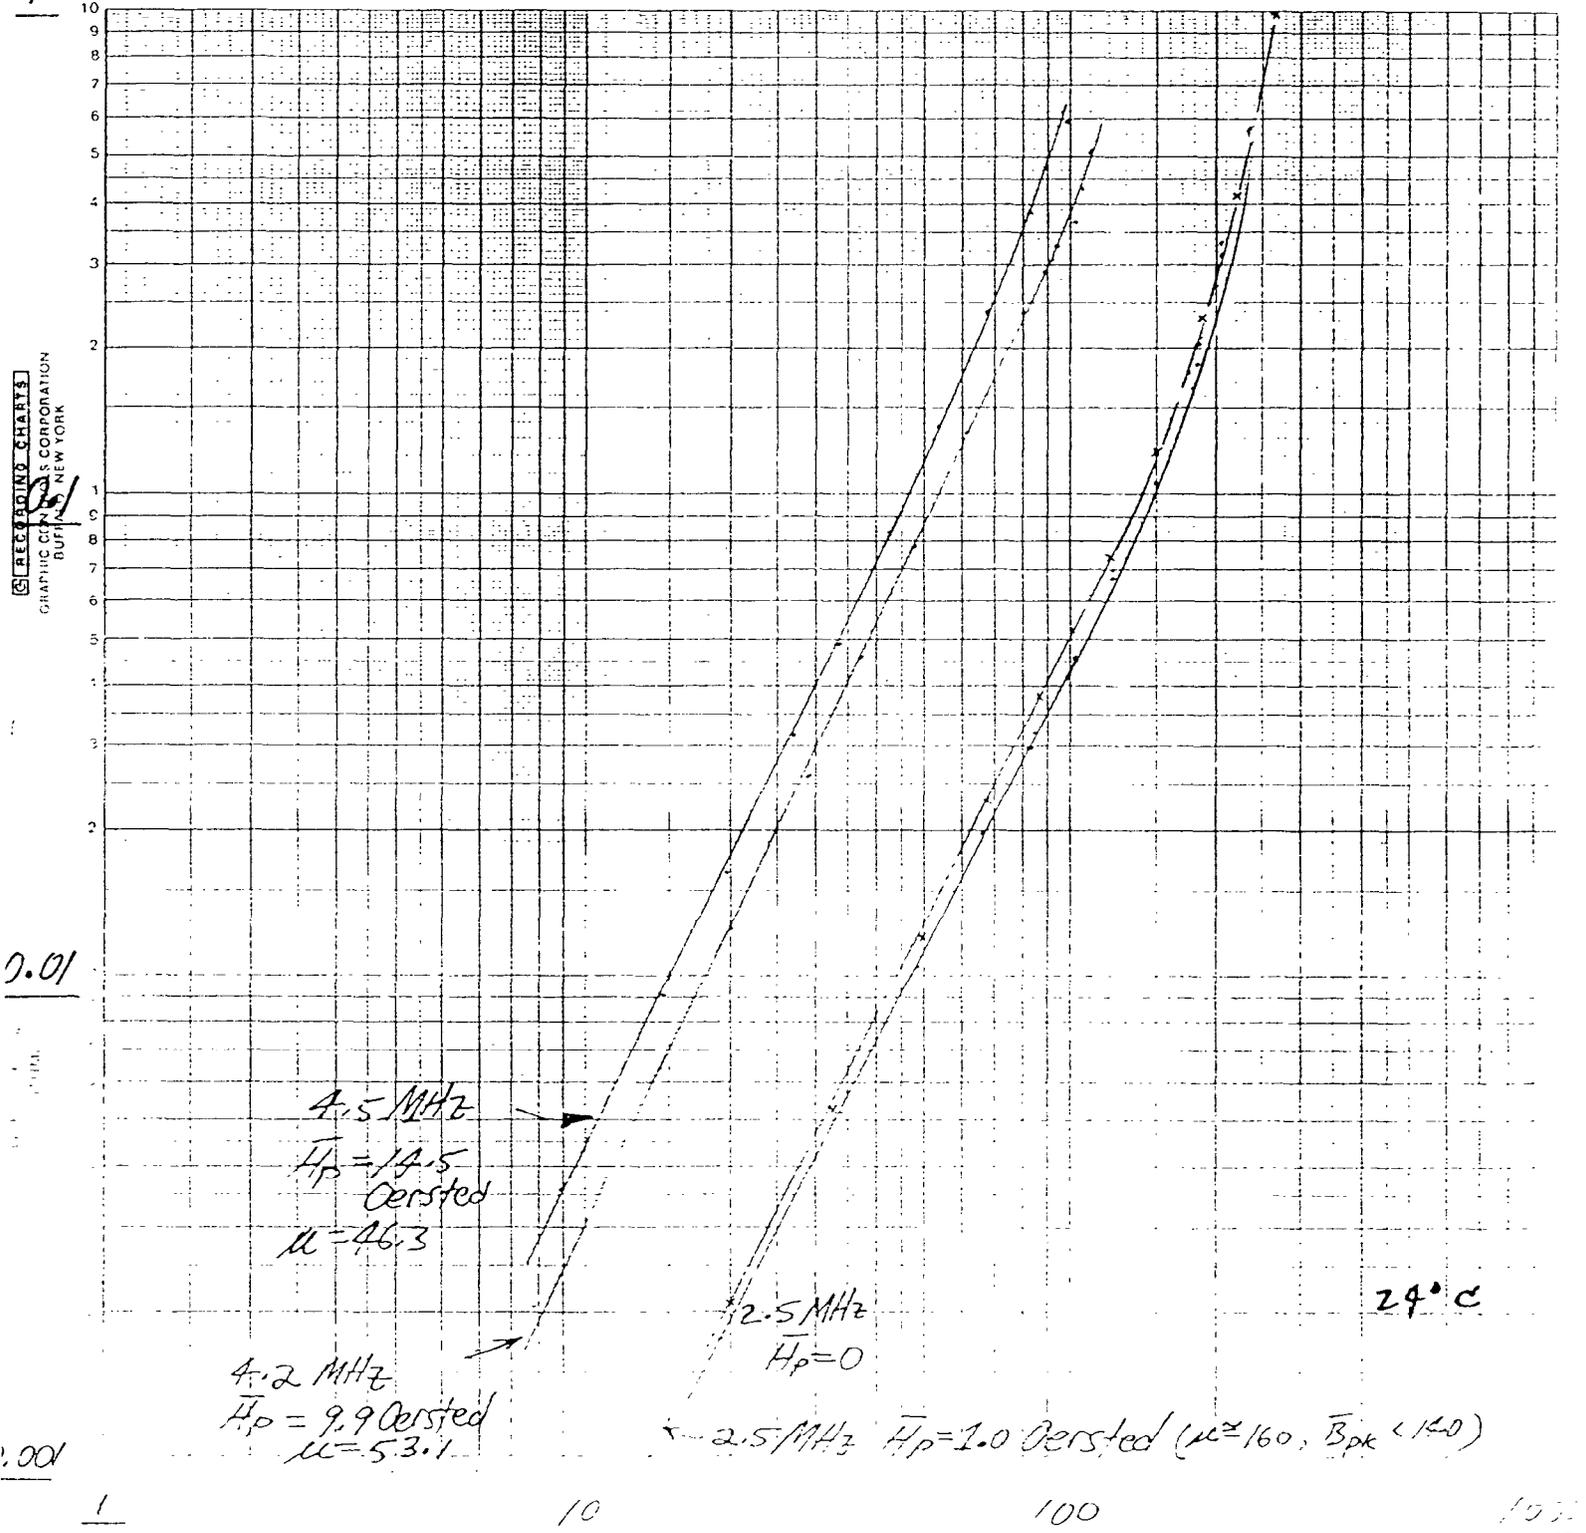

$\bar{B}_{PEAK}$  (GAUSS)  
 RF

FIG. I

M.A. GOLDMAN  
 H. ZHANG

V-KV STA	N/STA	ID C/M	F MHz	B gauss	Pwr mm/cc	TIME AVG PWR. mμ/cc	Vol. cc/STA	Pwr TOTAL/KW	Σ-σ STA.	1/STP/μh (4=130)	Q	I drive (CONSTY ONLY)	IARC	Q/STP/μh (4=130)
35	44	23	4.2	89.2	290	} 143	185800	39.95	6336	6.06	69	3.55	245	363
45	44	23	2.4	201	275		185800	81.75	3096	1.98	59.3	7.27	431	363
45	44	23	4.2	114.7	550		229	176715	47.7	5305	5.4	65.1	4.24	406
45	48	23	2.4	184	215	} 189	176715	93.7	2702	1.77	57.8	8.33	481	406
45	48	23	4.2	105	440		222	185800	45.52	6336	6.06	69	3.55	245
45	48	25	2.4	199	270	} 118	185800	39.95	6336	1.98	64.4	5.2	335	363
45	48	25	4.2	114	530		222	176715	47.7	3364	1.77	65.1	4.24	406
35	48	23	4.2	88.5	280	} 138	176715	49.5	3095	1.77	66.3	5.65	375	406
45	48	23	2.4	199	270		222	176715	47.7	5305	5.4	65.1	4.24	406
45	48	23	4.2	114	530		222	176715	93.66	2702	1.77	57.8	8.33	406

Summary of results

TABLE I