

# FAST BACKLEG WINDING SUPPLY DESIGN PARAMETERS

J. G. Cottingham

September 1970

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.AT(30-1)-16 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Accelerator Department  
BROOKHAVEN NATIONAL LABORATORY  
Associated Universities Inc.  
Upton, New York

AGS DIVISION TECHNICAL NOTE

No. 79

J.G. Cottingham, A. Tranis, G.P. Bagley  
September 2, 1970

FAST BACKLEG WINDING SUPPLY DESIGN PARAMETERS

The Fast Backleg Winding Supply (FBLW) currently being designed to power the Fast Backleg Windings will be capable of deflecting the 28 GeV proton beam 1.8 in. (nom.) in either the  $\frac{3}{2} \lambda$  backleg winding configuration or the  $\frac{1}{2} \lambda$  configuration. Three interchangeable systems will be built; two to be operated in the  $\frac{3}{2} \lambda$  configuration and one in the  $\frac{1}{2} \lambda$  configuration.

Each FBLW will include two sub-units each of which will switch a charged capacitor bank on to backleg windings of half the magnets involved. A half sine wave current will then flow in both loops. Additional capacitors will be connected in when the FBLW is used in the  $\frac{1}{2} \lambda$  configuration.

Detailed design parameters are given in Table I. The magnets will be wired as shown in Figs. 1 and 2.

TABLE I

	Min.	Nom.	Max.
Beam Deflection		1.8 in.	
Peak Current Per Unit ( $\frac{3}{2} \lambda$ )		625 A	750 A
Peak Current Per Unit ( $\frac{1}{2} \lambda$ )		1050 A	1500 A
Half Period		10 msec	
Load Inductance Per Unit ( $\frac{3}{2} \lambda$ )		1.8 mH	
Load Inductance Per Unit ( $\frac{1}{2} \lambda$ )		0.9 mH	
Q (estimate)		4	
Peak Voltage Per Unit		425 V	520 V
Power Required; 440 V, 3 $\phi$ ( $\frac{3}{2} \lambda$ )			24 kW
Power Required; 440 V, 3 $\phi$ ( $\frac{1}{2} \lambda$ )			48 kW
Pulses Per Magnet Cycle			4
Interval Between Pulse Initiations	100 msec		
Usable Interval ( $\pm 1\%$ )		1.1 msec	
RMS Current Per Loop ( $\frac{3}{2} \lambda$ , 4 pulses)			68 A
RMS Current Per Loop ( $\frac{1}{2} \lambda$ , 4 pulses)			136 A
C Per Unit ( $\frac{3}{2} \lambda$ )		5600 $\mu$ f	
C Per Unit ( $\frac{1}{2} \lambda$ )		11,200 $\mu$ f	

Distr: Department Administration  
AGS Division Staff

BY erp DATE 9/1/70

SUBJECT \_\_\_\_\_

SHEET No. \_\_\_\_\_ OF \_\_\_\_\_

CHKD. BY \_\_\_\_\_ DATE \_\_\_\_\_

DEPT. OR PROJECT \_\_\_\_\_

JOB No. \_\_\_\_\_

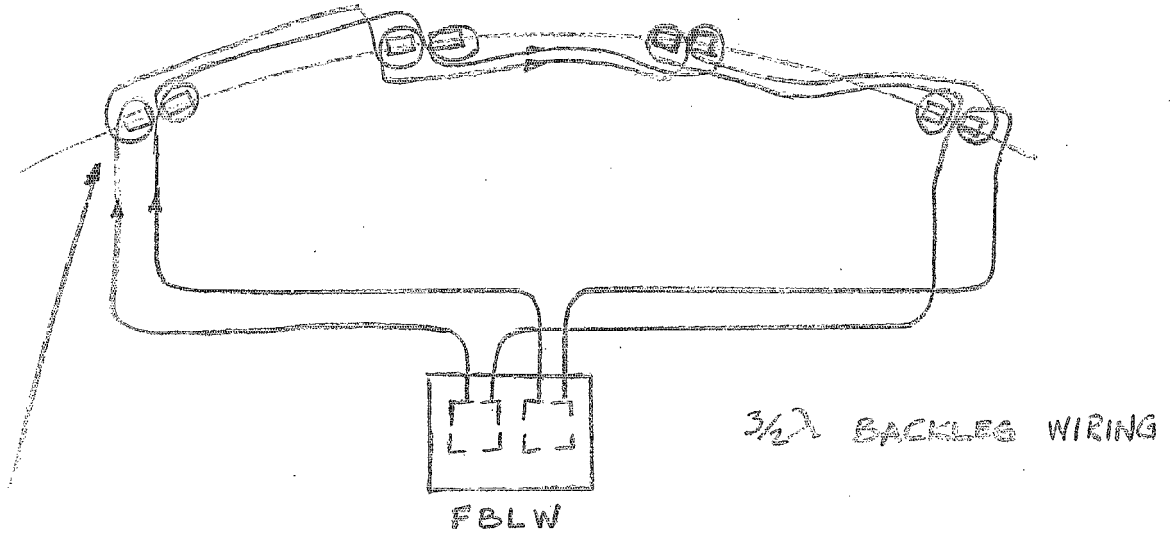


Fig. 1

5 TURNS / LONG MAGNET  
6 TURNS / SHORT MAGNET

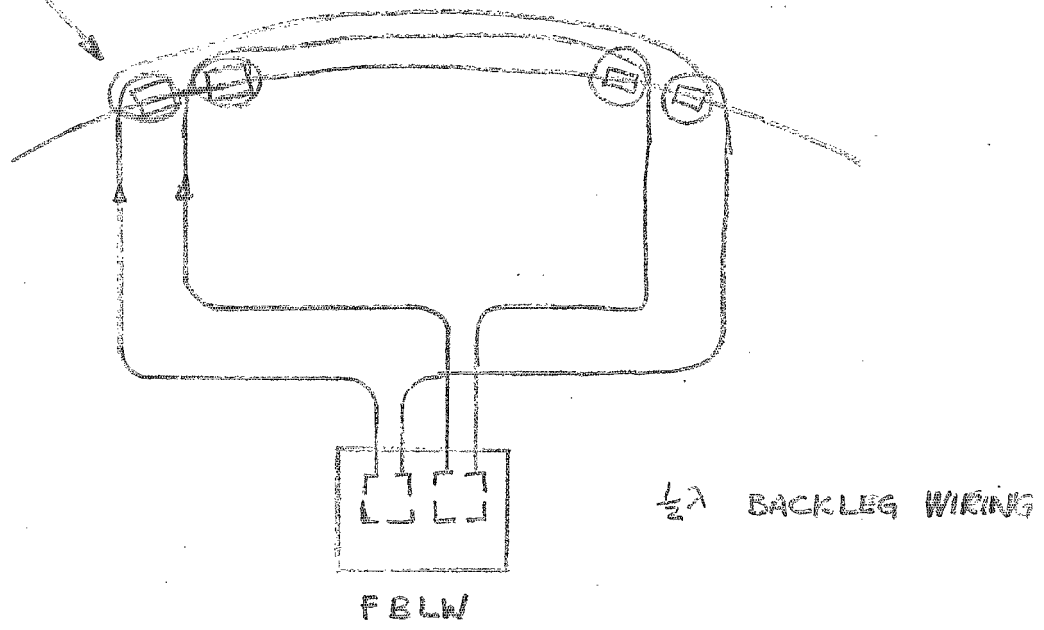


Fig. 2