



BNL-104578-2014-TECH

AGS/AD/Tech Note No. 149;BNL-104578-2014-IR

LOW FIELD CORRECTION READBACK EVALUATION

W. Frey

November 1978

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.EY-76-C-02-0016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Accelerator Department
BROOKHAVEN NATIONAL LABORATORY
Associated Universities, Inc.
Upton, New York 11973

AGS DIVISION TECHNICAL NOTE

No. 149

LOW FIELD CORRECTION READBACK EVALUATION

W. Frey

November 15, 1978

The low field correction (LFC) coil current readback system tends to be erratic. The LFC, both horizontal and vertical, are checked periodically using a computer program. This program uses approximately 10 steps to control LFC current between 0 and 2A for a selected coil. The program compares the command and readback currents and prints out the deviation from the mean value. Just prior to the September 1978 shutdown the 196 LFC (dipole) currents were scanned and typical deviations from the mean were greater than 30 counts (0.5 ma/count). During the shutdown the system was recalibrated and thoroughly examined to determine the cause of the error build-up.

The LFC is basically a DATACON I system controlling current regulators. Figure 1 is a simplified block diagram of the dipole LFC system. The LFC system investigation was split into two basic areas: (a) Command/Control and (b) Readback.

A. Command/Control

1. D/A Conversion

A manual DATACON control head was used to send current control information to the 10 bit D/A converter. There was good tracking accuracy between command value and reference voltage output. Most of the D/A converters had developed a slight DC offset at 0 (± 3 or 4 mV), but tracked very well (less than 10mV error--0 - 10V). The polarity reversing command and readback came through every time.

2. Regulator

The current regulators using shunt voltage readback, tracked the reference command voltage very well with less than a 0.2% error.

B. Readback

Most of the errors are in the readback portion of the DATACON I system. The major culprit is a mechanical problem involving the readback board/connector. There also is a noisebuild-up problem in readback concept.

1. Board/Connector

The readback boards are fabricated using a 98-circuit card edge connector.

a. PC layout of circuit lands for connectors used are too narrow a width. This results in many of the connections being made at the edge of the lands. The card must be positioned perfectly at insertion to make sure all connections are made.

b. High insertion force required to mate the single 98-pin connector results in cracking mating connectors. In addition, if the board is not fully mated, it will slowly creep out.

c. The board is not plated and this results in electrical noise build-up due to corrosion at the connector interface.

2. Conceptual Problem

Figure 2 illustrates the conceptual problem in the present LFC system; i.e., the signal conditioning amplifier (gain of 5 operational amplifiers) follows the FET switching ladder amplifying the noise contribution of the ladder and connector noise noted in 1c above. The signal conditioning amplification should take place before the FET switching ladder (at the regulator shunt) to improve the signal to noise (S/N) ratio of the input to the A/D converter. The data input to the FET ladder should be amplified to the maximum value that can be accepted by the FET switch then attenuated after the switch ladder.

C. Conclusions and Recommendations

The present LFC system (DATACON I) is adequate for the job if two conditions are met; i.e., 1. A two week minimum shutdown approximately every six months to allow repair and recalibration of the LFC subsystem, and 2. Ignore the 0 to 100 mA range of the readback due to system noise. In addition, if a discrepancy between command current and readback current develops, the LFC will follow the command current very accurately and the command current trusted while ignoring the readback.

The most desirable solution would be to connect the LFC to DATACON II. Since DATACON I is obsolete (LFC the only remaining system using it) there are no readily available spares. At present there is one board of each type available as spares, requiring all boards removed from the system to be repaired immediately. DATACON II is a standardized system and replacement cards, card buckets, power supplies, etc. are stocked at the AGS. However, a very coarse estimate of \$100K to \$150K and approximately six month building, installation and debugging time would be required to convert the entire LFC to DATACON II.

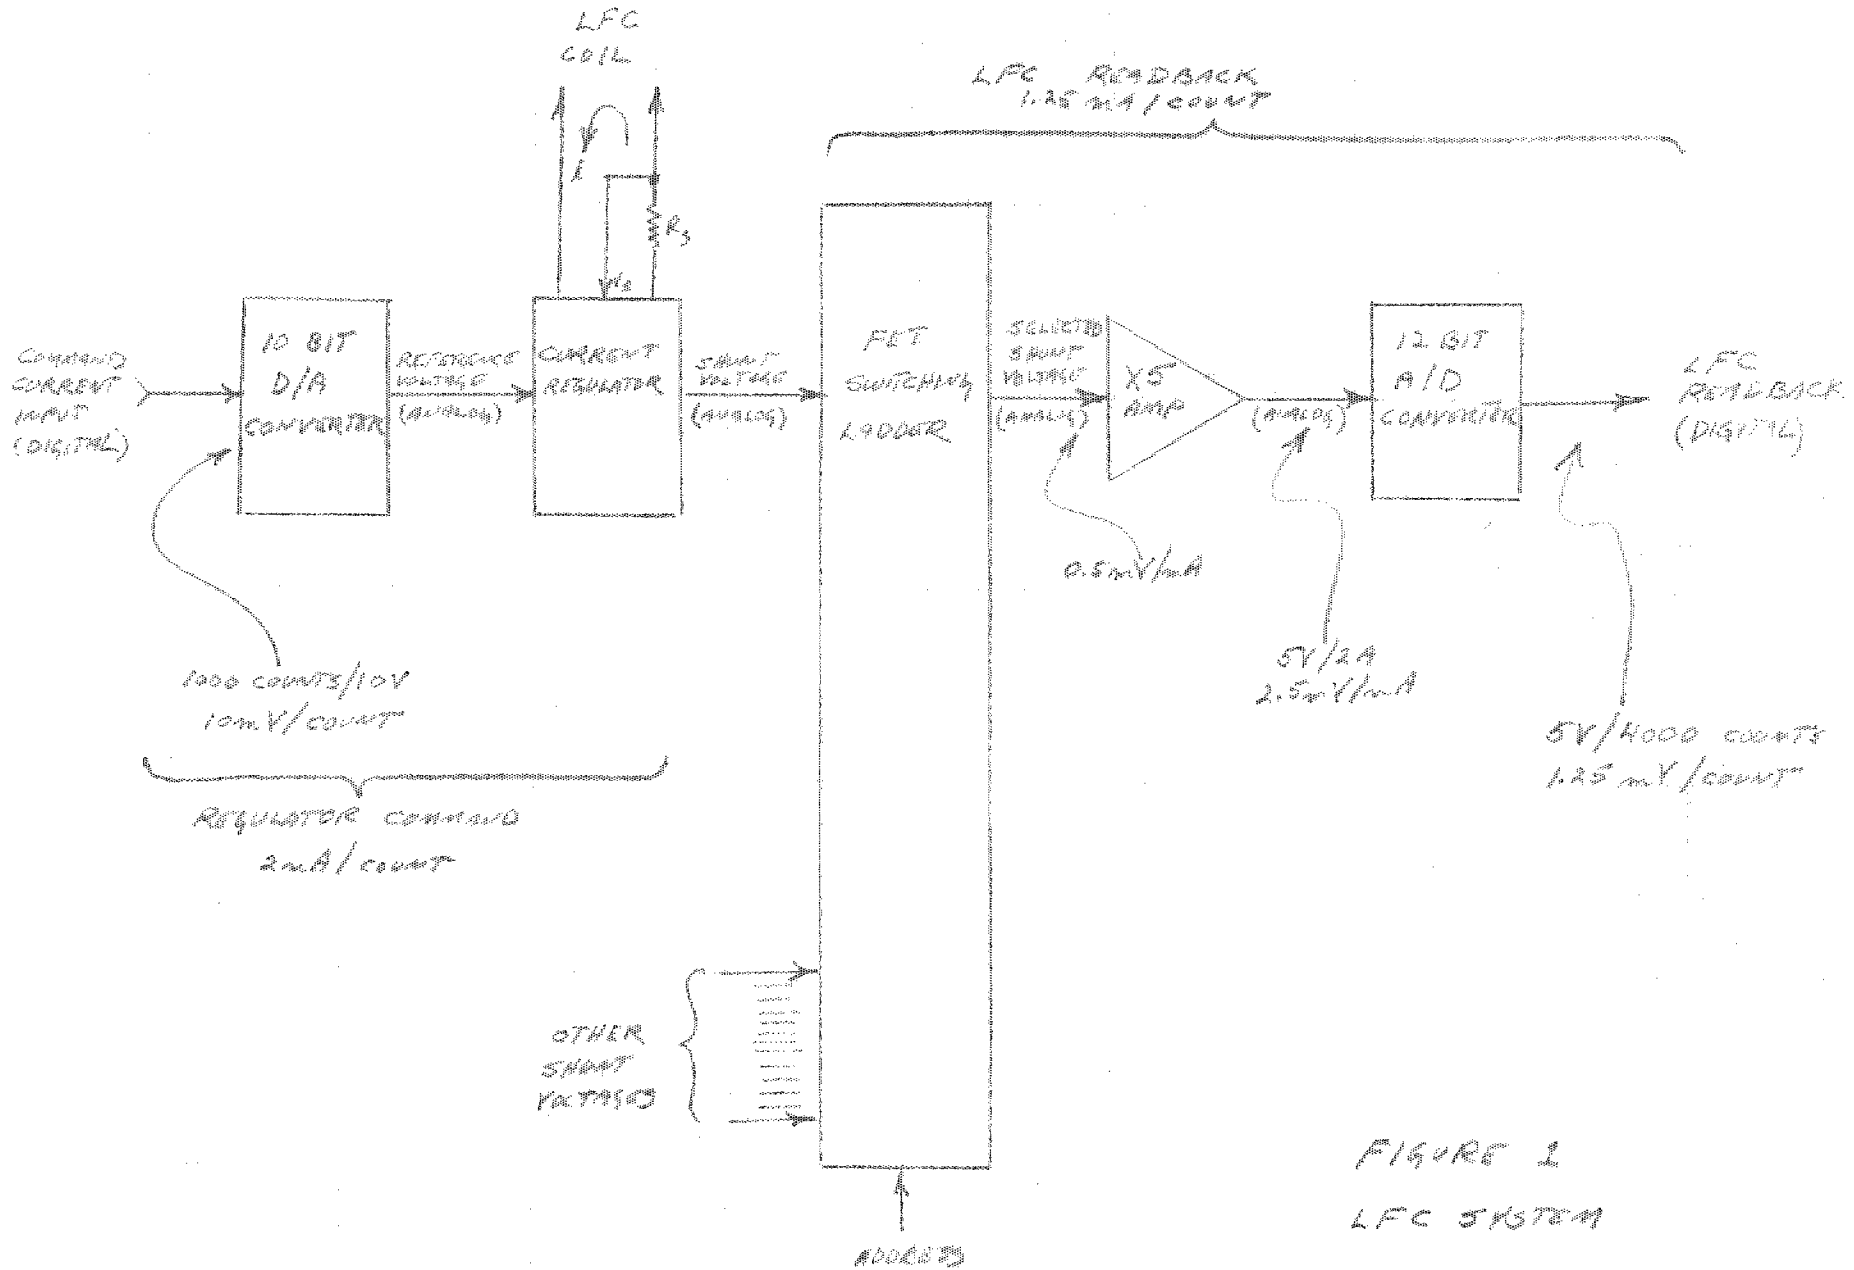


FIGURE 1
LFC SYSTEM

