



BNL-104105-2014-TECH

AGS.SN229;BNL-104105-2014-IR

SEB Extraction Study III - Measurement of Extraction Efficiency During the Spill

E. Bleser

March 1987

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

AGS Studies Report

Date(s) March 1, 1987 Time(s) 0000 - 1200
Experimenter(s) E. Bleser, J.W. Glenn, M. Tanaka, R. Thern
Reported by M. Tanaka
Subject SEB Extraction Study III - Measurement of Extraction
Efficiency during the Spill.

Observations and Conclusion

We have attempted to measure the extraction efficiency at the middle of spill as well as for the whole extraction period in order to separate the non-conventional beam losses (i.e., non-resonant beam components) at the beginning and the end of spill, which account for 30 to 40% of the total extraction beam loss. The total extraction efficiency is measured to be 97 to 98%, slightly higher than previous measurements (95 to 96%), and the middle extraction efficiency, giving close to 99% although the quality of the data prohibited making any quantitative measurements.

Introduction

This SEB Study III is part of the Extraction Group's continuous effort^{1,2} to understand the current AGS SEB third interger resonance extraction process and to measure the extraction efficiency as accurate as possible for the present SEB extraction system with a W/Re(25)-wire septum at H20^{3,4}.

I. Setup

The following three IAGPE files were created and run simultaneously to collect extraction data at various times during the spill:

IAGPE Files

Parameters	1H20A	1H20B	2H20C
MAGPL	x	x	x
H20US/DS	x		
F05US/DS	x		
F10US/DS	x		
SESLD	x		
SSLNG	x		
RXL15 (=XCBM)		a	b/c
CE010 (=SEC)		d	b/c
RLMS		d	b/c
H20LS		d	
F5ULM/DLM		d	
F10UL/DL		d	

(a,b,c,d: data at T = 650, 1150, 1950 and 2150 msec, (respectively))

@ Transition : 255 ms RF - Off : 665 ms
T-invert : 2150 ms XCBM(650) : 4·10¹² ppp

II. Data Taking

Within the limited available beam time (less than 2 hours), we could manage to collect quickly the extraction data varying F10US/DS, F05US/DS, H20US/DS, HPBLW, F5FLG (in/out), F10FLG, H20FLG, SSLNG, SESLD, etc. and saved them on disk for an off-line analysis later.

III. Results

Though we have not yet complete our full analysis of the whole data set due to some technical difficulties in data processing, most essential results are shown in the following figures:

A. Varying the H20DS with H20US = 1724 fixed:

For the whole extraction period (T = 650-2150 ms).

Fig. 1a : RLMn vs. SECn (Total),
1b : RLMn, SECn-7 vs. H20DS (Total),

where $RLM_n = RLM(2150)/XCBM(650)$,
 $SEC_n = SEC(2150)/XCBM(650)$.

A linear fit to the RLM_n - SEC_n data gives

$$RLM_n = 15.2 - 1.83 * SEC_n,$$

which yields a SEC calibration of 8.31 counts/ 10^{10} extracted protons and a RLM calibration of 13.4 counts per 10^{10} protons lost. At the optimum position of $H2ODS = 2040 \pm 10$ as seen in Figure 1b, the extraction (in)efficiency is 98 ± 0.5 (2.0 ± 0.4)%.

In order to separate the beam losses at the beginning and the end of the spill we took the same data at the middle of the spill ($T = 1150 - 1950$ ms),

Fig. 2a : $dRLM_n$ s vs. $dSEC_n$ (Middle),
2b : $dRLM_n$, $dSEC_n - 7$ vs. $H2ODS$ (Middle),
2c : $XCBM_n$ s vs. Pulse #

where

$$dRLM_n = [RLM(1950) - RLM(1150)] / [XCBM(1150) - XCBM(1950)],$$
$$dSEC_n = [SEC(1950) - SEC(1150)] / [XCBM(1150) - XCBM(1950)].$$

There are two distinctive sets of data that appeared, one clustered around $dSEC_n = 7.8$, another around 8.5, apparently depending on whether the spill process had already been completed at the time of $t = 1950$ ms or not. (We should have set this timing earlier, e.g. $t = 1800$ ms, to avoid pulse-to-pulse variation of the spill duration.) It should be noted that in contrast the $dRLM_n$ values are almost identical for both cases. This indicates that even if the spill process ended before $t = 1950$ ms for some pulses, the non-resonant beam components (a fraction of the beam not extracted, approximately 1.5%) may have survived inside the machine for a moment (or may have lost inside the catcher so that an extra beam loss due to the non-resonant components did not make any contribution to RLM readings at $t = 1950$ ms) though $XCBM(RXL15)$ read no beam left at that time for some reason as seen in Figure 2c.

Since the data is not self consistent and data points are rather spread, it is not proper to make any definite conclusions from these results. However, if you discard the data around $dSEC_n = 7.8$, then it is clear that relative extraction (in) efficiency at the middle of

spill is systematically higher than one for the whole extraction period, as expected;

Whole	Middle
SECn = 8.16	dSECn = 8.50
RLMn = 0.28	dRLMn = 0.18

at the optimum position.

The data points at the middle of the spill do not line up on the same calibration line in Figure 1a, shifting to the higher dSECn side. A hand drawn line to the data gives a similar (very rough) calibration,

$$dRLMn = 15.5 - 1.80 * dSECn$$

which yields 98.7 (1.2)% extraction (in)efficiency.

Various other SEB beam loss monitor responses are also shown in Figure 3.

Fig. 3 : RLMn, H20Ln, F5Ln & F10Ln vs. SECn (Total)

where $H20Ln = H20LS(2150)/XCMB(650)$
 $F5Ln = (F5ULM(2150) + F5DLM(2150))/XCMB(650)$
 $F10Ln = (F10UL(2150) + F10DL(2150))/XCMB(650)$

These data also give similar extraction (in)efficiency = 97.5 - 99 (2-1)%.

B. Varying F5US/DS and F10US/DS

The loss of monitor responses for beam losses inducted by varying F5 septum or F10 ejector positions are shown in the following figures:

Fig. 4 : RLMn, H20Ln, F5Ln & F10Ln vs. SECn(Total) varying F5US/DS

Fig. 5 : RLMn, H20Ln, F5Ln & F10Ln vs. SECn(Total) varying F10US/DS

As seen in these figures, F5LM is not sensitive to losses caused by F10US/DS and H20LM are not sensitive to both cases. Each monitor responded rather erratically pulse-to-pulse and displayed substantial amount of hysteresis for beam losses induced by its own extraction magnet displacements. RLMn gave the most smooth response for all cases.

Extraction (in)efficiency obtained from this data is consistent with one obtained by varying H20DS.



IV. Conclusions and Future Plans



To separate the beam loss at the beginning and the end of spill, which may account for more than one-third of the total beam loss during extraction, we attempted to measure simultaneously extraction efficiency at the middle of the spill. The total extraction efficiency is measured to be 97 to 98%, slightly higher than previous measurements (95 to 96%). The extraction efficiency at the middle of extraction is found to be systematically higher than the total extraction efficiency, giving close to 99%. The 1% middle inefficiency is believed to be the beam loss solely due to effects directly related to the H20 electrostatic septum. However, the quality of the data prohibited making any quantitative measurements.


For the next SEB extraction study (IV) in May, we plan to collect the same data with a hybrid Ti-alloy (low Z material) wire septum and do a full analysis of both data sets in order to see if there is any improvement in comparison with the present W/Re wire septum. In addition, technical difficulties we had in collecting, processing, and analyzing the data will be discussed in the next report.



References

1. M. Tanaka, AGS Studies Report #219, "SEB Extraction Study I".
2. M. Tanaka, AGS Studies Report #222, "SEB Extraction Study II".
3. H. Weisberg and J.W. Glenn, Nucl. Instrum. & Meth. 169, 319 (1980), "Exploitation of Nonlinear Growth of Betatron Oscillations to Obtain Efficient Slow Extraction from the AGS".
4. M. Tanaka, Extraction Group Physics Note #0001, "The Electrostatic Wire Septum".

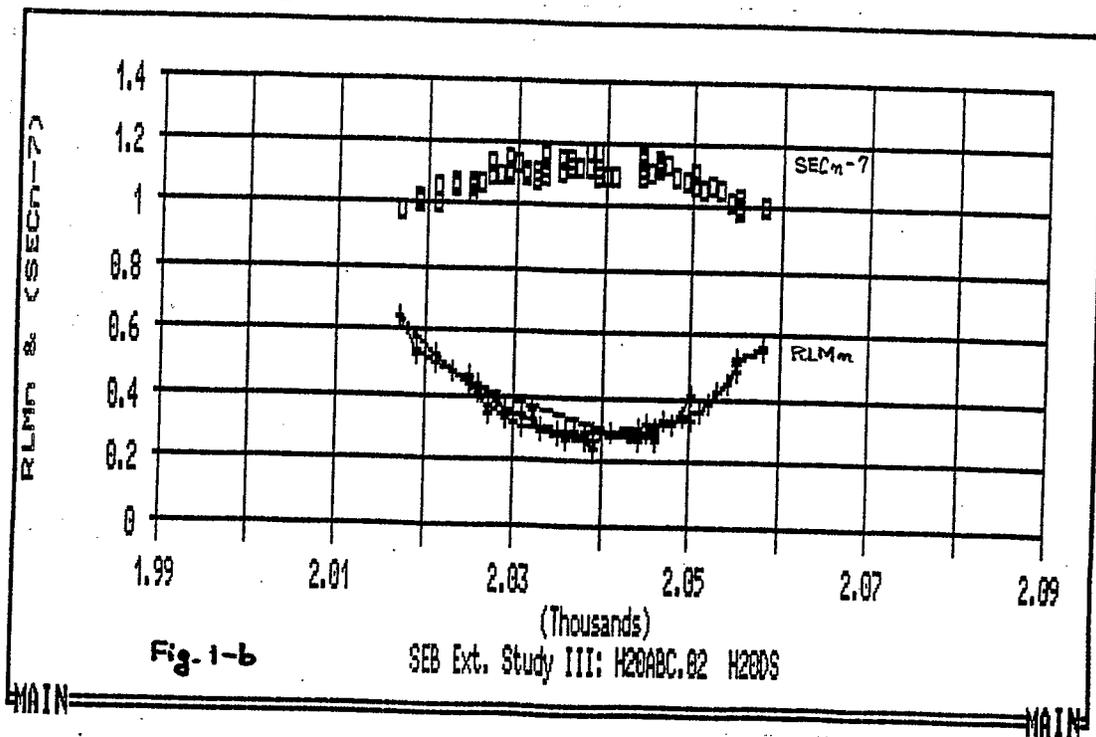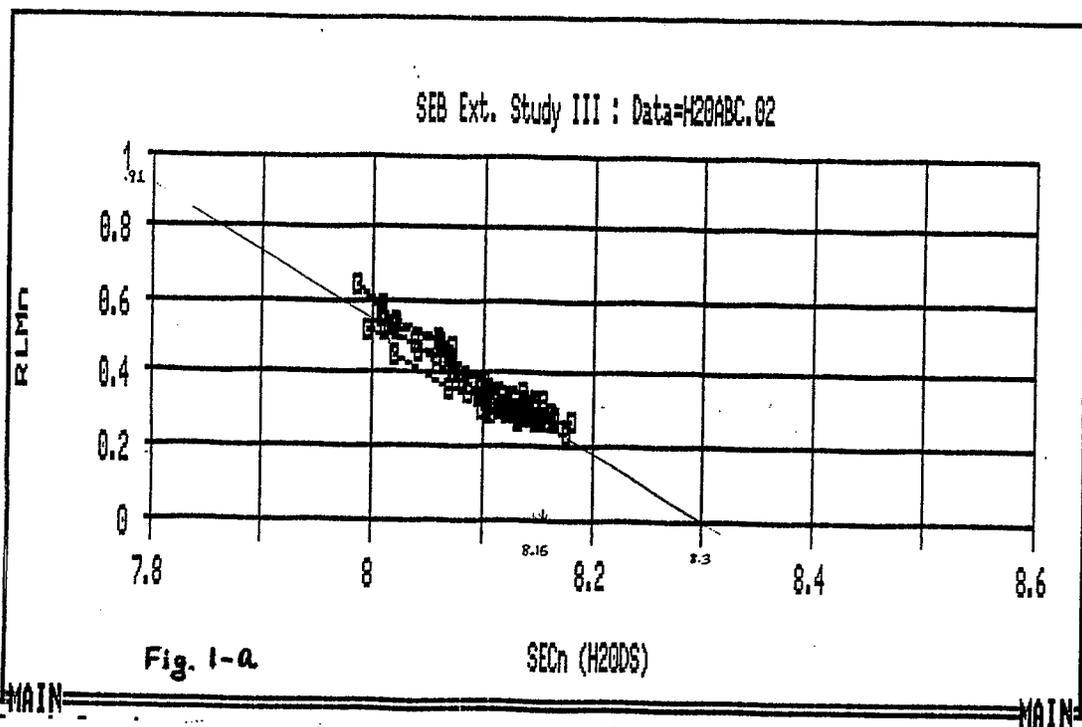

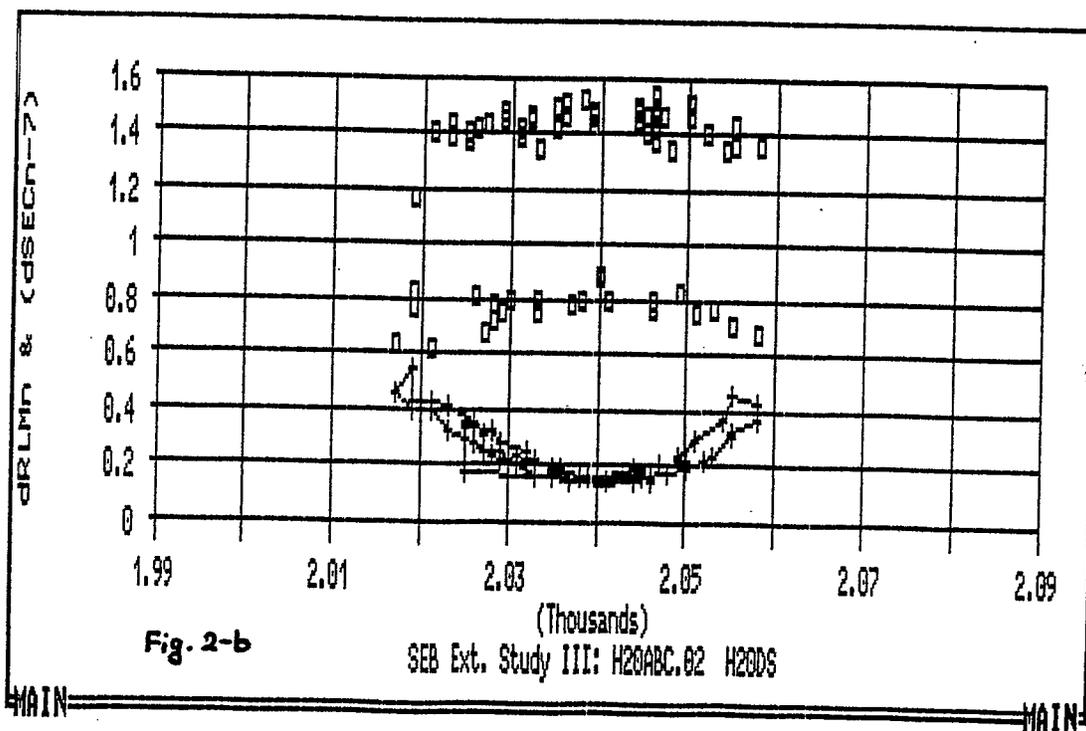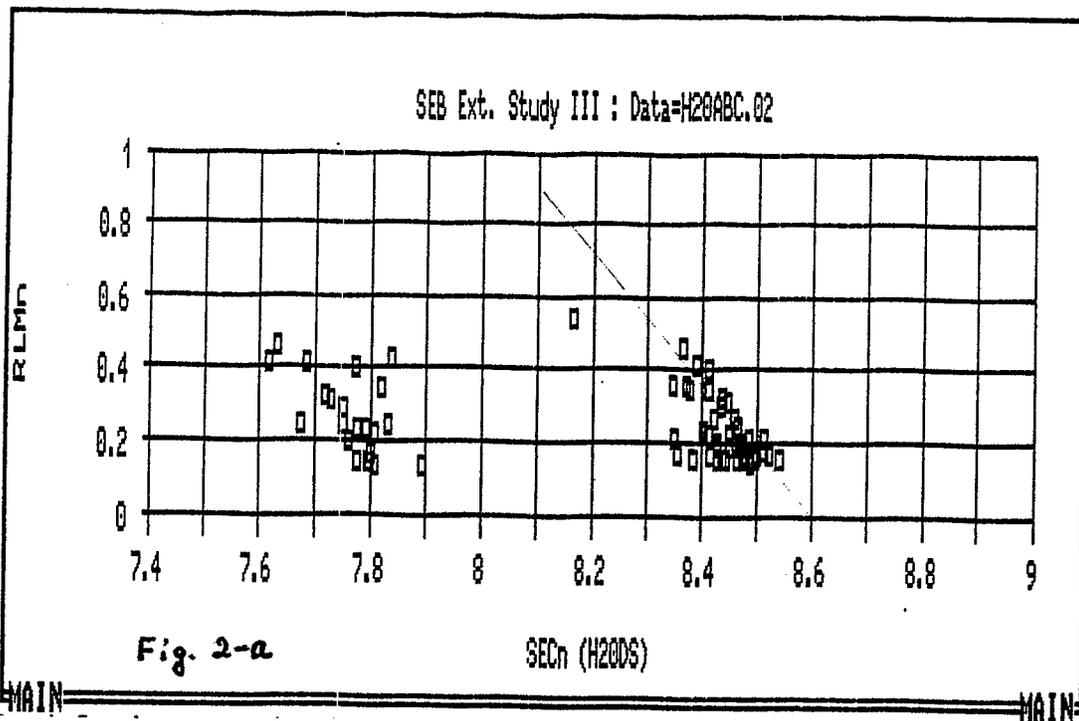

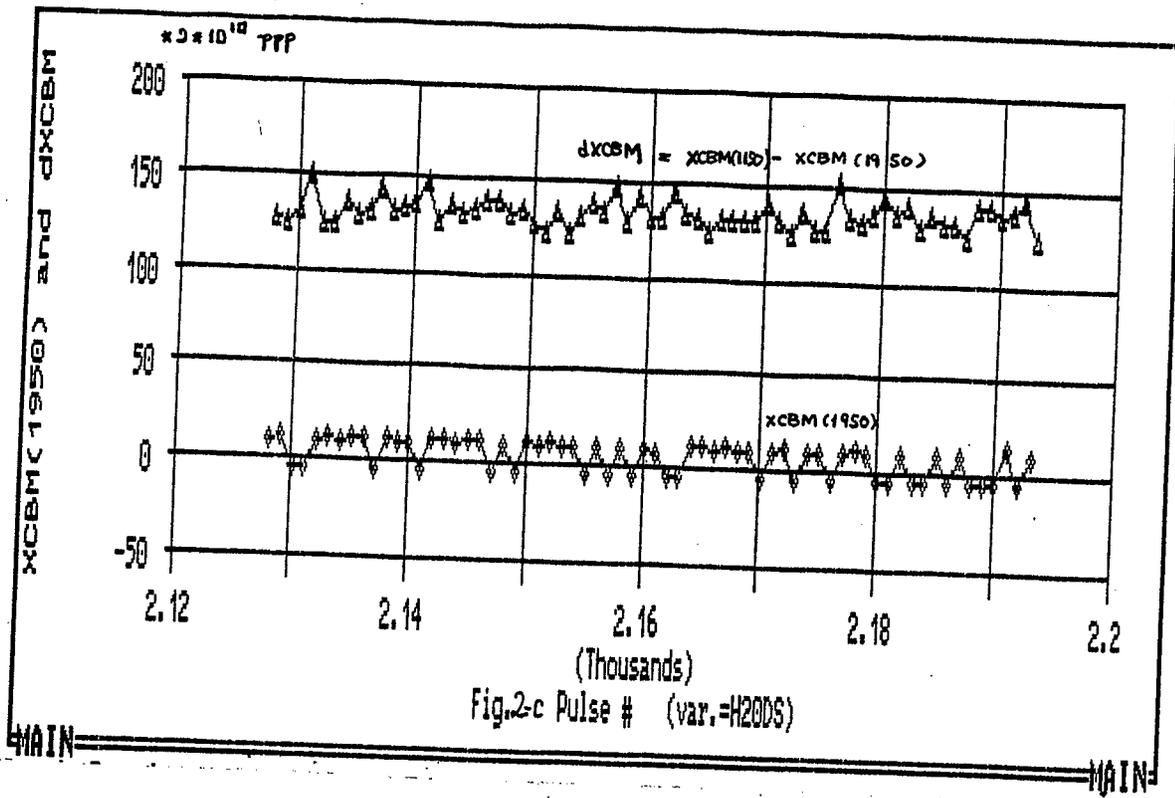

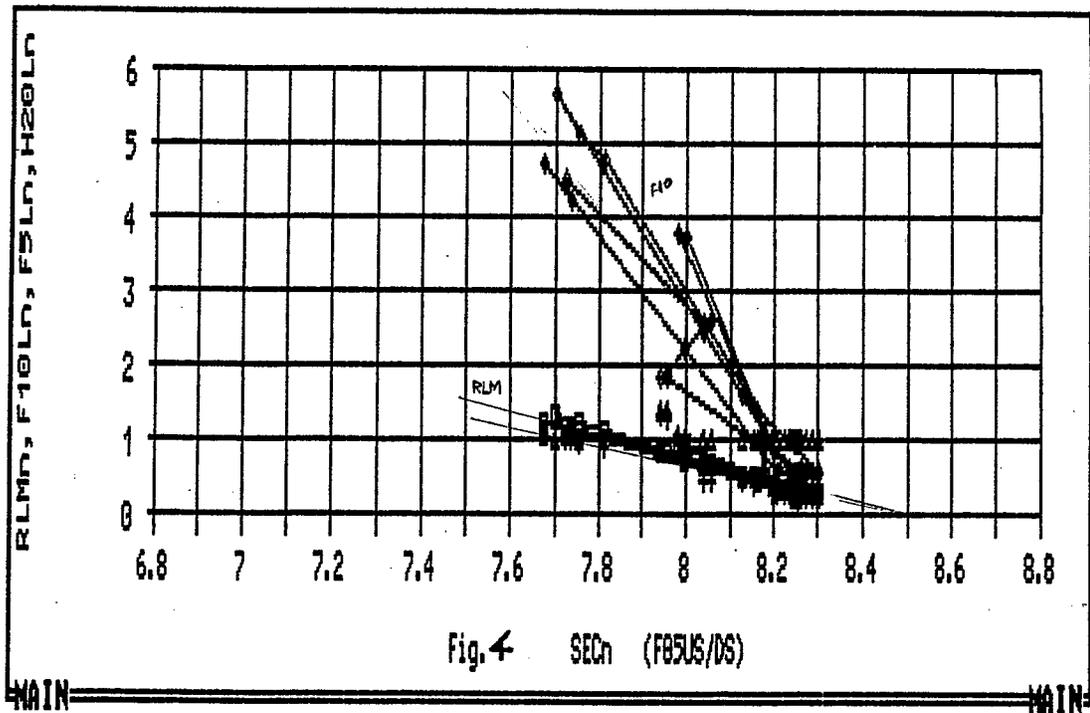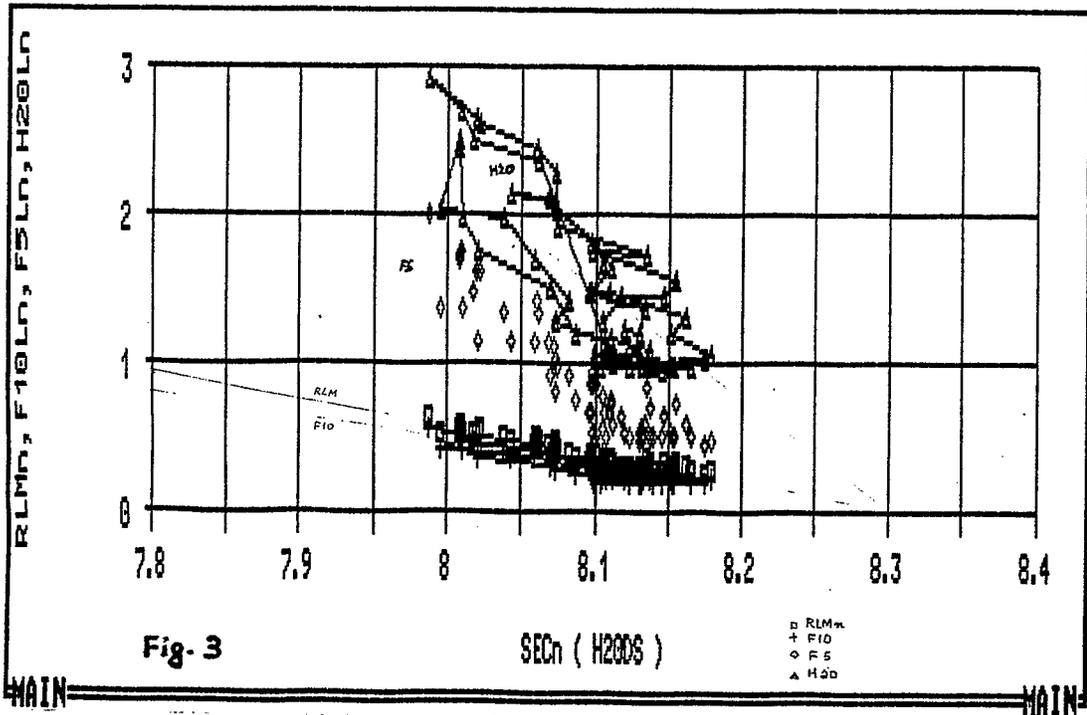

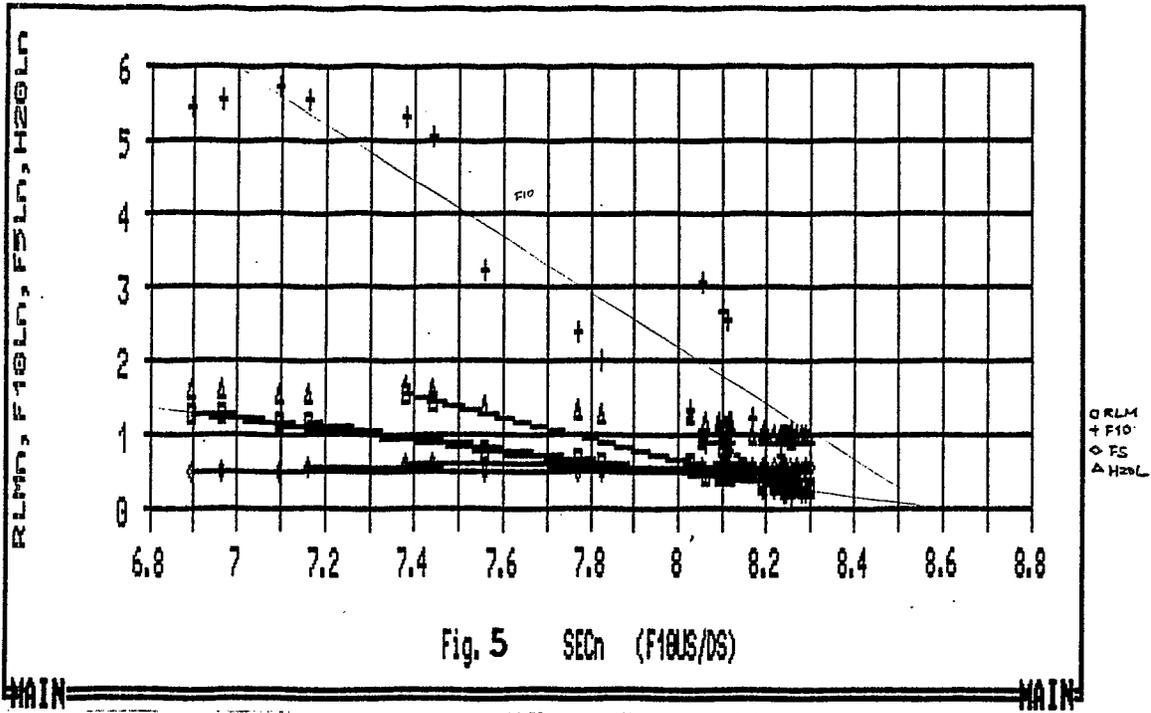


Fig. 5 SECn (F10US/DS)

MAIN

MAIN