



BNL-104141-2014-TECH

AGS.SN265;BNL-104141-2014-IR

# Measurement of Beam Loss of Au<sup>+78</sup> at 267 MeV/æ in CO<sub>2</sub> Pressure Bumps and the Calculated Charge Exchange Cross Sections

E. Gill

May 1992

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

---

## AGS STUDIES REPORT

---

**Date:** May 7, 1992  
**Time:** 00:01 - 0150  
**Experimenters:** E.G. Gill, H.C. Hseuh  
**Reported by:** H.C. Hseuh  
**Subject:** Measurement of Beam Loss of Au<sup>+78</sup> at 267 MeV/ $\mu$  in CO<sub>2</sub> Pressure Bumps and the Calculated Charge Exchange Cross Sections

---

### Abstract:

Using B5 beam current transformer, the decay rates of gold beam(+78, 267 MeV/ $\mu$ ) at several vacuum levels were measured in AGS ring at injection flat porches. The injection flat porches were stretched from  $\sim 50$  msec to 1 sec and to 1.8 sec. The average ring vacuum was varied between  $2 \cdot 10^{-8}$  Torr and  $2 \cdot 10^{-7}$  Torr by bleeding in CO<sub>2</sub> through variable leak valves located at C5 and E15 IPMs. The beam decay rates increased proportionally with increasing CO<sub>2</sub> pressures. Using the measured beam decay rates and average ring vacuum, the charge exchange cross section of Au<sup>+78</sup> at 267 MeV/ $\mu$  in CO<sub>2</sub> is estimated to be  $(3.5 \pm 1.7) \cdot 10^{-21}$  cm<sup>2</sup>.

### Introduction:

Charge exchange processes (either electron capture or electron stripping) dominate the beam-vacuum loss mechanism for partially stripped, low  $\beta$ , very heavy ion. This is one of the reasons that we need Booster with its ultrahigh vacuum to pre-accelerate ions heavier than silicone to higher energy before injecting into AGS. Few experimental charge exchange cross section data exist for gold ions at Booster and AGS injection energies. The knowledge of them will allow us to estimate the vacuum induced beam loss in various acceleration modes in Booster and AGS, as well as for those of RHIC injection. With the commissioning of the gold heavy ion program, we are in a unique position to carry out these measurements.

for beam decay due to background residual gas in AGS vacuum. After the introduction of pressure bumps of CO<sub>2</sub> gas at the IPMs, the equivalent ring CO<sub>2</sub> pressure will induce additional beam decay as given by:

$$R' = I_t'/I_0' = e^{-1 \cdot 10^{27} \cdot (\sum \sigma_i \cdot P_i + \sigma_{CO_2} \cdot P_{CO_2}) \cdot t} \quad (5)$$

with  $\sigma_{CO_2}$  the cross section of Au in CO<sub>2</sub> and  $P_{CO_2}$  the ring equivalent partial pressure of CO<sub>2</sub>. If we assume the rates of beam loss due to non-vacuum related mechanisms remains the same over the selected portion "t" of the flat porches and will cancel with each other, the ratios of beam decay rates will be proportional to CO<sub>2</sub> pressures according to:

$$R/R' = e^{-1 \cdot 10^{27} \cdot (\sigma_{CO_2} \cdot P_{CO_2}) \cdot t} \quad (6)$$

From eqn. (6), we can derive  $\sigma_{CO_2}$  without knowing the composition of the background gas in AGS.

The  $\sigma_s$  and  $\sigma_c$  for Au at 267 MeV/ $\mu$  in CO<sub>2</sub> are calculated to be  $1.5 \cdot 10^{-21}$  and  $5 \cdot 10^{-22}$  cm<sup>2</sup> using eqns. (1) and (2), respectively. Based on these theoretical cross sections, the product of  $P_{CO_2} \cdot t$  has to be greater than  $2 \cdot 10^{-7}$  Torr.sec, if one expects to observe tens percent in vacuum induced beam loss. The ring equivalent  $P_{CO_2}$  of  $10^{-7}$  Torr can be generated with pressure bumps of  $10^{-5}$  Torr at IPMs. Flat porches of 1 sec or longer, therefore, is needed at injection.

### Measurement of Equivalent CO<sub>2</sub> Pressure

The AGS ring vacuum is monitored through sputter ion pump currents. There are a total of 255 ion pumps located, approximately every three meters, on an elbow 1 m from beam channel. Detailed ring pressure profile converted from ion pump currents is available every AGS pulse from the "Log\_Read" program. At the same pressure, the newly installed AGS ion pumps draw twice the current of the old ones, resulting in a pressure reading by the Apollo twice that of the true pressure at the pumps. However, due to conductance limitation of the elbows and the dipole chambers, the pressure inside the chambers is higher than that at the pumps. Using Eqn. (5) in ref. 4, the average pressure inside the chambers is calculated to be 2.5 times of the pressure at the nearby pumps. The ring average pressure, therefore, is approximately 25% higher than the readouts indicated.

The ring background pressure is  $\approx 2 \cdot 10^{-8}$  Torr ( $N_2$  equivalent). Pressure bumps upto  $1 \cdot 10^{-5}$  Torr level were generated by bleeding-in  $CO_2$  gas through the variable leak valves located at C5 and E15 IPMs. The pressure distributions around the IPMs are shown in Fig.1 with and without  $CO_2$  leaks. For the short study period, the pressure bumps were confined within six ion pumps upstream and downstream of the leaks. The equivalent ring  $CO_2$  pressure is derived by summing up the  $\Delta P$  of twelve pumps around the leaks; then divided by the total number of ring ion pumps.

### **Measurement of Beam Decay at Flat Porches**

The output voltages of B5 beam current transformer were used as a relative measure of beam intensity at flat porches. Typical outputs are shown in Figs. 2 and 3 for 1 sec flat porch and 1.8 sec flat porch, respectively. One volt signal equals to  $3 \cdot 10^9$  charges. To improve statistics, signals from consecutive pulses were accumulated and averaged. The decay in beam intensity could be caused by a number of mechanisms. The contribution from beam-residual gas charge exchange should give a monotonous decrease in beam intensity. We select the portion of flat porches which gave the monotonous beam decay and used them to derive the decay rates and the charge exchange cross sections.

For 1 sec flat porch, the region between 160 msec and 560 msec is selected as the time "t", based on above mentioned reasons. The decay rate over the whole second is also used for comparison. For 1.8 second flat porches, sharp drops in voltages were observed at 0-360 msec and 1.16 - 1.8 sec. The later was caused by a shift in the horizontal beam center as evident in Fig. 4 of the horizontal outputs of IPM. The time period between 0.56 - 1.16 sec, therefore, was used to derive the decay rates and the charge exchange cross sections.

## Results and Conclusion

Several sets of measurements were carried out at flat porches of 1 sec and 1.8 sec. The pressure bumps were first generated at E15 IPM, then at both E15 and C5 IPMs; and the equivalent CO<sub>2</sub> pressure calculated accordingly. The output voltages from beam current transformer at the selected "t"s are listed in Table 1. The logarithmic ratios (Log(R/R')) of the beam decay rates are plotted in Fig. 5 against equivalent CO<sub>2</sub> pressures.

**Table 1. Summary of Beam Current Transformer Output Voltages w/ and w/o CO<sub>2</sub>**

<u>1 sec flat porch</u>		BKG	CO <sub>2</sub>	CO <sub>2</sub>	CO <sub>2</sub>	BKG
P <sub>co<sub>2</sub></sub> (*10 <sup>-8</sup> Torr)		0	5	8	20	0
# of AGS pulses		8	1	8	8	88
Xmer Output						
t(sec)=	0	0.86	0.78	0.85	0.75	0.7
	0.16	0.82	0.76	0.8	0.68	0.67
	0.56	0.8	0.67	0.7	0.53	0.64
	1.0	0.67	0.51	0.56	0.36	0.52
<u>1.8 sec flat porch</u>		BKG	CO <sub>2</sub>	CO <sub>2</sub>	BKG	
P <sub>co<sub>2</sub></sub> (*10 <sup>-8</sup> Torr)		0	16	16	0	
# of AGS pulses		7	8	46	10	
Xmer Output						
t(sec)=	.36	0.74	0.6	0.52	0.46	
	0.56	0.7	0.56	0.48	0.42	
	1.16	0.67	0.36	0.25	0.41	
	1.76	0.64	0.02	0.01	0.4	

The ratios of the decay rates of 1.8 sec flat porches ( the diamonds at P<sub>co<sub>2</sub></sub> ~ 1.6\*10<sup>-7</sup> Torr) are much higher than those from 1 sec flat porches and might be caused by some other beam loss mechanisms such as the shift of the horizontal beam center indicated from IPM data in Fig. 4. If we ignore these two points, the remaining data fall almost on a straight line. The slope of this line represents the total charge exchange cross sections and gives a value of (3.5 ± 1.7) \*10<sup>-21</sup> cm<sup>2</sup>, after correcting the 25% error in pressure readouts.

In summary, the measured total cross sections are consistent with theoretically calculated value of  $\sigma_s + \sigma_c = 2 \cdot 10^{-21} \text{ cm}^2$  using equations (1) and (2). Measurements with  $\text{Au}^{+79}$  and  $\text{Au}^{+77}$  beam in the future HIP runs will allow us measure the capture and stripping cross sections separately, since only capture is possible for  $\text{Au}^{+79}$ , and capture into L and M shells is much less likely than stripping in  $\text{Au}^{+77}$ .

#### **Acknowledgment**

The authors are indebted to R. Witkover for his original suggestion of using output signals from beam current transformer to measure the beam decay rates during injection.


#### **References**

1. M.J. Rhoades-Brown & H. Gould, "Accelerating Uranium in RHIC - II Surviving the AGS Vacuum", RHIC Tech. Note No. 38, May, 1988.
2. H.E. Bethe, Ann. Phys. **5**, 225(1930).
3. G.R. Young, "Collider Vacuum Requirements", RHIC-PG-11, Dec., 1983.
4. H.C. Hseuh, "Pressure Distribution Along the AGS Vacuum Chambers", AGS/AD Tech. Note No.273, Jan., 1987.


Fig. 1. Pressure profiles around IPMs.

ags\_vac.1.log.0 groups 7:BC thru 9:CD  
Wed May 6 23:45:00 1992 TO Wed May 6 20:59:59 1992

ags\_vac.1.log.0 groups 12:E thru 14:F  
Wed May 6 23:45:00 1992 TO Wed May 6 20:59:59 1992

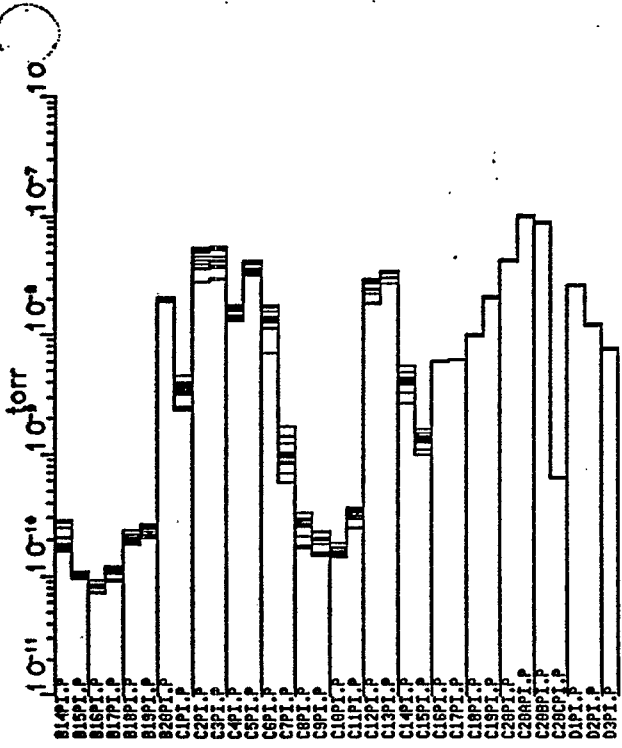


(a). Background around C5

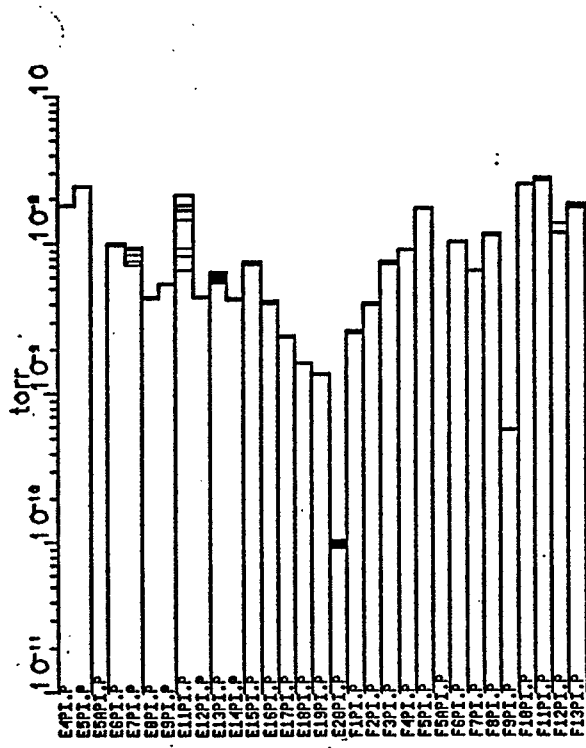


(b). Background around E15

ags\_vac.1 groups 7:BC thru 9:CD  
Thu May 7 00:57:43 1992 5 Thu May 7 00:50:05 1992

ags\_vac.1 groups 12:E thru 14:F  
Thu May 7 00:53:40 1992 8 Thu May 7 00:54:22 1992

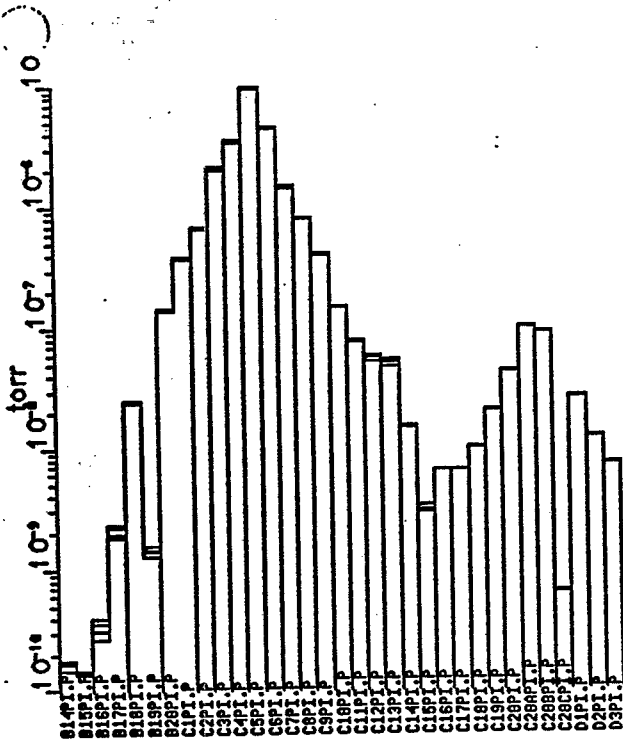


(c). With CO<sub>2</sub> leak at C5

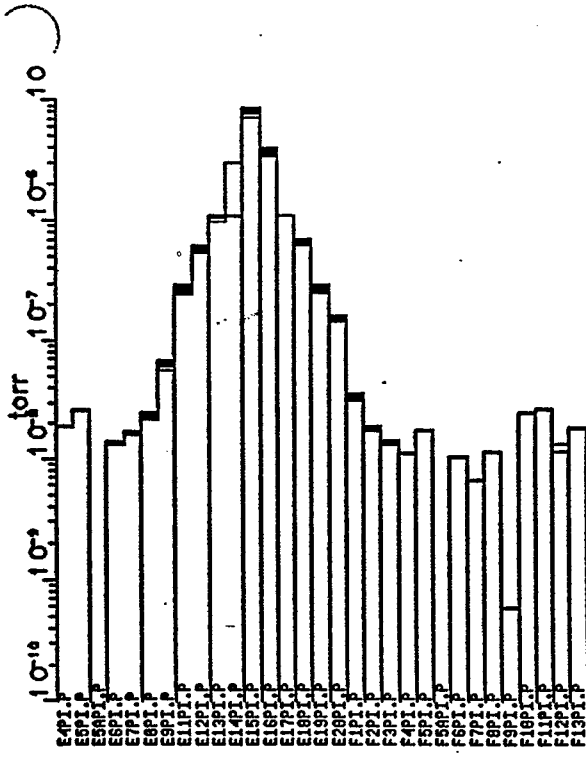

(d). With CO<sub>2</sub> leak at E15





Fig. 2. Outputs of Beam Current Transformer at 1 sec flat porch. 0.2 s/div., 0.2 V/div.

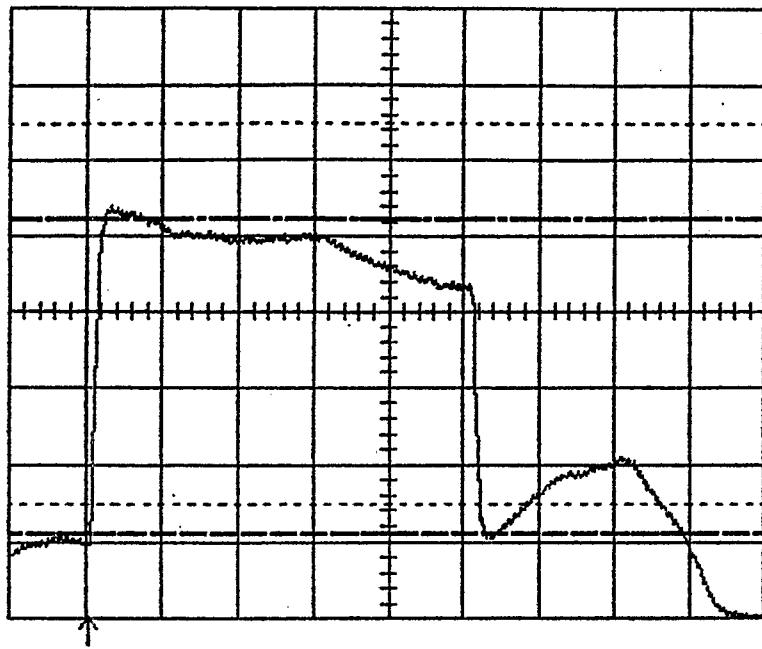

(a). Background w/ 8-pulse average

(b).  $8 \cdot 10^{-8}$  Torr CO<sub>2</sub> equivalent w/ 8-pulse average

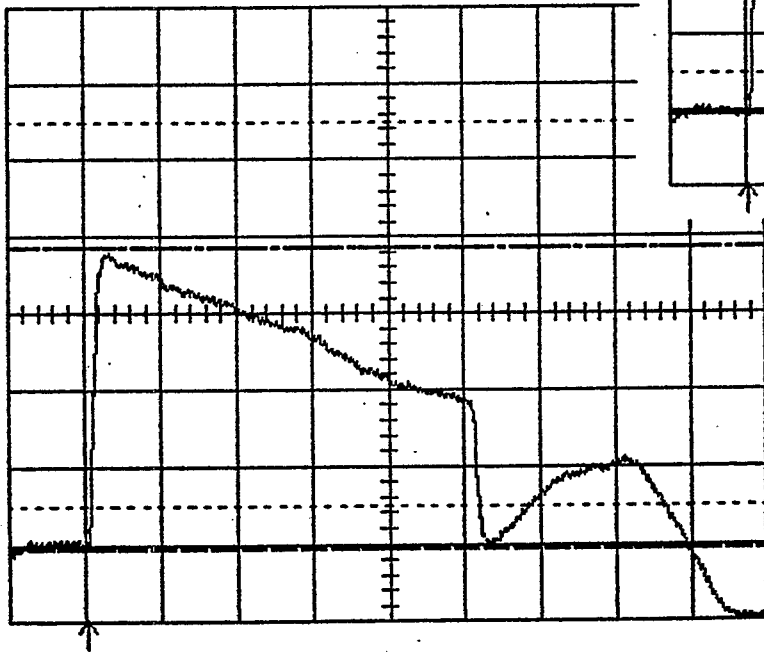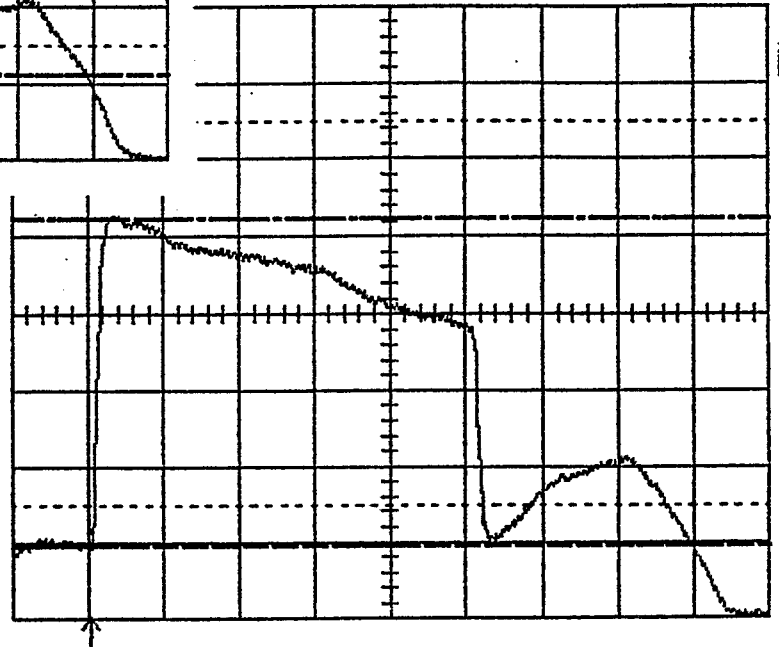

(c).  $2 \cdot 10^{-7}$  Torr CO<sub>2</sub> equivalent w/ 8-pulse average

(d). Background w/ 88-pulse average




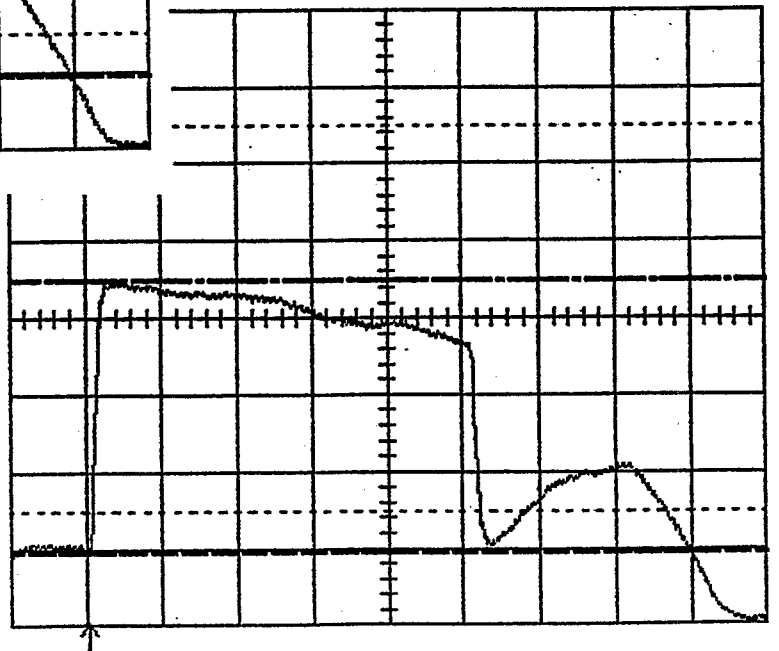


Fig. 3. Outputs of Beam Current Transformer at 1.8 sec flat porch, 0.2 s/div., 0.2V/div.

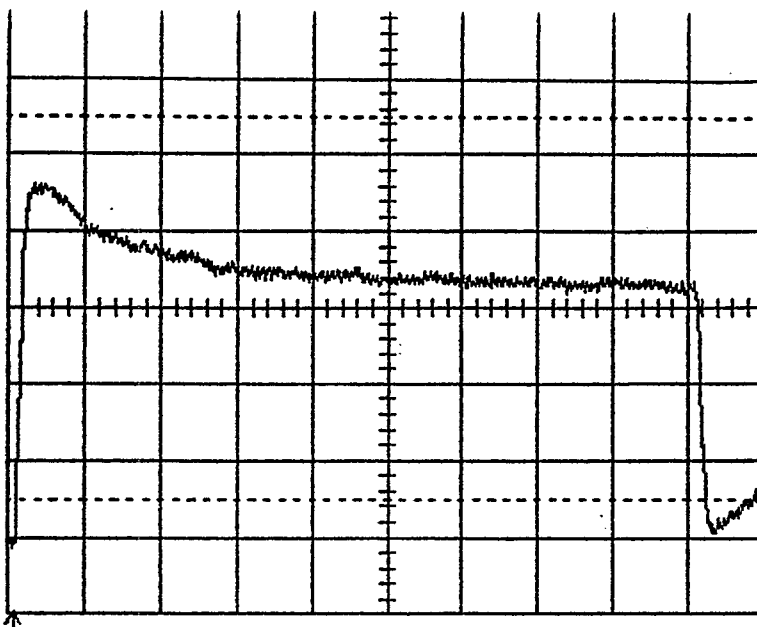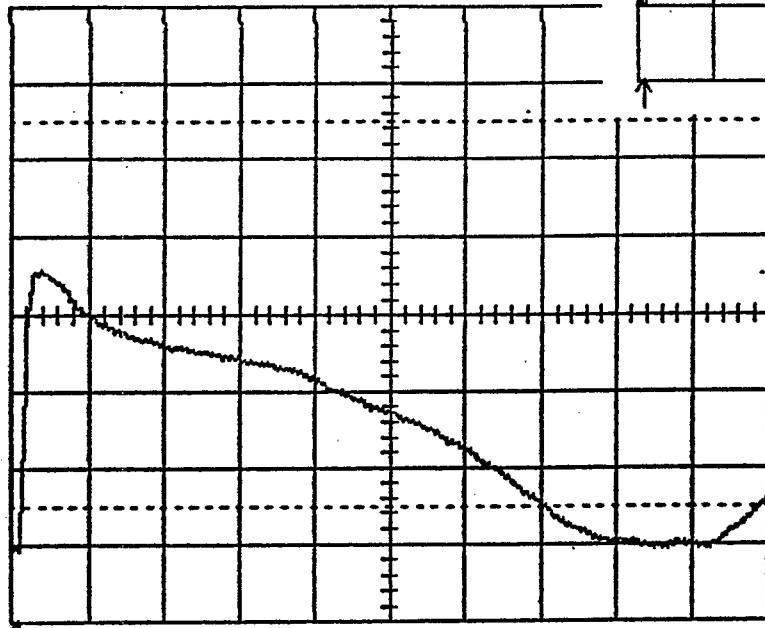

← (a). Background, 7-pulse average

(b).  $1.6 \cdot 10^{-7}$  Torr CO<sub>2</sub> equivalent  
w/ 8-pulse average →

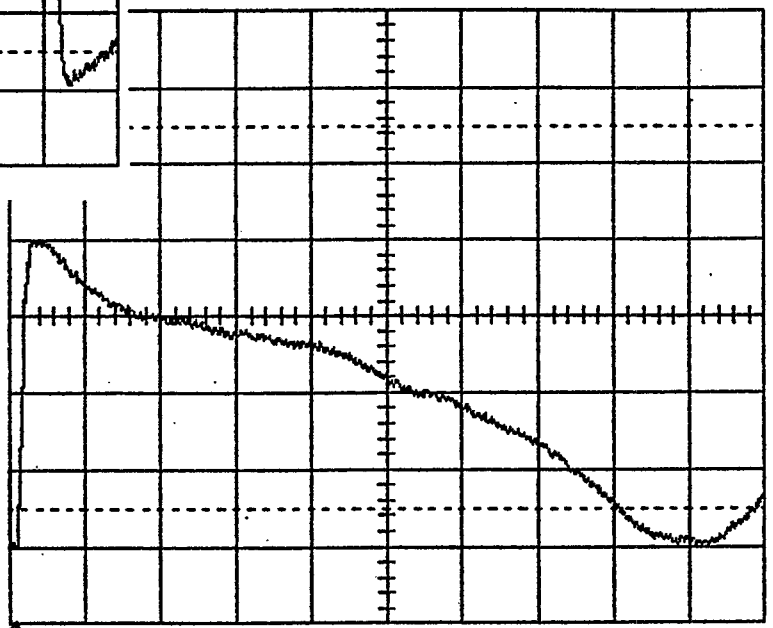

← (c).  $1.6 \cdot 10^{-7}$  Torr CO<sub>2</sub> equivalent  
w/ 46-pulse average

(d). Background w/ 10-pulse average →




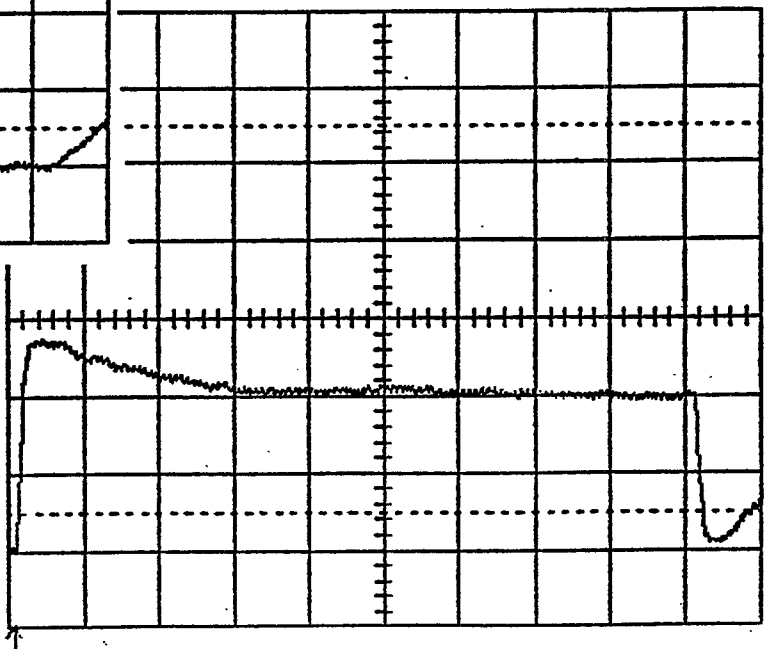


Fig. 4. Horizontal beam centroid and integrated intensity from C5 IPM

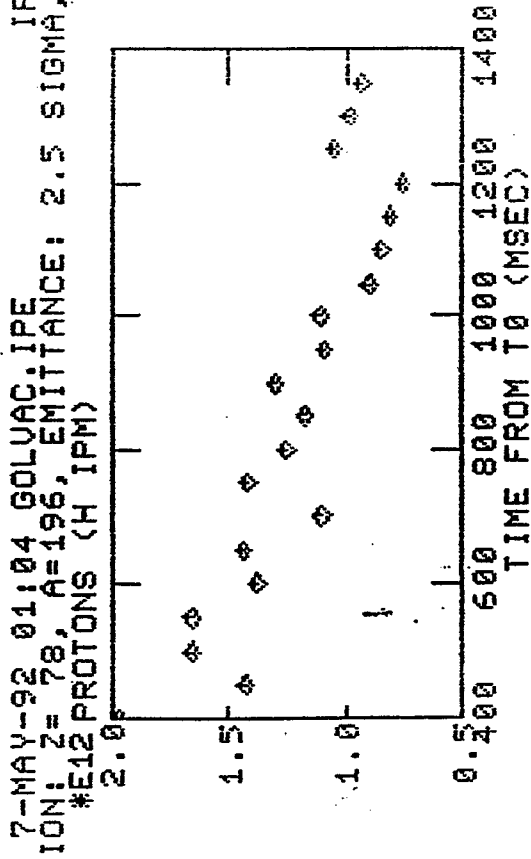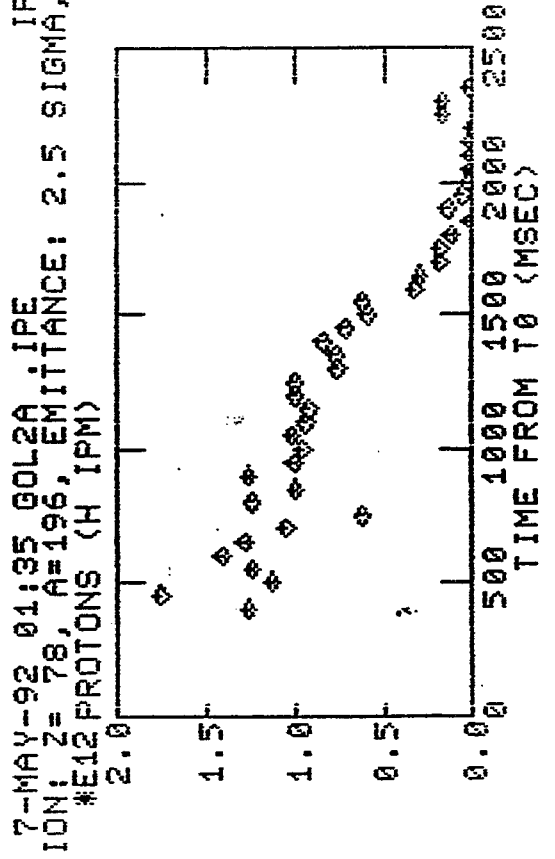

*1 sec flat porch*

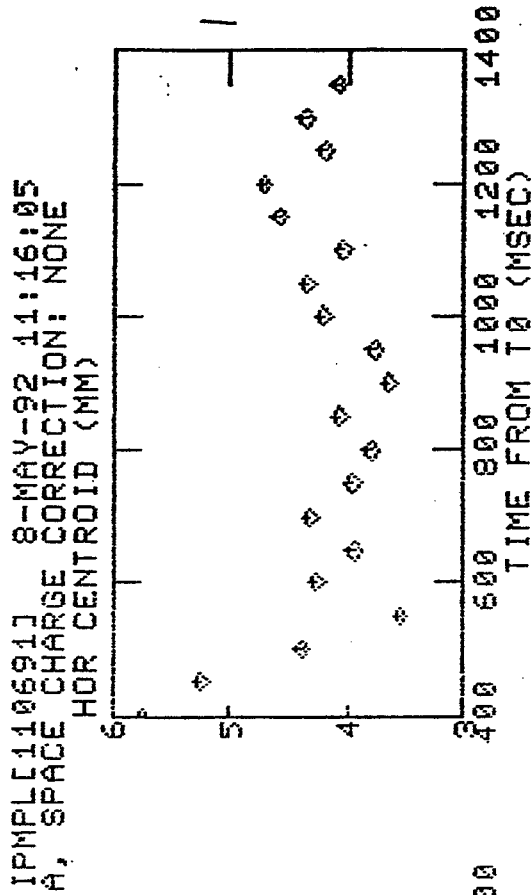

*1.8 sec flat porch*

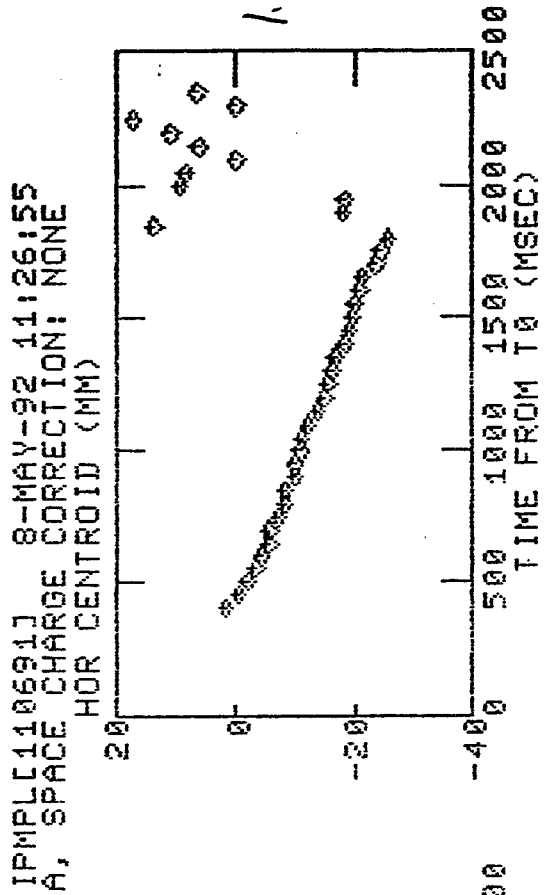


Fig. -

# Decay Rate of Gold Beam vs P(CO2)

+78 and 267-MeV/u

