

Matching Between LTB and Booster

R. K. Reece

March 1993

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

<i>AGS Complex Machine Studies</i>	
(AGS STUDIES REPORT Number <u>277</u>)	
<u>Matching between LtB and Booster</u>	
Study Period:	09 -12 March 1993
Participants:	K. Reece, T. Roser, R. Thern, M. Tanaka, V. Garczynski, J. Wei, D-P Deng+MCR
Reported by :	T. Roser at the 10.Mar.93 System Coordinators Meeting
Edited by :	M. Tanaka
Machines:	LINAC + LtB+ AB_Inj
Beam:	User3, 200 MeV low intensity H ⁻ injection with the fast chopper and 1/2 turn beam, RF off
Instruments:	HARPS @LtB, PIP and IPM@AB_Inj
Aim	<i>To attempt to match the LtB beam optically to the booster</i>

I. Transport quadrupole settings:

The following quadrupole setting of the HEBT and LtB Lines are used before and after matching the Twiss parameters and dispersion at the C5 foil:

	Before	After	
QV07I :=	630	630	[A] @HEBT
QH017 :=	650	650	
QV029 :=	640	640	
QH042 :=	750	750	
QV054 :=	490	490	
QH11I :=	160	160	[A] @LtB
QV21I :=	213	213	
QH31I :=	112	112	
QV41I :=	156	156	
QH51I :=	203	203	
QH61I :=	184	110	
QH71I :=	166	175	
QH81I :=	122	55	
QV91I :=	131	45	
QH101I :=	111	0	
QV111I :=	72	67	
QH121I :=	207	237	
QV131I :=	208	201	

Fig.1a and 1b show β_h (S) and β_v (S) at HEBT and LtB before and after matching.

II. Summary of LtB3 emittance measurements:

Measurements of the transverse beam emittance in the LtB3 were made by varying quadrupoles and observing the change in the HARP beam profile (MW107). The profile were analyzed by a new method described in ref.[1], which fits the initial beam parameters to all measured beam profiles simultaneously, rather than to the beam sizes since the emittance obtained by the standard method depends strongly on the way to calculate the beam size from the measured profiles.

The following table summarized the results together with the previous measurements(26.Feb.93) for comparison. As seen, the present results are in agreement with the previous one.

Twiss parameters... at Tank 9	(26.Feb.93) (9 meas.)	09-10.Mar.93 before (5)	12.Mar.93 after (6)
α_h	2.0 ± 0.1	2.0 ± 0.3	1.4 ± 0.2
β_h [m]	9.1 ± 0.6	7.3 ± 0.7	7.6 ± 1.0
$\epsilon_{rms_h} [\pi \mu m]$	1.7 ± 0.2	1.6 ± 0.2	0.9 ± 0.2
$\sigma_{p/p} [10^{-3}]$	2.5 ± 0.1	2.1 ± 0.1	1.0 ± 0.2
α_v	-0.1 ± 0.1	0.4 ± 0.1	0.1 ± 0.1
β_v [m]	3.6 ± 0.2	4.2 ± 0.2	7.9 ± 0.6
$\epsilon_{rms_v} [\pi \mu m]$	1.2 ± 0.1	1.3 ± 0.1	0.6 ± 0.1

[1] T. Roser, AGS Studies Report No. 275

III. Beam profiles at MW107 before and after matching (HARP):

The beam profiles before and after matching were measured at MW107 as follows:

	MW035 (before)	MW107 (before)	MW107 (after)
$x_{rms_h}^m$ [mm]	- 10.25	0.76	- 5.29
$x_{rms_v}^m$ [mm]	- 0.69	- 4.50	- 0.39
FWHM_h [mm]	20.50 (21.2)	4.06 (5.6)	10.32 (9.7)
FWHM_v [mm]	5.56 (9.1)	14.81 (14.9)	6.88 (13.1)

	before	after
DH115/Width	43.3 A/4.9 mm (5.1 mm)	46.7 A/5.3 mm (7.0 mm)

(xxx) : expected values

IV. Dispersion at injection before and after matching (PIP):

The position and angle of the injected beam at the foil were measured by PIP as a function of the tank 9 phase (TRFP9) which changes the momentum of the LINAC beam. The revolution frequency of the spiral beam was also measured to calibrate the TRFP9 command. Assuming the $C_{orbit} = 201.78$ m, we have

$$\Delta p / \Delta TRFP9 = 0.039 \text{ MeV/c/count}$$

or

$$(\Delta p/p) / \Delta TRFP9 = 6.1 \times 10^{-5} / \text{count}$$

and $p_{inj} = 642.5$ MeV/c ($T = 198.90$ MeV) at $TRFP9 = 200$ as seen in Fig. 2.a.

	before	after
$\Delta x / \Delta TRFP9$ [mm]	-0.17	-0.05
$\Delta x' / \Delta TRFP9$ [mrad]	-0.035	0.003
$Dx = \Delta x / (\Delta p/p)$ [m]	-2.8 (-1.3)	-0.81 (0.0)
$Dx' = \Delta x' / (\Delta p/p)$ [rad]	-0.6 (-0.4)	0.05

(xxx) : expected values.

Fig. 2b and 2c show x [mm] and x' [mrad] at D2 vs. TRFP9 command after matching, respectively

The measured dispersion mismatch is about a factor 2. This could be due to an error in the calibration of Tank9 phase or D2 PUE.

V. Beam emittance at injection before and after matching (IPM):

IPM data were taken at $t = 31.60$ ms (5 ms after injection) before and after matching. Missteering at injection was corrected to about ± 3 mm in both planes before taking IPM profiles. After matching, there is an improvement in both vertical and horizontal emittance though the values are still a factor of two higher than expected one. The horizontal emittance is not corrected for dispersion effects.

	before	after
$\epsilon_{rms,h}^{\dagger}$ [$\pi \mu\text{m}$]	≤ 4.9	≤ 4.4
$\epsilon_{rms,v}^{\dagger}$ [$\pi \mu\text{m}$]	3.1 (3.8)	2.5 (1.3)

\dagger values are obtained neglecting dp/p .

(xxx) : expected values

Fig.3a and 3b shows the IPM beam profiles at $t = 31.60$ ms before and after matching, respectively.

VI. Conclusions:

✎ The matching procedure did not introduce any additional losses in the LtB line. It successfully reduced the dispersion mismatch to negligible levels. The horizontal beam width in LtB is well controlled, however, the is not true for the vertical width. Some improvement in the emittance of the circulating beam was achieved, but there is still a factor of 2 emittance blow-up.

BEFORE

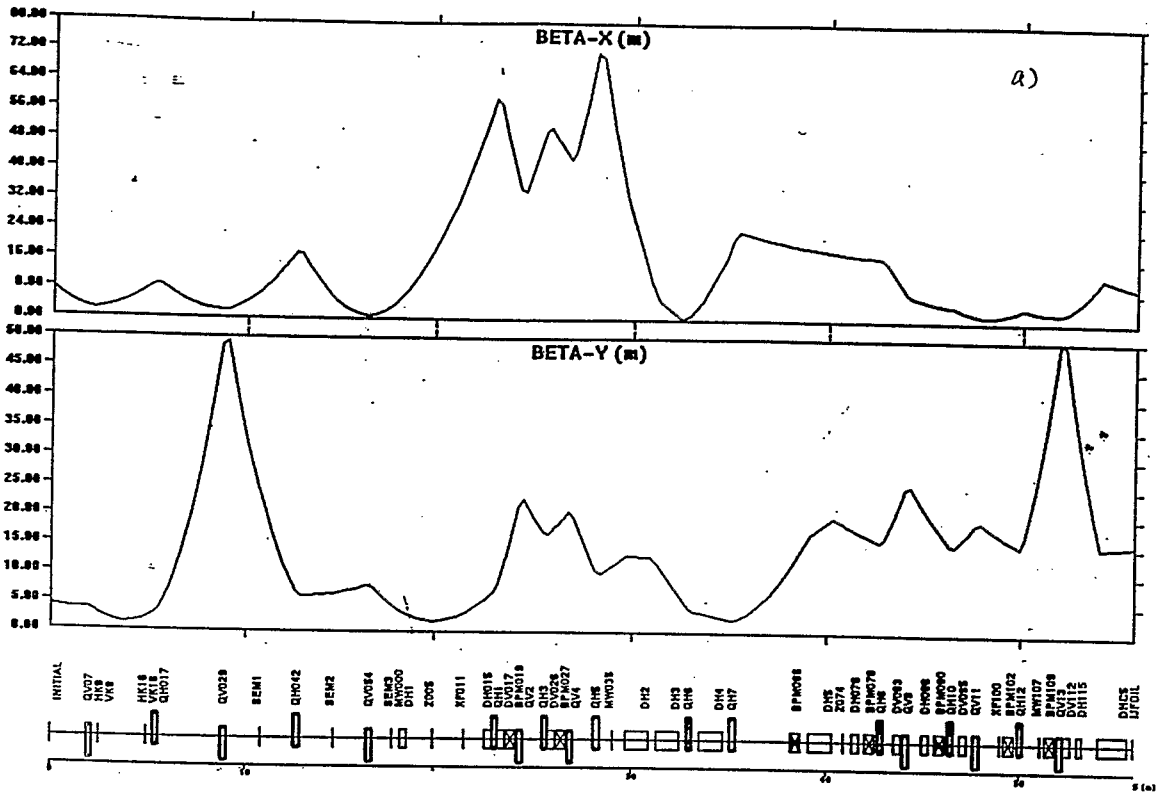


Fig. 1a

AFTER

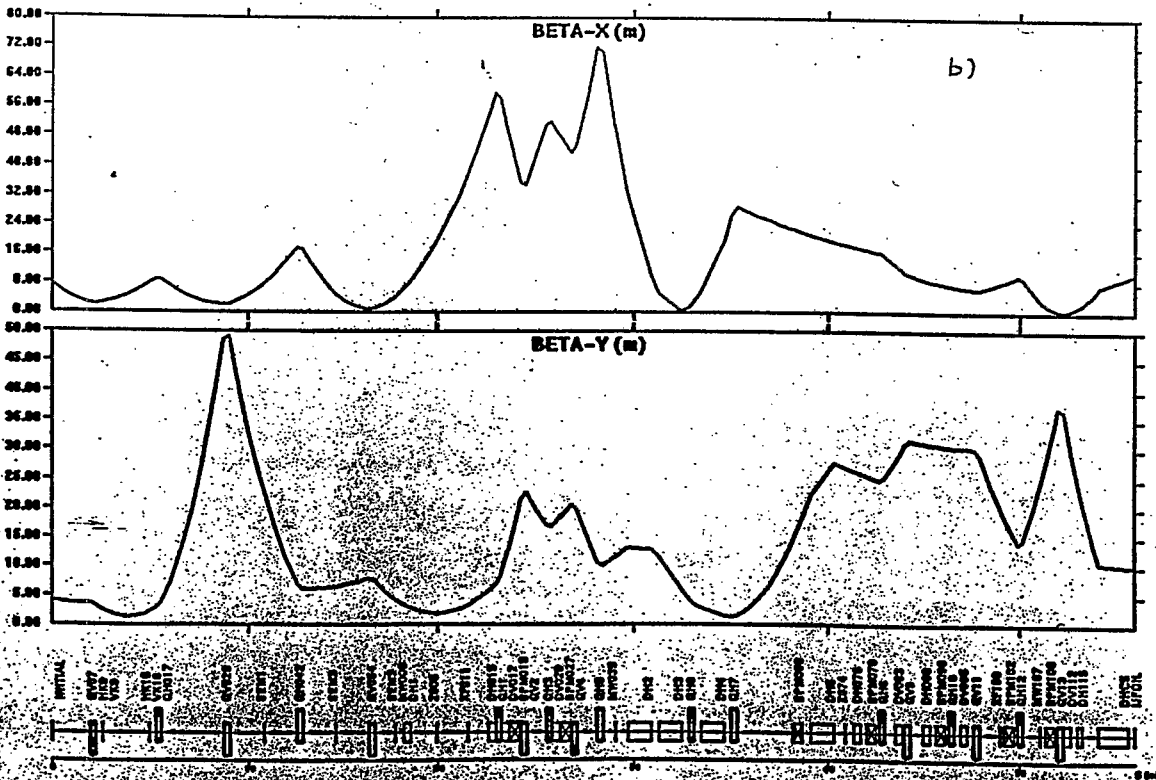


Fig. 1b




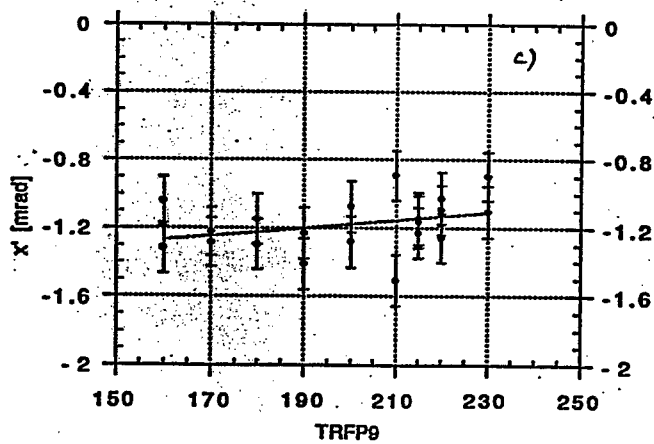


Fig. 2

Fig. 2

BEFORE

BOOSTER IPM [030493] 03-11-1993 14:38:47 file:30310215.725 no: 2 of 31

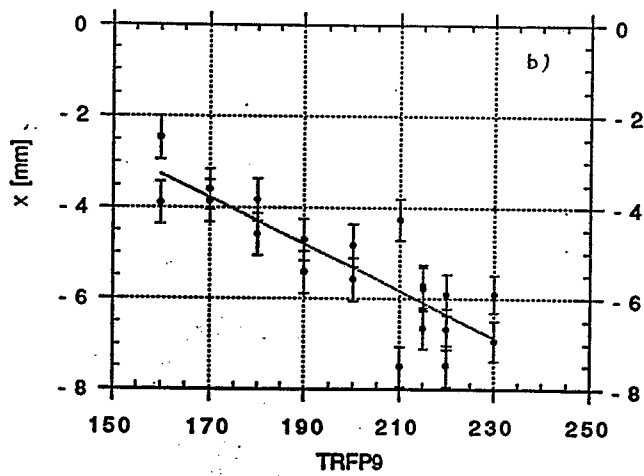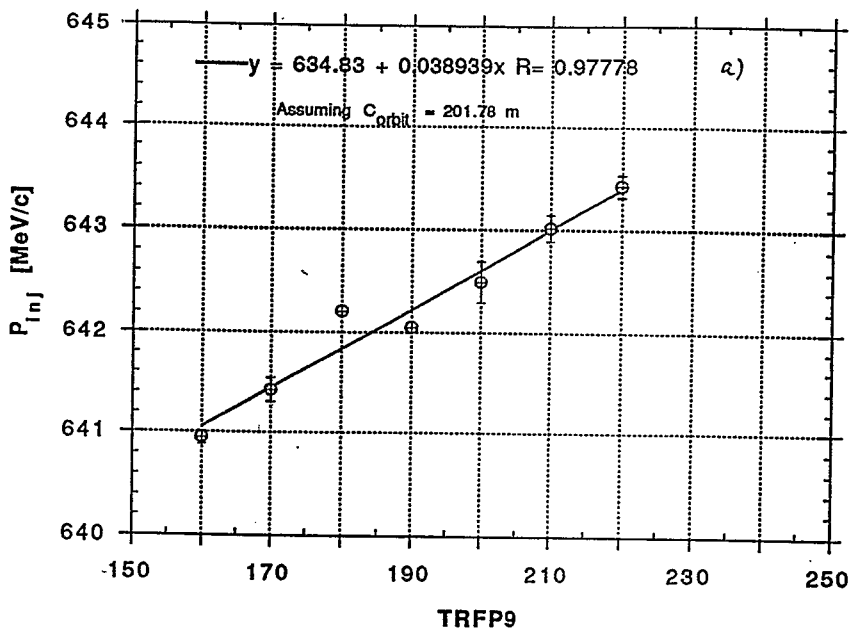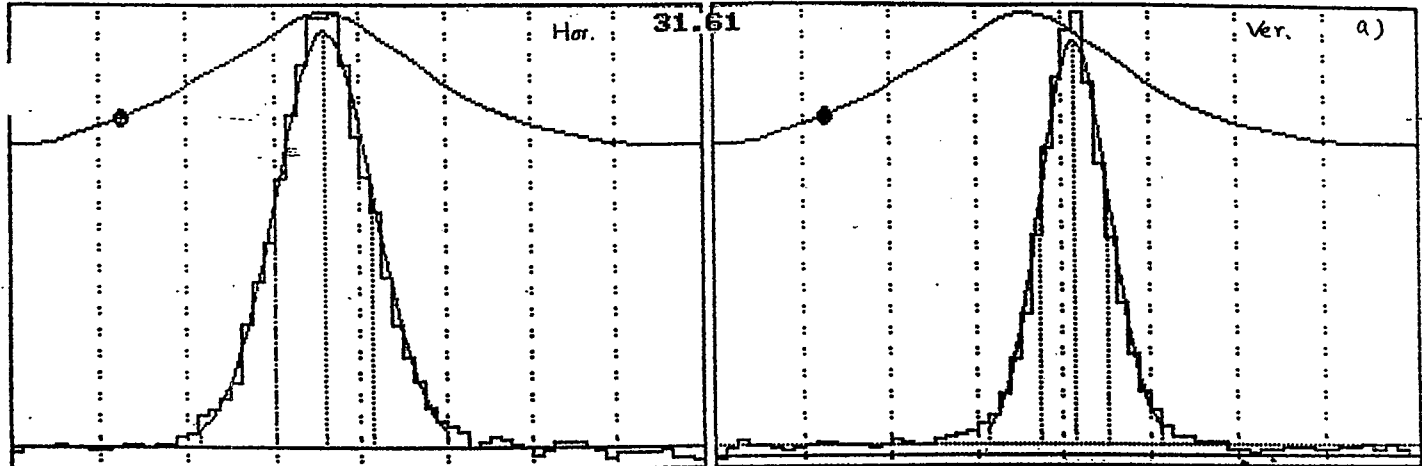

H min= -18	max= 666	tot= 7268	V min= -7	max= 1546	tot= 13534			
M0-1-2: 7283	-4.948	6.694	X: 0.04	M0-1-2: 11342	1.509	4.706	X: 0.04	
ags: 1466	bstr: 1	#: 1	trig: 31.61	int req: 3.000	actual: 3.008			
DAC00-07: 0	-200	-200	0	1600	0	1600	0	out: 22 01 02
ADC00-07: -325	-164	-154	-1753	-632	-328	-1938	-1204	in: 00 00 00
ADC08-15: -1339	-1417	-1307	-1661	-1554	-1428	-1167	-1310	[NL] []


beam aligned using PIP
 $\epsilon = 4.9\pi$

$\epsilon = 3.1\pi$ (EXPECT 3.8)

Fig. 3a

AFTER

BOOSTER IPM [030493] 03-11-1993 14:37:47 file:30310223.710 no: 2 of 31

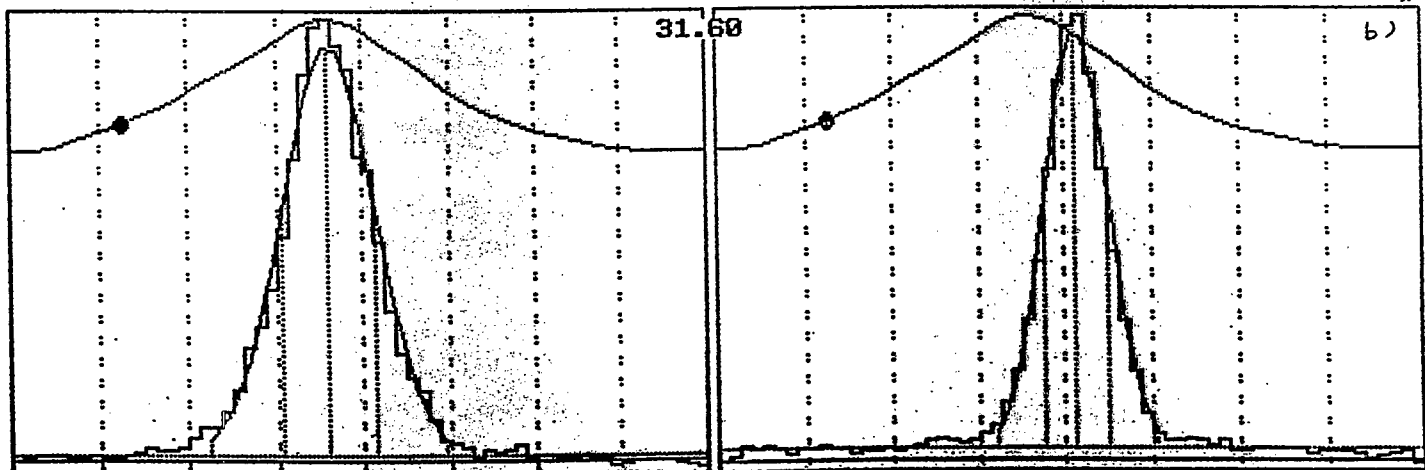

H min= -14	max= 815	tot= 8686	V min= -3	max= 1312	tot= 11649			
M0-1-2: 8172	-4.802	6.320	X: 0.05	M0-1-2: 8191	1.454	4.371	X: 0.04	
ags: 2101	bstr: 1	#: 1	trig: 31.60	int req: 3.000	actual: 3.008			
DAC00-07: 0	-200	-200	0	1600	0	1600	0	out: 22 01 02
ADC00-07: -328	-166	-157	-1754	-648	-328	-1941	-1206	in: 00 00 00
ADC08-15: -1341	-1418	-1308	-1668	-1555	-1429	-1170	-1310	[NL] []

After matching
 $\epsilon = 4.4\pi$

$\epsilon = 2.5\pi$ (EXPECT 1.3 π)

Fig. 3b

Fig. 3