

BNL-104250-2014-TECH AGS.SN378;BNL-104250-2014-IR

Tandem Gold Beam Two Injections Study at the Booster

J. Benjamin

July 2000

Collider Accelerator Department Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-98CH10886 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

	AGS Complex Machine Studies
۰ ۸۰ ۱۹۰۰ - ۲۰۰۰ - ۲۰۰۰ - ۲۰۰۰ - ۲۰۰۰	(AGS Studies Report No. 378)
Tandem	Gold Beam Two Injections Study at the
	Booster
Study Period: A	oril 2000
Participants: J. E	enjamin, D. Steski, K. Zeno, and S.Y. Zhang
Reported by: S.)	. Zhang and K. Zeno
Machine: Tande	m and Booster
Beam: Gold Ions	
Tools: Dump Bu	mp and Current Transformer

Aim: To study the effect of the lost particles in the first injection on the efficiency of second injection at the Booster.

.

Tandem Gold Beam Two Injections Study at the Booster

S.Y. Zhang and K. Zeno

AGS Studies Report, No. 378

July 27, 2000

Summary

- 1. Two movable Gold beam injections at the Booster are established at a 600 Gauss porch to study the effect of first injection on second one.
- 2. It is found that the beam dumped in the ring by the first injection affects the second injection. The time structure of this effect is approximately consistent with the one of previous studies, i.e., the vacuum bump created by the lost beam decays in 100 to 150 ms.

Experiment

The gold beam loss mechanism was studied by scraping beam in the Booster ring, e.g. in [1], and it was found that the lost beam created vacuum bump might cause further beam loss. In specific, this vacuum bump has a decay time constant of 35 ms [2].

It is of interest, therefore, to establish two Tandem beam injections that are close enough to compare, or to observe the effect of first injection on second one.

Two Tandem beams were established as close as 20 ms, for the Booster injection. At the Booster, a 600 Gauss porch of more than 200 ms long was tuned to accommodate two injections.

With the second request of beam this close, the cesium replenishment at the ion source becomes insufficient. Therefore, the intensity of the second pulse was significantly lower than the first one. After several tries of tuning, the plan to directly compare two injections was abandoned.

The study then was focused on the effect of first injection on second one.

The two injections were set apart by 20 ms. The first injected beam was dumped by the Booster dump bump about 10 ms after the injection. This is compared with the case that the beam stopped outside of the Booster ring. In Fig.1, it is shown that without the beam loss in the ring, the beam life time of second injection is longer.

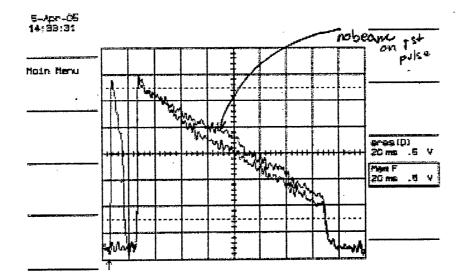


Fig.1. First injected beam dumped outside of Booster ring, and dumped 10 ms after injection.

The beam was also dumped 5 ms and 15 ms after the injection, and this did not show visible difference from the ones dumped at 10 ms. Since the vacuum bump created by the beam loss lasts more than 100 ms, the difference in these situations might be too subtle to identify.

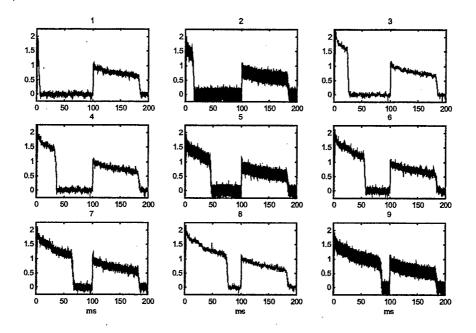


Fig.2. First injected beam was dumped at different times.

To get more systematic comparison, two injections were moved 100 ms apart, and the dump bump was set to dump the first injected beam every 10 ms apart. The beam currents of these 9 cases are shown in Fig.2. Tandem intensity of the first and second injections was about 2×10^9 and 10^9 ions.

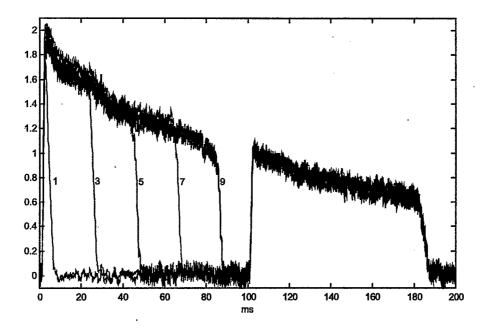


Fig.3. Beam current of the cases of 1, 3, 5, 7, and 9.

In Fig.3, the beam currents of the cases of 1, 3, 5, 7, and 9 are displayed, where the beam was dumped 100, 80, 60, 40 and 20 ms before the second injection, respectively.

In Fig.4a, a 10 ms filter is applied to these beam currents. In Fig.4b, the beam currents of the second injection are logarithmically displayed, where the slightly different peak beam intensity is normalized for better comparison of the beam life time. One may observe that the beam life time of second injection is 300 ms, if the first beam is dumped 100 ms prior to second injection, and it becomes 200 ms, if the first beam dumped 20 ms prior to second injection. It is observed quite consistently that, the first injected beam dumped closer, the beam life time of the second pulse is shorter.

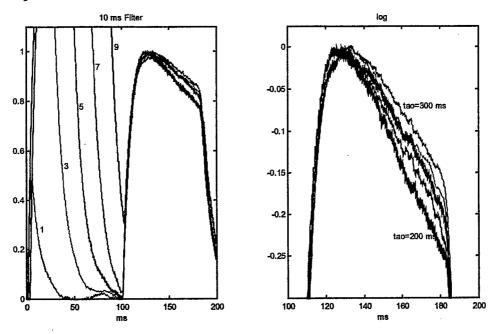


Fig.4. a. Beam currents, 10 ms filter applied. b. Beam currents of the second injection are logarithmically displayed.

The 10 ms filter has smeared out the detailed beam current structure of the second pulse, however, the overall picture is consistent with the results obtained in previous studies, i.e., the vacuum bump created by the lost beam has a decay time constant of 35 ms, and it takes effect in 100 to 150 ms.

Acknowledgment

We would like to thank J. Benjamin and D. Steski for establishing the Tandem beams and also the help in the study.

References

1. S.Y. Zhang, AGS Study Report No.373, Oct. 1999.

2. S.Y. Zhang, AGS Study Report No.370, May 1998.