



BNL-103979-2014-TECH

AGS.SN101;BNL-103979-2014-IR

## Fast Repetition Rate of AGS

W. Weng

October 1977

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.EY-76-C-02-0016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.


## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Date 10/19/77 Time 0045-0345 Experimenters W. Weng, E. GillSubject Fast Repetition Rate of AGSOBSERVATIONS AND CONCLUSION

Objectives: Run the AGS at different repetition rates (from 2 to 0.5 pulse/sec) to test the injection and acceleration performance.

Procedure: We started with spiral beam for 1 msec and with AGS cycle varied from 2 sec to 0.6 sec. The voltage variation for the complete cycle of 0.57 sec is shown in the picture. In the front porch the voltage is 1.8 kV and the peak voltage before going to invert is 10 kV. The AGS was left at 1.8 pulse/sec with spiral beam intensity  $\sim 14 \times 10^{12}$  ppp for about two hours. Then the rf was turned on for five minutes to accelerate  $5 \times 10^{12}$  ppp up to 140 msec. At 3:40 the study was terminated because of the vacuum problem in ABS section.

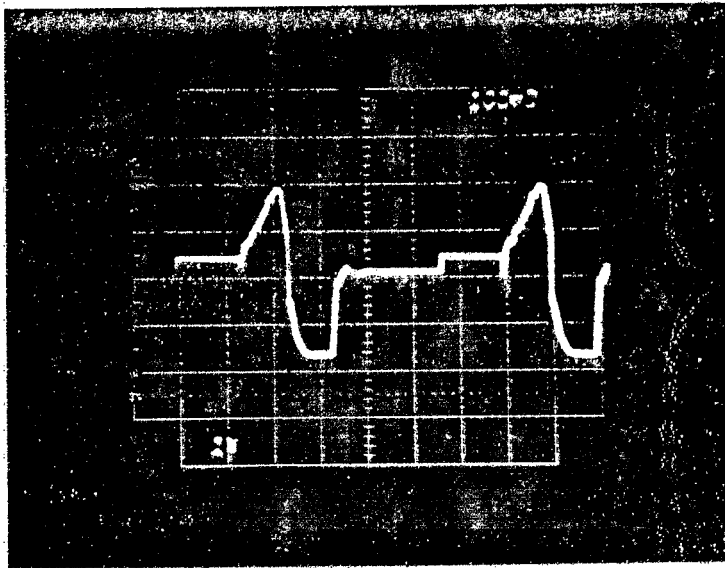

- Conclusions:
- (1) The inflector is capable of handling fast rep rate up to 1.8 pulse/sec without causing any problem.
  - (2) With spiral beam the extreme condition we have tested was 2 pulse/sec with 120 msec dwell time.
  - (3) The acceleration test of 0.6 sec cycle (with 220 msec dwell time) is not decisive. Although we anticipate no further problems, the test has to be repeated as soon as possible.

Problem: During the test we found a fluctuation of Gauss clock of 30 counts out of 2970. This should be fixed before the next study.