

Injection Capture vs. B

J. Herrera

November 1973

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.AT(30-1)-16 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Study of Injection Capture vs a change in \dot{B} (Nov 20, 1973)
HERRERA & RAJA

A. Initial Conditions

- 1) \dot{B} vs time is shown on Fig. (1)
- 2) Spreading beam shown in Fig. (2)
- 3) Linac current about 45 to 50 ma for 120 psec.
- 4) Machine was tuned for max. accelerated beam of 6.0×10^{12} p/p. Early monitor about 7.2×10^{12}


B. Experiment:

- 1) \dot{B} vs time changed (Fig. (3))
- 2) Spreading beam shown in Fig. (4)
- 3) Machine was tuned for max accelerated beam of about 6.5×10^{12} p/p. Early monitor was 8.0×10^{12}

C. Comments:


- 1) It appears that running at a higher \dot{B} at injection with the higher r.f. voltage we presently use results in a higher overall accelerated beam.
- 2) Additional experiments with increased and decreased \dot{B} are required.

Herrera
11/21/73

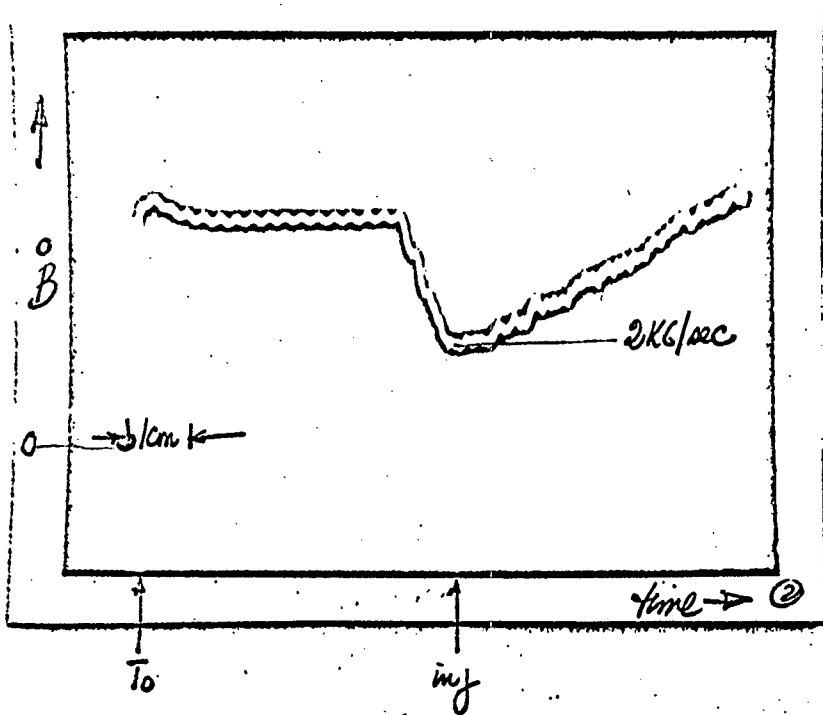


- 1) Backleg D3 magnet
- 2) 0.1 volt/cm
- 3) 10ms/cm

Fig. (1)

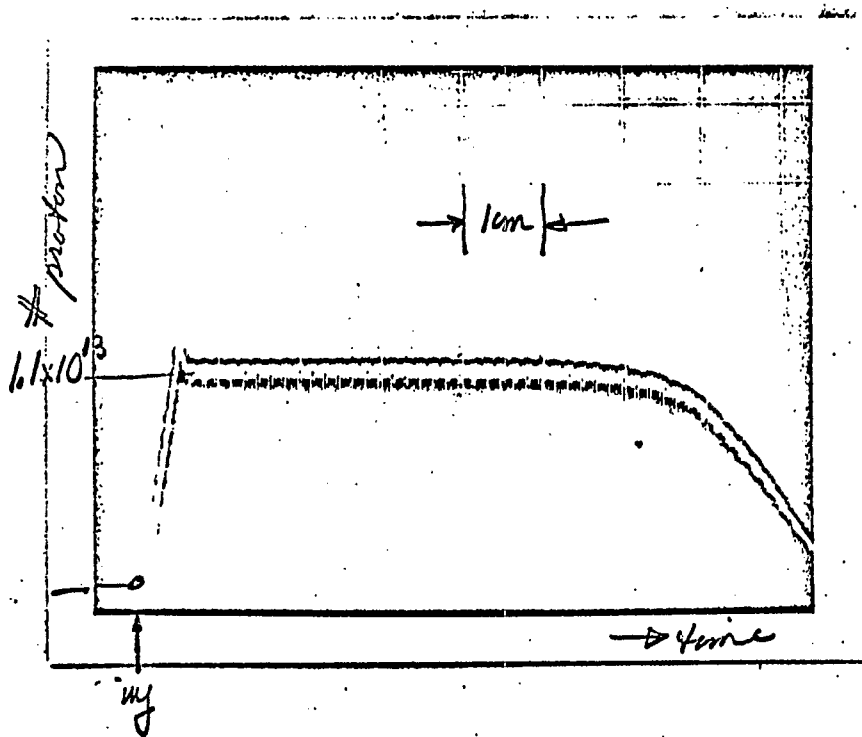


- 1) H 15 transformer
- 2) 1 volt/cm
- 3) 200 μsec/cm

Fig. (2)

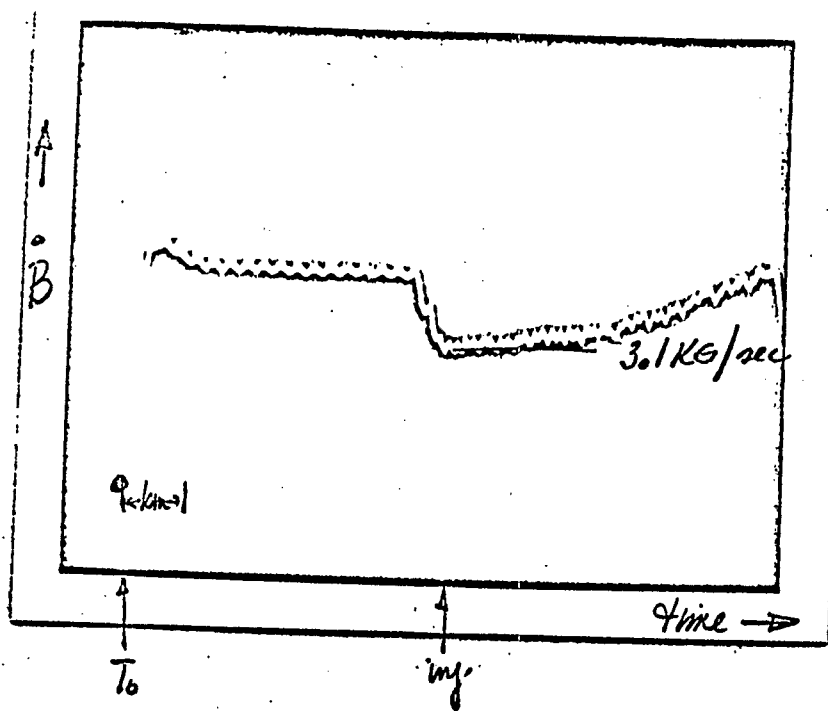

- 1) Beckley D3 magnet
- 2) 0.1 volt/cm
- 3) 10 ms/cm

Fig. (3)

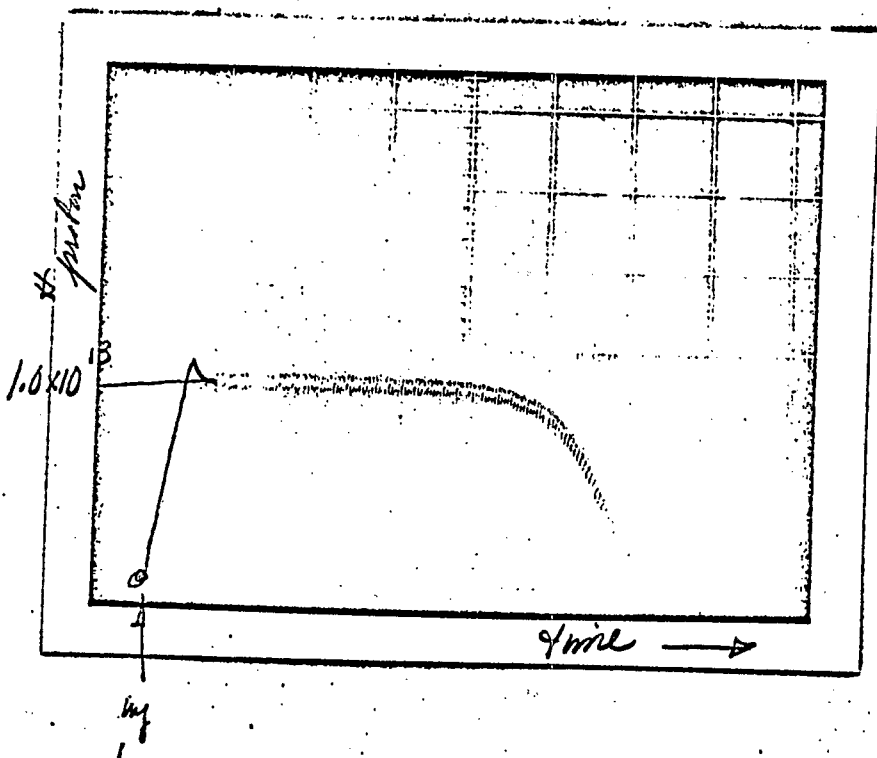

- 1) H 15 transformer
- 2) 1 volt/cm
- 3) 200 μ sec/cm

Fig. (4)