



BNL-104058-2014-TECH

AGS.SN181;BNL-104058-2014-IR

To Program Power Supplies for Horizontal and Vertical High Field Quadrupole Strings to Shift Tune of AGS During Acceleration Cycle

A. Feltman

May 1985

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

5/22/85

Number 181

AGS Studies Report

Date(s) May 22, 1985 Time(s) 0400 - 0700

Experimenter(s) A. Feltman, J. Funaro, R. DiFranco

Reported by A. Feltman

Subject/Experiment To program power supplies for horizontal and vertical high field quadrupole strings to shift tune of AGS during acceleration cycle

Preliminary Preparation

Two function generator cards were installed and SEB programs QVERT and QHORIZ were setup to talk to these cards. The function generator outputs were coupled to the respective d.c. power supply reference inputs. The SCR bridges were also bypassed.

Observations and Conclusion

QHORIZ and QVERT were called and the respective function generators programmed through "FUNK". QHORIZ was setup in the LIN mode and QVERT was setup in the ramp mode. This was done to demonstrate the versatility of the function generators.


The function generator amplitudes and time settings are as shown with photos of the function generator output voltages and the corresponding magnet string currents.

One hundred amps full scale was used rather than two hundred amps because it appeared that we could not drive the power supply this high. It appears that the MUX for QVERT is probably off by 2/1.


mvh

SEB HFELT 22-May-85 06:37 27.9
TIME= 1000 PRIORITY= 4

	AREA	EQPT	REQUEST	READBACK
1	SEB	QH0RZ	1 ON	515 -514
2	SEB	QH1A	50	MSEC T0
3	SEB	QH1S	10 LIN	MSEC T0
4	SEB	QH1T	4 ON	MSEC T0
5	SEB	QH2A	380	MSEC T0
6	SEB	QH2S	40 LIN	MSEC T0
7	SEB	QH2T	12 ON	MSEC T0
8	SEB	QH3A	500	MSEC T0
9	SEB	QH3S	10 LIN	MSEC T0
10	SEB	QH3T	28 ON	MSEC T0
11	SEB	QH4A	1000	MSEC T0
12	SEB	QH4S	50 LIN	MSEC T0
13	SEB	QH4T	40 ON	MSEC T0
14	SEB	QH5A	2000	MSEC T0
15	SEB	QH5S	30 LIN	MSEC T0
16	SEB	QH5T	52 ON	MSEC T0
17	SEB	QH6A	-1000	MSEC T0
18	SEB	QH6S	600 LIN	MSEC T0
19	SEB	QH6T	70 ON	MSEC T0

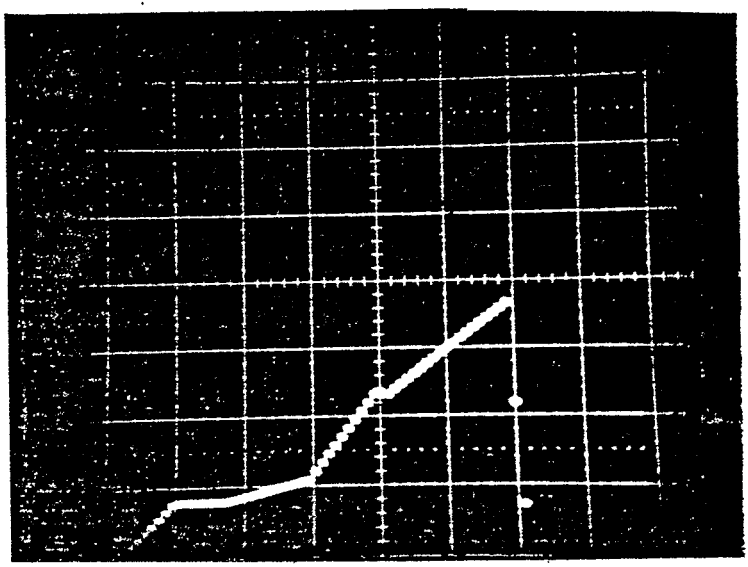

100m SEC/DIV 20 DIVS/DIV 5/27/85

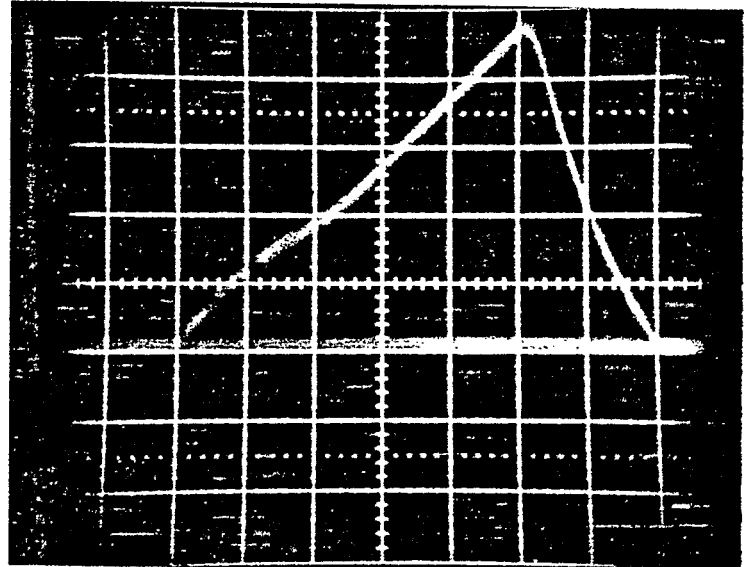

SEB	AFELT	22-May-85	06:15 16.2
TIME= 1000	PRIORITY= 4		
AREA	EQPT	REQUEST	READBACK
1 SEB	QVERT	1 ON	0 1
2 SEB	QV1A	50	MSEC T0
3 SEB	QV1S	50 LIN	MSEC T0
4 SEB	QV1T	2 OFF	MSEC T0
5 SEB	QV2A	700	MSEC T0
6 SEB	QV2S	200 RMP	MSEC T0
7 SEB	QV2T	4 ON	MSEC T0
8 SEB	QV3A	700	MSEC T0
9 SEB	QV3S	400 RMP	MSEC T0
10 SEB	QV3T	26 ON	MSEC T0
11 SEB	QV4A	1700	MSEC T0
12 SEB	QV4S	800 RMP	MSEC T0
13 SEB	QV4T	40 ON	MSEC T0
14 SEB	QV5A	1000	MSEC T0
15 SEB	QV5S	32 RMP	MSEC T0
16 SEB	QV5T	32 ON	MSEC T0
17 SEB	QV6A	-2000	MSEC T0
18 SEB	QV6S	1000 LIN	MSEC T0
19 SEB	QV6T	70 ON	MSEC T0

