



BNL-104609-2014-TECH

AGS/AD/Tech Note No. 181; BNL-104609-2014-IR

The QTUNE Program--The AGS Extracted Beam Transport Program

J. Ryan

August 1982

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Accelerator Department
BROOKHAVEN NATIONAL LABORATORY
Associated Universities, Inc.
Upton, New York 11973

AGS Division Technical Note
No. 181

The "QTUNE" Program--The AGS Extracted Beam Transport Program

J.F. Ryan
August 4, 1982

Introduction

The purpose of this Technical Note is to document the extracted beam transport program called "QTUNE". This program can be used to calculate beam sizes in the four SEB lines and the FEB line from the ring to the primary targets using the known power supply and magnet characteristics. Typical TTY and Versatec outputs for the "U" line and "C" line are shown in Figures 1 and 2. The program is run with the R-R QTUNE command when in the operations area.

Discussion

The primary purpose of this program is to calculate the horizontal and vertical beam sizes in the various beam lines using the present settings of the power supplies and the best known values of beam emittance. Beam splitting is not considered. All beam is assumed going down each line when calculating beam sizes. The magnetic data is calculated from the calculated magnet current using a 4th order power series. Power supply and magnet current limitations for the beam lines are included. Various groups of quadrupoles in the beam lines can be tuned to vary waist locations and sizes.

This program uses 5 by 5 matrices to include momentum dispersion effects. Because this program is similar to a first order "TRANSPORT" run, one output option will write on the "MATRIC-DAT" data file matrices and beam sizes in a similar format to "TRANSPORT". All other output data is written on the "QTUNE-DAT" data file which should be printed after exiting from the program.

Program Options

The various program options are shown on the HELP file in Figure 3.

The "A" command will print on the "MATRIC-DAT" file the transport matrices and emittances using the beam line chosen with the constant BFILE and the power supply data chosen with constraints IAGSF and IENUT. Figures 4A-B show a part of this file.

The "B" command prints the calculated currents and fields in the magnets. The power supply values are chosen with the constants BFILE, IAGSFG and IENUT. Figures 5A-B show this file for the "C" line.

The "H", "D", "E", "K" and "L" command descriptions are shown on Figure 3.

The "C" command is used to change one or more constants shown in Figure 6 using the NAMELIST feature. These constants only have numerical values. Those that effect the graphics output are XYRANG, ZRANGE, LFRAME, AND TEKVER. The input beam at H13 (FEB) or F13 (SEB) is described with PBEAM, ABEF13, ABEH13, DPP and H13MOM (FEB only). The beam line is chosen with BFILE, and IAGSFG selects if the power supply command or readback is used to calculate the magnet current. An off-line program, "ENUTQ", can be chosen to supply the power supply values and is selected using constant IENUT. This program, similar to "AGAST", rather than the TTY option, should be used for off-line communication since these values can be easily transferred to and from the on-line program "AGAST". The constant TEGFG is used to change to a different "ENUTQ" file.

The "G" command is used to plot beam sizes as on Figures 1, 2 or 7. An "E" will exit from this option. During FEB or SEB operation the constants are initialized so that a "G" command will plot the "U" line or "C" line beam sizes. The values of certain parameters are printed on the graph, "QTUNE-DAT", and sent to "AGAST" or "ENUTQ". These are shown in Figure 8 and defined in Figure 9.

The "P" and "M" commands will print on "QTUNE-DAT" the constants of the beam line and magnets as shown in Figures 10 and 11.


The "T" command, shown in Figure 12, is used to tune various groups of quads to meet desired values of waist parameters described in Figure 9. The beam sizes at the targets cannot be used to tune the quads before the targets, but can be varied by changing the waist locations and sizes. If tuning is mathematically successful and the program is on-line, the quad power supplies will be changed.

The "W" command calculates the values of the FEB or SEB parameters without plotting the graph.

Theory and Units


The beam is considered a collection of particles traveling down a beam line with the magnetic elements described with a matrix R_i .

→ BEAM DIRECTION →

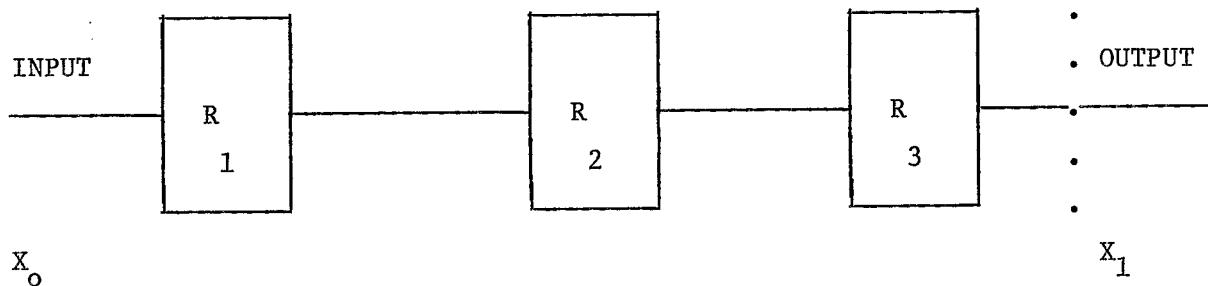

Or

→ BEAM DIRECTION →

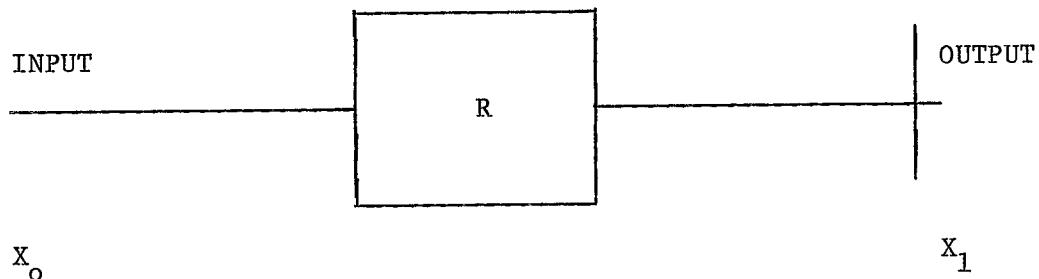

$$[R] = [R_3] \times [R_2] \times [R_1] \quad (1)$$

DET [R] = 1

The characteristics of the beam particles at the output can be determined from the following matrix equation:

$$[X_1] = [R] \times [X_0] \quad (2)$$

"QTUNE" uses a 5x5 order matrix for the magnetic elements, [R]. Equation 2 can be expanded to:

$$\begin{bmatrix} x_1 \\ \theta_1 \\ y_1 \\ \phi_1 \\ \delta_1 \end{bmatrix} = \begin{bmatrix} R_{11} & R_{12} & R_{13} & R_{14} & R_{15} \\ R_{21} & R_{22} & R_{23} & R_{24} & R_{25} \\ R_{31} & R_{32} & R_{33} & R_{34} & R_{35} \\ R_{41} & R_{42} & R_{43} & R_{44} & R_{45} \\ R_{51} & R_{52} & R_{53} & R_{54} & R_{55} \end{bmatrix} \times \begin{bmatrix} x_o \\ \theta_o \\ y_o \\ \phi_o \\ \delta_o \end{bmatrix} \quad (3)$$

where standard TRANSPORT definitions apply to the particle characteristics:

x_o ----- horizontal displacement of input ray, in inches, with respect to assumed central trajectory.

θ_o ----- the angle (mr) that this input ray makes in horizontal plane with respect to central trajectory.

y_o ----- vertical displacement of input ray (inches) with respect to central trajectory.

ϕ_o ----- the angle (mr) that this input ray makes in vertical plane with respect to central trajectory.

δ_o ----- $\Delta P/P$ = fractional momentum deviation (%) of this input ray and the assumed central trajectory.

The units for the [R] matrix are:

$$\begin{array}{ccccc} R_{11} \left(\frac{\text{In } X}{\text{In } X} \right) & R_{12} \left(\frac{\text{In } X}{\text{mr } X} \right) & R_{13} \left(\frac{\text{In } X}{\text{In } Y} \right) & R_{14} \left(\frac{\text{In } X}{\text{mr } Y} \right) & R_{15} \left(\frac{\text{In } X}{\%} \right) \\ R_{21} \left(\frac{\text{mr } X}{\text{In } X} \right) & R_{22} \left(\frac{\text{mr } X}{\text{mr } X} \right) & R_{23} \left(\frac{\text{mr } X}{\text{In } Y} \right) & R_{24} \left(\frac{\text{mr } X}{\text{mr } Y} \right) & R_{25} \left(\frac{\text{mr } X}{\%} \right) \\ R_{31} \left(\frac{\text{In } Y}{\text{In } X} \right) & R_{32} \left(\frac{\text{In } Y}{\text{mr } X} \right) & R_{33} \left(\frac{\text{In } Y}{\text{In } Y} \right) & R_{34} \left(\frac{\text{In } Y}{\text{mr } Y} \right) & R_{35} \left(\frac{\text{In } Y}{\%} \right) \\ R_{41} \left(\frac{\text{mr } Y}{\text{In } X} \right) & R_{42} \left(\frac{\text{mr } Y}{\text{mr } X} \right) & R_{43} \left(\frac{\text{mr } Y}{\text{In } Y} \right) & R_{44} \left(\frac{\text{mr } Y}{\text{mr } Y} \right) & R_{45} \left(\frac{\text{mr } Y}{\%} \right) \\ R_{51} \left(\frac{\%}{\text{In } X} \right) & R_{52} \left(\frac{\%}{\text{mr } X} \right) & R_{53} \left(\frac{\%}{\text{In } Y} \right) & R_{54} \left(\frac{\%}{\text{mr } Y} \right) & R_{55} \left(\frac{\%}{\%} \right) \end{array}$$

Figures 4A-B show the individual element matrix and total [R] matrix at different points in the "C" line. "QTUNE" calculates matrices for drift spaces, horizontal and vertical focussing quadrupoles, wedge dipole and pitching magnets without edge focusing, and rectangular dipole and pitching magnets with edge focussing.

The beam is considered an array of particles that is described with a 5th order symmetrical sigma ellipsoid. For historical reasons the program uses a rms beam and then converts this to a 99% beam. The symmetric SIGMA matrix at the beam line input is:

$$\left[\begin{array}{ccccc} \sigma_{11} & \sigma_{21} & \sigma_{31} & \sigma_{41} & \sigma_{51} \\ \sigma_{21} & \sigma_{22} & \sigma_{32} & \sigma_{42} & \sigma_{52} \\ \sigma_{31} & \sigma_{32} & \sigma_{33} & \sigma_{43} & \sigma_{53} \\ \sigma_{41} & \sigma_{42} & \sigma_{43} & \sigma_{44} & \sigma_{54} \\ \sigma_{51} & \sigma_{52} & \sigma_{53} & \sigma_{54} & \sigma_{55} \end{array} \right] \quad (4)$$

$\sqrt{\sigma_{11}}$ = X_{\max} = maximum (half) width of the beam envelop in the X (bend) plane at the given point (inches).

$\sqrt{\sigma_{22}}$ = θ_{\max} = maximum (half) angular divergence of the beam envelope in the X-bend plane.

$\sqrt{\sigma_{33}}$ = Y_{\max} = maximum (half) height of the beam envelope.

$\sqrt{\sigma_{44}}$ = ϕ_{\max} = maximum (half) angular divergence of the beam envelope in the Y (non-bend) plane.

$\sqrt{\sigma_{55}}$ = δ_{\max} = half-width (1/2 $\Delta P/P$) of the momentum interval being transmitted by the system.

The coupling elements are the σ_{ij} elements for i not equal to j.

"QTUNE" assumes that the input beam for the SEB or FEB lines have no input X-Y coupling or:

$$\left[\begin{array}{ccccc} \sigma_{11} & \sigma_{21} & 0 & 0 & 0 \\ \sigma_{21} & \sigma_{22} & 0 & 0 & 0 \\ 0 & 0 & \sigma_{33} & \sigma_{43} & 0 \\ 0 & 0 & \sigma_{43} & \sigma_{44} & 0 \\ 0 & 0 & 0 & 0 & \sigma_{55} \end{array} \right] \quad (5)$$

The input FEB beam is also assumed to have input momentum dispersion or the R_{15} and R_{25} elements are non-zero at H13.

At any point in the beam line, the SIGMA matrix $[\sigma_1]$ can be found from the input matrix $[\sigma_0]$ and the total $[R]$ matrix to this point:

$$[\sigma_1] = [R] \times [\sigma_0] \times [R^T] \quad (6)$$

where $[R^T]$ is the transpose of $[R]$.

The graphs of Figures 1 and 2 are obtained by plotting $\sqrt{\sigma_{11}}$ and $\sqrt{\sigma_{33}}$ along the beam line for a 99% beam. The program also plots the horizontal momentum dispersion parameters, R_{15} and R_{25} , along the beam line.

The input SIGMA matrix, $[\sigma_0]$ is obtained from the constants ABEF13 or ABEH13 and DPP. For no X-Y coupling, the horizontal part of $[\sigma_0]$ is:

$$\begin{bmatrix} \sigma_{11} & \sigma_{21} \\ \sigma_{21} & \sigma_{22} \end{bmatrix} = \varepsilon_H \begin{bmatrix} \beta_H & -\alpha_H \\ -\alpha_H & \delta_H \end{bmatrix} \quad (7)$$

$$\sigma_{11} = \varepsilon_H \beta_H \quad \varepsilon = \text{DET} \begin{pmatrix} \sigma_{11} & \sigma_{21} \\ \sigma_{21} & \sigma_{22} \end{pmatrix}$$

$$\sigma_{21} = -\varepsilon_H \alpha_H$$

$$\sigma_{22} = \varepsilon_H \gamma_H = \varepsilon_H \left(\frac{1 + \alpha_H^2}{\beta_H} \right)$$

where α , β , and ε are the rms beam Twiss parameters as specified in ABEF13 or ABEH13. These are initialized to the best known values of the emittance at F13 (from H. Weisberg) or H13 (W. Weng).

α - dimensionless

β - kiloinch

ε - epsilon = rms emittance (inch-mrad)

The 99% beam emittance = $9.2103 \varepsilon_{\text{rms}}$

The 99% beam width plotted = 3.0348 (beam width for rms beam)

The vertical $[\sigma_0]$ elements, σ_{33} , σ_{43} , and σ_{44} are obtained in a similar way.

If X-Y coupling occurs downstream, the beam ellipsoid is assumed to have the same 5th order volume or no losses are assumed. The horizontal and vertical emittances may change. To determine the location of a waist, the emittance in that plane is needed at the entrance to the drift space. The emittance is the projection of the ellipsoid on that plane or

$$\epsilon_H = \text{DET} \begin{pmatrix} \sigma_{11} & \sigma_{21} \\ \sigma_{21} & \sigma_{22} \end{pmatrix} \quad \text{or} \quad \epsilon_V = \text{DET} \begin{pmatrix} \sigma_{33} & \sigma_{43} \\ \sigma_{43} & \sigma_{44} \end{pmatrix} \quad (8)$$

where DET is the determinant.

Equation (6) can be expanded and simplified for an input beam with no X-Y coupling (Equation (5)).

$$[\sigma]_1 = [R] \times [\sigma]_0 \times [R^T] \quad (6)$$

At Point 1

$$\begin{aligned} (\sigma_{11})_1 &= (x_{\max})^2 = (\sigma_{11})_0 R_{11}^2 + 2(\sigma_{21})_0 R_{11} R_{12} + (\sigma_{22})_0 R_{12}^2 \\ &\quad + (\sigma_{33})_0 R_{13}^2 + 2(\sigma_{43})_0 R_{13} R_{14} + (\sigma_{44})_0 R_{14}^2 \\ &\quad + (\sigma_{66})_0 R_{16}^2 \end{aligned} \quad (7)$$

$$\begin{aligned} (\sigma_{33})_1 &= (y_{\max})^2 = (\sigma_{11})_0 R_{31}^2 + 2(\sigma_{21})_0 R_{32} R_{31} + (\sigma_{22})_0 R_{32}^2 \\ &\quad + (\sigma_{33})_0 R_{33}^2 + 2(\sigma_{43})_0 R_{34} R_{33} + (\sigma_{44})_0 R_{34}^2 \\ &\quad + (\sigma_{66})_0 R_{36}^2 \end{aligned} \quad (8)$$

$$\begin{aligned} (\sigma_{13})_1 &= \text{tilt component} = (\sigma_{11})_0 R_{11} R_{31} + (\sigma_{21})_0 (R_{12} R_{31} + R_{11} R_{32}) \\ &\quad + (\sigma_{22})_0 R_{12} R_{32} + (\sigma_{33})_0 R_{13} R_{33} + (\sigma_{43})_0 \\ &\quad (R_{14} R_{33} + R_{13} R_{34}) \\ &\quad + (\sigma_{44})_0 R_{14} R_{34} + (\sigma_{66})_0 R_{16} R_{36} \end{aligned} \quad (9)$$

Where the $(\sigma_{ij})_0$ are the input beam components and the R_{ij} are the total matrix elements from the input to the Point 1 in the beam line. The input beam Twiss parameters (α , β , ϵ) can be found experimentally by fitting several beam width measurements to Equation (6) or (7) knowing the elements of the [R] matrix at the measurement point.

mn

Distribution: Dept. Admin.
A.D. Physicists
AGS Div. Engineers


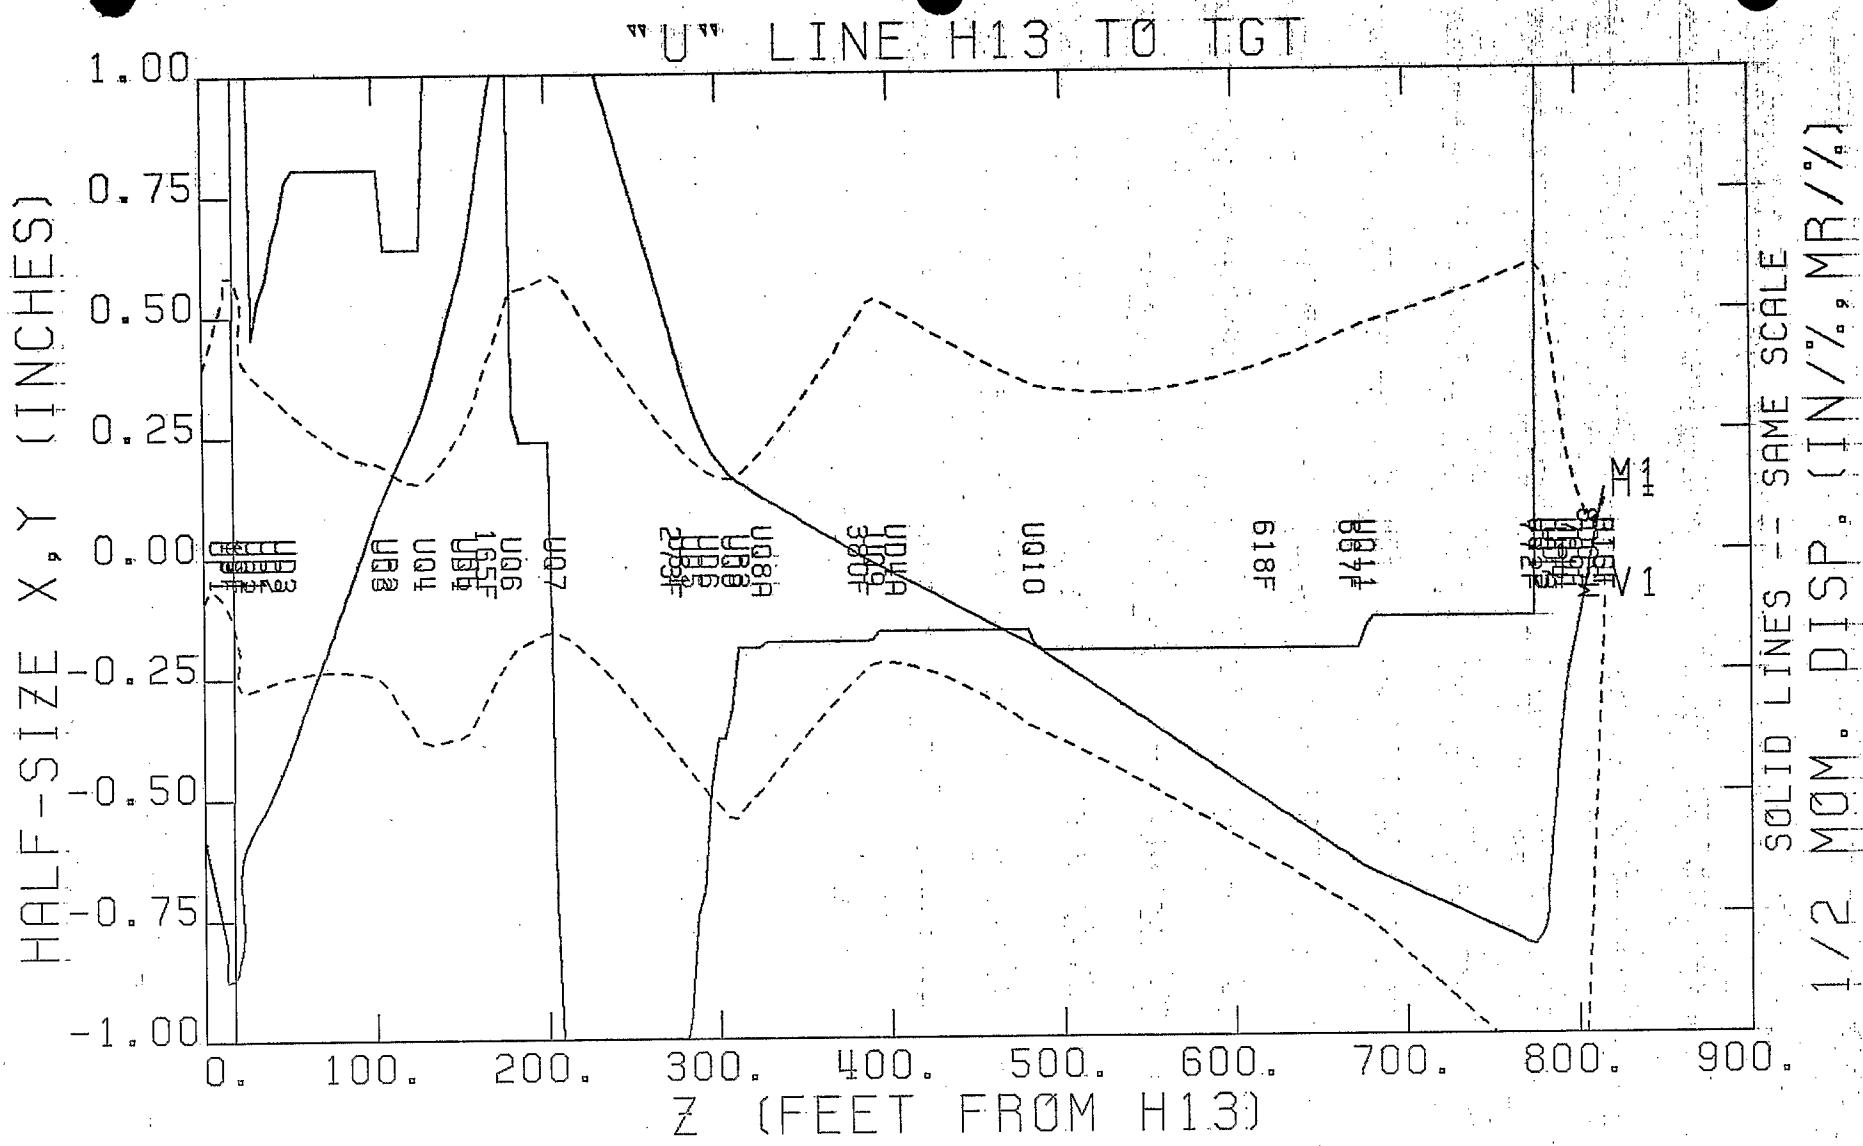


Figure 1

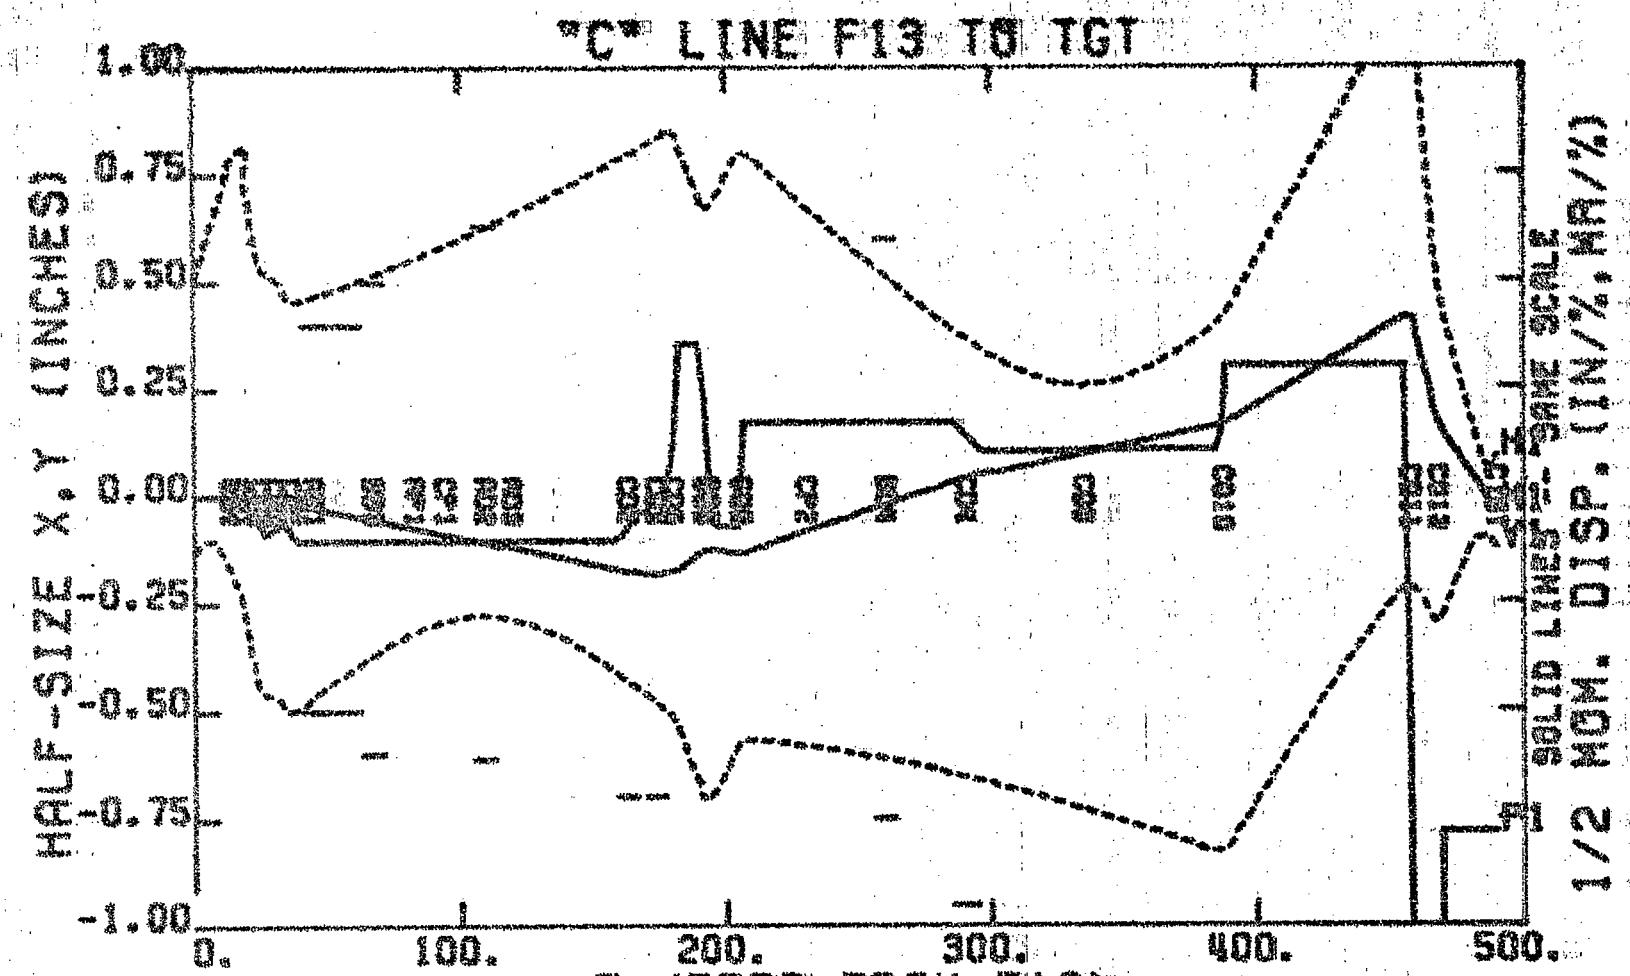

CMXHZ	CMXHX	CMXVZ	CMXUX	CAXHI	CAXHO	CAXVI	CAZVO
-199.8	484.0	1297.0	277.0	-1858.7	2977.5	-1533.4	-162.7
CTXHZ	CTXHX	CTXVZ	CTXUX	BTXHZ	BTXHX	BTXVZ	BTXUX
-33.4	62.5	-156.6	95.3	-1.0	62.0	3.0	32.0
ATXHZ	ATXHX	ATXVZ	ATXUX	BMDIV	TGXCH	TGXCV	
654.0	224.0	-1592.0	127.0	86.5	93.0	125.0	

Figure 2

VALID COMMANDS:

- H <CR> -- TYPES THIS HELP MESSAGE.
- A <CR> -- PRINT OUT TRANSPORT MATRICES & EMITTANCES ON "MATRIC.DAT".
- B <CR> -- PRINT ON "QTUNE.DAT" BEAM LINE DATA WITH FIELDS & CURRENTS IN MAGNETS.
- C <CR> -- CHANGE THE CONSTANTS.
- D <CR> -- DELETE (START OVER) ON THE "QTUNE.DAT" FILE.
- E <CR> -- EXIT.
- G <CR> -- PLOT BEAM PROFILES & GET WAIST PARAMETERS FROM PRESENT MAGNET SETTINGS.
- K <CR> -- TYPE OUT CONSTANTS AND THEIR DEFINITIONS.
- L <CR> -- LIST (PRINT) ON "QTUNE.DAT" CONSTANTS & DEFINITIONS.
- M <CR> -- PRINT ON "QTUNE.DAT" MAGNET LENGTHS & FIELD VS CURRENT POWER SERIES COEFF. FOR BEAM LINE MAGNETS.
- P <CR> -- PRINT ON "QTUNE.DAT" POWER SUPPLY PARAMETERS FOR BEAM LINE MAGNETS.
- T <CR> -- TUNE THE QUADS BY VARYING THE QUADS OR WAIST PARAMETERS ON AGAST AND PLOT BEAM PROFILES.
- W <CR> -- CALCULATES WAIST PARAMETERS FROM AGAST COMMANDS & SEND WAIST INFORMATION TO AGAST FOR MORNING REPORT; NO PLOTS MADE.

COMMAND: (A, B, C, D, E, G, H, K, L, M, P, T, W)

15-Jul-82 14:13

ORMS PARAMETERS:

ALPHA, BETA, EPSILON (H,V) AT F13: -6.3388 1.9952 0.01404 0.8708 0.012799 0.0150

CD1 (-2248) CQ1 (-1898) CQ2 (-1073) CQ3 (-303) CQ4 (-687) CD283 (8269) CD283 (8269) CQ588 (-1105) CQ687 (-1000) CQ687 (-1000) C
 Q588 (-1105) CD4 (-2681) CQ9 (-1) CQ10 (-2658) CQ11 (-3502) CQ12 (-2390) CD3T (-0)

ELEMENT	Z (INCHES)	ELEMENT OR TOTAL MATRIX FROM START					TRANSPORT (BEAM MATRIX)
START ==	1.00000	0.00000	0.00000	0.00000	0.00000		
	0.00000	1.00000	0.00000	0.00000	0.00000		
	0.00000	0.00000	1.00000	0.00000	0.00000		
	0.00000	0.00000	0.00000	1.00000	0.00000		
	0.00000	0.00000	0.00000	0.00000	1.00000		
0.000 INCHES							
TOTAL MATRIX ==	1.00000	0.00000	0.00000	0.00000	0.00000	0.507 IN	
	0.00000	1.00000	0.00000	0.00000	0.00000	1.631 MR	0.988
	0.00000	0.00000	1.00000	0.00000	0.00000	0.133 IN	0.000 0.000
	0.00000	0.00000	0.00000	1.00000	0.00000	1.378 MR	0.000 0.000 -0.657
	0.00000	0.00000	0.00000	0.00000	1.00000	0.000 PC	0.000 0.000 0.000 0.000
0.000 INCHES							
==	1.00000	0.14383	0.00000	0.00000	0.00000		
	0.00000	1.00000	0.00000	0.00000	0.00000		
	0.00000	0.00000	1.00000	0.14383	0.00000		
	0.00000	0.00000	0.00000	1.00000	0.00000		
	0.00000	0.00000	0.00000	0.00000	1.00000		
143.825 INCHES							
TOTAL MATRIX ==	1.00000	0.14383	0.00000	0.00000	0.00000	0.740 IN	
	0.00000	1.00000	0.00000	0.00000	0.00000	1.631 MR	0.994
	0.00000	0.00000	1.00000	0.14383	0.00000	0.150 IN	0.000 0.000
	0.00000	0.00000	0.00000	1.00000	0.00000	1.378 MR	0.000 0.000 0.3742
	0.00000	0.00000	0.00000	0.00000	1.00000	0.000 PC	0.000 0.000 0.000 0.000
143.825 INCHES							
CD1 ==	1.00000	0.03435	0.00000	0.00000	-0.00201		
	-0.00000	1.00000	0.00000	0.00000	-0.11699		
	0.00000	0.00000	0.99993	0.03435	0.00000		
	0.00000	0.00000	-0.00398	0.99993	0.00000		
	0.00000	0.00000	0.00000	0.00000	1.00000		
178.175 INCHES							
TOTAL MATRIX ==	1.00000	0.17817	0.00000	0.00000	-0.00201	0.796 IN	
	-0.00000	1.00000	0.00000	0.00000	-0.11699	1.631 MR	0.995
	0.00000	0.00000	0.99993	0.17817	0.00000	0.187 IN	0.000 0.000
	0.00000	0.00000	-0.00398	0.999936	0.00000	1.378 MR	0.000 0.000 0.845
	0.00000	0.00000	0.00000	0.00000	1.00000	0.000 PC	0.000 0.000 0.000 0.000
178.175 INCHES							
==	1.00000	0.00303	0.00000	0.00000	0.00000		
	0.00000	1.00000	0.00000	0.00000	0.00000		
	0.00000	0.00000	1.00000	0.00303	0.00000		
	0.00000	0.00000	0.00000	1.00000	0.00000		
	0.00000	0.00000	0.00000	0.00000	1.00000		
186.250 INCHES							
TOTAL MATRIX ==	1.00000	0.18625	0.00000	0.00000	-0.00295	0.809 IN	
	-0.00000	1.00000	0.00000	0.00000	-0.11699	1.631 MR	0.995
	0.00000	0.00000	0.99990	0.18623	0.00000	0.197 IN	0.000 0.000
	0.00000	0.00000	-0.00398	0.99986	0.00000	1.378 MR	0.000 0.000 0.860
	0.00000	0.00000	0.00000	0.00000	1.00000	0.000 PC	0.000 0.000 0.000 0.000
186.250 INCHES							

Figure 4A

CQ1	==	0.88149	0.03601	0.00000	0.00000	0.00000	
		-6.19288	0.88149	0.00000	0.00000	0.00000	
		0.00000	0.00000	1.12389	0.03903	0.00000	
		0.00000	0.00000	6.71290	1.12389	0.00000	
		0.00000	0.00000	0.00000	0.00000	1.00000	
		223.750 INCHES					
		0.88149	0.20018	0.00000	0.00000	-0.00682	0.771 IN
		-6.19288	-0.27193	0.00000	0.00000	-0.08483	3.580 MR -0.999
		0.00000	0.00000	1.12312	0.24822	0.00000	0.269 IN 0.000 0.000
		0.00000	0.00000	6.70775	2.37285	0.00000	2.767 MR 0.000 0.000 0.983
		0.00000	0.00000	0.00000	0.00000	1.00000	0.000 PC 0.000 0.000 0.000 0.000
		223.750 INCHES					
		1.00000	0.04650	0.00000	0.00000	0.00000	
		0.00000	1.00000	0.00000	0.00000	0.00000	
		0.00000	0.00000	1.00000	0.04650	0.00000	
		0.00000	0.00000	0.00000	1.00000	0.00000	
		0.00000	0.00000	0.00000	0.00000	1.00000	
		270.250 INCHES					
		0.59352	0.18754	0.00000	0.00000	-0.01076	0.605 IN
		-6.19288	-0.27193	0.00000	0.00000	-0.08483	3.580 MR -0.998
		0.00000	0.00000	1.43503	0.35856	0.00000	0.396 IN 0.000 0.000
		0.00000	0.00000	6.70775	2.37285	0.00000	2.767 MR 0.000 0.000 0.992
		0.00000	0.00000	0.00000	0.00000	1.00000	0.000 PC 0.000 0.000 0.000 0.000
		270.250 INCHES					
CQ2	==	1.16467	0.05219	0.00000	0.00000	0.00000	
		6.83020	1.16467	0.00000	0.00000	0.00000	
		0.00000	0.00000	0.84390	0.04690	0.00000	
		0.00000	0.00000	-6.13762	0.84390	0.00000	
		0.00000	0.00000	0.00000	1.00000	0.00000	
		319.750 INCHES					
		0.36805	0.20423	0.00000	0.00000	-0.01696	0.518 IN
		-3.15683	0.96421	0.00000	0.00000	-0.17229	0.250 MR -0.095
		0.00000	0.00000	1.52559	0.41386	0.00000	0.463 IN 0.000 0.000
		0.00000	0.00000	-3.14701	-0.19824	0.00000	0.315 MR 0.000 0.000 -0.326
		0.00000	0.00000	0.00000	0.00000	1.00000	0.000 PC 0.000 0.000 0.000 0.000
		319.750 INCHES					
		1.00000	0.02050	0.00000	0.00000	0.00000	
		0.00000	1.00000	0.00000	0.00000	0.00000	
		0.00000	0.00000	1.00000	0.02050	0.00000	
		0.00000	0.00000	0.00000	1.00000	0.00000	
		0.00000	0.00000	0.00000	0.00000	1.00000	
		340.250 INCHES					
		0.30330	0.22399	0.00000	0.00000	-0.02049	0.518 IN
		-3.15683	0.96421	0.00000	0.00000	-0.17229	0.250 MR -0.085
		0.00000	0.00000	1.46108	0.40980	0.00000	0.461 IN 0.000 0.000
		0.00000	0.00000	-3.14701	-0.19824	0.00000	0.315 MR 0.000 0.000 -0.313
		0.00000	0.00000	0.00000	0.00000	1.00000	0.000 PC 0.000 0.000 0.000 0.000
		340.250 INCHES					
CQ3	==	0.95560	0.04877	0.00000	0.00000	0.00000	
		-1.78052	0.95560	0.00000	0.00000	0.00000	
		0.00000	0.00000	1.04507	0.05024	0.00000	
		0.00000	0.00000	1.83441	1.04507	0.00000	
		0.00000	0.00000	0.00000	0.00000	1.00000	
		389.750 INCHES					
		0.13579	0.26107	0.00000	0.00000	-0.02798	0.494 IN
		-3.55861	0.52257	0.00000	0.00000	-0.12816	0.972 MR -0.963
		0.00000	0.00000	1.36881	0.41381	0.00000	0.477 IN 0.000 0.000
		0.00000	0.00000	-0.50361	0.54457	0.00000	0.206 MR 0.000 0.000 0.983
		0.00000	0.00000	0.00000	0.00000	1.00000	0.000 PC 0.000 0.000 0.000 0.000
		389.750 INCHES					

Figure 4B

"C" LINE MAGNETS FROM F13 TO C TARGET

ELEMENT #	NAME	LABEL	MAGNET KIND	POWER SUPPLY DATA		MAGNET DATA FOR 29,000 GEV/C		
				DDF1 CMD/RDBK	DDF2R CMD/RDBK	CURRENT(KA)	KG-IN/IN OR KG/IN	GAIN(GEV)
1			DRIFT					0.0
2	CD1	CD1	RDPOL	CD1	-2243	0	1.40138	-445.5247
3			DRIFT					0.0
4	CQ1	CQ1	QUAD	CQ1	-1898	0	1.42850	-6.5502
5			DRIFT					0.0
6	CQ2	CQ2	QUAD	CQ2	1073	0	1.07300	4.9843
7			DRIFT					0.0
8	CQ3	CQ3	QUAD	CQ3	-303	0	0.30300	-1.3905
9			DRIFT					0.0
10	CQ4	CQ4	QUAD	CQ4	687	0	0.51525	2.37467
11			DRIFT					0.0
12		AB1	DRIFT					0.0
13			DRIFT					0.0
14		BB3	DRIFT					0.0
15			DRIFT					0.0
16		AP1	DRIFT					0.0
17			DRIFT					0.0
18		CP1	DRIFT					0.0
19			DRIFT					0.0
20		AD2	DRIFT					0.0
21			DRIFT					0.0
22		AD3	DRIFT					0.0
23			DRIFT					0.0
24	CD2	CD2	RDPOL	CD283	3269	0	1.22588	510.3198
25			DRIFT					0.0
26	CD3	CD3	RDPOL	CD283	3269	CD3TB	0	1.22588
27			DRIFT				510.3198	0.76775
28	CQ5	CQ5	QUAD	CQ588	-1105	0	0.27625	-4.0898
29			DRIFT					0.0
30	CQ6	CQ6	QUAD	CQ687	1000	0	0.25000	3.7738
31			DRIFT					3.77383
32	CQ7	CQ7	QUAD	CQ687	1000	0	0.25000	3.7738
33			DRIFT					3.77383
34	CQ8	CQ8	QUAD	CQ588	-1105	0	0.27625	-4.0898
35			DRIFT					0.0
36		CP2	DRIFT					0.0
37			DRIFT					0.0
38		ED4	DRIFT					0.0
39			DRIFT					0.0
40	CD4	CD4	RDPOL	CD4	-2681	0	1.00537	-514.3780
41			DRIFT					0.0
42	CQ9	CQ9	QUAD	CQ9	1	0	0.00006	0.0126
43			DRIFT					0.01256
44	CQ10	CQ10	QUAD	CQ10	2658	0	0.99675	1.2642
45			DRIFT					1.26418
46	CQ11	CQ11	QUAD	CQ11	-3502	0	1.31325	-6.0712
47			DRIFT					-6.07116
48	CQ12	CQ12	QUAD	CQ12	2390	0	1.79250	8.0039
49			DRIFT					8.00388
50	CTGT	CTGT	DRIFT					0.0
								0.0

NOTE *****

- A) CMD/RDBK -- READINGS ARE FROM AGAST CMDS; THE "A" RDBK IS NEGATIVE -- I.E., 2140A = -2140.
- B) DDF2 (SECONDARY P.S. READBACKS) ARE SAS RDBKS WITH THE POLARITY OF NORMAL READBACK.

C) KG1 = KG/IN FOR QUADS; KG-IN FOR DIPOLES.
D) GEL = 0 FOR DRIFT; -KG/IN FOR H.F. QUAD; +KG/IN FOR V.F. QUAD; BEND ANGLE (DEGREES) FOR DIPOLES (+ = EAST).
(+ = DOWN FOR PITCH)

Figure 5B

15-Jul-82 13:56

EFILE (BEAM FILE NUMBER; 1=A,2=B,3=C,4=D,5=U) 3
 PBEAM (BEAM MOMENTUM, GEV/C) 29.00
 ABEF13 (ALPHA, BETA (KILOINCH), EPSILON (INCH-MRAD, RMS) AT F13
 HORIZONTAL: -6.3388 1.9952 0.0140
 VERTICAL: 0.8768 0.1279 0.0150
 ABEH13 (ALPHA, BETA (KILOINCH), EPSILON (INCH-MRAD, RMS) AT H13
 HORIZONTAL: -5.6700 2.2620 0.0064
 VERTICAL: 0.9870 0.1457 0.0064
 DPP ((DELTA P/P) OR MOMEN.FRACT. IN % FOR 99% BEAM) 0.0000
 H13MOM (INPUT HORZ. MOMEN. DISPERSION AT H13; INCH/%,MR/%)
 -1.1650 -2.9500
 TEKVER (=1 FOR TEKTRONIX PLOTS, =2(MODEL 1200) OR -2(MODEL
 1100) VERSATEK & NO TUNING) 1
 LFRAME (=0 OR NEG. TO SUPPRESS FRAMES & LABELS ON GRAPHS;
 -1,0 OR 1 FOR ALL GRAPHS; -2 OR 2 FOR NO(MOMEN.
 DISPERSION PLOTS) 1
 IAGSFG (AGS FLAG;=1 FOR MAGNET VALUES FROM TTY,=2 FOR
 ACAST RDBKS,=3 FOR AGCAST COMMANDS) 3
 PSTIME (POWER SUPPLY READ TIME IN MS AFTER TO) 11000
 ZRANGE (PLOTTING RANGE IN BEAM LINE FEET (MIN,MAX))
 0.000 (STARTING POINT OR 0 FEET FROM F13)
 10000.000 (END POINT OR END OF BEAM LINE)
 IENUT (0="ACAST" OR TTY; -1 = OFFLINE "ENUTQ") 0
 TEGFG (0=USE CURRENT "ENUTQ" "QTUNE.TEG" FILE;-1 TO
 CHANGE FILE NAME) 0
 XYRANG (MAX. BEAM HALF SIZE FOR PLOTTING, INCH) 1.0000

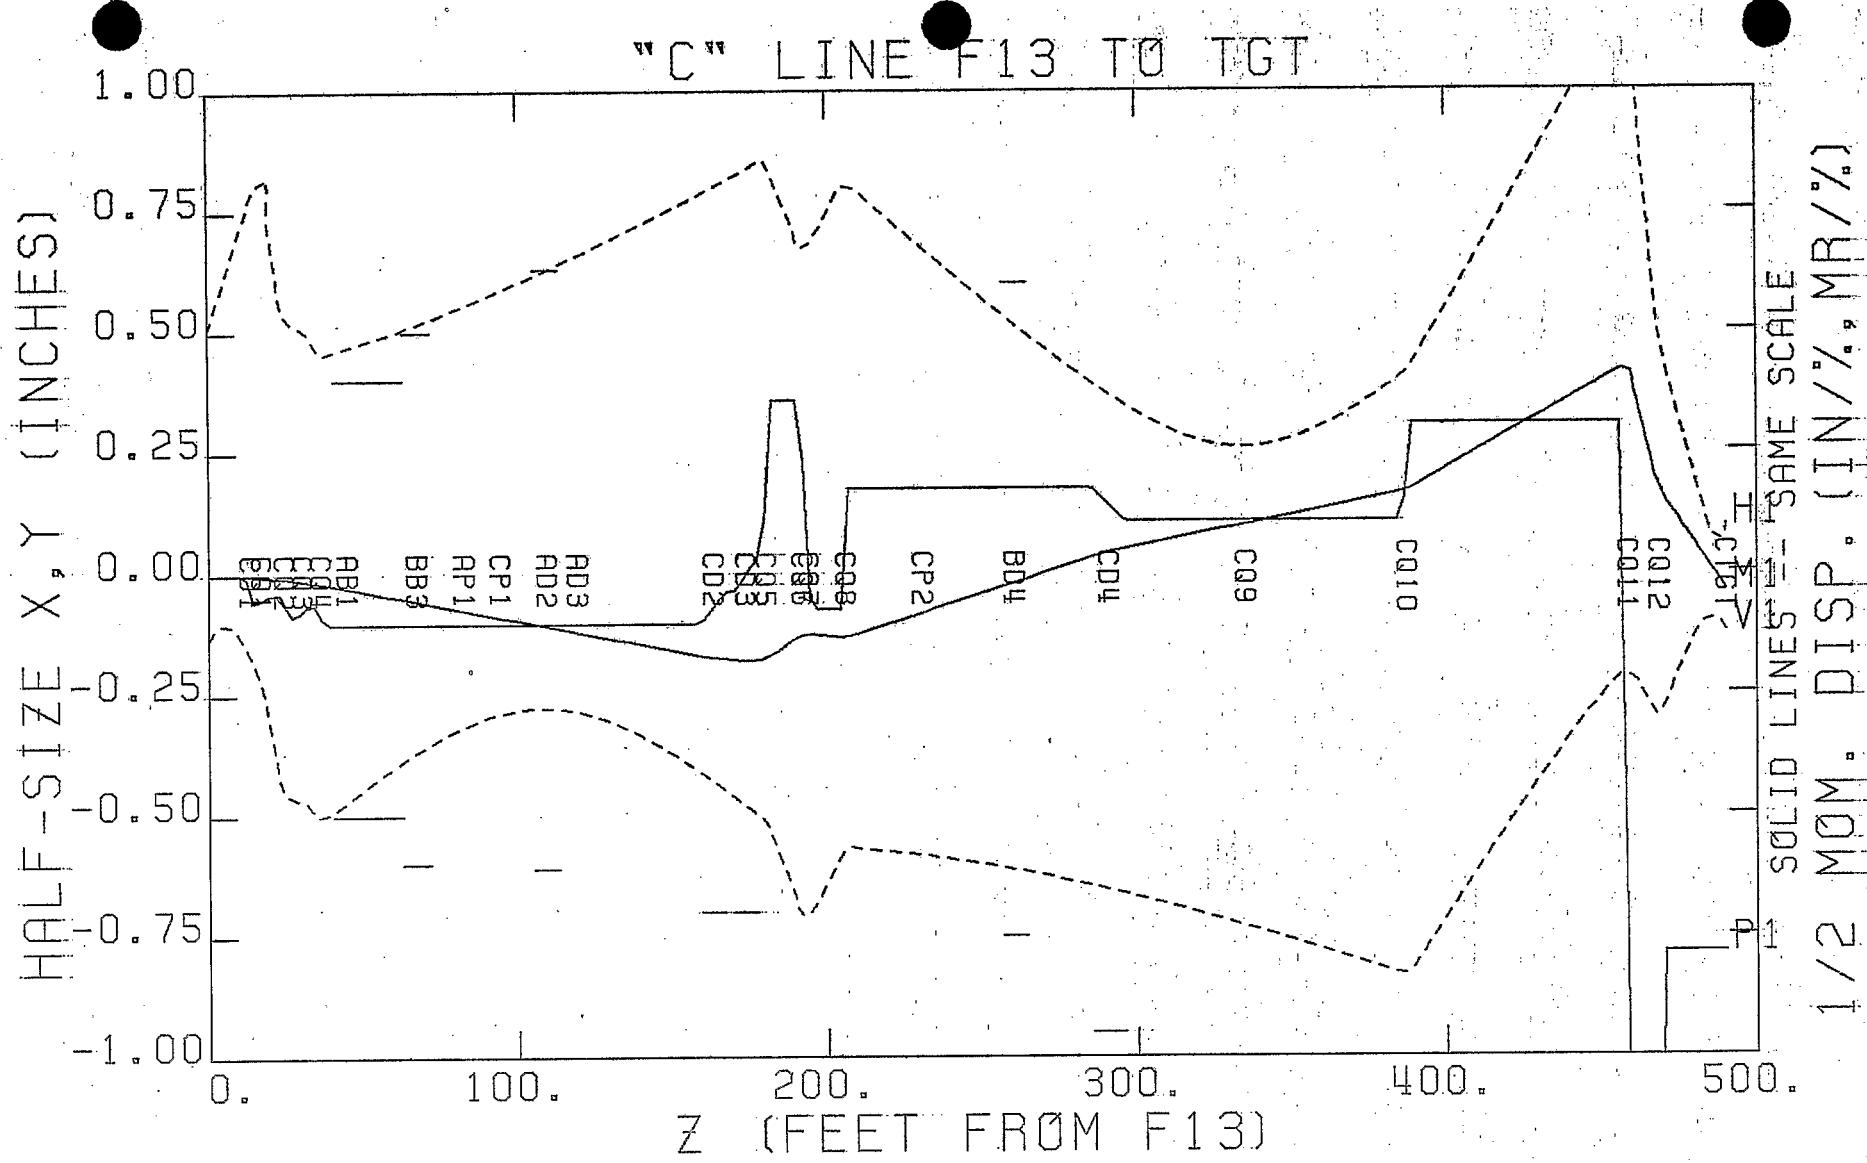


Figure 7

15-Jul-82 13:59

ORMS PARAMETERS:

ALPHA, BETA, EPSILON (H,V) AT F13: -6.3388 1.9952 0.0140 0.8708 0.12798 0.0150

CD1 (-2243) CQ1 (-1898) CQ2 (-1073) CQ3 (-303) CQ4 (-687) CD283(3269) CD283(3269) CQ588(-1105) CQ687(-1000) CQ687(-1000) C
Q588(-1105) CD4 (-2681) CQ9 (-1) CQ10 (-2658) CQ11(-3502) CQ12 (-2390) CD3T (-10)
CM%HZ CM%HX CM%VZ CM%VX CA%HI CA%HO CA%VI CA%VO CT%HZ CT%HX CT%VZ CT%VX
-199.77 403.98 1296.98 277.03 -1858.70 2977.50 -1533.36 -162.67 -33.40 62.45 -56.59 95.35
BT%HZ BT%HX BT%VZ BT%VX AT%HZ AT%HX AT%VZ AT%VX BMDIV TG%CH TG%CV
-1.00 62.00 3.00 32.00 854.00 224.00 -1592.00 127.00 86.52 93.04 125.76

15-Jul-82 14:03

ORMS PARAMETERS:

ALPHA, BETA, EPSILON (H,V) AT F13: -6.3388 1.9952 0.0140 0.8708 0.12798 0.0150

CD1 (-2243) CQ1 (-1898) CQ2 (-1073) CQ3 (-303) CQ4 (-687) CD283(3269) CD283(3269) CQ588(-1105) CQ687(-1000) CQ687(-1000) C
Q588(-1105) CD4 (-2681) CQ9 (-1) CQ10 (-2658) CQ11(-3502) CQ12 (-2390) CD3T (-10)
CM%HZ CM%HX CM%VZ CM%VX CA%HI CA%HO CA%VI CA%VO CT%HZ CT%HX CT%VZ CT%VX
-199.77 403.98 1296.98 277.03 -1858.70 2977.50 -1533.36 -162.67 -33.40 62.45 -56.59 95.35
BT%HZ BT%HX BT%VZ BT%VX AT%HZ AT%HX AT%VZ AT%VX BMDIV TG%CH TG%CV
-1.00 62.00 3.00 32.00 854.00 224.00 -1592.00 127.00 86.52 93.04 125.76

Figure 8

NAME(?????)	AREA	COMP	DEVTPC	ADDR	WHO	WHRG	14-Jul-82
EQUIP	AREA	DEVICE TYPE				DEFINITION	
1	AT%HX SEB	(REFERENCE)				(HALF WIDTH(MILS) OF HORIZ. BEAM AT WAIST NEAR 'A' TGT) (QTUNE PGM.)	
2	AT%HZ SEB	(REFERENCE)				(Z POS. OF 'A' TGT HORZ. WAIST, INCH; 0='A' TGT; -50=50 IN. UPSTM 'A')	
3	AT%VX SEB	(REFERENCE)				(HALF WIDTH(MILS) OF VERT. BEAM AT WAIST NEAR 'A' TGT. (QTUNE PGM.))	
4	AT%VZ SEB	(REFERENCE)				(Z POS. OF 'A' TGT. VERT. WAIST, INCH; 0='A' TGT; -50=50 IN. UPSTRM 'A' TGT)	
5	BT%HK SEB	(REFERENCE)				(HALF WIDTH(MILS) OF HORIZ. BEAM AT WAIST NEAR 'B' TGT. (QTUNE PGM.))	
6	BT%HZ SEB	(REFERENCE)				(Z POS. OF 'B' TGT HORZ. WAIST, INCH; 0='B' TGT; -50=50 IN. UPSTM 'B')	
7	BT%VX SEB	(REFERENCE)				(HALF WIDTH(MILS) OF VERT. BEAM AT WAIST NEAR 'B' TGT. (QTUNE PGM.))	
8	BT%VZ SEB	(REFERENCE)				(Z POS. OF 'B' TGT VERT. WAIST, INCH; 0='B' TGT; -50=50 IN. UPSTRM 'B' TGT)	
9	CAZHI SEB	(REFERENCE)				(1000 TIMES BEAM HORIZ. EMITTANCE ALPHA AT CQ5 UPSTREAM (Q TUNE USES))	
10	CAZHO SEB	(REFERENCE)				(1000 TIMES BEAM HORIZ. EMITTANCE ALPHA AT CQ8 DOWNSTREAM (Q TUNE USES))	
11	CAZVI SEB	(REFERENCE)				(1000 TIMES BEAM VERTICAL EMITTANCE ALPHA AT CQ5 UPSTREAM (Q TUNE USES))	
12	CAZVO SEB	(REFERENCE)				(1000 TIMES BEAM VERTICAL EMITTANCE ALPHA AT CQ8 DNSTREAM (Q TUNE USES))	
13	CM%HK SEB	(REFERENCE)				(HALF-WIDTH(MILS) OF HORIZ BEAM AT WAIST MID 'C' LINE(Q TUNE PGM))	
14	CM%HZ SEB	(REFERENCE)				(Z POS. MIDDLE C LINE (INCH FROM F13)OF HORZ. WAIST(Q TUNE PGM USES))	
15	CM%VX SEB	(REFERENCE)				(HALF-WIDTH(MILS) OF VERT. BEAM AT WAIST MID C LINE (Q TUNE PGM.))	
16	CM%VZ SEB	(REFERENCE)				(Z POS. MIDDLE C LINE (INCH FROM F13)VERT. WAIST (Q TUNE PGM USES))	
17	CT%HX SEB	(REFERENCE)				(HALF WIDTH(MILS) OF HORIZ.BEAM AT WAIST NEAR 'C' TGT. (QTUNE PGM USES))	
18	CT%HZ SEB	(REFERENCE)				(Z POS. OF 'C' TGT. HORZ. WAIST, INCH; 0='C' TGT; -50=50 IN. UPSTRM 'C')	
19	CT%VX SEB	(REFERENCE)				(HALF WIDTH(MILS) OF VERT. BEAM AT WAIST NEAR 'C' TGT. (QTUNE PGM USES))	
20	CT%VZ SEB	(REFERENCE)				(Z POS. OF 'C' TGT. VERT. WAIST, INCH; 0='C' TGT; -50=50 IN. UPSTRM 'C')	
21	TG%AH SEB	(REFERENCE)				(CALCULATED HORIZONTAL HALF WIDTH BEAM SIZE IN MILS AT "A" TARGET)	
22	TG%AV SEB	(REFERENCE)				(CALCULATED VERTICAL HALF WIDTH BEAM SIZE IN MILS AT "A" TARGET)	
23	TG%BH SEB	(REFERENCE)				(CALCULATED HORIZONTAL HALF WIDTH BEAM SIZE IN MILS AT "B" TARGET)	
24	TG%BV SEB	(REFERENCE)				(CALCULATED VERTICAL HALF WIDTH BEAM SIZE IN MILS AT "B" TARGET)	
25	TG%CH SEB	(REFERENCE)				(CALCULATED HORIZONTAL HALF WIDTH BEAM SIZE IN MILS AT "C" TARGET)	
26	TG%CV SEB	(REFERENCE)				(CALCULATED VERTICAL HALF WIDTH BEAM SIZE IN MILS AT "C" TARGET)	
27	TG%UH FEB	(REFERENCE)				(CALCULATED HORZ. HALF WIDTH BEAM SIZE IN MILS AT U TGT. - QTUNE PGM)	
28	TG%UV FEB	(REFERENCE)				(CALCULATED VERT. HALF WIDTH BEAM SIZE IN MILS AT U TGT. - QTUNE PGM)	
29	US%HD FEB	(REFERENCE)				(1000 X CALC. MOMENTUM DISPERSION (INCH/RATIO) AT END OF 8 DEG. MAGNET)	
30	US%MP FEB	(REFERENCE)				(1000 X CALC. MOMENTUM DISPERSION PRIME(MR/RATIO) AT END OF 8 DEG. MAGNET)	
31	UT%HX FEB	(REFERENCE)				(HALF WIDTH(MILS) OF HORZ. BEAM AT WAIST NEAR TGT - QTUNE PGM. USES)	
32	UT%HZ FEB	(REFERENCE)				(Z POS. OF U TGT. HORZ. WAIST, INCH; 0=U TGT.; -50=50 IN. UPSTRM U TG)	
33	UT%VX FEB	(REFERENCE)				(HALF WIDTH(MILS) OF VERT. BEAM AT WAIST NEAR TGT - QTUNE PGM. USES)	
34	UT%VZ FEB	(REFERENCE)				(Z POS. OF U TGT. VERT. WAIST, INCH; 0=U TGT.; -50=50 IN. UPSTRM U TG)	

Figure 9

"C" LINE MAGNETS FROM F13 TO CTARGET

ELEMENT #	NAME	MAGNET LABEL	KIND	GROUP	#	Z(U/S) INCH	LENGTH INCH	POWER SUPPLY INFORMATION				
								XAPER INCH	YAPER/ INCH	PRIMARY AMPS/DDF	MAX AMPS/DGN	
1			DRIFT		0	0.000	143.825	0.000	0.000			
2	CD1	CD1	RDPOL	15C30	-7	143.825	34.350	1.440	1.440 CD1	0.6250	2.100	
3			DRIFT		0	178.175	6.075	0.000	0.000			
4	CQ1	CQ1	QUAD	N3Q36	1	186.250	37.500	1.440	1.440 CQ1	0.7500	2.400	
5			DRIFT		0	223.750	46.500	0.000	0.000			
6	CQ2	CQ2	QUAD	N3Q48	2	270.250	49.500	1.360	1.360 CQ2	1.0000	2.400	
7			DRIFT		0	319.750	20.500	0.000	0.000			
8	CQ3	CQ3	QUAD	N3Q48	2	340.250	49.500	1.380	1.380 CQ3	1.0000	2.400	
9			DRIFT		0	389.750	26.500	0.000	0.000			
10	CQ4	CQ4	QUAD	N3Q36	1	416.250	37.500	1.440	1.440 CQ4	0.7500	2.400	
11			DRIFT		0	453.750	33.125	0.000	0.000			
12	AB1		DRIFT		0	486.875	106.250	0.400	0.500			
13			DRIFT		0	593.125	163.750	0.400	0.500			
14	BB3		DRIFT		0	756.875	106.250	0.500	0.600			
15			DRIFT		0	863.125	68.750	0.000	0.000			
16	AP1		DRIFT		0	931.875	122.500	0.000	0.000			
17			DRIFT		0	1054.875	15.500	0.000	0.000			
18	CP1		DRIFT		0	1069.875	122.500	0.000	0.000			
19			DRIFT		0	1192.375	70.024	0.000	0.000			
20	AD2		DRIFT		0	1262.399	96.000	0.630	0.6100			
21			DRIFT		0	1358.399	22.191	0.000	0.000			
22	AD3		DRIFT		0	1380.590	96.000	0.000	0.000			
23			DRIFT		0	1476.590	434.038	0.000	0.000			
24	CD2	CD2	RDPOL	5C90T	8	1910.628	91.500	0.000	0.700 CD283	0.3750	1.400	
25			DRIFT		0	2002.128	34.501	0.000	0.000			
26	CD3	CD3	RDPOL	5C90T	8	2036.629	91.500	0.000	0.700 CD283	0.3750	1.400 CD3	0.1250
27			DRIFT		0	2128.129	24.650	0.000	0.000			
28	CQ5	CQ5	QUAD	4Q16	3	2152.779	17.200	1.690	1.690 CQ583	0.2500	0.406	
29			DRIFT		0	2169.979	124.800	0.000	0.000			
30	CQ6	CQ6	QUAD	4Q16	3	2294.779	17.200	1.690	1.690 CQ687	0.2500	0.406	
31			DRIFT		0	2311.979	6.800	0.000	0.000			
32	CQ7	CQ7	QUAD	4Q16	3	2318.779	17.200	1.690	1.690 CQ687	0.2500	0.406	
33			DRIFT		0	2335.979	124.800	0.000	0.000			
34	CQ8	CQ8	QUAD	4Q16	3	2410.779	17.200	1.690	1.690 CQ583	0.2500	0.406	
35			DRIFT		0	2477.979	229.150	0.000	0.000			
36	CP2		DRIFT		0	2707.129	122.500	0.000	0.000			
37			DRIFT		0	2829.629	248.897	0.000	0.000			
38	BD4		DRIFT		0	3078.526	92.500	0.600	0.750			
39			DRIFT		0	3171.026	256.120	0.000	0.000			
40	CD4	CD4	RDPOL	D121	9	3427.146	123.500	1.000	0.950 CD4	0.3750	1.200	
41			DRIFT		0	3550.646	461.013	0.000	0.000			
42	CQ9	CQ9	QUAD	4Q16	3	4011.659	17.200	1.690	1.690 CQ9	0.0625	0.200	
43			DRIFT		0	4028.859	601.900	0.000	0.000			
44	CQ10	CQ10	QUAD	BQ32	4	4630.759	86.000	0.000	0.000 CQ10	0.3750	1.050	
45			DRIFT		0	4666.759	813.570	0.000	0.000			
46	CQ11	CQ11	QUAD	N3Q36	1	5480.329	37.500	1.440	1.440 CQ11	0.3750	1.425	
47			DRIFT		0	5517.829	84.542	0.000	0.000			
48	CQ12	CQ12	QUAD	N3Q36	1	5602.371	37.500	1.440	1.440 CQ12	0.7500	2.100	
49			DRIFT		0	5639.871	240.155	0.000	0.000			
50	CTGT		DRIFT		0	5880.026	0.000	0.000	0.000			

Figure 10

"C" LINE MAGNETS FROM T13 TO C TARGET

#	NAME	LABEL	MAGNET KIND	GROUP #	EFF. LEN INCH.	KG/IN OR KG-IN POWER SERIES COEFFICIENTS FOR 1 IN KILOAMPS					MAX. MAGNET KAMPS
						A0	A1	A2	A3	A4	
1			DRIFT	0	143.825						
2	CD1	CD1	RDPOL 15C30	-7	34.350	1.6358793E+00	3.0900037E+02	1.5332217E+01	-7.0501699E+00	0.0000000E+00	2.4000
3			DRIFT	0	8.075						
4	CQ1	CQ1	QUAD N3Q36	1	37.500	1.5201630E-02	4.4772430E+00	1.9792940E-01	4.7379500E-02	-9.1596540E-02	2.6000
5			DRIFT	0	46.500						
6	CQ2	CQ2	QUAD N3Q48	2	49.500	1.5201630E-02	4.4772430E+00	1.9792940E-01	4.7379500E-02	-9.1596540E-02	2.6000
7			DRIFT	0	20.500						
8	CQ3	CQ3	QUAD N3Q48	2	49.500	1.5201630E-02	4.4772430E+00	1.9792940E-01	4.7379500E-02	-9.1596540E-02	2.6000
9			DRIFT	0	26.500						
10	CQ4	CQ4	QUAD N3Q36	1	37.500	1.5201630E-02	4.4772430E+00	1.9792940E-01	4.7379500E-02	-9.1596540E-02	2.6000
11			DRIFT	0	33.125						
12	AB1		DRIFT	0	106.250						
13			DRIFT	0	163.750						
14	BB3		DRIFT	0	106.250						
15			DRIFT	0	63.750						
16	AP1		DRIFT	0	122.500						
17			DRIFT	0	15.500						
18	CP1		DRIFT	0	122.500						
19			DRIFT	0	70.024						
20	AD2		DRIFT	0	96.000						
21			DRIFT	0	22.191						
22	AD3		DRIFT	0	96.000						
23			DRIFT	0	434.038						
24	CD2	CD2	RDPOL 5C90T	8	91.500	-9.8442070E-02	3.7920254E+02	5.6712130E+01	-2.1529586E+01	0.0000000E+00	3.5000
25			DRIFT	0	34.501						
26	CD3	CD3	RDPOL 5C90T	8	91.500	-9.8442070E-02	3.7920254E+02	5.6712130E+01	-2.1529586E+01	0.0000000E+00	3.5000
27			DRIFT	0	24.650						
28	CQ5	CQ5	QUAD 4Q16	3	17.200	1.1668710E-02	1.4303190E+01	1.9918540E+01	-8.3568380E+01	6.3286540E+01	0.5000
29			DRIFT	0	124.800						
30	CQ6	CQ6	QUAD 4Q16	3	17.200	1.1668710E-02	1.4303190E+01	1.9918540E+01	-8.3568380E+01	6.3286540E+01	0.5000
31			DRIFT	0	6.800						
32	CQ7	CQ7	QUAD 4Q16	3	17.200	1.1668710E-02	1.4303190E+01	1.9918540E+01	-8.3568380E+01	6.3286540E+01	0.5000
33			DRIFT	0	124.800						
34	CQ8	CQ8	QUAD 4Q16	3	17.200	1.1668710E-02	1.4303190E+01	1.9918540E+01	-8.3568380E+01	6.3286540E+01	0.5000
35			DRIFT	0	229.150						
36	CP2		DRIFT	0	122.500						
37			DRIFT	0	248.897						
38	BD4		DRIFT	0	92.500						
39			DRIFT	0	256.120						
40	CD4	CD4	RDPOL D121	9	123.500	4.3116340E+00	7.3160340E+02	-7.2491390E+02	8.0547750E+02	-3.0467400E+02	1.3000
41			DRIFT	0	461.013						
42	CQ9	CQ9	QUAD 4Q16	3	17.200	1.1668710E-02	1.4303190E+01	1.9918540E+01	-8.3568380E+01	6.3286540E+01	0.5000
43			DRIFT	0	601.900						
44	CQ10	CQ10	QUAD S032	4	36.000	1.0087900E-03	1.2879310E+00	-4.5792030E-02	3.6950680E-02	-1.1621350E-02	3.3000
45			DRIFT	0	613.570						
46	CQ11	CQ11	QUAD N3Q36	1	37.500	1.5201630E-02	4.4772430E+00	1.9792940E-01	4.7379500E-02	-9.1596540E-02	2.6000
47			DRIFT	0	84.542						
48	CQ12	CQ12	QUAD N3Q36	1	37.500	1.5201630E-02	4.4772430E+00	1.9792940E-01	4.7379500E-02	-9.1596540E-02	2.6000
49			DRIFT	0	240.155						
50	CTGT		DRIFT	0	0.000						

*** HELP INFO. FOR TUNING QUADS ***
WHEN REQUESTED: GIVE 0,1,2,3,4,5,6, OR E; PLOT MADE IF TUNING OK; ALL
DEVICES ASSUMED CONSTANT EXCEPT THE QUADS.

- 0 --TYPE 0 AFTER VARYING QUADS--NEW WAIST PARAMETERS WILL BE FOUND
AFTER READING ALL DEVICES.
E --TYPE E TO LEAVE TUNING MODE.
--TYPE 1 PGM READS "CMX???" WAIST PARAM. & FINDS NEW VALUES OF C01-4.
--TYPE 1 PGM VARYS C05&6 AND C06&7 TO MAKE CAXHO=-CAXHI AND CAXVO =-CAXVI
--PGM VARYS C09&8 AND C09&9 TO MAKE CAXHO=-CAXHI AND CAXVO =-CAXVI
--PGM READS ALL "CTX???" AND TUNES C09-12.
--PGM READS ALL "BTX???" AND TUNES B09-13.
--PGM READS ALL "ATX???" AND TUNES A07&8 AND A09.
--PGM READS "UTX???" AND TUNES U011-14.

***NOTE: IF TUNING OK BUT POW. SUPPLY SATURATED, PLOT MADE BUT VALUES
TYPED & NOT SENT TO AGAST: *2551* = SATUR. TO TUNE, MAKE
SMALL CHANGES (LESS THAN 20).

TYPE <CR> TO CONTINUE