



BNL-105262-2014-TECH

Booster Technical Note No. 220;BNL-105262-2014-IR

BOOSTER TUNE CONTROL LIMITS AT HIGH FIELD

C. J. Gardner

February 1993

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

BOOSTER TUNE CONTROL LIMITS AT HIGH FIELD

**BOOSTER TECHNICAL NOTE
NO. 220**

C. J. GARDNER and W. van ASSELT

February 10, 1993

**ALTERNATING GRADIENT SYNCHROTRON DEPARTMENT
BROOKHAVEN NATIONAL LABORATORY
UPTON, NEW YORK 11973**

Booster Tune Control Limits at High Field

C. J. Gardner and W. van Asselt

February 8, 1993

The Booster tunes are controlled by excitation of the one-turn (pancake) auxiliary windings located on each of the 48 ring quadrupoles. The windings on the horizontal quads are connected together in series, as are those on the vertical quads, to form two series strings which are powered by two 700 A bipolar power supplies. The five-turn main windings on the quadrupoles are connected in series with the ring dipoles.

At high field, the quadrupole iron begins to saturate before the dipole iron, which weakens the strength of the quadrupole relative to the dipole and decreases the machine tunes. Measurements reported in Refs. 1-2 show that the quadrupoles begin to saturate when the current in the main windings reaches 2500 A. (The dipole field at this current is 0.6 T and the magnetic rigidity is 8.3 T-M.) Using the measured quadrupole strengths, the tunes for various quadrupole currents have been calculated with the MAD program, as discussed in Ref. 3, and the results have been incorporated into the Booster Tune Control program. This program is used to control the tunes throughout the machine cycle and is described in Ref. 4. It calculates and displays the currents required in the horizontal and vertical quadrupole strings for the tunes desired during the cycle, and also calculates the tunes for given currents.

The Booster operates in the region of tune space for which the horizontal and vertical tunes are between four and five. Figures 1 and 2 are tune diagrams showing the second and third order resonances which cross this region. The dashed lines in the figures mark the boundaries, obtained from the Tune Control program, of regions that can be reached by adjusting the currents in the horizontal and vertical quadrupole strings. The three diamond shaped regions shown in figure 1 are those that can be reached when the magnetic rigidity is 12.5, 14.1, and 16.0 T-M, assuming the maximum current available from the power supplies is ± 700 A. The

corresponding regions shown in figure 2 are those that can be reached assuming the maximum current is ± 950 A.

For magnetic rigidities of 16.0 T-M or greater, the area in which the tunes can be maneuvered is rather limited with the present 700 A power supplies. If, for example, one wishes to keep both tunes at 4.4 throughout the acceleration cycle, as may be desired for the acceleration of heavy ions, then the present power supplies do not provide quite enough current. Moreover, if one wishes to do third integer resonant extraction, as required for the proposed Booster Application Facility, then extraction on the 13/3 or 14/3 resonance is just barely possible for a rigidity of 16.0 T-M. Figure 2 shows that these limitations can be overcome if the maximum available current is increased to ± 950 A. Such an increase would require increasing the current carrying capacity of the horizontal and vertical quadrupole strings.

REFERENCES

1. E. Bleser, 'Booster Short Quadrupole Production Measurements', Booster Tech. Note No. 174, Sept. 12, 1990
2. E. Bleser, 'Booster Long Quadrupole Production Measurements', Booster Tech. Note No. 176, Sept. 13, 1990
3. A. Luccio, 'Algorithm and Charts to Calculate and Modify Tunes and Chromaticity in the AGS Booster, Proton Case', Booster Tech. Note No. 179, October 17, 1990.
4. W. van Asselt, 'Booster Tune Control', AGS/AD/Op. Note No. 40, February 4, 1993.

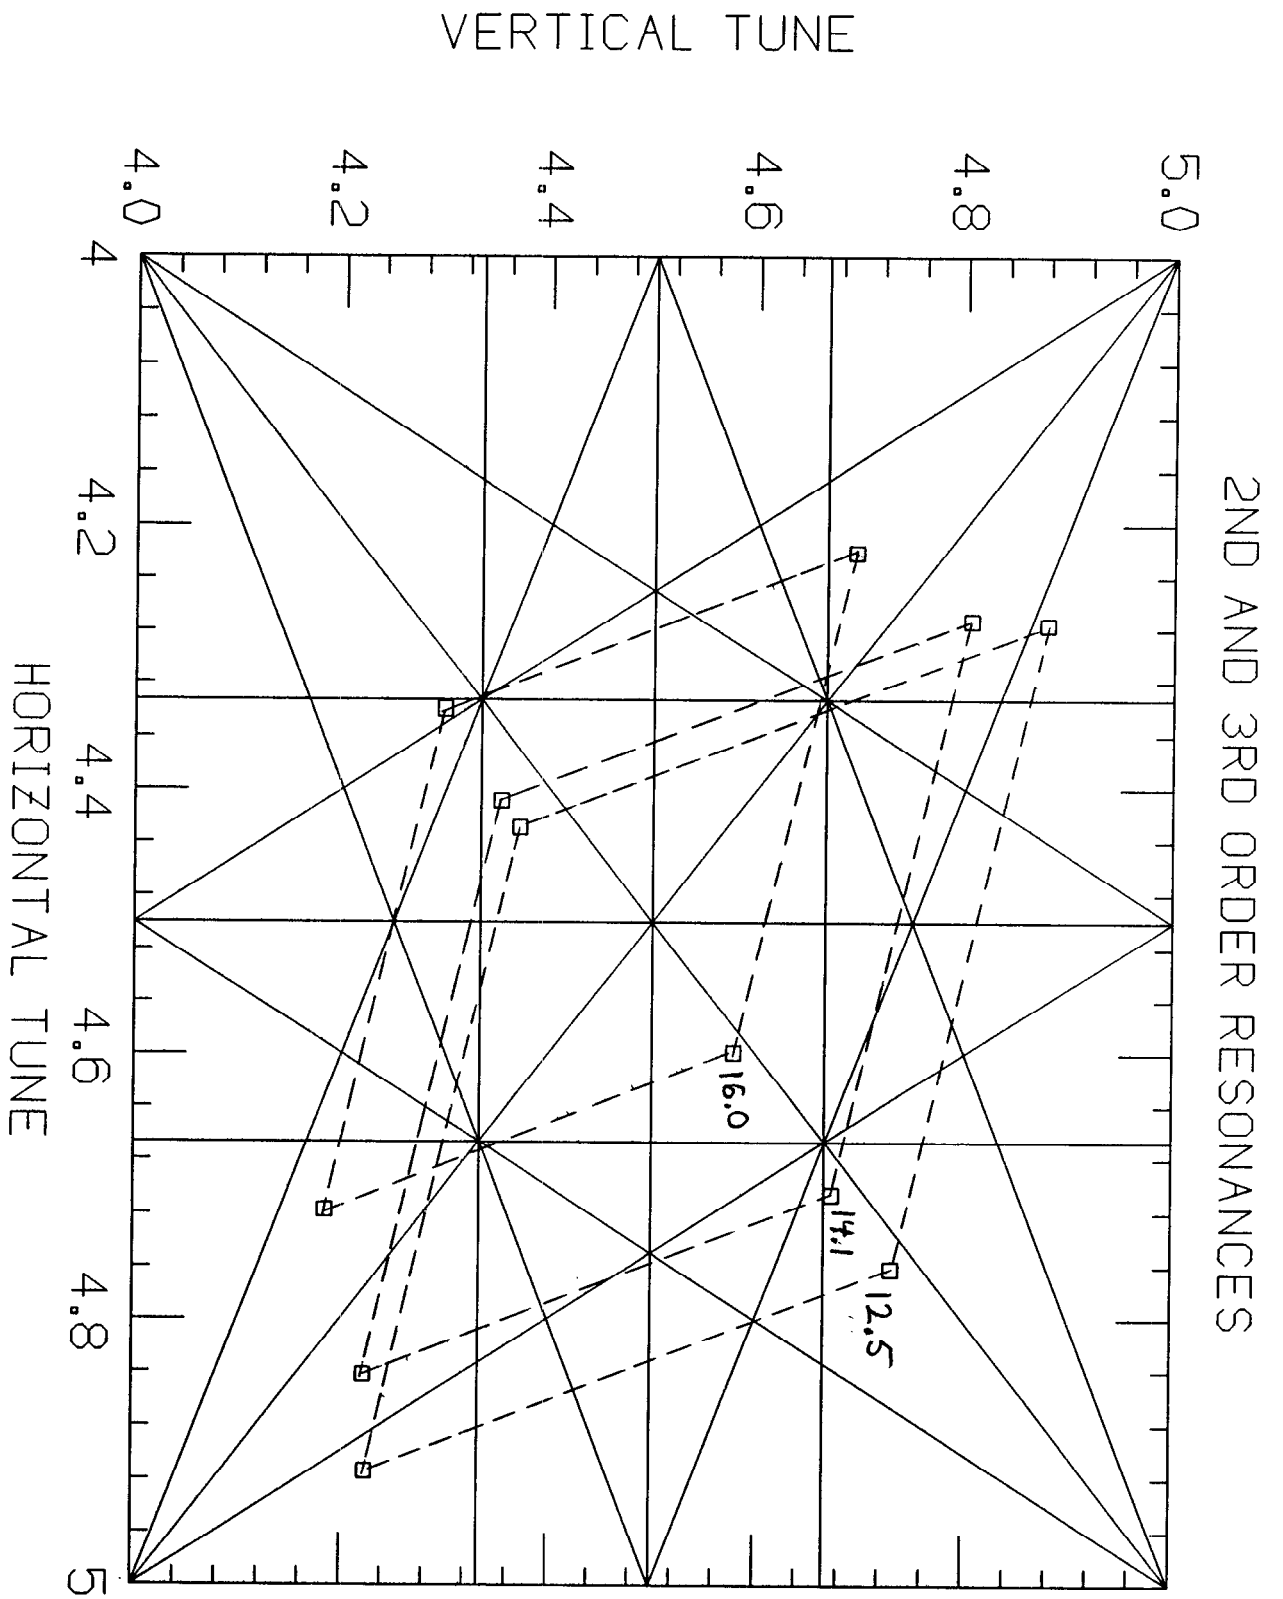


Fig. 1

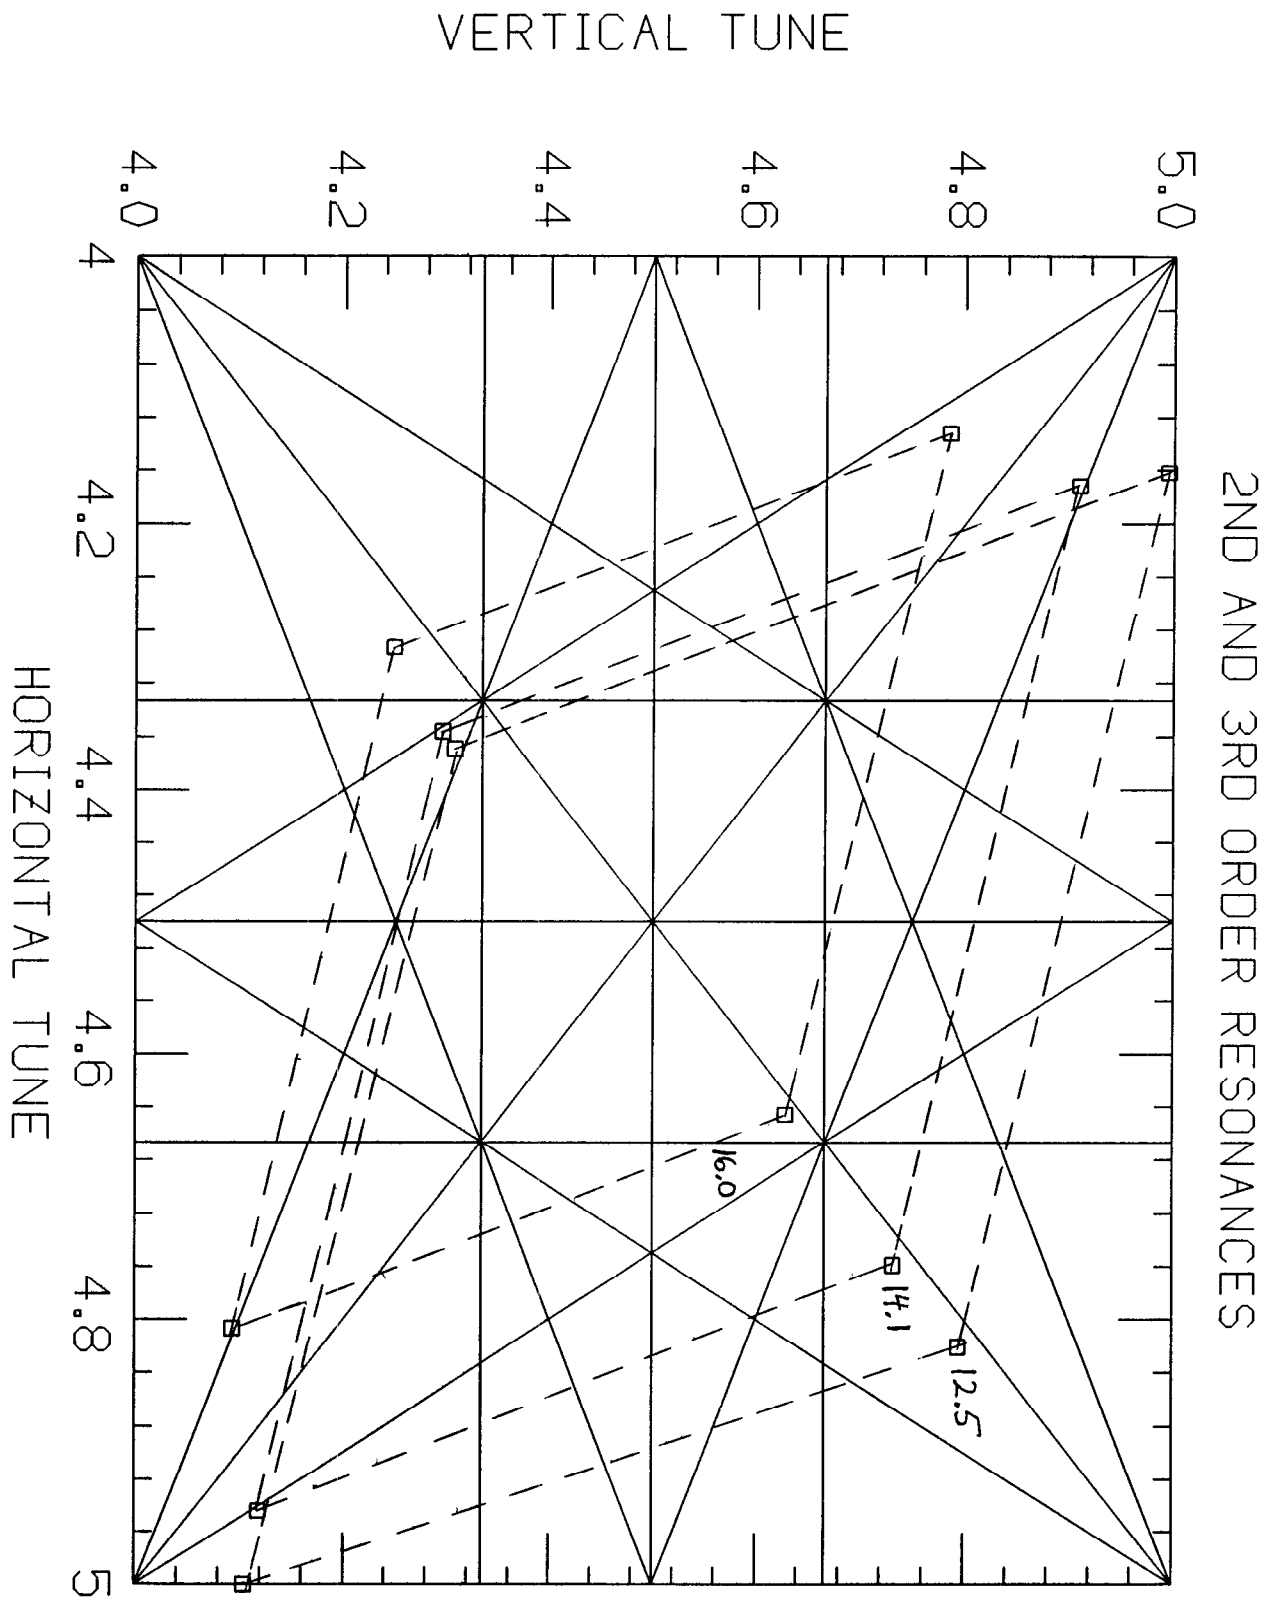


Fig. 2