

## Optimization of Stacking by Varying $\beta_H$

A. van Steenbergen

April 1973

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.AT(30-1)-16 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

No. 10

Blumberg

Injection Studies

April 17-18, 1973

van Steenberg, Brown, Claus

10:00 pm - 4:00 am

Objective: Further optimization of stacking efficiency, horizontal by variation of  $\beta_H$  only, for various injection bump collapse rates.

Procedure: See studies note of April 10, 1973.

Results: 1. Determined 200 MeV beam emittance. See attached data (p. 3,4). From this, input ellipses to matching system:

$$\begin{array}{ll} \alpha_H = + 3.6 & \alpha_V = + 2.3 \\ \beta_H = 29.9 & \beta_V = 14.2 \text{ m} \end{array}$$

2. Using these values and existing transport quad settings, the resultant emittance at the inflector exit is:

$$\begin{array}{ll} \alpha_H = - 0.6 & \alpha_V = - 2.1 \\ \beta_H = 13.0 \text{ m} & \beta_V = 82.3 \text{ m} \end{array}$$

Note: High  $\beta_V$  value at exit inflector. Also, note, for input data both  $\alpha$ 's pos. contrary to previous experience.

3. Using the input values (somewhat suspect for the reasons noted) a "match" was requested to (at exit inflector):

$$\begin{array}{ll} \alpha_H = 0 & \alpha_V = 1.0 \\ \beta_H = 10.0 \text{ m} & \beta_V = 13.0 \text{ m} \end{array}$$

These specified ellipse parameters approximate somewhat the present assumed operational data, as has been measured and established by computer transport checks on a number of previous occasions.

The computed results are indicated on p.5. The matching quad settings were implemented and minor corrections were made to the steering dipoles. The stacked beam intensity was essentially zero. This was contradictory to previous experience whereby the computed settings for the matching quads, requesting the above ellipse at the inflector exit, had yielded close to or equal actual running stacked beam intensities.

Since confidence in and knowledge of the ellipse data at the exit of the inflector is essential to the planned studies, all the study time was spent in repeat measurements, repeat calculations and implementation of the computed data.

4. Emittance data taking was repeated, also since linac had re-adjusted LEBT quads, after a "spontaneous" variation of the pre-injector beam. These data are also plotted on p.3 and p. 4. The resultant data were sufficiently different, so that the transport program input was changed.

Later, the average of these two runs was taken as input. Note again, both  $\alpha$ 's positive.

5. In subsequent computer trials the sign of  $\alpha_V$  was deliberately changed (notwithstanding the measured data) based on input from previous studies. Again after matching calculations and implementation of the quad settings no reasonable results.

6. Subsequent computational checks with the 6600 programs verified the correctness of the transport and matching calculations. Further checks on the emittance program and operational programs are in progress.

17 / 11 / 18 Apr


# HORIZONTAL 200 Mcw Emission.

KE 10 X 10 TO THE CENTIMETER 46 1510  
MADE IN U.S.A.  
KEUFFEL & ESSER CO.

90% BEAM

100%

50%

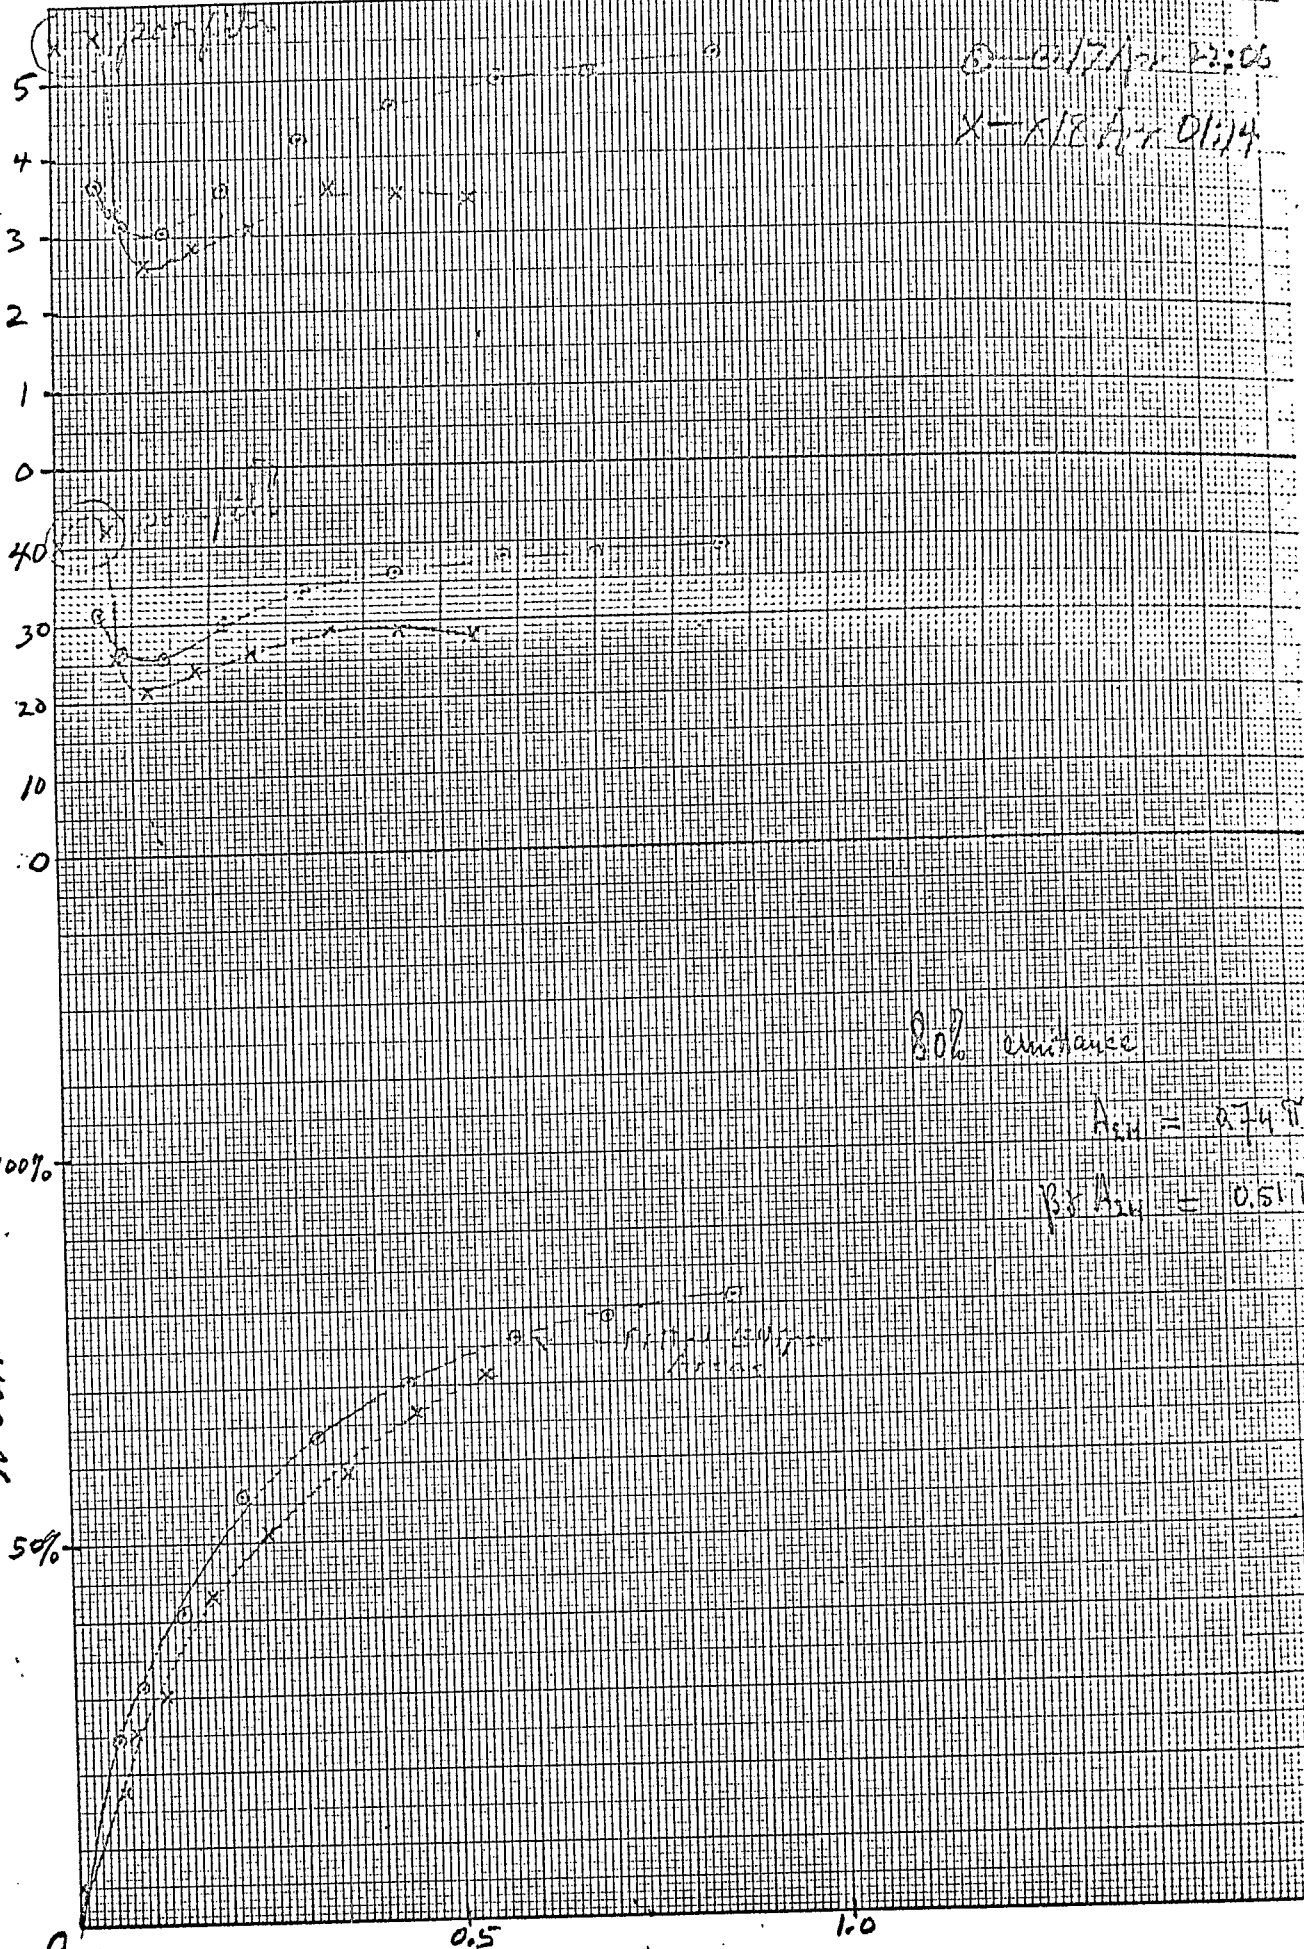

$$A_{50} = 0.74 \text{ m}$$

$$\beta_{50} A_{50} = 0.51 \text{ m}$$


0.5 - 0.7 m

0.5

1.0

# VERTICAL 200 Mw Emittance.

p. 4 - 17 APR 73  
18 APR 73

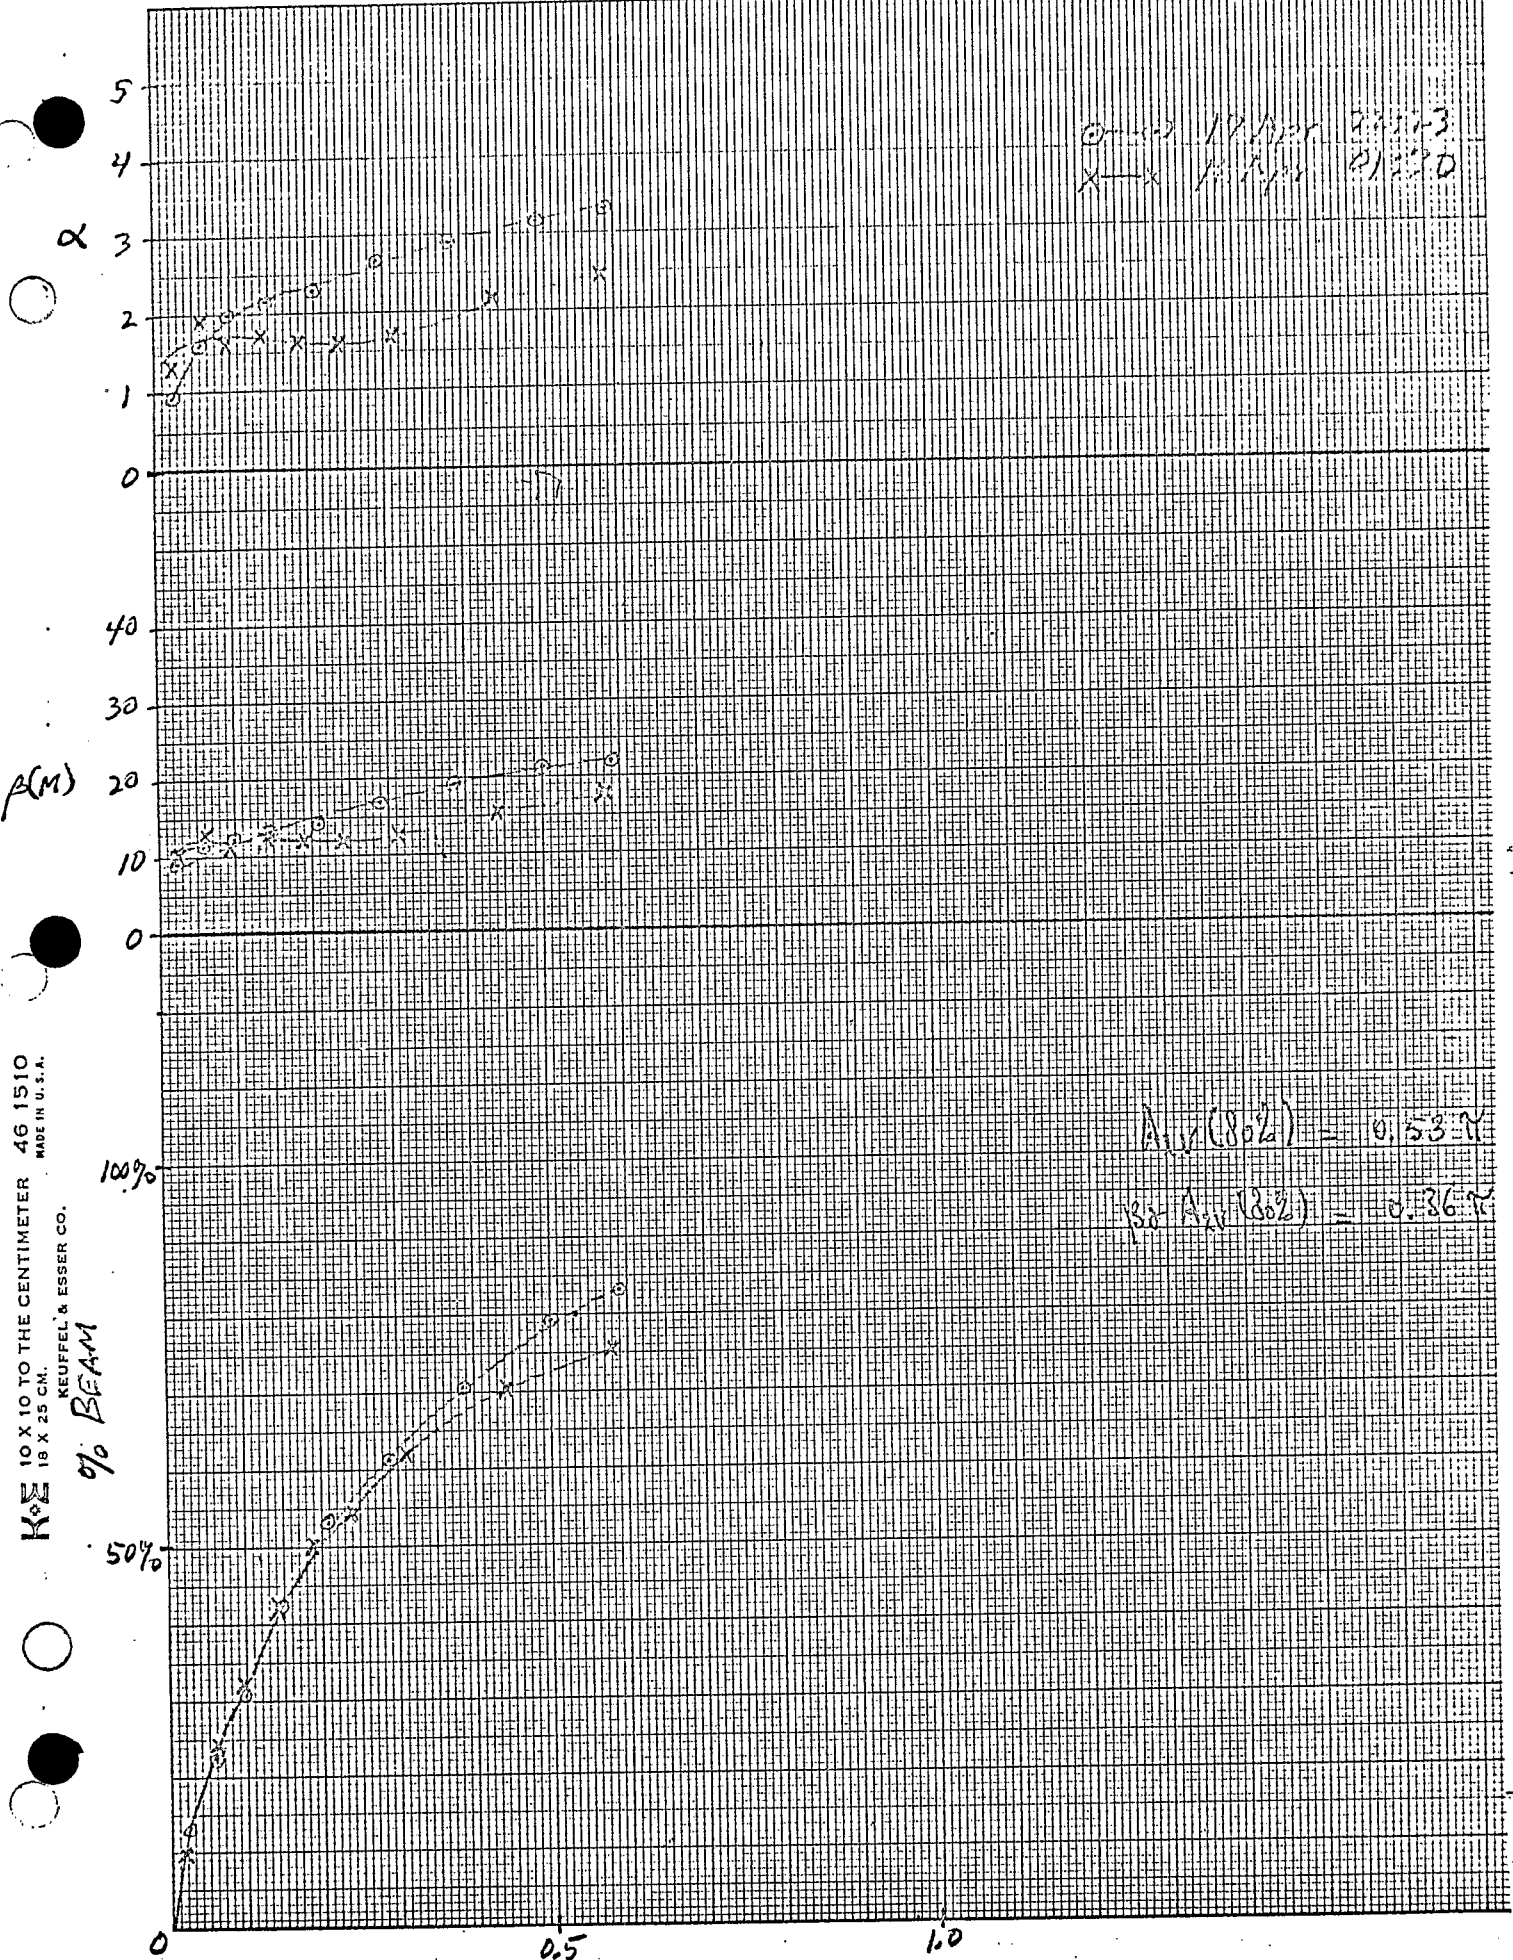

KE 10 X 10 TO THE CENTIMETER 46 1510  
 18 X 25 CM.  
 KEUFFEL & ESSER CO.  
 MADE IN U.S.A.  
 % BEAM

Transport and Matching Results

160

Subject

Date April 17, 1961

				HOR.	VERT.
	EMITTANCE/PI	0.50		0.63	CM-MRAD
EMITTANCE AT INPUT				ALPHA -0.157	1.105
	HOR.	VERT.		BETA 9.943	12.959 M
EMITTANCE/PI	0.50	0.63	CM-MRAD	GAMMA 0.103	0.171 1/M
ALPHA	3.600	2.300		SHOULD THESE MAGNETCURRENTS BE IMPLEM	
BETA	29.910	14.240	M	ENTED?' YES OR NO?	
GAMMA	0.467	0.442	1/M		

PROPOSED MAGNETCURRENTS AND BEAMCHARACTERISTICS

ENERGY: 200.00 MEV, BEAMCURRENT: 100.00 MA

	CURRENT (A)	X (CM)	X' (MRAD)	Y (CM)	Y' (MRAD)	WIDTH/2 (CM)	HEIGHT/2 (CM)
018	-2253.2395	0.00	0.00	0.00	0.00	1.22	0.94
		0.00		0.00		0.83	0.44
019	2209.1708						
020	3179.8901						
021	1959.3831						
		0.00		0.00		0.72	0.24
022	2917.5865					0.58	1.15
		0.00		0.00			
023	1179.7144						
US3	-260.0000						
IFC	3149.9963						
		-22.15		-0.19		0.71	1.14
US4	200.0000						
TAC	4055.0001						
		-2.23	8.75	-0.19	0.09	0.70	0.90

EMITTANCE AT INFLECTOR EXIT