



BNL-104080-2014-TECH

AGS.SN204;BNL-104080-2014-IR

Study of the AGS Tune Control, Especially at Extraction

L. Ahrens

March 1986

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

4/15/86

Number 204

AGS Studies Report

Date(s) 3/19; 4/1; 4/8/86 Time(s) 1900-2200; 1200-1500;
0800-1000

Experimenter(s) L.A. Ahrens and W.K. van Asselt

Reported by W.K. van Asselt

Subject Study of the AGS Tune Control, Especially at
Extraction

Observations

During the first period the high field quads have been programmed in such a way that the working point of the machine was at $(\nu_x, \nu_y) = (8.71 \pm 0.01, 8.80 \pm 0.01)$ during the second half of the acceleration cycle until just before extraction. A further increase of the tunes was not possible due to current limitations of the power supplies. The existing radial shift before extraction caused the tunes to cross at that time.

Removing the radial shift at extraction was not possible, while simultaneously keeping extraction losses low (extraction losses are defined as acceptable when $H5 < 0.5\%$ and $H10 < 1.0\%$). It was decided that a separate study of the present extraction set-up was necessary in order to understand this phenomena.

The tunes at extraction with the present extraction set-up ($RS7A = -220$) are 8.765 horizontal and 8.645 vertical. The tune shift due to the radial shift is 0.12 horizontal and -0.06 vertical. During the second study period an attempt was made to remove the radial shift and to power the high field quads in such a way that the tunes were unchanged. Under these conditions the extraction losses were high and could not be tuned away. Before restoring the machine for HEP an IPM scan and ORBITS were taken for later analysis. The ORBITS showed that besides changing the radius, the residuals in the orbit had changed also, while the IPM scan showed that there was no change in horizontal or vertical beam sizes. It was concluded that the position of the H10 ejector magnet had to be adjusted with respect to the H5 kicker magnet. The exercise was therefore repeated during the third study period. After some tuning it was then possible to

extract at high intensity with acceptable extraction losses, typically 0.3% and 0.8% for H5 and H10 respectively. Whether these losses could be reduced even further by more tuning remains an open question at this moment, because of the limited time available during the experiment. In the table below the settings of the different elements are given for the present running (old) set-up and for the final set-up during the study session (new).

Device	old	new
RS7A	-220	0
H10U	2316	2496
H10D	2020	2160
H5AB	3463	3123
H5BB	3410	3070
QH0RZ	0	113 A

In figure 1 the difference orbit between the 'new' and the 'old' settings is plotted, showing the huge difference in the 9th harmonic for the cases. In figure 2 the orbits for the two cases are given. The figure shows that the orbit in the 'new' case certainly isn't any worse than in the 'old' case.

Conclusions

It is demonstrated that the radial shift at extraction is not necessary for high intensity machine operation. The H10 ejector magnet has been moved about 4 mm to the outside in the new set-up, which roughly corresponds with the change of the orbit at the H10 position (see figure 1).

Why or if the tunes have to cross before extraction is not yet understood. IPM scans do not indicate that there is exchange


of energy between the two transverse planes in either case. Figures 3 and 4 give the IPM scans for the two cases for reference (scans were taken at an intensity of 6 TPPP).

The results of this study suggest that with respect to extractio efficiencies tune shifts due to radial shifts are equivalent to tune shifts due to the high field quads.

The maximum current of the high field quads is insufficient for flexible machine studies. With the radius centred in the high field multipoles (-4 mm with respect to the PUE zero) for instance it is not possible to program the tunes as reported.

***** DIFFERENCE PLOT USING FILE STDD *****
 8 APR 86 09:23 HOR. ORBIT @ 444 EXTNL NAVG: 1
 NORM BY L2OCT = 554 REFER L2OCT = 554
 AVERAGE DIFF = 0.003


FIGURE 1

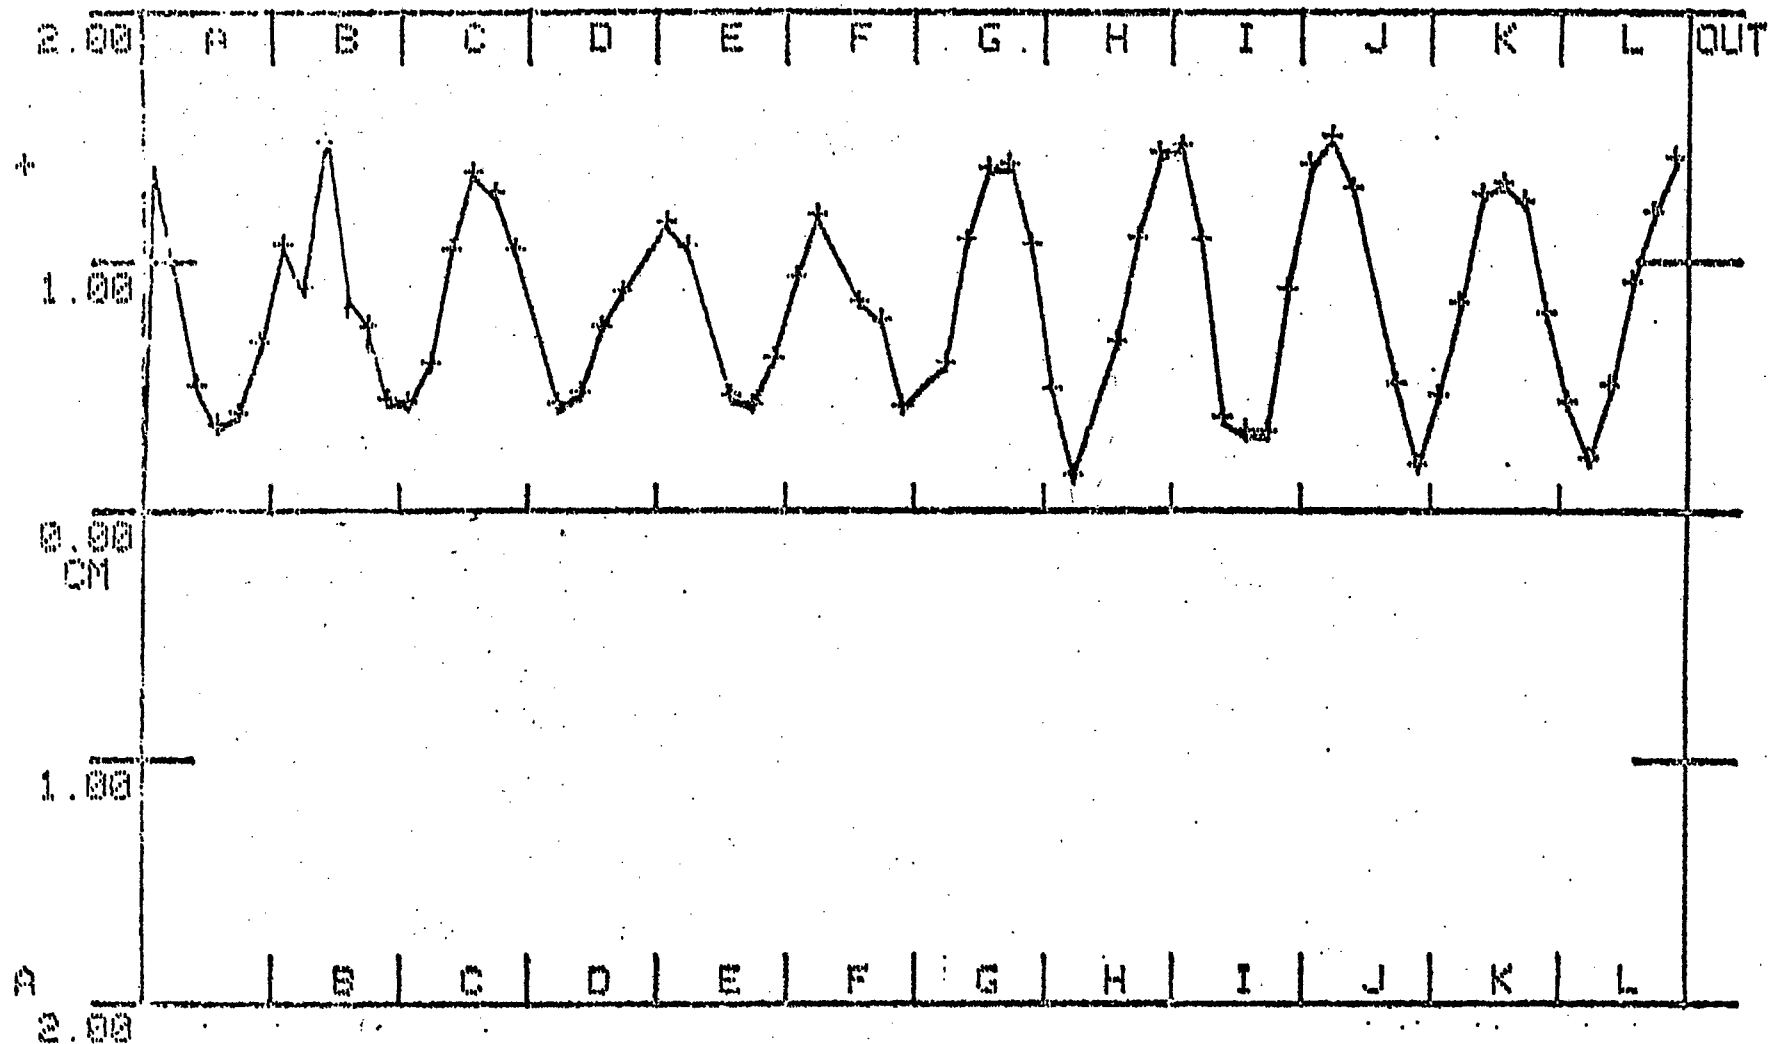


R (RESTART), E (EXIT), S (SAVE FILE), N (NO OUTPUT), L (LOOP), C (NORMC), <CR> (LOOP 0
 NCE):

I	0.59	0.45	0.45	0.01	-0.17	-1.00	-0.36	-0.79	-1.45	I
J	-2.16	-1.16	-1.11	-1.11	-0.41	-0.41	-0.41	-0.49	J	
K	-1.57	-1.70	-2.17	-1.00	-0.70	-0.70	-0.70	-0.10	K	
L	0.71	0.17	-1.40	-2.02	-2.07	-1.59	L			

FIGURE 2

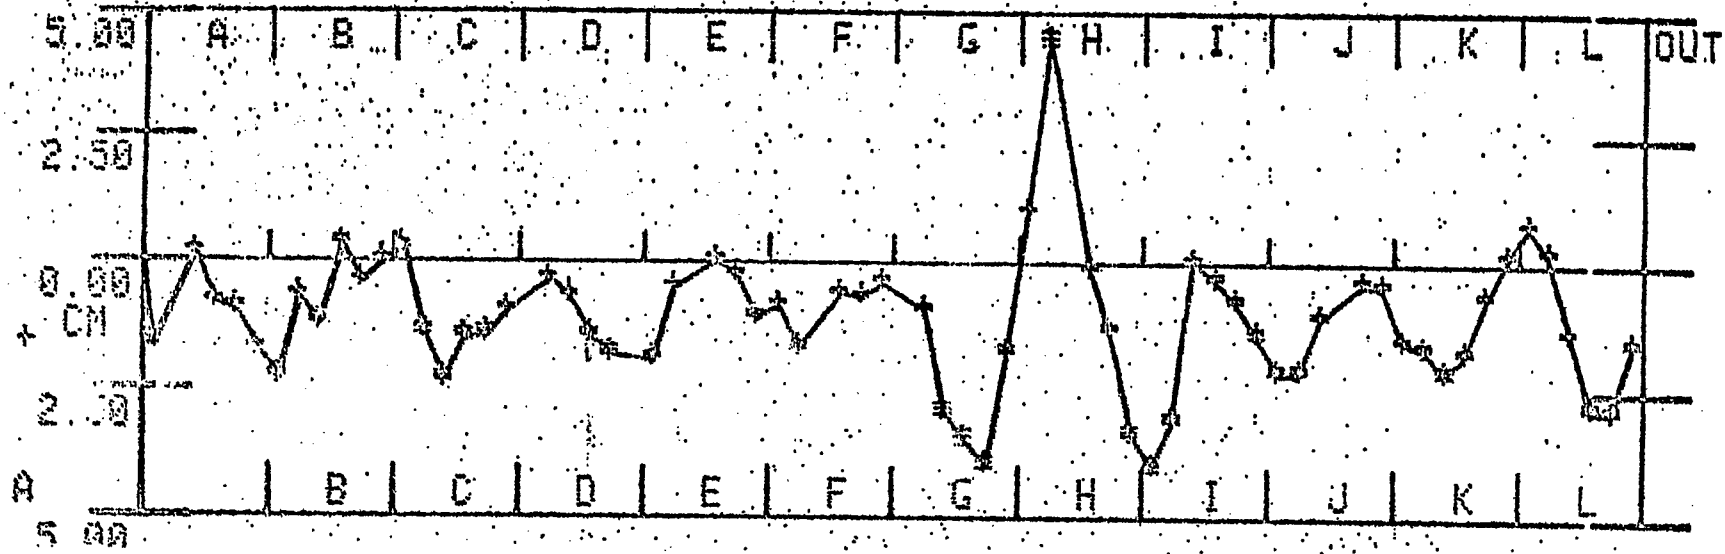

'OLD'

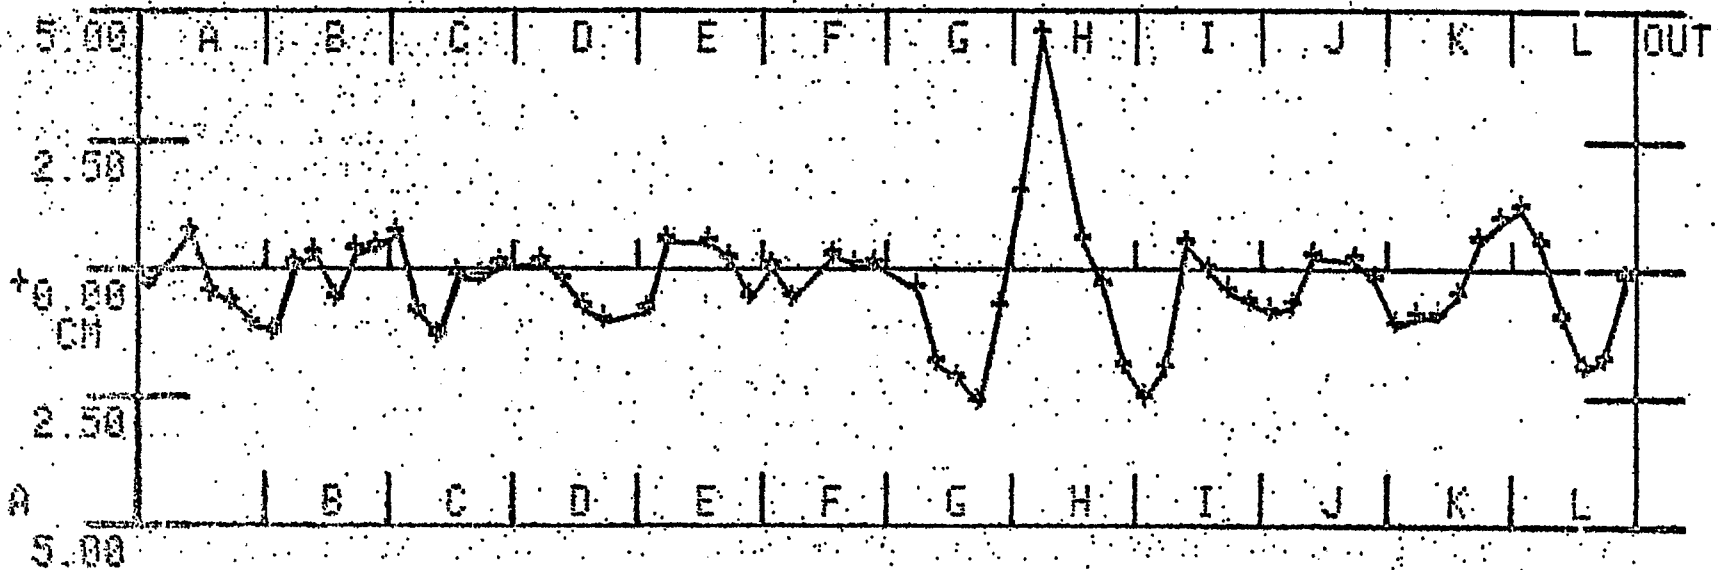

'NEW'

R(RESTART), E(EXIT), S(SAVE FILE), N(NO OUTPUT), L(LOOP), C(NORMC), <CR>(LOOP 0
ACE):

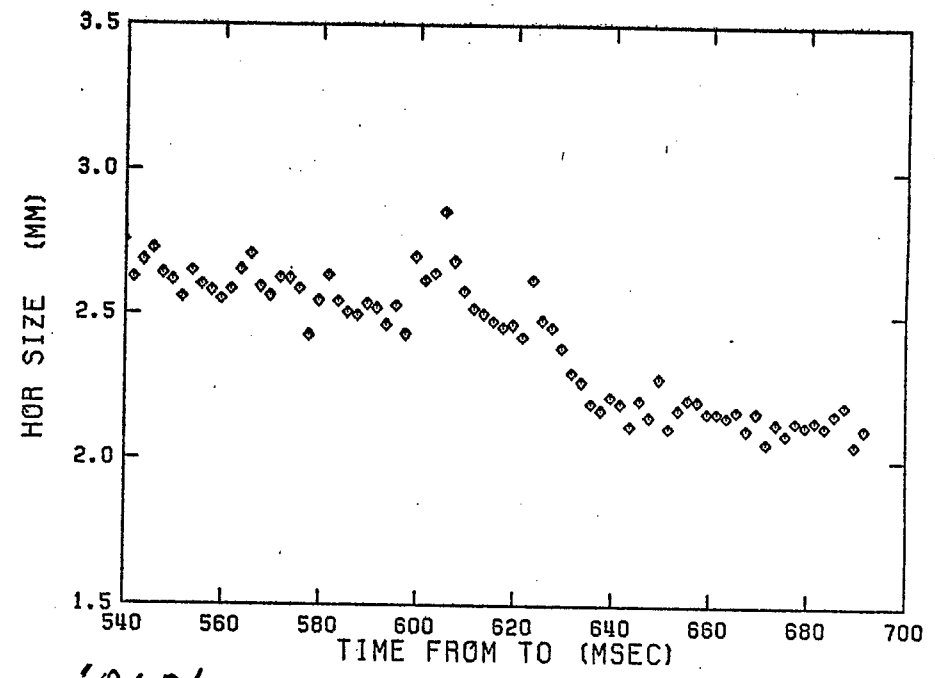
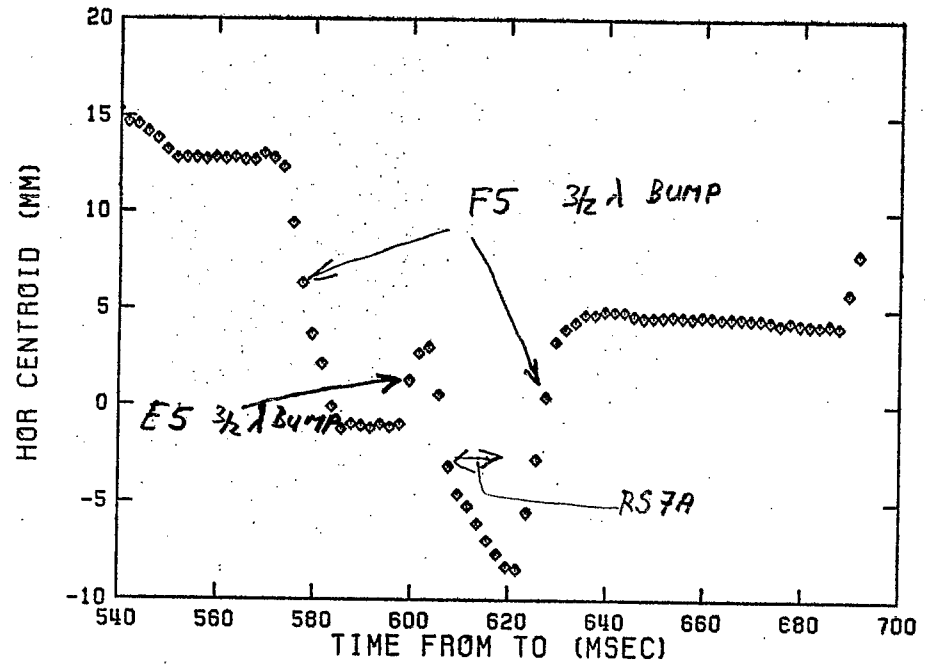
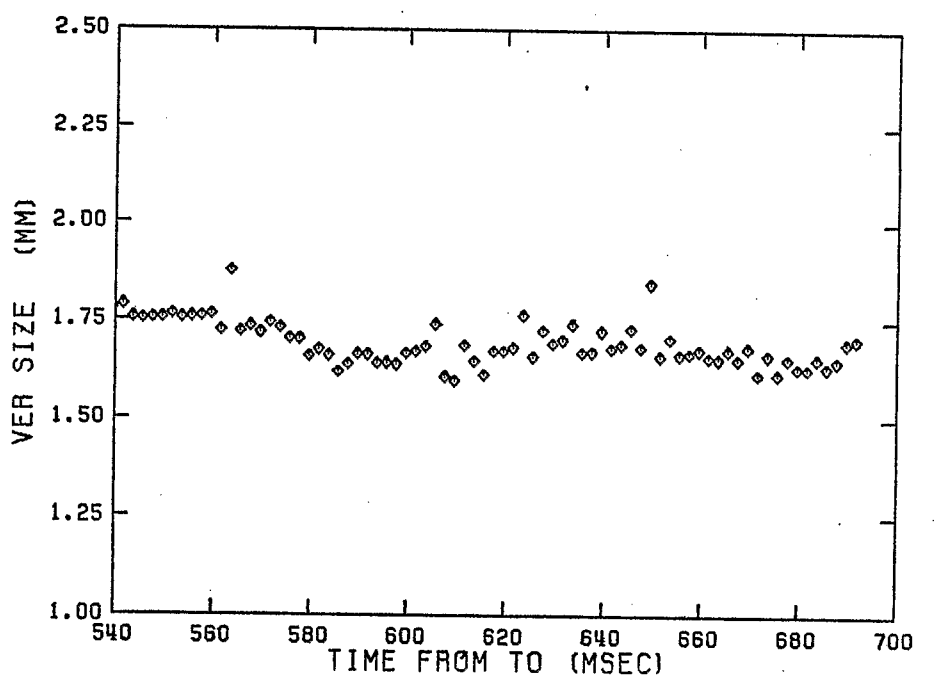
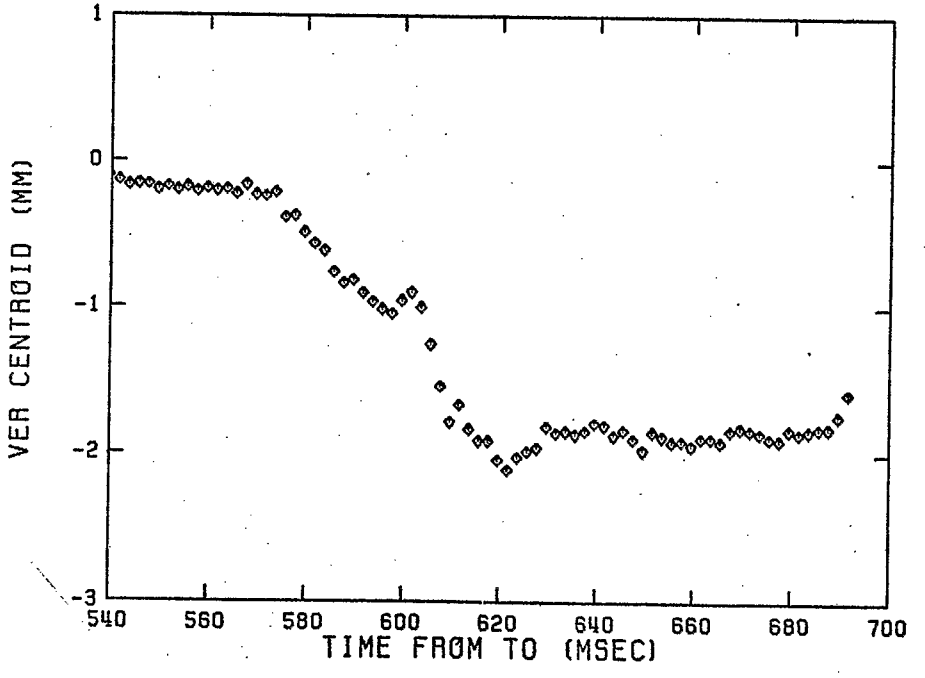


FIGURE 3 'OLD'




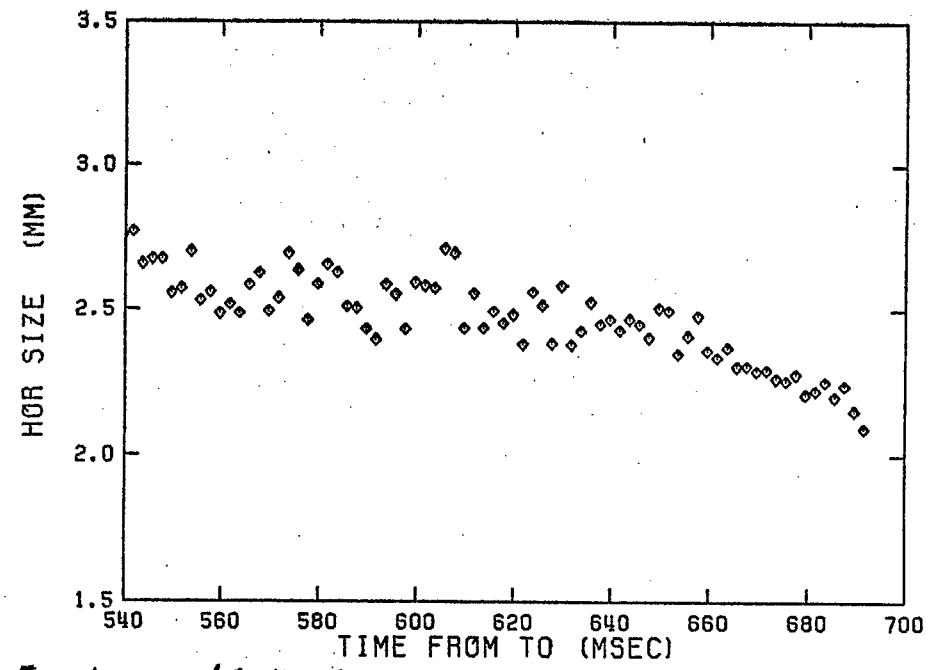


FIGURE 4 'NEW'

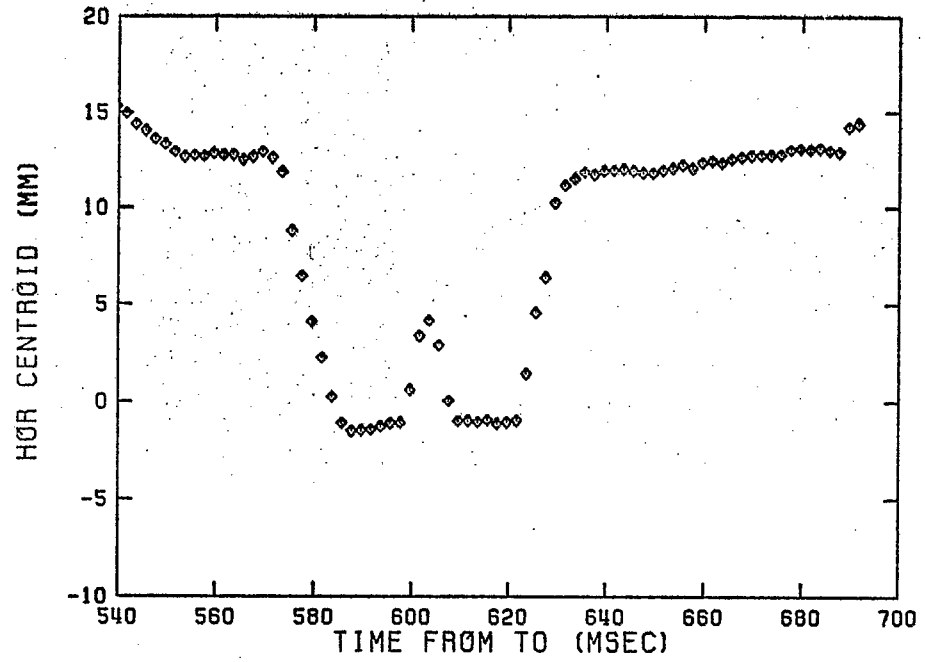