



BNL-104039-2014-TECH

AGS.SN162;BNL-104039-2014-IR

## Measurement of Tune Conditions for HEBT Achromatic Bend

M. Q. Barton

March 1984

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

AGS Studies Report

Date March 26, 1984 Time 1100-1330  
Experimenters D. Barton, K. Reece  
Reported by D. Barton  
Subject Measurement of Tune Conditions for HEBT Achromatic Bend

Observations and Conclusion

A potential problem area in the operation of the HEBT line is the tuning of the three quadrupoles in the achromatic bend. These three quads, which, in the absence of a small correction for space charge, are run as a symmetric triplet, are required to provide a point-to-point focus in the horizontal (bend) plane between the centers of the two bending magnets. This tune recombines off-momentum rays to give the proper dispersion-free conditions at the beginning of the matching section of the line. The three control parameters (DACADS settings) presently available for these quads should actually be reduced to a single parameter which selects, through these constraints, a set of currents which satisfy the proper conditions. The single parameter would provide the means for matching the desired vertical tune in this section of the line.

The method used in this measurement consisted of using the magnetic-loop position monitor downstream of the second bending magnet (Y352H) to measure horizontal displacement of the beam. The bending magnet current was set successively to values chosen to represent substantial off-momentum settings of the beam. The outer pair of quadrupoles (NQ280, NQ317) were then held at a fixed setting while the central quad (NQ299) was varied to produce a sweep of the beam at the position monitor. The procedure was then repeated for two more fixed settings of the outer quads. The data are shown in Fig. 1. The reading accuracy of the position monitor on the scope was approximately 0.01 V which has been indicated on the plotted points. Straight lines have been drawn by eye to the data in order to determine the points for which the position is independent of bending magnet setting. These three measurements each yield a point on the locus of allowed settings for these quads which should be a straight line. These data are plotted in Fig. 2 and are in good agreement with linearity. The equation of the straight line is:

$$X = (1.935) Y - 775.1$$

where X = DACADS (NQ280, NQ317) and Y = DACADS (NQ299)

Also shown in Fig. 2 is the prediction for this line based on a TRANSPORT calculation of the tune and DACADS calibration constants from LeMaire\* with zero offsets. The open circle on the measured line corresponds to the running conditions found at the start of the study, which at least demonstrates that underconstrained controls can sometimes give serendipitous results. Finally, Fig. 3 is a plot of the calculated TRANSPORT tuning line for these quads in actual magnetic gradient.

---


\*LeMaire, J-L, "A Study of HEBT Optics and Instrumentation", BNL 22498.  
(1977)

mvh

Distribution: Dept. S&P

FIG 1. HERT BEND

D. BARSTON 3/27/64

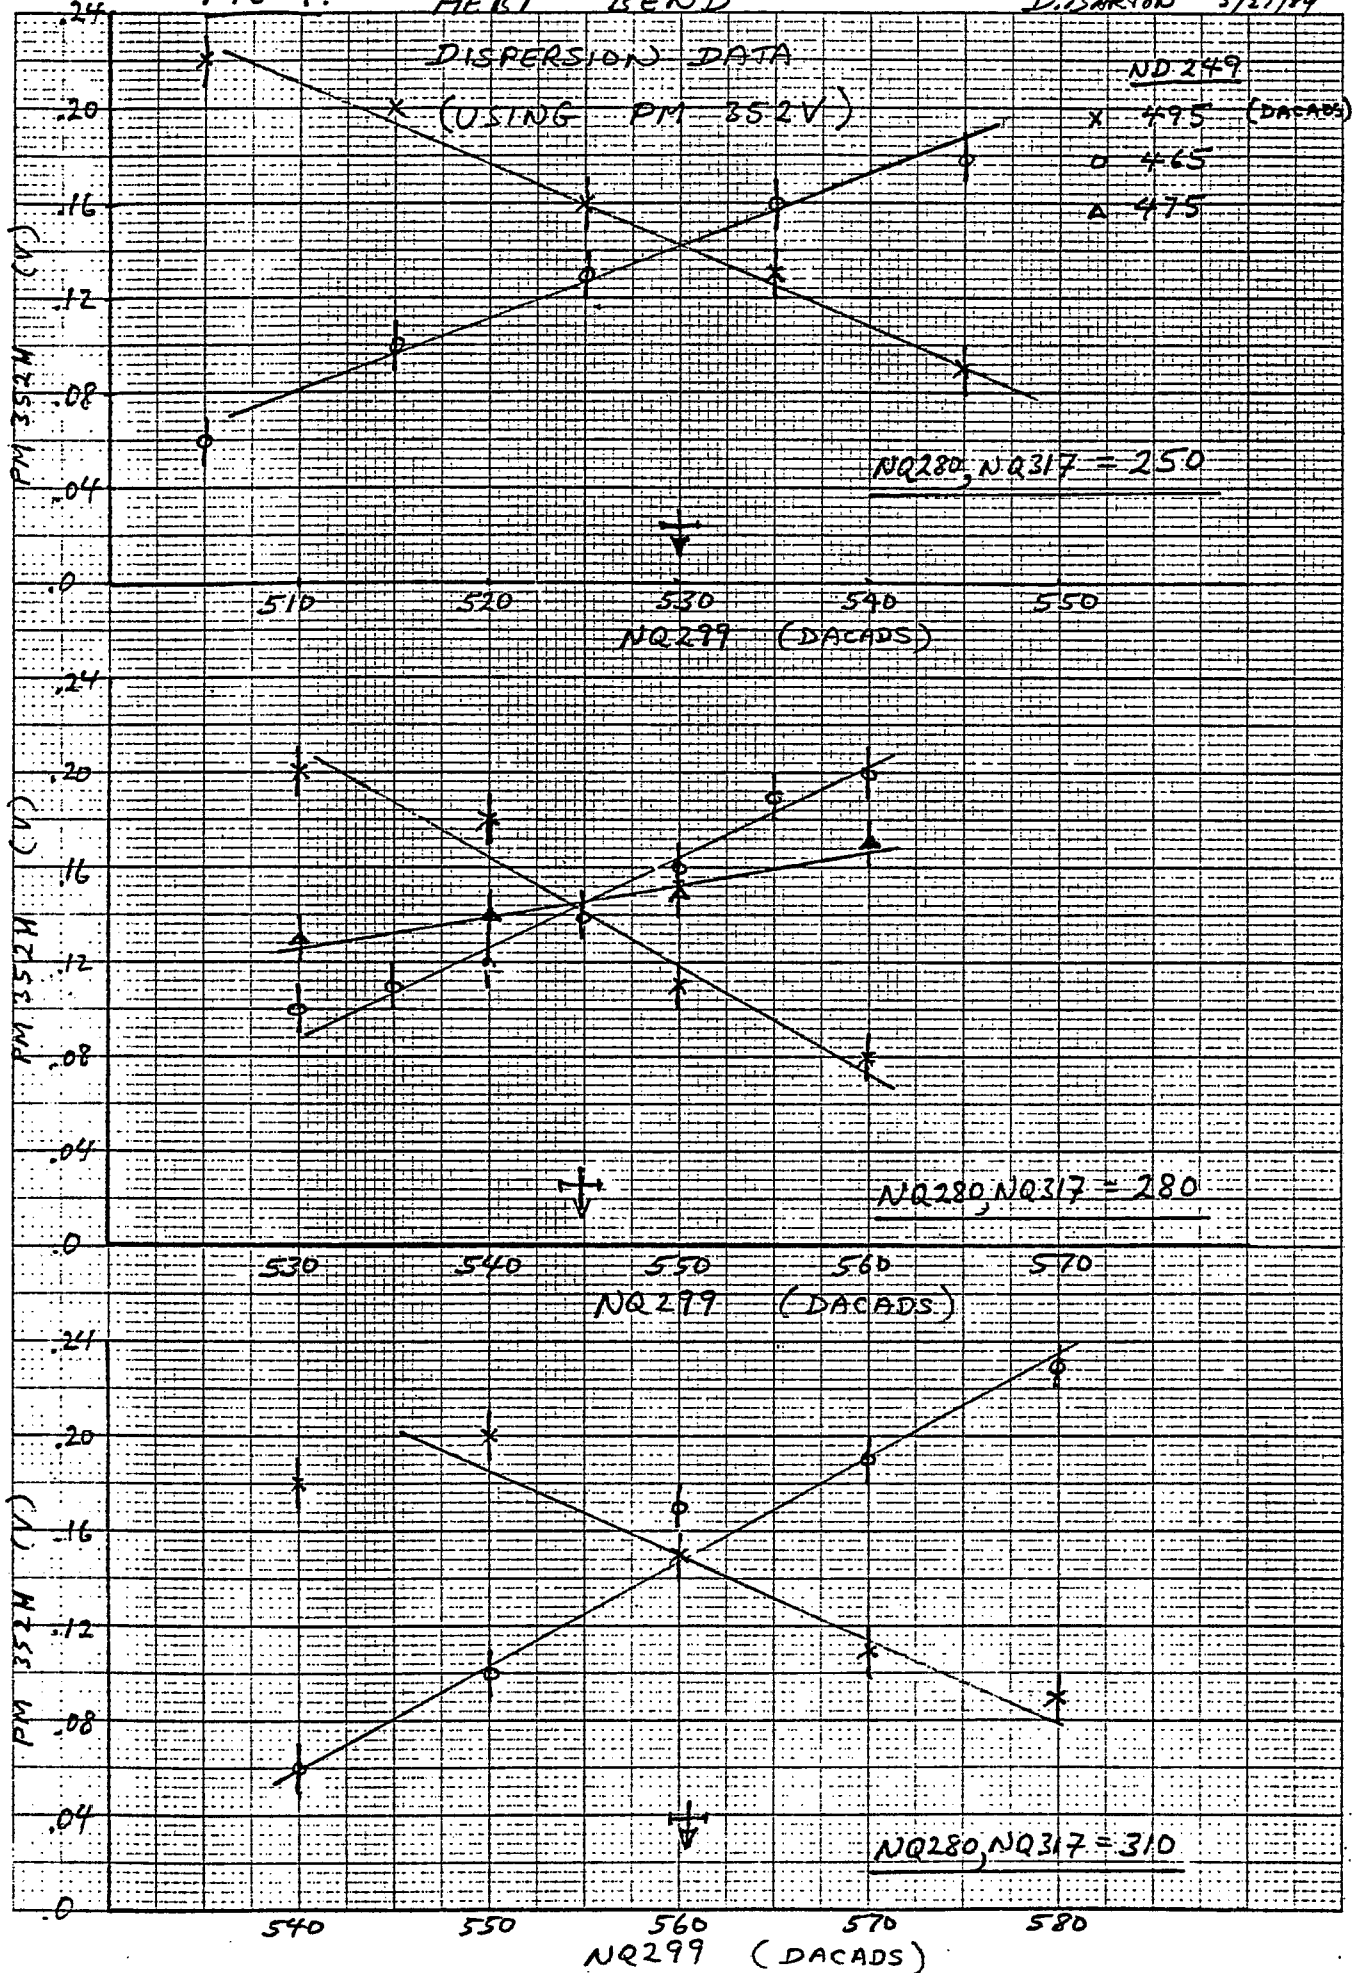


46 1320

K&E 10 X 10 TO 1/4 INCH 7 X 10 INCHES KEUFFEL & ESSER CO. MADE IN U.S.A.

FIG. 2

LOCUS OF DESIRED SETTINGS FOR  
HEBT ACHROMATIC BEND OPTICS

"TRANSPORT" model, zero offsets  
FROM MEASURED DATA (1)

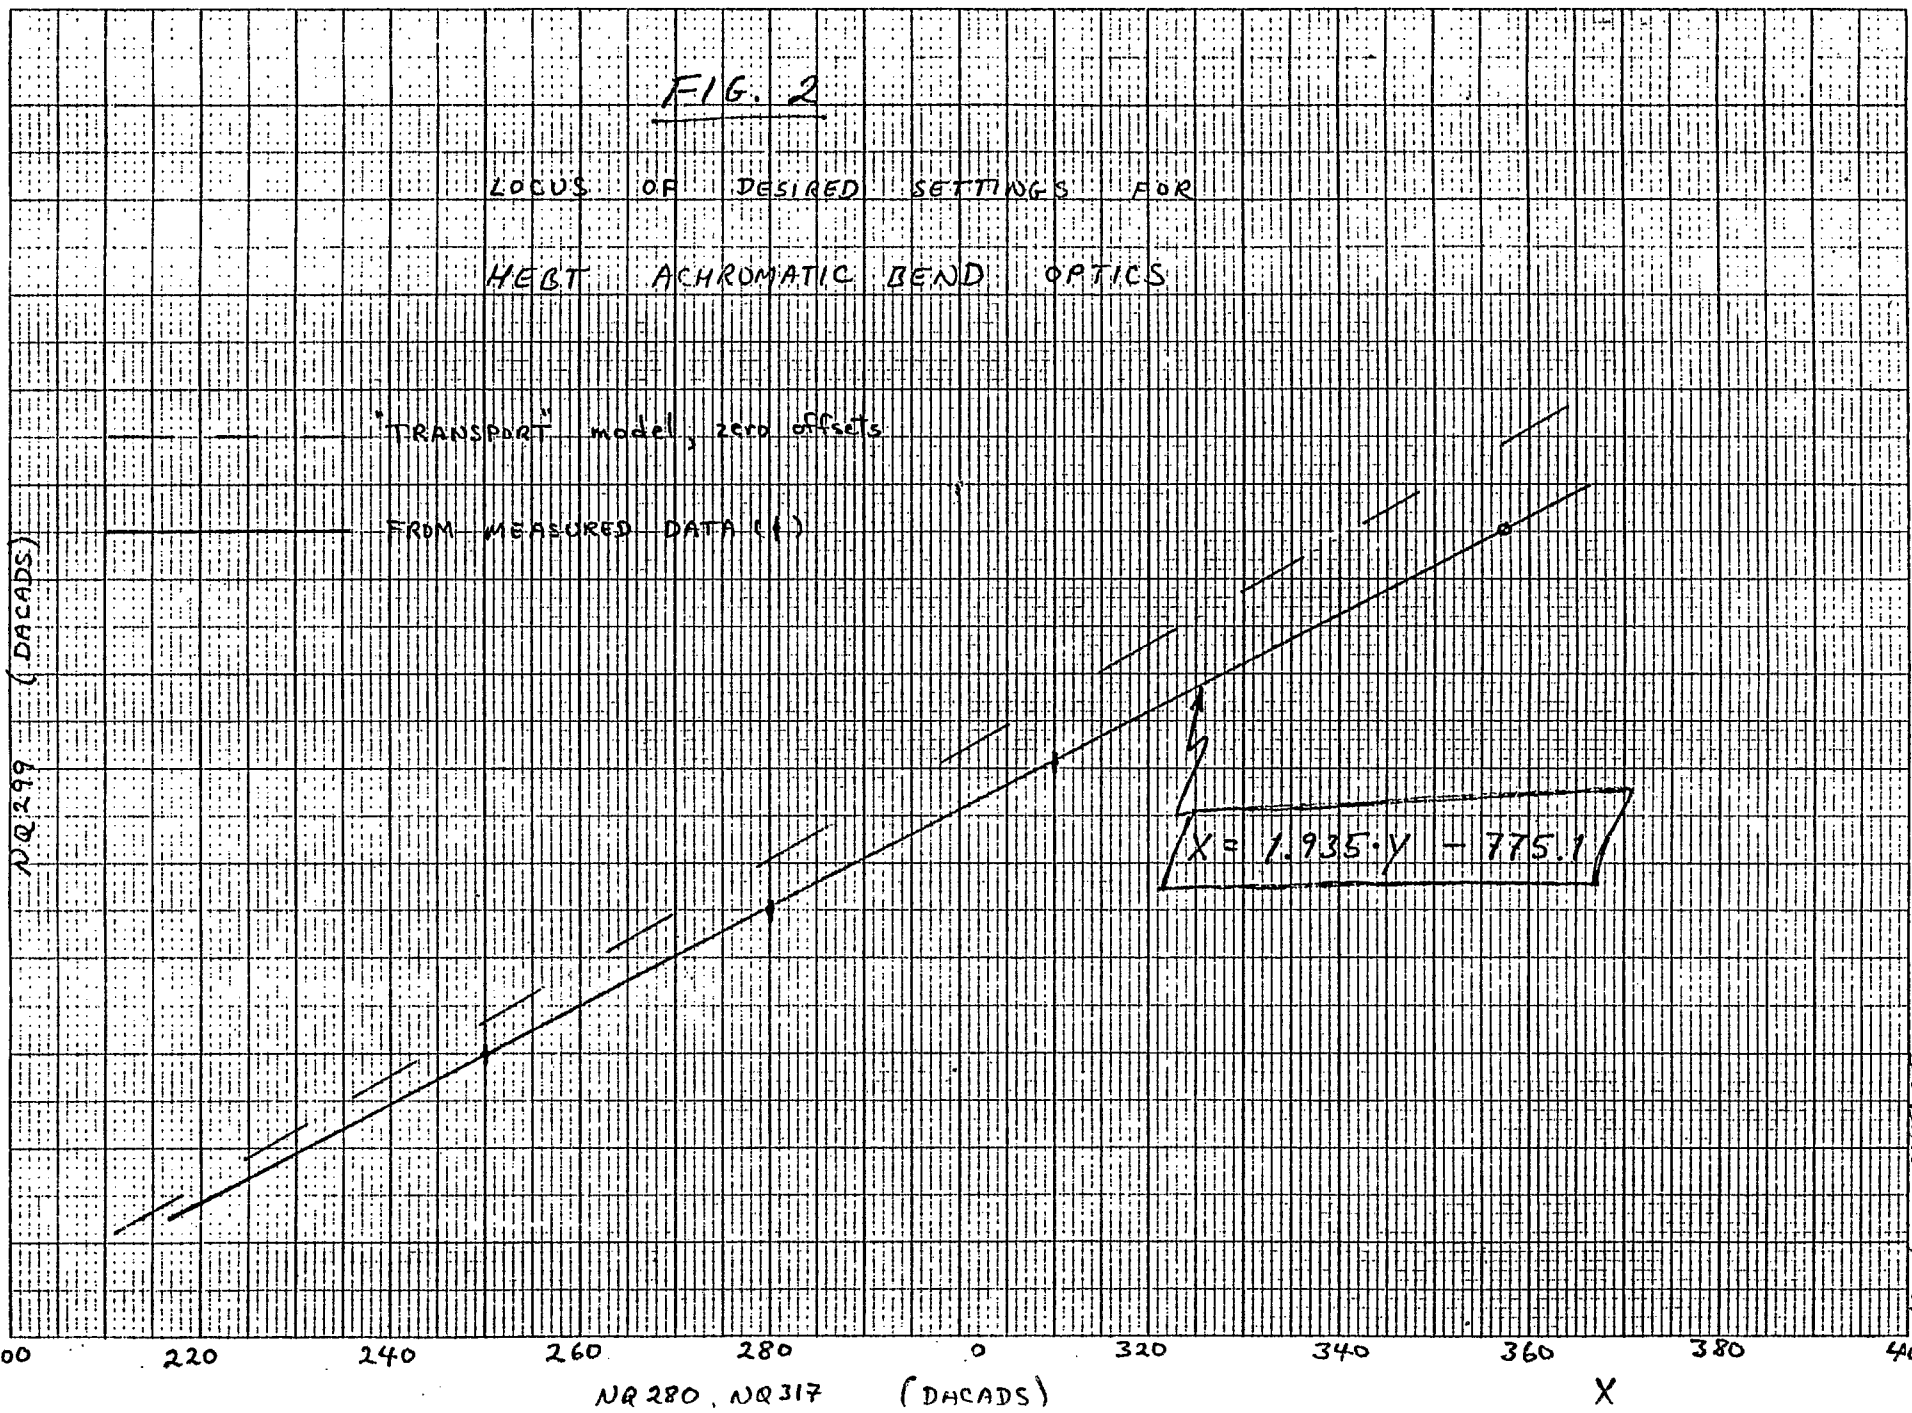

D. BARRON 3/1/77

D. Barton 8-FEB-84

