



BNL-103982-2014-TECH

AGS.SN104;BNL-103982-2014-IR

## Investigation of A-line Transport Losses

J. W. Glenn

October 1977

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.EY-76-C-02-0016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Date 10/27/77 Time 1800-2000 Experimenters J.W. GlennSubject Investigation of A Line Transport LossesOBSERVATIONS AND CONCLUSION

- 1) Swept beam vertically with CPO33 and AP109. Though not at an optimum for A line, the loss at AD5-6 and the A transmission are near minimum and maximum for the typical settings of CPO33 and AP109 (Figs. 1,2).
- 2) Increased A line intensity from a typical  $\sim 9\%$  (of CE010) to  $\sim 15\%$ . After a quick optimization of beam to B&C the best delivery  $[(A+B+C)/C10]$  was 68% (vs. 77% for 9% on A). Thus it appears 1.7 protons are required to deliver 1 proton to A target.
- 3) The beam was swept at the entrance to AD1 with CD014. The delivery to B&C was ignored. The transmission increased by  $\sim 30\%$  while the losses on AD1 dropped  $\sim 30\%$ . The losses on AD5-6 went up by a factor of  $\sim 3$  (Fig. 3).
- 4) Beam was steered with combinations of AD1T, AD1-8 and AD242. Increasing AD1T to its limit helped slightly but increased the losses at AD5-6 (Figs. 4,5,6).

Conclusion: A major part of the loss of beam directed toward A target occurs due to horizontal losses in AD1 and possibly AD2-8.

Recommendations:

- 1) Vertical positioning should be cleaned up though this is not critical.
- 2) The optics of CQ1, 2 & 3 should be checked for the possibility of decreasing the focusing of CQ3. This quad could bend the beam into AD1's septum.
- 3) More loss monitors are needed in the A line with a flag box at the end of AD8. The C057 SWIC should be operational to check the 1.7:1 ratio.
- 4) The possibility of running AD019 at higher current should be examined.

Note: The spot was generally centered on the A target but small motions at the A SEC could affect these results.


Note of Figures: A300F  $\equiv$  A SEC/CE010 SEC  
AD19  $\equiv$  AD19 loss monitor/CE010 SEC  
AQ47S  $\equiv$  AD5-6 loss monitor/CE010 SEC  
AD1  $\equiv$  AD1 loss monitor/CE010 SEC

Fig 1

A: LOSSES AND EFF'S  
9-NOV-77 18:25 19.3

YA: A300F, 0=  
YB: AD19, 0=  
YC: A0478, 0=  
YD: AD1, 0=

2000  
1000  
10000  
300

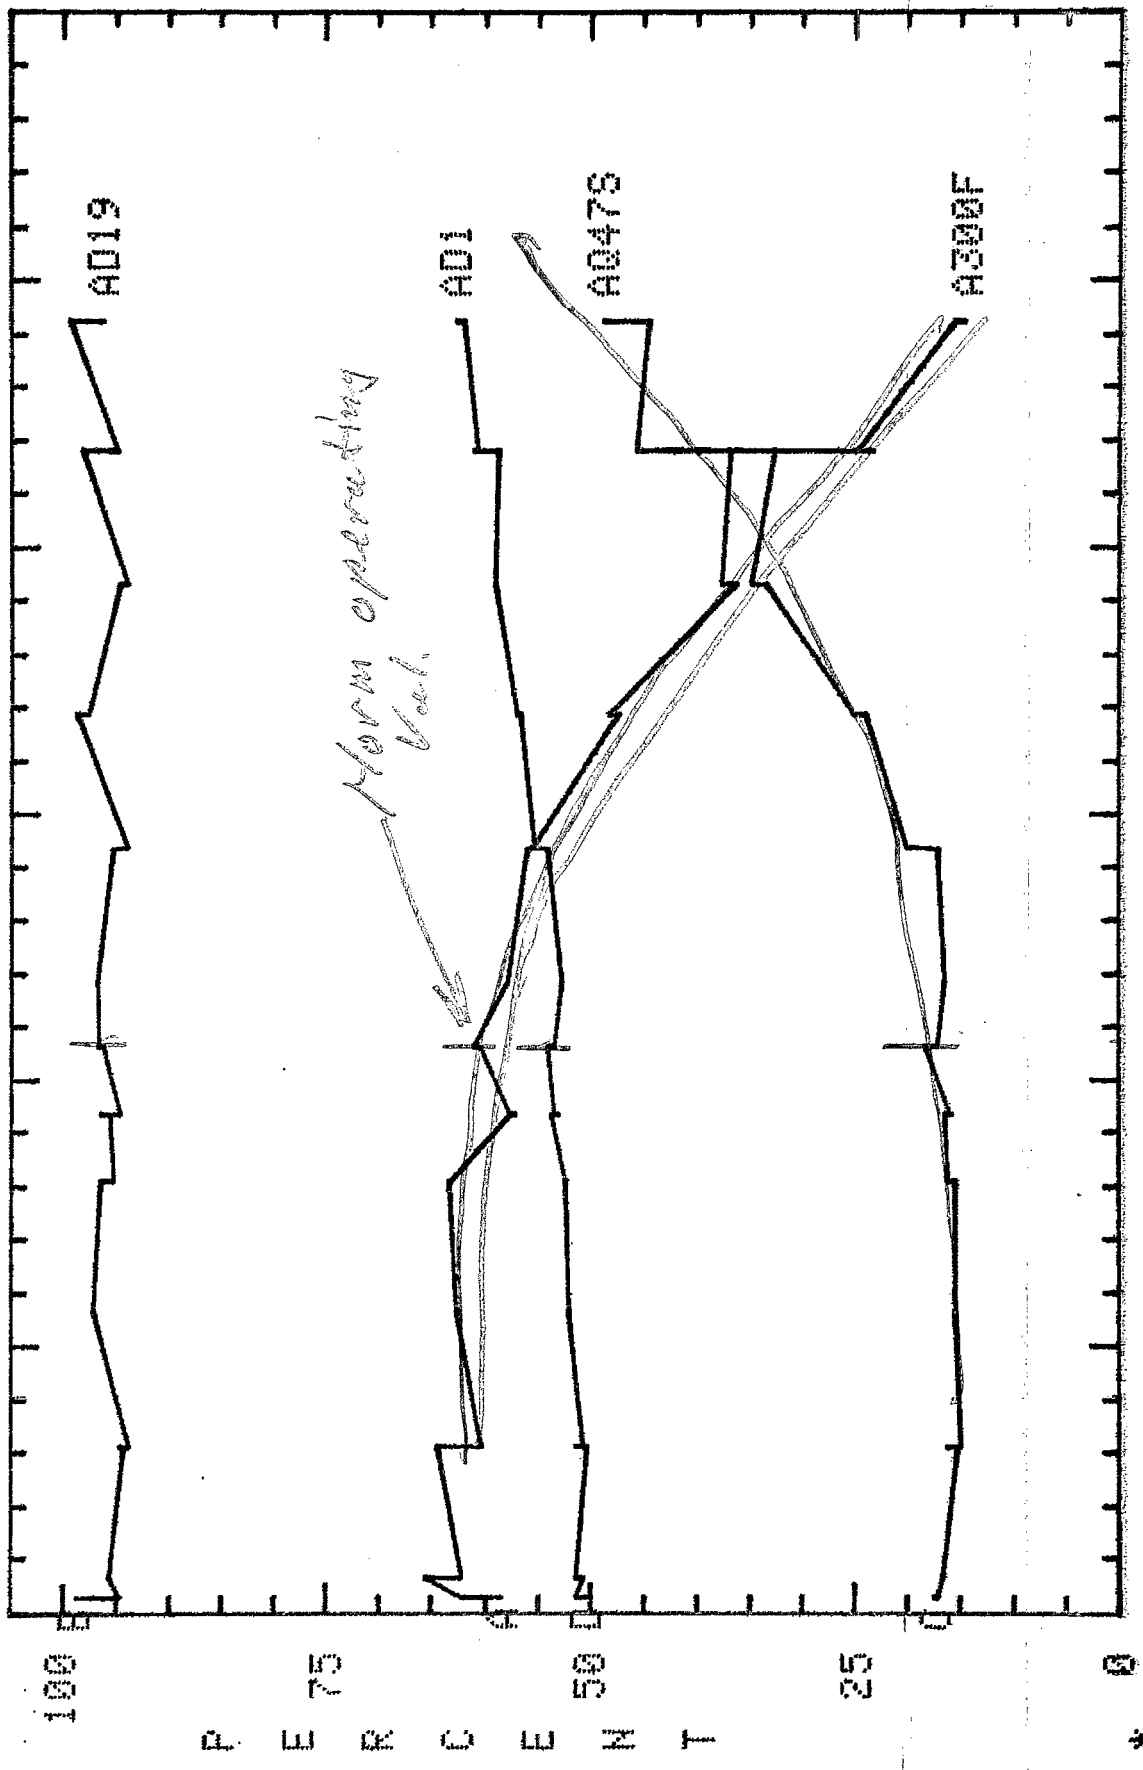


0.00 4.00 8.00 12.00 16.00 20.00  
CP033 X 100 PLOTS WHEN ABS(OLD-NEW) >= 0

Fig 2

A LOSSES AND EFF'S 18:41 21.4  
 9-NOV-77

YA:A300F,0= 2000  
 YB:AD19,0= 10000  
 YC:AQ47S,0= 10000  
 YD:AD1,0= 300

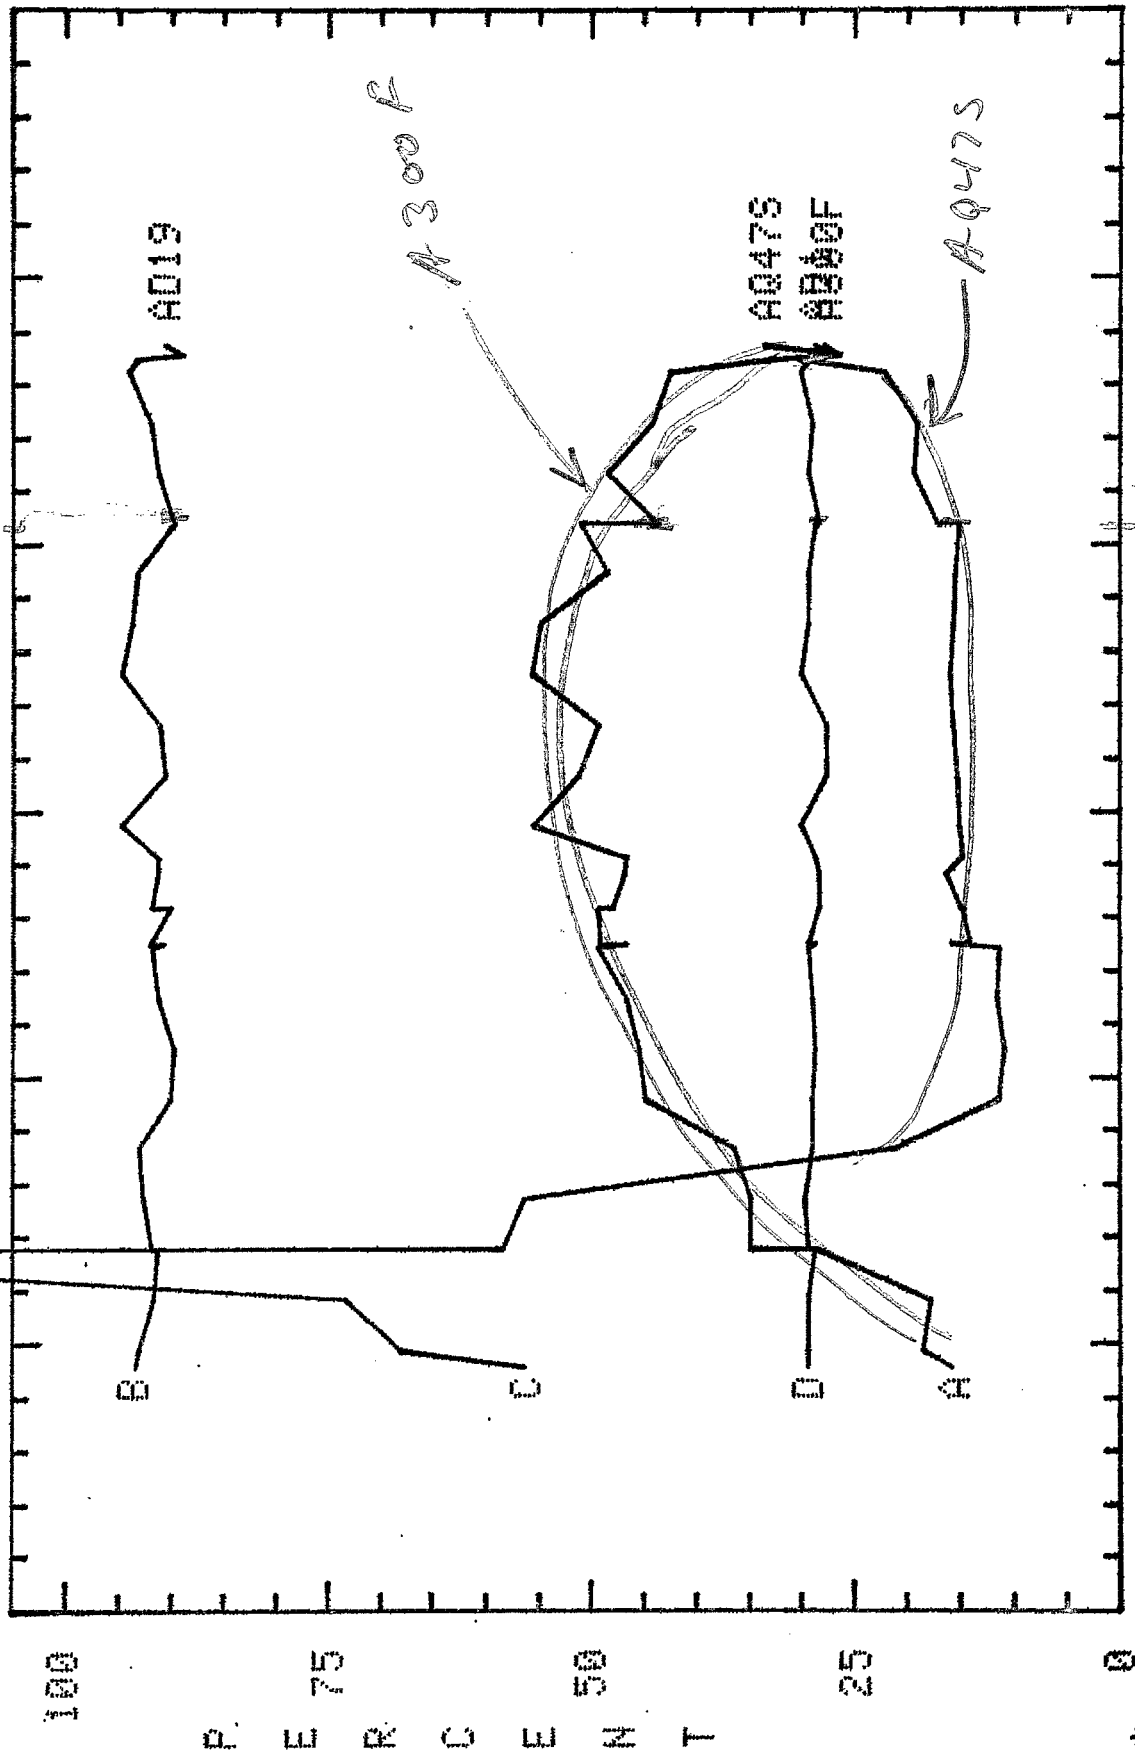

\* -40.00 -24.00 -8.00 8.00 24.00 40.00  
 AP109 X 100 PLOTS WHEN ABS(OLD-NEW) >= 0

Fig 3


A LOSSES AND EFF'S  
9-NOV-77 17:58 27.2

YA:A300F,0=  
YB:AD19,0=  
YC:A047S,0=  
YD:AD1,0=

0,100=  
0,100=  
0,100=  
0,100=

2000 %  
1000 %  
10000 Arbt  
300 Arbt

A SEC/E10

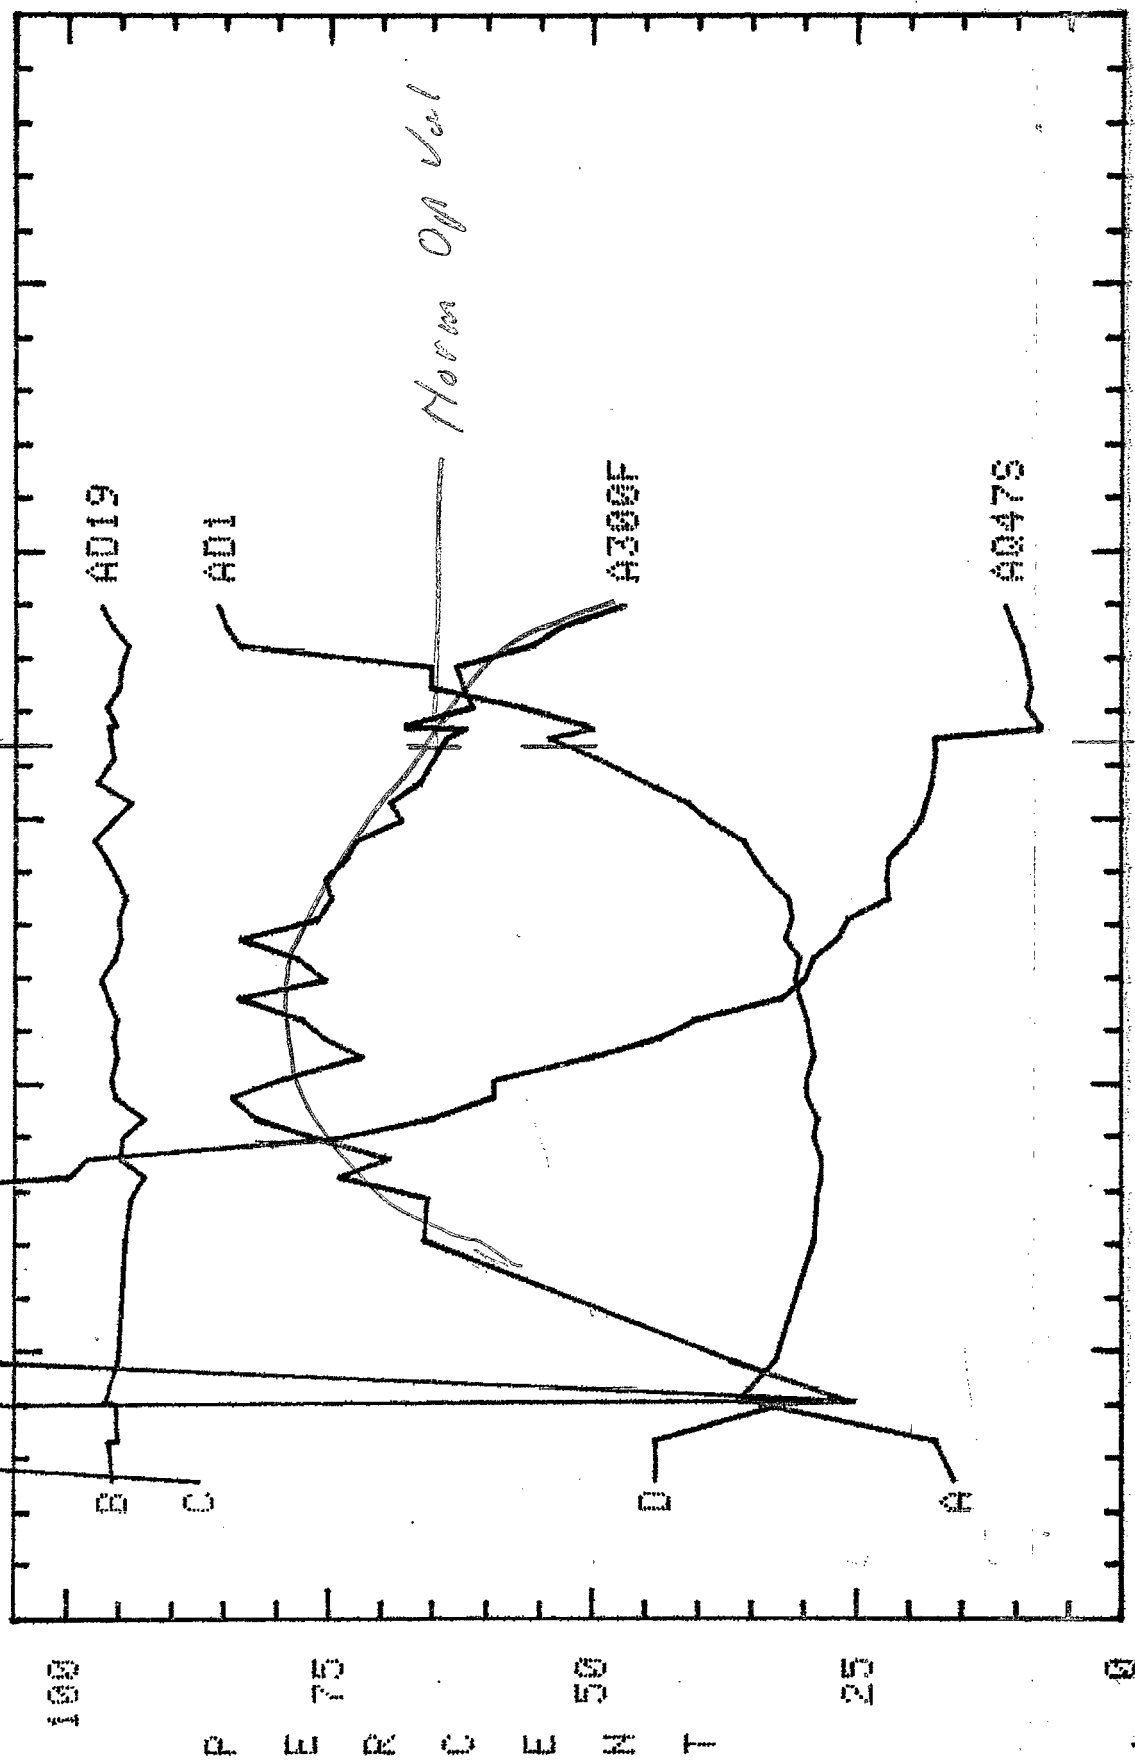

\* -5.00 -1.00 3.00 7.00 11.00 15.00  
C0014 X 100 PLOTS WHEN ABS(OLD-MEN) >= 0


Fig 4

4 LOSSES AND EFF'S  
9-NOV-77 18:35 51.8

YA:A300F,0=  
YB:AD19,0=  
YC:A047S,0=  
YD:AD1,0=

0,100=  
0,100=  
0,100=  
0,100=

2000  
1000  
10000  
300

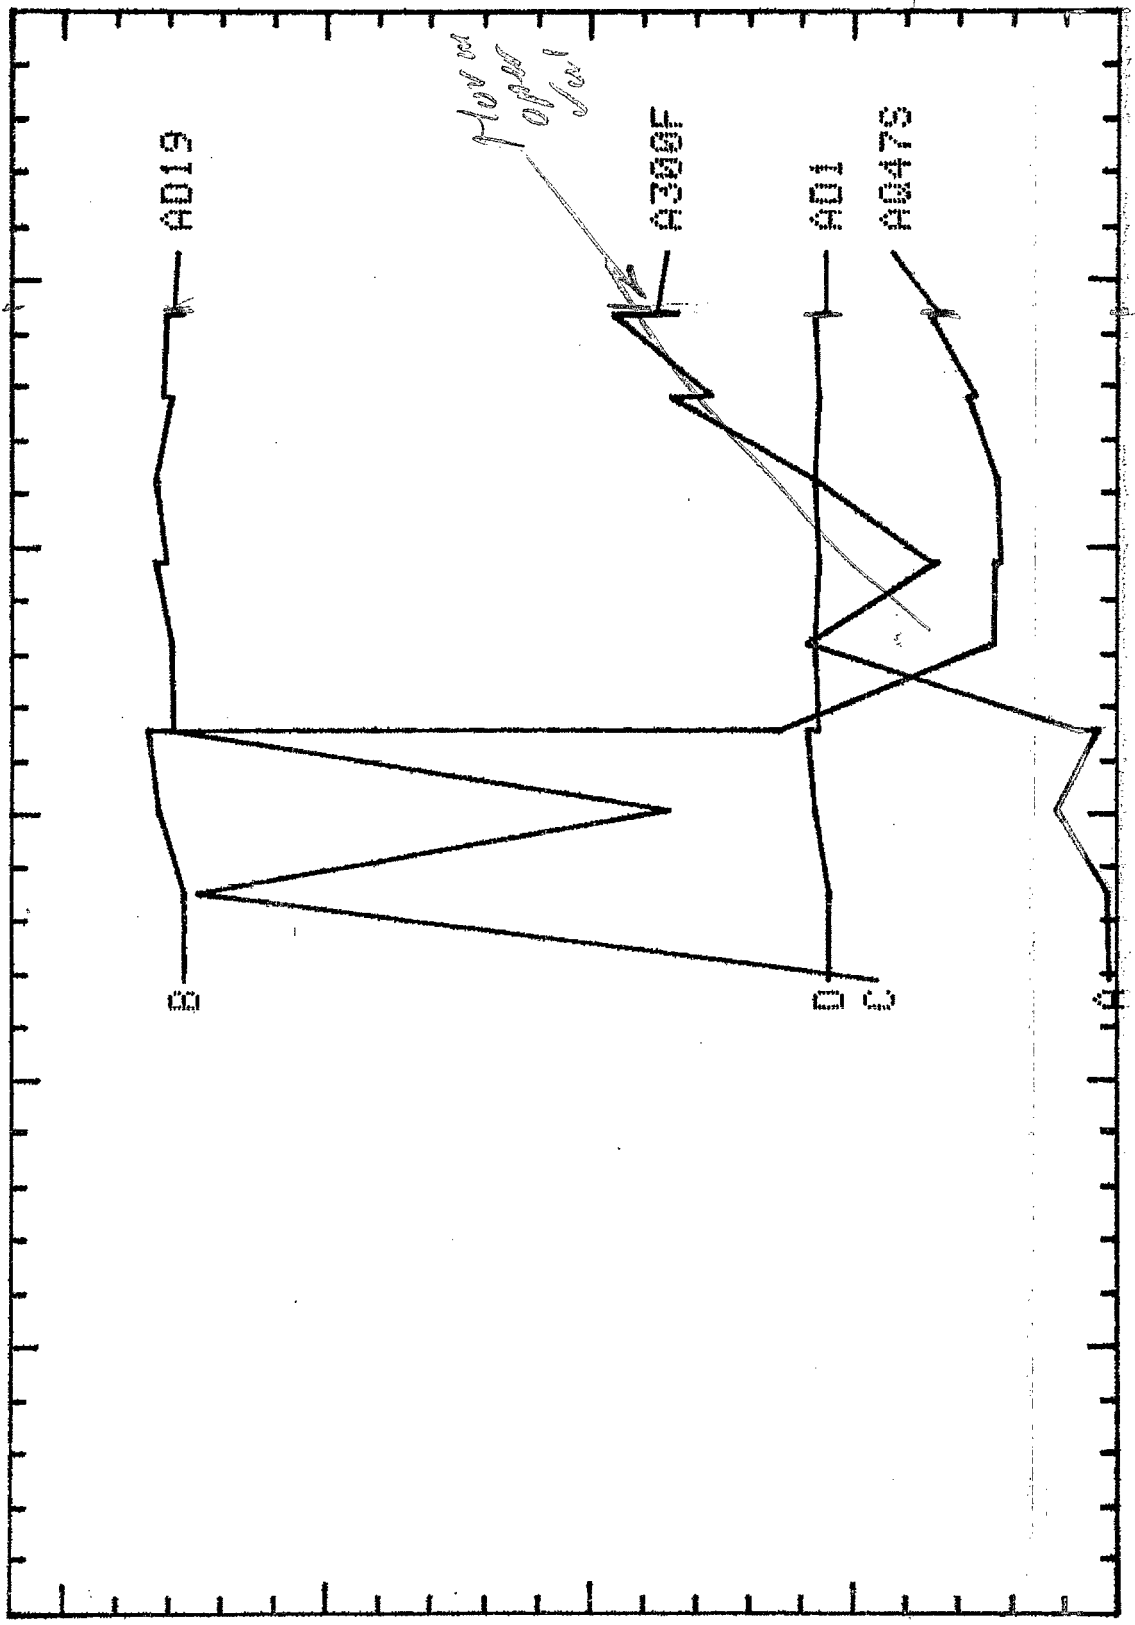

0 25 50 75 100  
k

0.00 8.00 16.00 24.00 32.00 40.00  
ADIT X PLOTS WHEN ABS(OLD-NEW) >= 0

W/AD242


Fig 5

A LOSSES AND EFF'S  
9-NOV-77 18:28 56.0

YA:A300F,0=  
YB:AD19,0=  
YC:A0478,0=  
YD:AD1,0=

0,100=  
0,100=  
0,100=  
0,100=

2000  
10000  
100000  
300

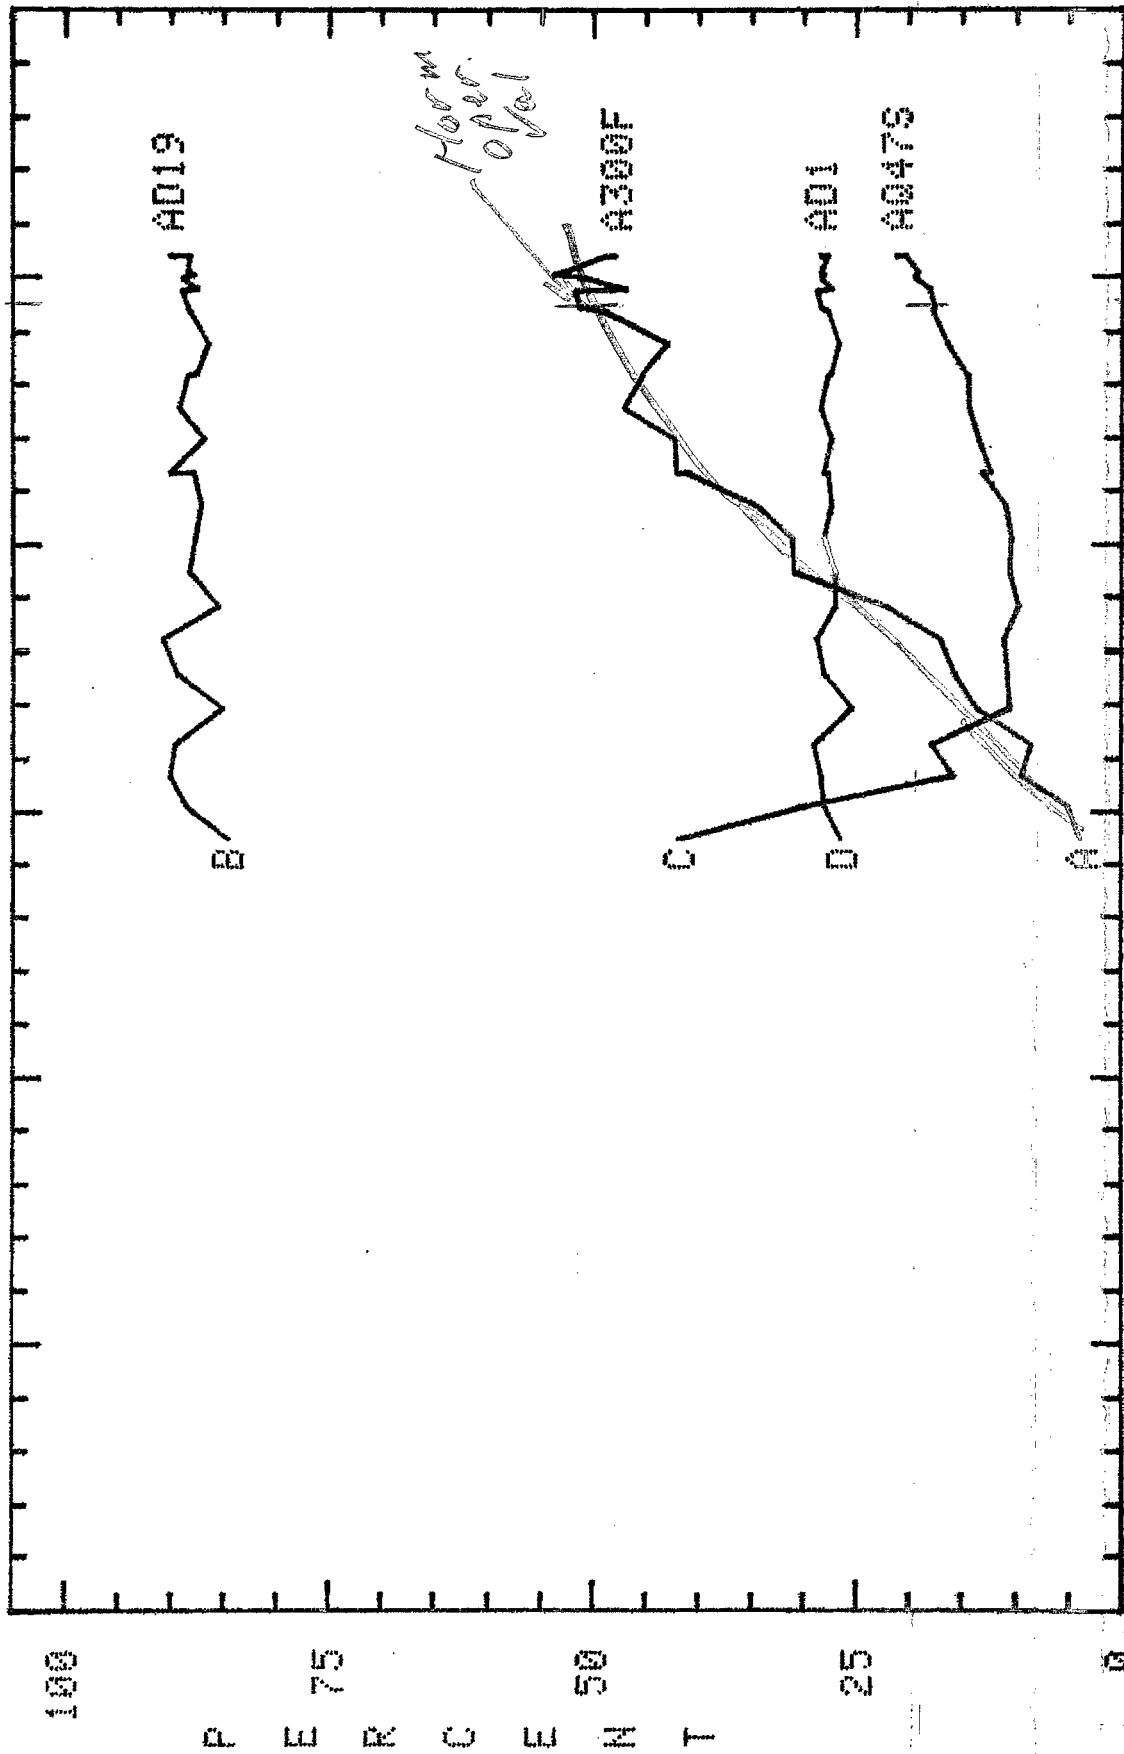

\* M/ADI-8 ADIT % 8.00 16.00 24.00 32.00 40.00  
PLOTS WHEN ABS(OLD-NEW) >=

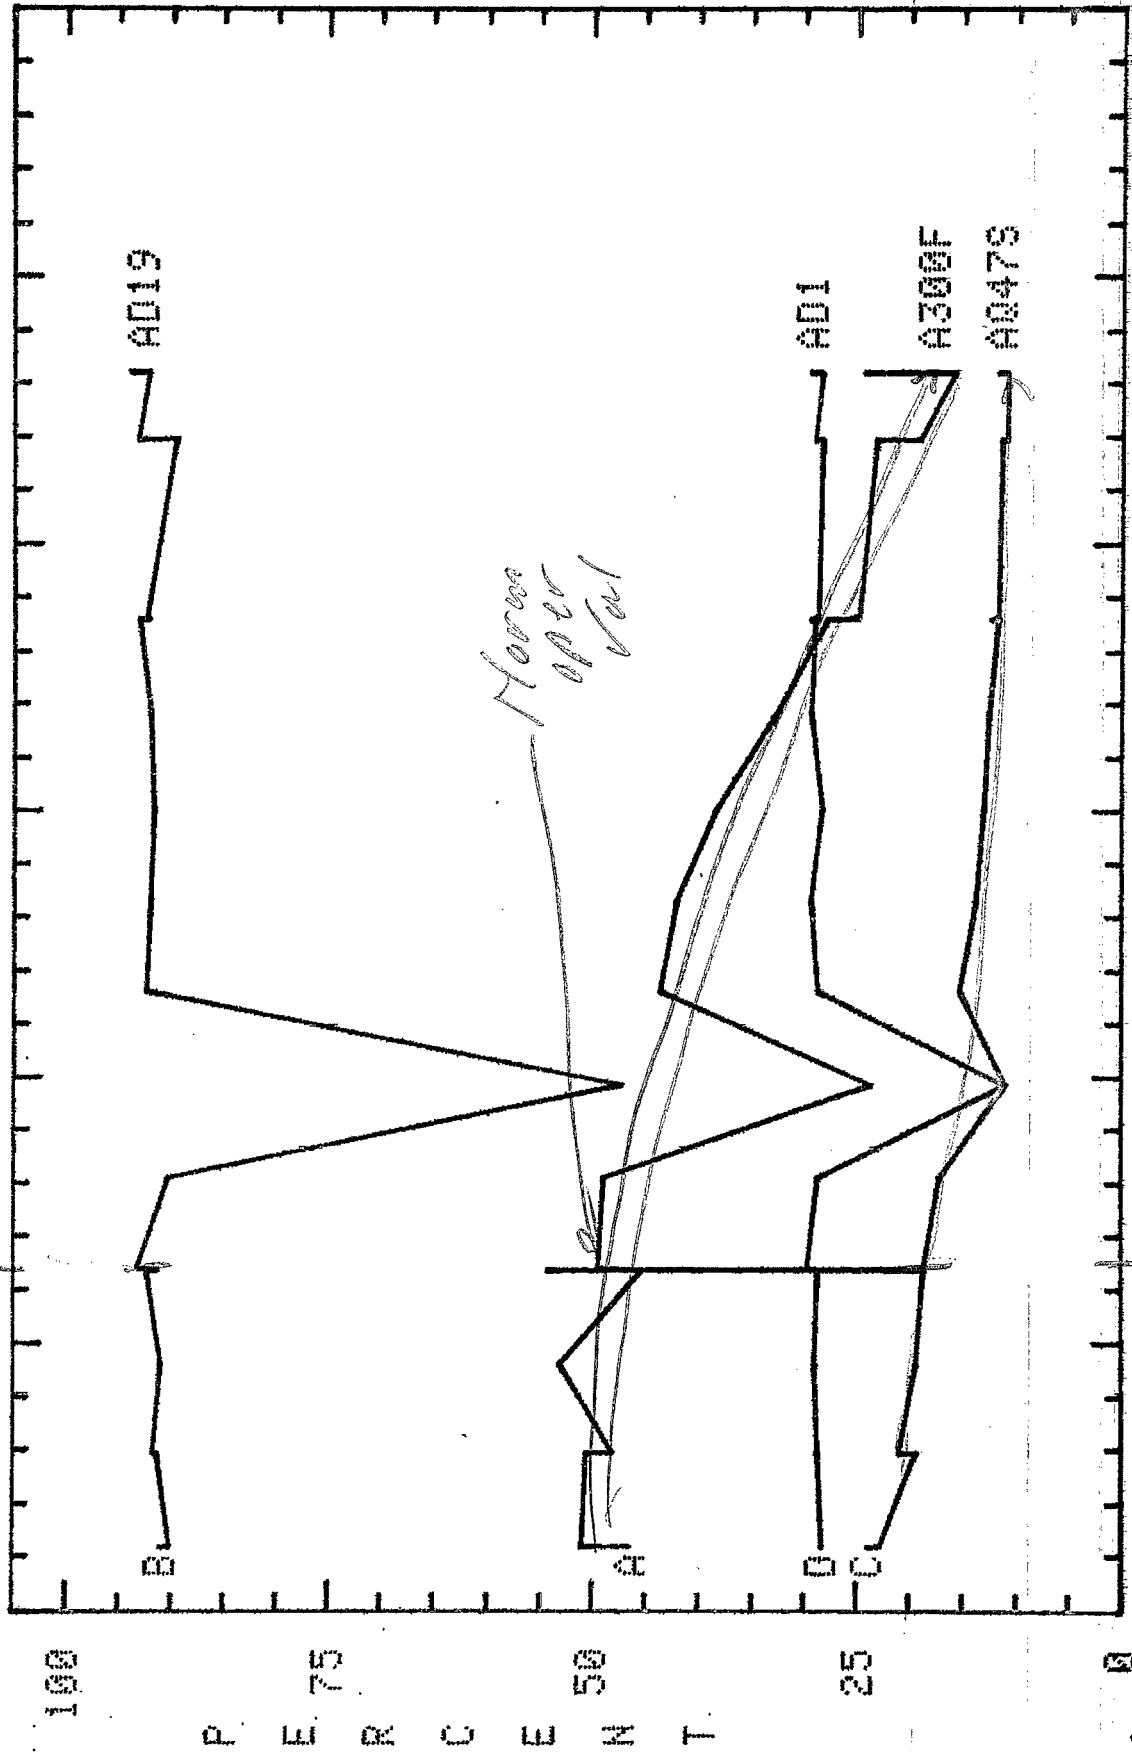


Fig 6

A LOSSES AND EFF'S  
9-NOV-77 18:38 56.5

YA: A300F, 0=  
YB: AD19, 0=  
YC: A047S, 0=  
YD: ADI, 0=

0, 100=  
0, 100=  
10000  
0, 100=  
300



# 0.00 8.00 16.00 24.00 32.00 40.00  
Moron oper Val PLOTS WHEN ABS(OLD-NEW) >=