

Halbach magnets outline construction method

S. Brooks,

October 2016

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC), Nuclear Physics (NP) (SC-26)


Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-SC0012704 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Halbach magnets outline construction methods

S. Brooks, D. Trbojevic, N. Tsoupas, G. Mahler

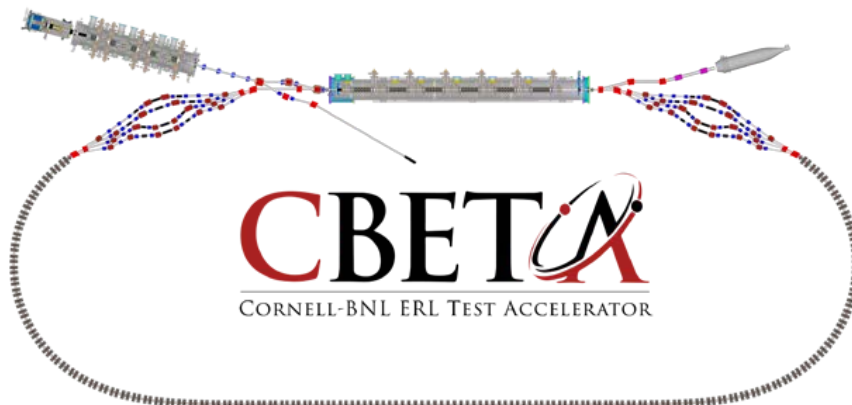

Collider-Accelerator Department, Brookhaven National Laboratory, Upton NY 11973
U.S. Department of Energy
Office of Science, Office of Nuclear Physics

Cornell Laboratory for Accelerator-Based Sciences and Education, Ithaca, NY 14850

Funded by NYSERDA contract 102192

Notice: This document has been authorized by employees of Brookhaven Science Associates, LLC under Contract No. **DE-SC0012704** with the U.S. Department of Energy. The United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this document, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Halbach Magnets Outline Construction Method

Stephen Brooks, Dejan Trbojevic, Nick Tsoupas, George Mahler
CBETA machine note #3

2016-Oct-28


Overall Assemblies and Quantity

There are two types of magnet assembly, QF and BD. These share a common outer frame and also include the same windowframe corrector around them. The differences are only (a) the thickness of the NdFeB permanent magnet wedges, (b) the shape of the 3D printed mould fitting around the wedges inside the aluminium holder and (c) the length of the overall magnet. All assemblies are splittable in order to fit the vacuum pipe through them.

Table 1: numbers of assemblies and lengths

Magnet assembly type	Number in design (CDR)	Number in magnet costing (includes some spares), comparable to iron costing	Length (mm)
QF	106	110	133.3
BD	107	110	121.7
Total	213	220	

Figure 1: assembly schematic parts

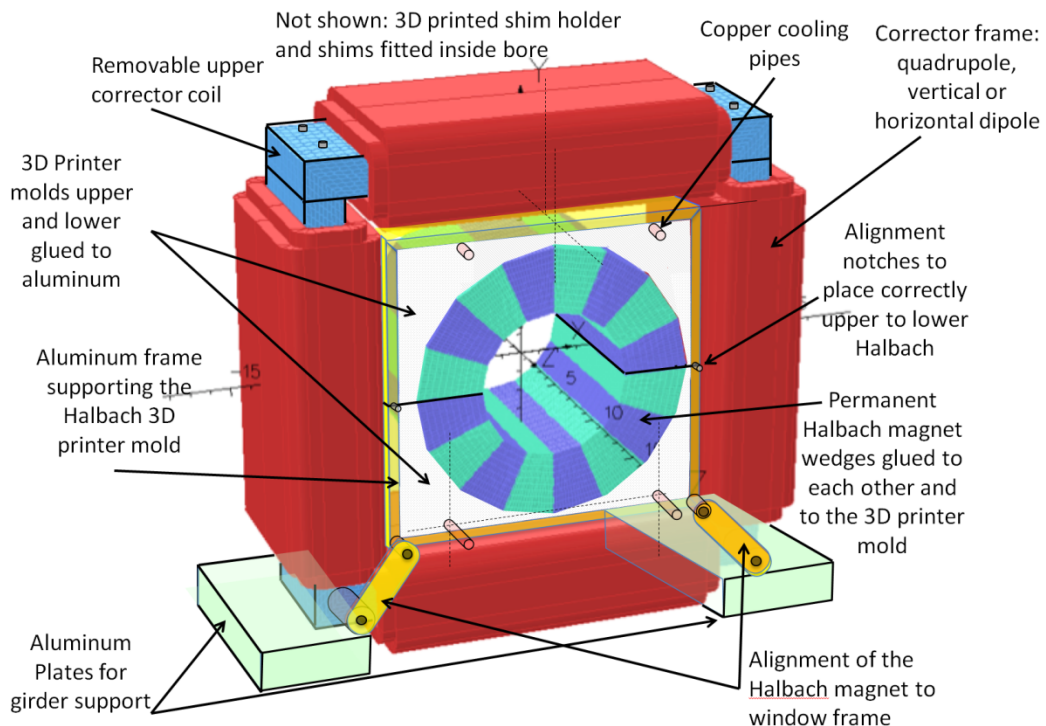

Cross-Sections with Dimensions

Figure 2: BD magnet cross-section


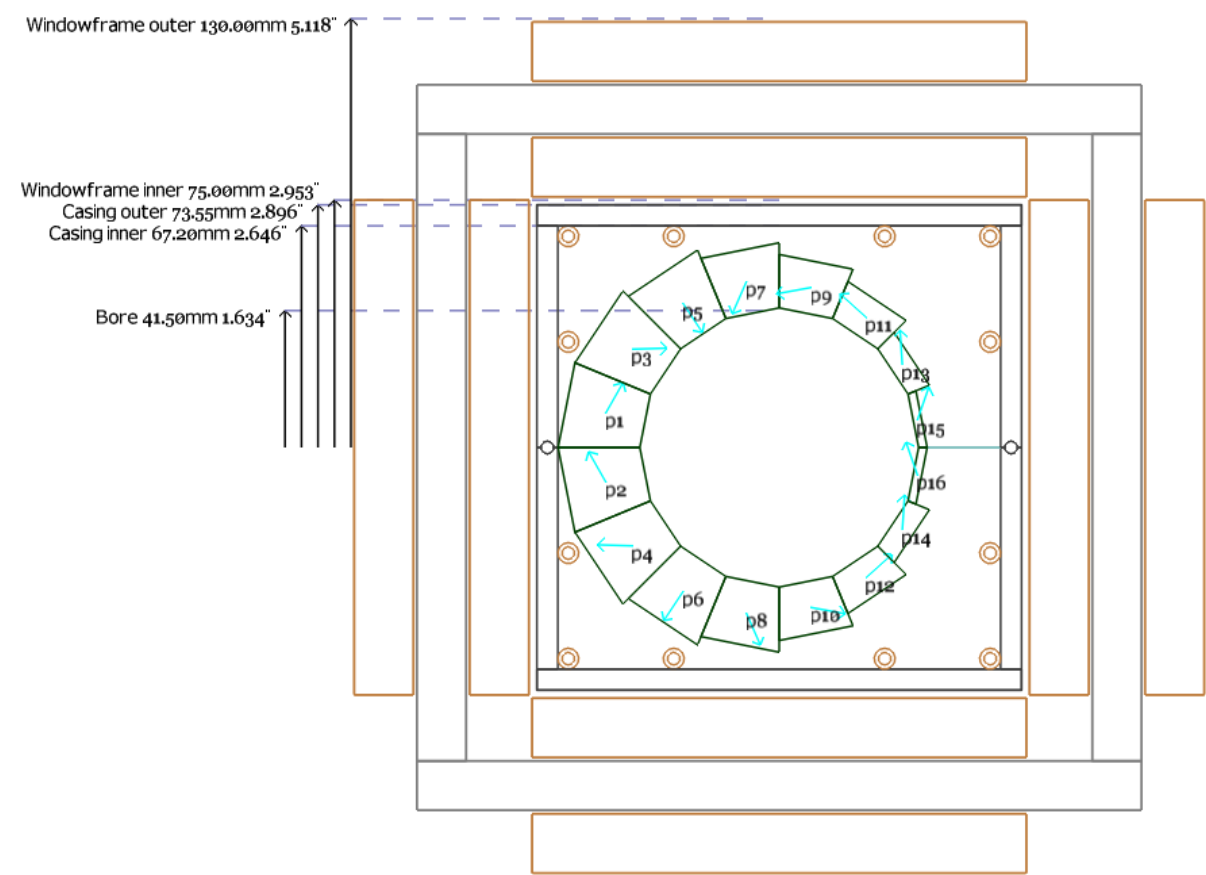



Figure 3: QF magnet cross-section

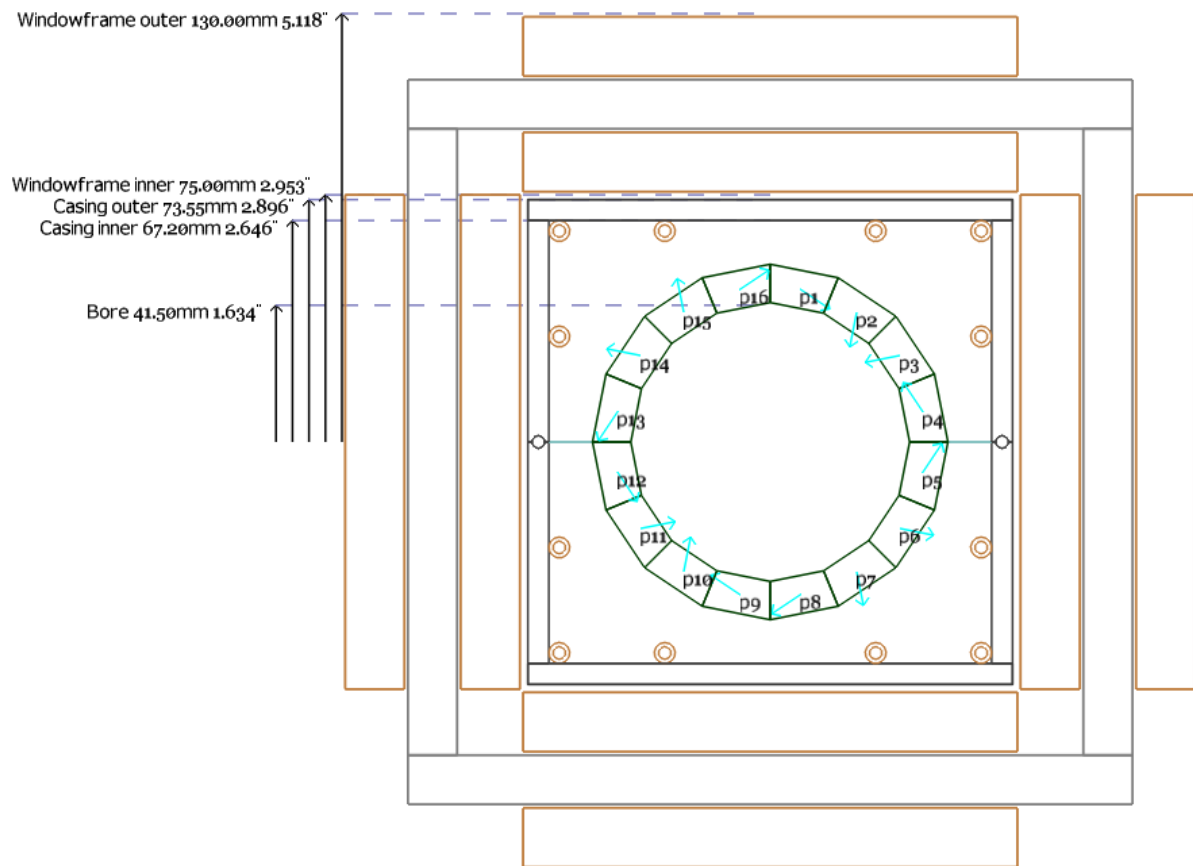

The windowframe iron is 15mm thick and the coils are 20mm thick on each side. An OPERA-3D model of the corrector is shown in figure 4.

Figure 4: windowframe corrector model in OPERA-3D by Nick Tsoupas

28/Oct/2016 14:28:22

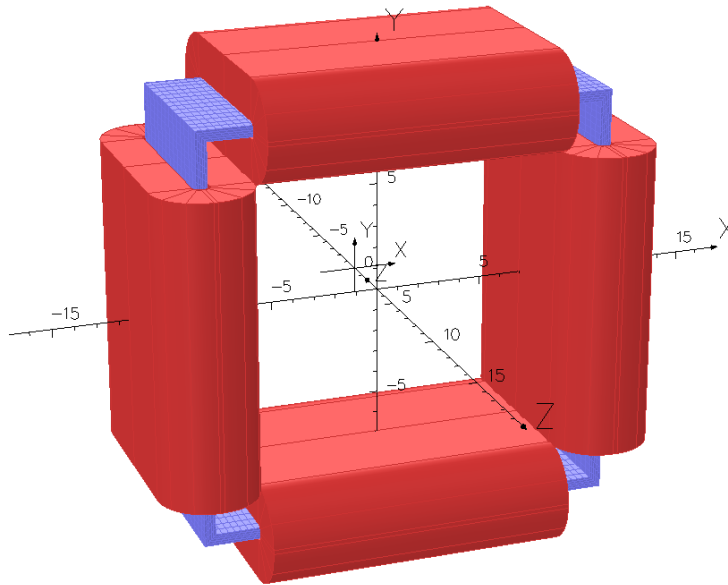

opera
simulation software

UNITS	
Length	cm
Magn Flux Density	gauss
Magnetic Field	oersted
Magn Scalar Pot	oersted cm
Current Density	A/cm ²
Power	W
Force	N
MODEL DATA	
WF_with-top-bottom-coils.op3	
Magnetostatic (TOSCA)	
Linear materials	
Simulation No 1 of 1	
5728000 elements	
10187349 nodes	
4 conductors	
Nodally interpolated fields	
Activated in global coordinates	
Field Point Local Coordinates	
Local = Global	

3D issues

The windowframe iron will be shortened in the longitudinal axis so the coils do not “overhang” the nominal magnet length.

Table 2: Parts List (excluding pins, screws etc.)

Part	Material	Number per magnet	Total number
Permanent magnet wedges	NdFeB	32 (2 layers of 16)	7040
Shim holder halves	3D printed plastic	2	440
Shimming wires	1006/1008 steel wire	32	7040
Moulds to hold wedges	3D printed plastic	2	440
Copper cooling pipes	Bent ¼” copper tube	2	440
Halbach casing	¼” thick Al plate	6	1320
Halbach-to-windowframe attachment plates	Steel plate	4	880
Windowframe iron	15mm thick 1006 iron	4	880
Windowframe coils	Cu potted in epoxy	4	880


Table 3: Assembly Methods

Part A	Part B	Attachment method
Permanent magnet wedges	Mould to hold wedges	Glue, while hammering blocks into plastic mould
Permanent magnet wedges	Permanent magnet wedges	Glue
Permanent magnet wedges	Shim holder halves	Glue before commencing shimming/rotating coil
Shimming wires	Shim holder halves	They stick there by magnetic force, helped by sockets in the shim holder, but can glue or epoxy in place when done
Moulds to hold wedges	Halbach casing (halves)	Glue, should also be good fit
Halbach casing (Al plates)	Halbach casing (Al plates)	Screws attaching two plates at 90 degrees
Halbach casing (upper half)	Halbach casing (lower half)	Pins in drilled holes to ensure accurate, repeatable alignment
Halbach casing (lower half)	Windowframe iron (lower half)	Via the Halbach-to-windowframe attachment plates, using screws or bolts
Windowframe coils	Windowframe iron	Manufacturer's choice
Windowframe iron (top/lid)	Windowframe iron (lower part)	Manufacturer's choice, probably screws
Windowframe iron (lower part)	Girder	6-axis adjustable mount

Figure 5: Glue tested at C-AD that (when dried) holds permanent magnet wedges together even when they repel.



Figure 6: Example of windowframe magnet with potted coils, similar construction will be used for CBETA's corrector.

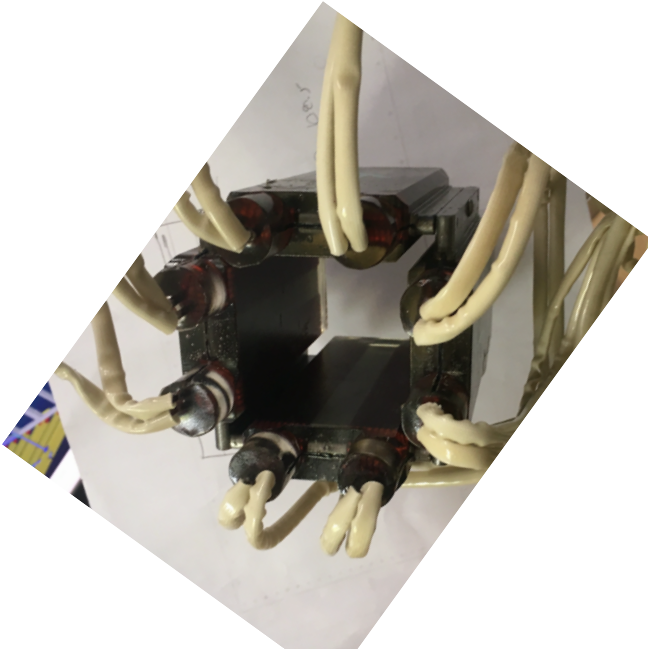

Shimming Method

1. Assemble whole magnet including corrector iron
2. Glue shim holder halves into bore
3. 1st rotating coil measurement
4. Run program that outputs wire sizes/lengths (fast)
5. Cut wires to length and insert in shim holder (1hr)
6. 2nd rotating coil measurement
 - a. Include survey of coil axis to magnet fiducials this time
7. If harmonics are low enough finish, otherwise re-shim for another iteration (go to step 4).

Typically only 1 or 2 iterations (2 or 3 coil measurements total) are required.