



Brookhaven  
National Laboratory

BNL-104009-2014-TECH  
AGS.SN131;BNL-104009-2014-IR

## The H5 Kicker Test

W. T. Weng

May 1981

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

AGS STUDIES REPORT

Date 4/21/81 Time 2100 - 2400  
4/24/81 0900 - 1230

Experimenters W. Weng, L. Ahrens, J. Gabusi, E. Gill, J. Glenn

Reported by W. Weng

Subject The H5 Kicker Test

OBSERVATIONS AND CONCLUSION

Purpose: To test the H5 kicker performance in actual operation condition and to execute fast extraction with the H5 kicker.

Summary of Equipment Preparation. Pulsing of the H5 kicker in H10 house produced a lot of noise. Major modifications on the ground connections for all the equipments in the H10 house had to be carried out to eliminate most of the interferences with each other. But the DATACON control card of the H20 electrostatic septum magnet had to be disconnected during the test.

The power supplies used for  $1/2 \lambda$  H10 bumps A and B were used for the  $3/2 \lambda$  H5 bumps A and B respectively. Because of the increase of factor of two in circuit inductance and the changed induced voltage pattern in the back-leg winding, the power supplies could not be recharged in time to give correct rep rate. Eventually the idea of  $3/2 \lambda$  local orbit bumps were abandoned for a  $1/2 \lambda$  H5 bump to facilitate the test.

Before the study, the H5 kicker was tuned again in the H10 house to achieve fast rise of current wave form in the order of 170 nsec and a clean flat top.

Procedure and Observations.a. Positioning of the Magnets

The designed central orbit of the deformed beam had been calculated and plotted in Fig. 1. The beam position at H5 s.s. is 2.7" and at H10U and H10D are 2.3" and 1.7" respectively. The edge of the H5 kicker was surveyed in at 2.06". With the good field region of the H5 kicker starts at 0.2" inside the edge of the ferrite and beam half width 0.35", the beam center point should be at  $2.06 + 0.2 + 0.35 = 2.61$ " as desired. The position of the H10 ejector was set to be 2.65" U and 2.1"D respectively.

b. Aperture Study

The actual location of the H5 kicker and the vertical aperture thereof was tested in the following way. First the beam was brought to a position of about 1.5" away from the center, then a vertical kick by F20 high-field dipole was introduced to create a vertical deformation which was recorded

by H4 PUE. There was no loss observed at H5. Then the horizontal deformation was increased and the vertical kick was reintroduced to observe the loss at H5. The results are summarized in the following table:

H5 Bump	2000	2400	3100	3500
H5 current	700A	820A	1050A	1200A
H5 orbit	1.5"	1.75"	2.2"	2.5"
F20 (at first loss)	>4000	2400	2400	2400
H4 PUE	>6mm	3.5mm	3.5mm	3.5mm

This test clearly established the fact that the edge of the ferrite was at 2.0" and there was a vertical clearance of 3.5 mm inside the H5 aperture.

c. Horizontal Displacement Test

The H10 flag (at the upstream end of the H10 s.s.) was brought to a position barely touching the circulating beam, then the H5 kicker was triggered and the beam edge at the H10 flag was recorded to indicate 0.3" displacement. Another test was to retract the H10 flag by 0.3" and turned on the H5 kicker to observe a trace of beam barely touching the flag. Both observations indicated only 0.3" displacement instead of 0.6" as desired.

Results and Discussion: With circulating beam intensity in the AGS of  $1.5 \times 10^{12}$  ppp the extraction efficiency achieved was 50 ~ 60%. A beam image was observed on the U15 flag. The vertical position of the kicker was identified and the fast rise of the kicker wave form was confirmed by the fast longitudinal pick-up electrode signal of F20CT.

It was clear that only less than half of the deflection was observed at H10 flag. The H5 kicker has to be removed and inspected to identify the problem and cure for it.

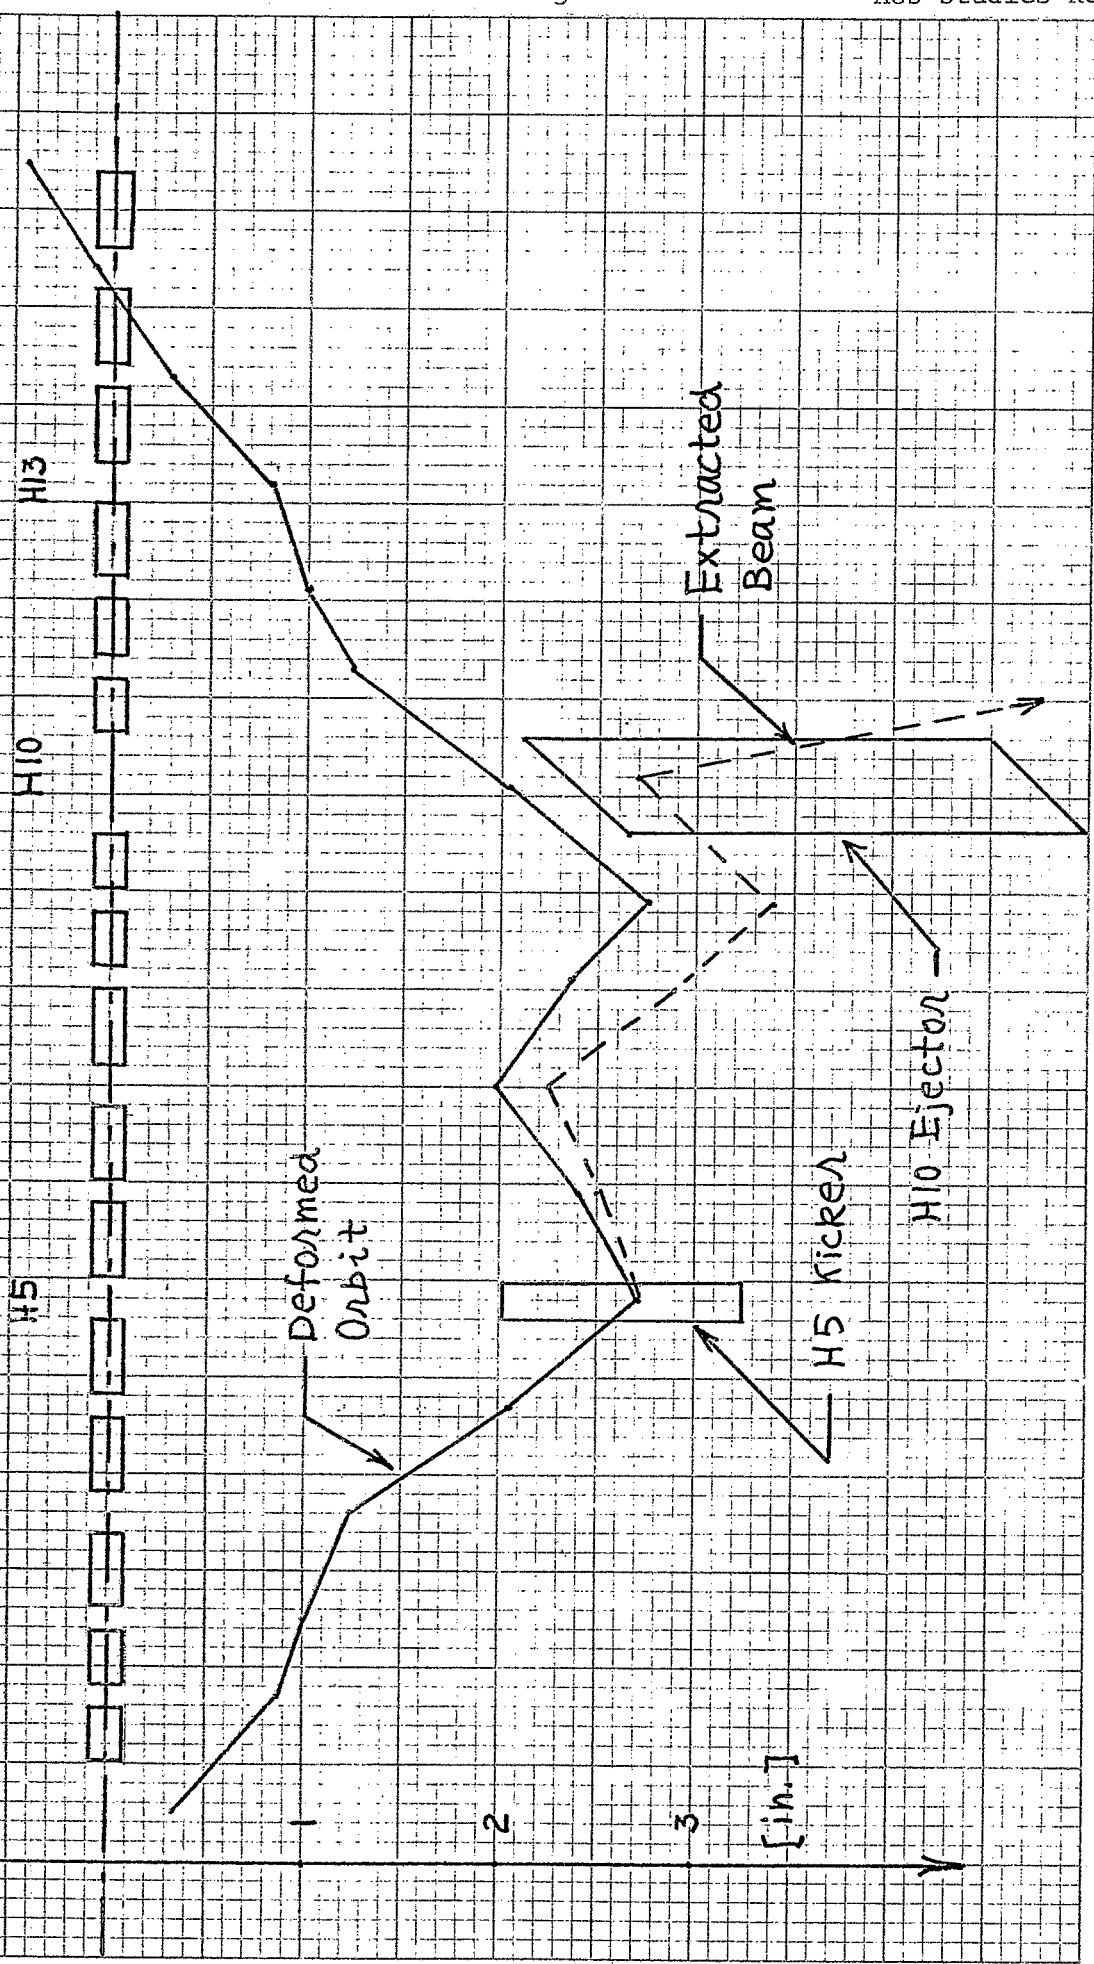


Fig. 1. H5-FEB Extraction Trajectory