



Brookhaven  
National Laboratory

BNL-104010-2014-TECH

AGS.SN132;BNL-104010-2014-IR

## SEB Beam Size vs. Intensity

H. Weisberg

June 1981

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

AGS STUDIES REPORTDate 5/4/81 & 5/14/81Time 1200 - 1400Experimenters H. Weisberg and J.W. GlennReported by H. WeisbergSubject SEB Beam Size vs. IntensityOBSERVATIONS AND CONCLUSION

The SEB beam size was measured with plunging SWIC's CW039, CW100 and CW223 for various settings of matching quads CQ1-4. The corrected beam widths were compared with predictions of a model of the SEB, as discussed in References 1 and 2. The model is characterized by parameters  $E_{rms}^V$  and  $\Delta$  that are related to the vertical emittance and the horizontal beam divergence at F5. In each case the spiral pitch at F5 is measured with the F5 flag, and fed into the model. Values measured two years ago and given in Reference 1 are

$$E_{rms}^V = 0.009 \pi \text{ in-mrad and } \Delta = 0.07 \text{ mrad.}$$

These values are consistent with the assumed emittance used in the design of the new SEB Switchyard (Reference 3).

New measurements were first made at high intensity ( $7.5 \times 10^{12}$  protons per pulse), yielding

$$E_{rms}^V = 0.009 \pi \text{ in-mrad and } \Delta = 0.14 \text{ mrad.}$$

These values confirm the measurements made in December of last year and given in Reference 4. The beam size is as expected in the vertical plane and much larger than expected horizontally. The horizontal emittance is too large for efficient Switchyard operation.

The problem in the horizontal plane could come either from the AGS internal emittance being too large (by a factor of 4) or from problems during extraction that blow up the beam size in the horizontal plane.

Measurements were then made at low intensity ( $2.5 \times 10^{12}$  protons per pulse) and the beam was found to be considerably smaller:

$$E_{\text{rms}}^V = 0.003 \pi \text{ in-mrad and } \Delta = 0.07 \text{ mrad.}$$

The low intensity was obtained by reducing Linac pulse width.

If the beam size is not blown up during extraction, and the internal beam shape is Gaussian, then the horizontal emittance is related to  $\Delta$  by

$$E_x^{\text{rms}} = (9\beta_{F5} / \sqrt{3}) \Delta^2$$

Also, the normalized emittance at, for example, 95 percent of phase space area, is related to the unnormalized rms emittance used here by

$$\beta\gamma\epsilon^{95\%} = -2 \ln (1-0.95) \beta\gamma E^{\text{rms}}$$


Our measured extracted beam sizes then translate into values of  $\beta\gamma\epsilon^{95\%}$  in mm-mrad that can be compared with other estimates of internal emittance:

Intensity, Protons/Pulse	H	V
$7.5 \times 10^{12}$	$130\pi$	$42\pi$
$2.5 \times 10^{12}$	$35\pi$	$14\pi$

The estimated measurement error for these values is  $\pm 25\%$ .

These are reasonable values for the vertical plane, but much too large for the horizontal.

A set of measurements was made, at different intensities, of horizontal beam size at CW100 (where it is most sensitive to internal emittance). The result is shown on the next page. The reason was to search for an intensity threshold; none was seen.

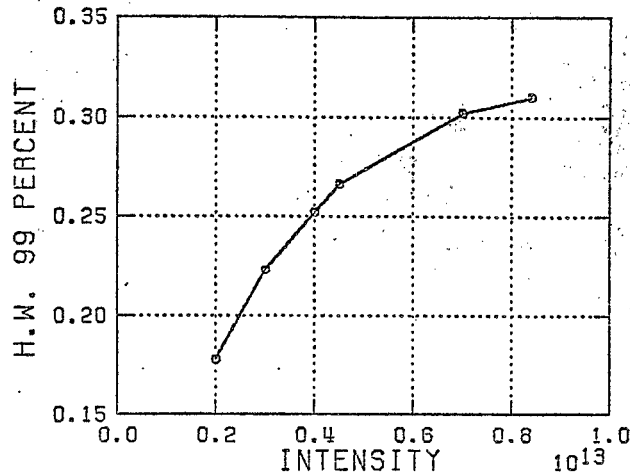

Finally, the horizontal beam size at CW100 was studied at  $2.5 \times 10^{12}$  protons per pulse for various kinds of injection tuning, with the results given below, expressed as half-width at 99% in inches.

Intensity	Injection Detuning	H	V
$7.5 \times 10^{12}$	--	0.39	0.46
$2.5 \times 10^{12}$	Linac Pulse Width	0.20	0.20
" "	Vertical Steering	0.29	0.38
" "	Vertical v Quads	0.17	0.32
" "	Manual Phase	0.25	0.33

These measurements show that, at low intensity, the AGS beam remembers all the way through acceleration and extraction how big it was and what shape it had at injection. During these tests no attempt was made to go clearly through phase transition.

A good measurement of internal horizontal beam size is needed to determine whether the SEB problem is with internal emittance or with extraction.

References

1. H. Weisberg, Improved Measurements of Slow-Extracted Beam Emittance, Nuclear Instruments and Methods 169, 11 (1980).
2. H. Weisberg, SEB Emittance Measurements, AGS Division Technical Note No. 155, October 1979.
3. H. Brown, et al, The AGS Slow External Beam Switchyard, BNL 24508R, December 1979.
4. H. Weisberg, More SEB Emittance Measurements, AGS Division Technical Note No. 168, February 1981.