

Multiturn injection of EBIS ions in booster

C. J. Gardner,

September 2010

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-98CH10886 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.


DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

C-A/AP/#405
Sept. 2010

''
''
'''O wkwat p'kpl gev kq p'qh'GDKU'Kpu'lp'Dqqwgt

.....ELOI ctf pgt
.....Brookhaven National Laboratory, Upton, NY 11973, USA

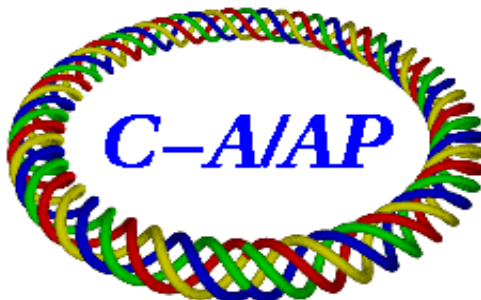

**Collider-Accelerator Department
Brookhaven National Laboratory
Upton, NY 11973**

Notice: This document has been authorized by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-98CH10886 with the U.S. Department of Energy. The United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this document, or allow others to do so, for United States Government purposes.

Multiturn Injection of EBIS Ions in Booster

C.J. Gardner

September 1, 2010

Ions from EBIS are injected into Booster after acceleration by an RFQ and a Linac. The velocity of the ions at Booster injection is $c\beta$ where c is the velocity of light and

$$\beta = 0.0655. \quad (1)$$

The kinetic energy is

$$W = mc^2(\gamma - 1) \quad (2)$$

where m is the ion mass and

$$\gamma = (1 - \beta^2)^{-1/2}. \quad (3)$$

Putting in numbers one gets a kinetic energy of approximately 2 MeV per nucleon for each ion. The revolution period at injection is 10.276 μ s.

The ions in the EBIS trap are delivered in a beam pulse that ranges from 10 to 40 μ s in length. This amounts to 1 to 4 turns around the machine. The transverse emittance (un-normalized) of EBIS beams just prior to injection into Booster is 11π mm milliradians in both planes. This is an order of magnitude larger than the nominal 1π mm milliradians for Tandem beams.

Injection proceeds by means of an electrostatic inflector in the C3 straight section and four programmable injection dipoles in the C1, C3, C7, and D1 straights. These devices have been in use for many years for the injection of ions from Tandem as described in [1] and [2]. The inflector brings the incoming beam to the edge of the Booster acceptance and the dipoles produce a closed orbit bump that initially places the closed orbit near the septum at the inflector exit. During injection the orbit bump must be collapsed at a rate that keeps the injected beam from hitting the septum while continuing to allow beam to be injected into the machine acceptance. The process is discussed in [2] and [3]. There it is assumed that the

injected beam moves with the closed orbit as the bump collapses. In the present report this is shown to be a valid approximation if the bump collapses sufficiently slowly. It is also shown that by judiciously choosing the horizontal tune and the initial distance of the closed orbit from the septum one can inject up to 4 turns of EBIS beams without loss on the septum. The reason for wanting to inject over a period of 4 rather than fewer turns is that this allows the beam to be distributed over a larger area of the Booster acceptance, thereby reducing the space charge force on the beam particles.

The framework for the injection process is set up in **Sections 1** through **5**. The injection dipoles and the capabilities of their power supplies are reviewed in **Section 6**. The injection process is illustrated with several examples in **Section 7**.

1 Injection Bump

The injection bump is produced by four dipole magnets located in the injection region with positions

$$s_1 < s_2 < s_I < s_3 < s_4 \quad (4)$$

where s_I is the point of injection. Let ϕ_j be the angular kick produced by the dipole at s_j and let

$$\Phi_j = \begin{pmatrix} 0 \\ \phi_j \end{pmatrix}, \quad \mathbf{X}_c = \begin{pmatrix} X_c \\ X'_c \end{pmatrix}, \quad \mathbf{M}_{ji} = \begin{pmatrix} a_{ji} & b_{ji} \\ c_{ji} & d_{ji} \end{pmatrix} \quad (5)$$

where X_c , X'_c are the horizontal position and angle of the bump at s_I and \mathbf{M}_{ji} is the transfer matrix from s_i to s_j . The elements of the matrix are

$$a_{ji} = \sqrt{\beta_j/\beta_i} (\cos \Delta\psi + \alpha_i \sin \Delta\psi), \quad b_{ji} = \sqrt{\beta_j\beta_i} \sin \Delta\psi \quad (6)$$

$$c_{ji} = -\left(\frac{\alpha_j - \alpha_i}{\sqrt{\beta_j\beta_i}}\right) \cos \Delta\psi - \left(\frac{1 + \alpha_j\alpha_i}{\sqrt{\beta_j\beta_i}}\right) \sin \Delta\psi \quad (7)$$

$$d_{ji} = \sqrt{\beta_i/\beta_j} (\cos \Delta\psi - \alpha_j \sin \Delta\psi) \quad (8)$$

where α_j and β_j are the Courant-Snyder lattice parameters at the point s_j . The phase

$$\Delta\psi = \psi_j - \psi_i \quad (9)$$

is the betatron phase advance from s_i to s_j . We also have

$$d_{ji} = a_{ij}. \quad (10)$$

If we require that four dipoles produce no closed orbit distortion outside the injection region then we must have

$$\Phi_4 + \mathbf{M}_{43}\Phi_3 + \mathbf{M}_{42}\Phi_2 + \mathbf{M}_{41}\Phi_1 = \mathbf{0} \quad (11)$$

and position and angle of the closed orbit at the injection point s_I are given by

$$\mathbf{X}_c = \mathbf{M}_{I2}\Phi_2 + \mathbf{M}_{I1}\Phi_1. \quad (12)$$

These equations can be inverted to obtain the kicks ϕ_j in terms of X_c and X'_c . Thus

$$\begin{pmatrix} \phi_1 \\ \phi_2 \end{pmatrix} = \frac{1}{b_{21}} \begin{pmatrix} d_{I2} & -b_{I2} \\ -d_{I1} & b_{I1} \end{pmatrix} \begin{pmatrix} X_c \\ X'_c \end{pmatrix} \quad (13)$$

and

$$\begin{pmatrix} \phi_3 \\ \phi_4 \end{pmatrix} = \frac{1}{b_{43}} \begin{pmatrix} -b_{41} & -b_{42} \\ b_{31} & b_{32} \end{pmatrix} \begin{pmatrix} \phi_1 \\ \phi_2 \end{pmatrix}. \quad (14)$$

2 Turn-by-Turn Evolution of Particle Position and Angle

The turn-by-turn evolution of the position and angle of a particle launched from the injection point s_I is determined by the four kicks ϕ_j and the one-turn matrix

$$\mathbf{M} = \mathbf{M}_{I1}\mathbf{N}\mathbf{M}_{4I}. \quad (15)$$

Here \mathbf{N} is the transfer matrix from s_4 around the machine to s_1 . Writing

$$\mathbf{M} = \begin{pmatrix} M_{11} & M_{12} \\ M_{21} & M_{22} \end{pmatrix} \quad (16)$$

we have

$$M_{11} = \cos(2\pi Q_H) + \alpha_I \sin(2\pi Q_H), \quad M_{12} = \beta_I \sin(2\pi Q_H) \quad (17)$$

$$M_{21} = -\gamma_I \sin(2\pi Q_H), \quad M_{22} = \cos(2\pi Q_H) - \alpha_I \sin(2\pi Q_H) \quad (18)$$

where α_I , β_I , and γ_I are the Courant-Snyder lattice parameters at s_I and Q_H is the horizontal tune.

Let

$$\mathbf{X} = \begin{pmatrix} X \\ X' \end{pmatrix}, \quad \mathbf{Y} = \begin{pmatrix} Y \\ Y' \end{pmatrix} \quad (19)$$

where X and X' are the initial position and angle at s_I , and Y and Y' are the position and angle after one turn. We then have

$$\mathbf{X}_3 = \mathbf{M}_{3I}\mathbf{X} + \Phi_3 \quad (20)$$

$$\mathbf{X}_4 = \mathbf{M}_{43}\mathbf{X}_3 + \Phi_4 \quad (21)$$

$$\mathbf{X}_1 = \mathbf{N}\mathbf{X}_4 + \Phi_1 \quad (22)$$

$$\mathbf{X}_2 = \mathbf{M}_{21}\mathbf{X}_1 + \Phi_2 \quad (23)$$

at s_3 , s_4 , s_1 , and s_2 , respectively, and

$$\mathbf{Y} = \mathbf{M}_{I2}\mathbf{X}_2. \quad (24)$$

Thus

$$\mathbf{Y} = \mathbf{M}_{I1}\mathbf{X}_1 + \mathbf{M}_{I2}\Phi_2 \quad (25)$$

$$\mathbf{Y} = \mathbf{M}_{I1}\mathbf{N}\mathbf{X}_4 + \mathbf{M}_{I1}\Phi_1 + \mathbf{M}_{I2}\Phi_2 \quad (26)$$

$$\mathbf{X}_4 = \mathbf{M}_{4I}\mathbf{X} + \mathbf{M}_{43}\Phi_3 + \Phi_4 \quad (27)$$

$$\mathbf{Y} = \mathbf{M}\mathbf{X} + \mathbf{M}_{I1}\mathbf{N}(\mathbf{M}_{43}\Phi_3 + \Phi_4) + \mathbf{M}_{I1}\Phi_1 + \mathbf{M}_{I2}\Phi_2 \quad (28)$$

$$\mathbf{Y} = \mathbf{M}\mathbf{X} + \mathbf{M}(\mathbf{M}_{3I}^{-1}\Phi_3 + \mathbf{M}_{4I}^{-1}\Phi_4) + \mathbf{M}_{I1}\Phi_1 + \mathbf{M}_{I2}\Phi_2 \quad (29)$$

and we can write

$$\mathbf{Y} - \mathbf{X}_b = \mathbf{M}(\mathbf{X} - \mathbf{X}_a) \quad (30)$$

where

$$\mathbf{X}_a = -(\mathbf{M}_{3I}^{-1}\Phi_3 + \mathbf{M}_{4I}^{-1}\Phi_4) \quad (31)$$

and

$$\mathbf{X}_b = \mathbf{M}_{I1}\Phi_1 + \mathbf{M}_{I2}\Phi_2. \quad (32)$$

Writing

$$\mathbf{X}_a = \begin{pmatrix} X_a \\ X'_a \end{pmatrix}, \quad \mathbf{X}_b = \begin{pmatrix} X_b \\ X'_b \end{pmatrix} \quad (33)$$

we then have

$$X_a = b_{3I}\phi_3 + b_{4I}\phi_4 \quad (34)$$

$$X'_a = -a_{3I}\phi_3 - a_{4I}\phi_4 \quad (35)$$

$$X_b = b_{I1}\phi_1 + b_{I2}\phi_2 \quad (36)$$

$$X'_b = d_{I1}\phi_1 + d_{I2}\phi_2 \quad (37)$$

and

$$Y = X_b + M_{11}(X - X_a) + M_{12}(X' - X'_a) \quad (38)$$

$$Y' = X'_b + M_{21}(X - X_a) + M_{22}(X' - X'_a). \quad (39)$$

3 Time Dependent Injection Bump

Let us specify bump positions

$$X_{cn} = X_c(T_n) \quad (40)$$

and angles

$$X'_{cn} = X'_c(T_n) \quad (41)$$

at times T_n where

$$T_0 < T_1 < T_2 < T_3 < \cdots < T_N. \quad (42)$$

Then the four kicks at these times are given by

$$\begin{pmatrix} \phi_{1n} \\ \phi_{2n} \end{pmatrix} = \frac{1}{b_{21}} \begin{pmatrix} d_{I2} & -b_{I2} \\ -d_{I1} & b_{I1} \end{pmatrix} \begin{pmatrix} X_{cn} \\ X'_{cn} \end{pmatrix} \quad (43)$$

and

$$\begin{pmatrix} \phi_{3n} \\ \phi_{4n} \end{pmatrix} = \frac{1}{b_{43}} \begin{pmatrix} -b_{41} & -b_{42} \\ b_{31} & b_{32} \end{pmatrix} \begin{pmatrix} \phi_{1n} \\ \phi_{2n} \end{pmatrix}. \quad (44)$$

For times t in the range

$$T_n \leq t < T_{n+1} \quad (45)$$

we take

$$\phi_j(t) = \phi_{jn} + m_{jn}(t - T_n) \quad (46)$$

where

$$m_{j0} = \frac{\phi_{j1} - \phi_{j0}}{T_1 - T_0}, \quad m_{j1} = \frac{\phi_{j2} - \phi_{j1}}{T_2 - T_1} \quad (47)$$

$$m_{j2} = \frac{\phi_{j3} - \phi_{j2}}{T_3 - T_2}, \quad m_{j3} = \frac{\phi_{j4} - \phi_{j3}}{T_4 - T_3} \quad (48)$$

and so on. For

$$t \geq T_N \quad (49)$$

we take

$$\phi_j(t) = \phi_{jN}. \quad (50)$$

We shall take the unit of time to be one revolution period. A particle launched from the injection point at time t_I will then arrive at positions s_3 , s_4 , s_1 , and s_2 at times

$$t_3 = t_I + (s_3 - s_I)/C \quad (51)$$

$$t_4 = t_I + (s_4 - s_I)/C \quad (52)$$

$$t_1 = t_I + 1 - (s_I - s_1)/C \quad (53)$$

$$t_2 = t_I + 1 - (s_I - s_2)/C \quad (54)$$

where C is the ring circumference. Eqs. (31) and (32) then become

$$\mathbf{X}_a = - \left(\mathbf{M}_{3I}^{-1} \Phi_3(t_3) + \mathbf{M}_{4I}^{-1} \Phi_4(t_4) \right) \quad (55)$$

$$X_a = b_{3I} \phi_3(t_3) + b_{4I} \phi_4(t_4) \quad (56)$$

$$X'_a = -a_{3I} \phi_3(t_3) - a_{4I} \phi_4(t_4) \quad (57)$$

and

$$\mathbf{X}_b = \mathbf{M}_{I1} \Phi_1(t_1) + \mathbf{M}_{I2} \Phi_2(t_2) \quad (58)$$

$$X_b = b_{I1} \phi_1(t_1) + b_{I2} \phi_2(t_2) \quad (59)$$

$$X'_b = d_{I1} \phi_1(t_1) + d_{I2} \phi_2(t_2). \quad (60)$$

Using these equations in (38) and (39) we obtain the turn-by-turn positions and angles of a particle launched from the injection point.

Let us now consider the conditions under which the launched particle moves with the bump. Subtracting (55) from (58) we have

$$\mathbf{X}_b - \mathbf{X}_a = \mathbf{M}_{I1} \Phi_1(t_1) + \mathbf{M}_{I2} \Phi_2(t_2) + \mathbf{M}_{3I}^{-1} \Phi_3(t_3) + \mathbf{M}_{4I}^{-1} \Phi_4(t_4) \quad (61)$$

and

$$\mathbf{M}_{4I} (\mathbf{X}_b - \mathbf{X}_a) = \Phi_4(t_4) + \mathbf{M}_{43} \Phi_3(t_3) + \mathbf{M}_{42} \Phi_2(t_2) + \mathbf{M}_{41} \Phi_1(t_1). \quad (62)$$

If the bump is constant in time then it follows from (11) that the right-hand side of (62) is zero and we have

$$\mathbf{X}_a = \mathbf{X}_b = \mathbf{X}_c \quad (63)$$

where \mathbf{X}_c is the constant closed orbit vector given by (12).

If the bump is collapsing then

$$\Phi_4(t) + \mathbf{M}_{43}\Phi_3(t) + \mathbf{M}_{42}\Phi_2(t) + \mathbf{M}_{41}\Phi_1(t) = \mathbf{0} \quad (64)$$

at each time t , but the right-hand side of (62) is generally not zero because the times t_j are not all the same. We shall assume that $s_3 - s_I$, $s_4 - s_I$, $s_I - s_1$, and $s_I - s_2$ are small compared to the ring circumference, which allows the approximations

$$t_3 \approx t_I, \quad t_4 \approx t_I, \quad t_1 \approx t_I + 1, \quad t_2 \approx t_I + 1. \quad (65)$$

It then follows that for a bump collapsing sufficiently slowly,

$$\mathbf{M}_{3I}^{-1}\Phi_3(t_3) + \mathbf{M}_{4I}^{-1}\Phi_4(t_4) \approx \mathbf{M}_{3I}^{-1}\Phi_3(t_I) + \mathbf{M}_{4I}^{-1}\Phi_4(t_I) \quad (66)$$

and

$$\mathbf{M}_{I1}\Phi_1(t_1) + \mathbf{M}_{I2}\Phi_2(t_2) \approx \mathbf{M}_{I1}\Phi_1(t_I + 1) + \mathbf{M}_{I2}\Phi_2(t_I + 1). \quad (67)$$

Using

$$\mathbf{M}_{4I}^{-1}\Phi_4(t) + \mathbf{M}_{3I}^{-1}\Phi_3(t) + \mathbf{M}_{I2}\Phi_2(t) + \mathbf{M}_{I1}\Phi_1(t) = 0 \quad (68)$$

and

$$\mathbf{X}_c(t) = \mathbf{M}_{I2}\Phi_2(t) + \mathbf{M}_{I1}\Phi_1(t) \quad (69)$$

we then have

$$\mathbf{X}_a \approx \mathbf{X}_c(t_I), \quad \mathbf{X}_b \approx \mathbf{X}_c(t_I + 1). \quad (70)$$

Finally, using this in (30) we have

$$\mathbf{Y} - \mathbf{X}_c(t_I + 1) \approx \mathbf{M}\{\mathbf{X} - \mathbf{X}_c(t_I)\} \quad (71)$$

which shows that the injected beam moves with the closed orbit if the bump is collapsed sufficiently slowly.

4 Non-closure of the Collapsing Bump

Now let

$$\tau_1 = t_I + 1 - (s_I - s_1)/C \quad (72)$$

$$\tau_2 = t_I + 1 - (s_I - s_2)/C \quad (73)$$

$$\tau_3 = t_I + 1 + (s_3 - s_I)/C \quad (74)$$

$$\tau_4 = t_I + 1 + (s_4 - s_I)/C \quad (75)$$

and consider a particle launched from s_1 with zero position and with angle $\phi_1(\tau_1)$. Then the position and angle at the injection point s_I are given by

$$\mathbf{X}_b = \mathbf{M}_{I1}\Phi_1(\tau_1) + \mathbf{M}_{I2}\Phi_2(\tau_2) \quad (76)$$

and at s_3 we have

$$\mathbf{X}_d = \mathbf{M}_{3I}\mathbf{X}_b + \Phi_3(\tau_3). \quad (77)$$

The position and angle at s_4 are then given by

$$\mathbf{X}_e = \mathbf{M}_{43}\mathbf{X}_d + \Phi_4(\tau_4) \quad (78)$$

$$\mathbf{X}_e = \mathbf{M}_{4I}\mathbf{X}_b + \mathbf{M}_{43}\Phi(\tau_3) + \Phi_4(\tau_4) \quad (79)$$

and

$$\mathbf{X}_e = \Phi_4(\tau_4) + \mathbf{M}_{43}\Phi_3(\tau_3) + \mathbf{M}_{42}\Phi_2(\tau_2) + \mathbf{M}_{41}\Phi_1(\tau_1). \quad (80)$$

This is the amount by which the orbit does not close at s_4 . If the bump is constant in time then the right-hand side of (80) is zero and the orbit is closed. For a collapsing bump the right-hand side is generally non-zero.

Writing

$$\mathbf{X}_e = \begin{pmatrix} X_e \\ X'_e \end{pmatrix} \quad (81)$$

and using

$$\mathbf{M}_{4k}\Phi_k = \begin{pmatrix} a_{4k} & b_{4k} \\ c_{4k} & d_{4k} \end{pmatrix} \begin{pmatrix} 0 \\ \phi_k \end{pmatrix} = \begin{pmatrix} b_{4k} \\ d_{4k} \end{pmatrix} \phi_k \quad (82)$$

we have

$$X_e = b_{41}\phi_1(\tau_1) + b_{42}\phi_2(\tau_2) + b_{43}\phi_3(\tau_3) \quad (83)$$

$$X'_e = d_{41}\phi_1(\tau_1) + d_{42}\phi_2(\tau_2) + d_{43}\phi_3(\tau_3) + \phi_4(\tau_4). \quad (84)$$

The emittance associated with \mathbf{X}_e is

$$\epsilon_e = \gamma_4 X_e^2 + 2\alpha_4 X_e X'_e + \beta_4 X'^2_e \quad (85)$$

where α_4 , β_4 , and γ_4 are the Courant-Snyder lattice parameters at s_4 .

Since $s_3 - s_I$, $s_4 - s_I$, $s_I - s_1$, and $s_I - s_2$ are assumed small compared to the ring circumference we have

$$\tau_1 \approx \tau_2 \approx \tau_3 \approx \tau_4 \approx \tau, \quad (86)$$

where $\tau = t_I + 1$. If the bump collapses sufficiently slowly we then have

$$\mathbf{X}_e \approx \Phi_4(\tau) + \mathbf{M}_{43}\Phi_3(\tau) + \mathbf{M}_{42}\Phi_2(\tau) + \mathbf{M}_{41}\Phi_1(\tau) \quad (87)$$

and we see that \mathbf{X}_e and ϵ_e are close to zero.

On the other hand, if the bump collapses rapidly to zero just after time $t_I + 1$ then

$$\phi_3(\tau_3) = 0, \quad \phi_4(\tau_4) = 0 \quad (88)$$

and (80) becomes

$$\mathbf{X}_e = \mathbf{M}_{42}\Phi_2(\tau_2) + \mathbf{M}_{41}\Phi_1(\tau_1). \quad (89)$$

In this case we have

$$\mathbf{M}_{42}\Phi_2(\tau_2) + \mathbf{M}_{41}\Phi_1(\tau_1) \approx \mathbf{M}_{42}\Phi_2(t_I + 1) + \mathbf{M}_{41}\Phi_1(t_I + 1) \quad (90)$$

and

$$\mathbf{X}_e \approx \mathbf{M}_{4I}\mathbf{X}_c(t_I + 1) \quad (91)$$

which shows that \mathbf{X}_e is as large as the bump itself.

5 Turn-by-Turn Evolution of the Beam Ellipse

The incoming beam ellipse at the point of injection is given by

$$\gamma_0(X - X_0)^2 + 2\alpha_0(X - X_0)(X' - X'_0) + \beta_0(X' - X'_0)^2 = \epsilon_0 \quad (92)$$

where X and X' are the position and angle of a beam particle on the ellipse, X_0 and X'_0 are the position and angle of the center of the ellipse, and $\pi\epsilon_0$ is the area of the ellipse. As discussed in [2, 3], the initial ellipse parameters α_0 , β_0 , and γ_0 are taken to be

$$\alpha_0 = B\alpha_I, \quad \beta_0 = B\beta_I, \quad \gamma_0 = \frac{1 + \alpha_0^2}{\beta_0} \quad (93)$$

where the parameter B is adjusted to make optimum use of the machine and injection inflector acceptances. Optimum use of the machine acceptance also requires that

$$X'_0 - X'_c = -\alpha_I(X_0 - X_c)/\beta_I \quad (94)$$

and

$$X_0 = X_s + \sqrt{\epsilon_0 \beta_0} \quad (95)$$

where X_s is the position of the outer side of the inflector septum. Eq. (94) is satisfied if we take

$$X'_0 = -\alpha_I X_0 / \beta_I, \quad X'_c = -\alpha_I X_c / \beta_I. \quad (96)$$

Writing

$$\mathbf{X} = \begin{pmatrix} X \\ X' \end{pmatrix}, \quad \mathbf{X}_0 = \begin{pmatrix} X_0 \\ X'_0 \end{pmatrix} \quad (97)$$

and

$$\mathbf{E}_0 = \begin{pmatrix} \beta_0 & -\alpha_0 \\ -\alpha_0 & \gamma_0 \end{pmatrix}, \quad \mathbf{E}_0^{-1} = \begin{pmatrix} \gamma_0 & \alpha_0 \\ \alpha_0 & \beta_0 \end{pmatrix} \quad (98)$$

the equation for the beam ellipse becomes

$$(\mathbf{X}^T - \mathbf{X}_0^T) \mathbf{E}_0^{-1} (\mathbf{X} - \mathbf{X}_0) = \epsilon_0 \quad (99)$$

where the superscript T denotes the transpose of a vector or matrix. After one turn around the machine we have

$$\mathbf{Y} = \mathbf{M}\mathbf{X} + \mathbf{M}_{I1}\mathbf{N}(\mathbf{M}_{43}\Phi_3 + \Phi_4) + \mathbf{M}_{I1}\Phi_1 + \mathbf{M}_{I2}\Phi_2 \quad (100)$$

$$\mathbf{Y}_0 = \mathbf{M}\mathbf{X}_0 + \mathbf{M}_{I1}\mathbf{N}(\mathbf{M}_{43}\Phi_3 + \Phi_4) + \mathbf{M}_{I1}\Phi_1 + \mathbf{M}_{I2}\Phi_2 \quad (101)$$

$$\mathbf{Y} - \mathbf{Y}_0 = \mathbf{M}(\mathbf{X} - \mathbf{X}_0) \quad (102)$$

and it follows that

$$(\mathbf{Y}^T - \mathbf{Y}_0^T) \mathbf{F}^{-1} (\mathbf{Y} - \mathbf{Y}_0) = \epsilon_0 \quad (103)$$

where

$$\mathbf{F} = \mathbf{M}\mathbf{E}_0\mathbf{M}^T. \quad (104)$$

This gives the turn-by-turn evolution of the beam ellipse.

6 The Injection Dipoles

The four injection dipoles are ferrite-core magnets located inside the vacuum chamber in the C1, C3, C7, and D1 straights. Specifically, the locations are as follows:

1. The C1 injection dipole is just downstream of main dipole DHB8 and just upstream of vertical dipole corrector DVCC1;
2. The C3 injection dipole is just downstream of quadrupole QVC3;
3. The C7 injection dipole is just downstream of the C6 current transformer and just upstream of corrector DVCC7;
4. The D1 injection dipole is just downstream of main dipole DHC8 and just upstream of corrector DVCD1.

Note that the exit of the C3 inflector is 2.756936 meters downstream of the center of the C3 injection dipole and 0.217555 meters upstream of horizontal dipole corrector DHCC4. (These numbers come from the MAD input file for Booster.)

The H-minus injection foil is downstream of main dipole DHC5 and upstream of corrector DHCC6. The sequence of elements downstream of the injection foil is DHCC6, SHC6 (sextuple), PUEHC6 (pick-up electrode), QHC6, LC6 (drift), C6 Current Transformer, C7 injection dipole, and DVCC7.

As per Ref. [4] each injection dipole has the following properties:

1. The integrated strength at 1200 A is 0.016 Tm which gives 1.33×10^{-5} Tm/A;
2. The peak magnetic field at 1200 A is 852 Gauss;
3. The average magnetic field over a magnetic length of 45.7 cm is 351 Gauss (at 1200 A);
4. The vertical gap is 2.73 inches (6.93 cm);
5. The horizontal width is 4.25 inches (10.80 cm);
6. The physical length is 5.99 inches (15.21 cm).

The power supplies for the injection dipoles provide programmed currents by discharging a capacitor bank through a transistor bank. Experience has shown that the transistors can be damaged if the requested current and voltage are too high. To prevent this, the rate of change of current is limited to about 6 A/ μ s. This is a factor of 2 less than the 1200 A per 100 μ s advertised in Ref. [5]. In the next section we will see that by

judiciously choosing the horizontal tune and the initial distance of the orbit from the septum one can stay well within the $6 \text{ A}/\mu\text{s}$ limit and inject up to 4 turns without loss on the septum.

7 Illustration of the Injection Process

The injection process is illustrated with several examples in **Figures 1** through **49**. In each example the injection bump position X_c starts at some initial value and then falls linearly to zero over a period of several turns. A beam ellipse is launched from the injection point at various times during the bump fall and is tracked turn-by-turn around the machine. The magnetic rigidity of the beam is taken to be 1.255 Tm which is close to the maximum expected in the ETB (EBIS-to-Booster) transport line.

Figures 1 through **14** show that with horizontal tune $Q_H = 4.75$ and with initial bump position $X_c = 30 \text{ mm}$, one can inject 4 turns of EBIS beam with no loss on the inflector septum. The required maximum rate of fall of the injection dipole currents is $4.19 \text{ A}/\mu\text{s}$.

Figures 15 through **29** show that with horizontal tune $Q_H = 4.74$ and with initial bump position $X_c = 30 \text{ mm}$, one can again inject 4 turns of EBIS beam with no loss on the inflector septum. The required maximum rate of fall of the injection dipole currents in this case is $4.47 \text{ A}/\mu\text{s}$.

In **Figures 30** through **37** the horizontal tune is raised to 4.80 . The initial bump position is lowered to $X_c = 20 \text{ mm}$ in order to keep the injected beam from hitting the septum. In this case one can inject just 2 turns without loss on the septum. The maximum rate of fall of the injection dipole currents is $4.16 \text{ A}/\mu\text{s}$.

In **Figures 38** through **49** the horizontal tune is lowered to 4.70 . This allows the initial bump position to be raised to $X_c = 36 \text{ mm}$ without getting loss on the septum. In this case one can inject 4 turns without loss on the septum, but the maximum rate of fall of the injection dipole currents increases to $6.87 \text{ A}/\mu\text{s}$.

References

- [1] C. J. Gardner, “Booster Inflector Specifications”, Booster Tech. Note 159, February 28, 1990.
- [2] C.J. Gardner, “Multiturn Injection of Heavy Ions into the Booster”, Booster Tech. Note 197, August 14, 1991.
- [3] C.J. Gardner, “Notes on the Injection of EBIS Ions into Booster”, C-A/AP/Note 240, June 2006.
- [4] Memo from S.Y. Zhang and C. Eld, “Booster Injection Kicker Magnet Test”, February 14, 1991.
- [5] Memo from S.Y. Zhang, “Booster Injection Kicker Operation”, January 7, 1992.

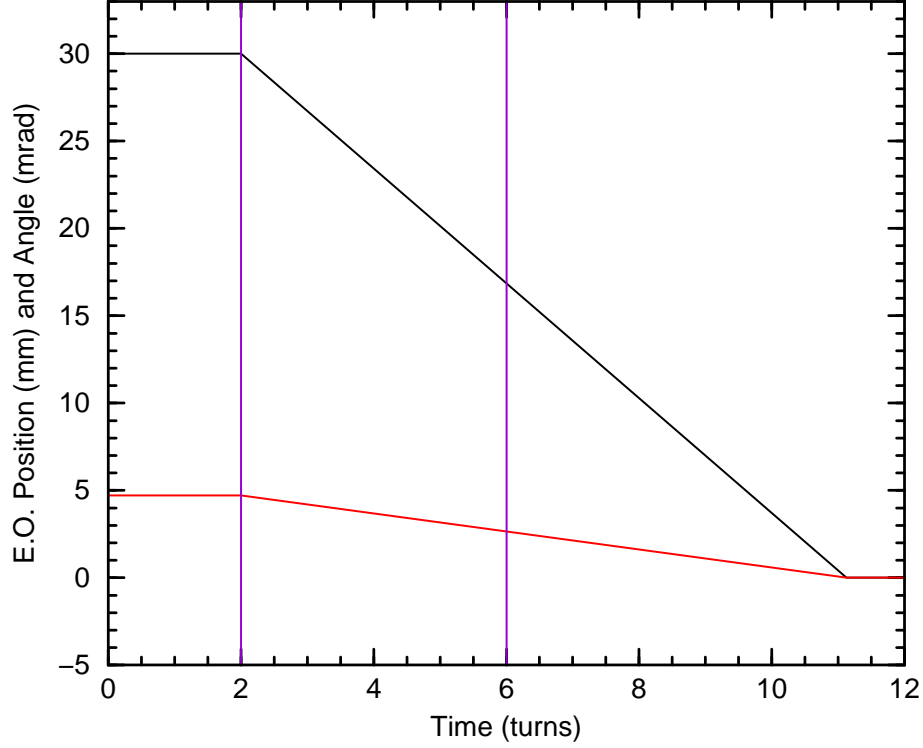


Figure 1: Here the black and red curves are the injection bump position X_c and angle $X'_c = -\alpha_I X_c / \beta_I$ as functions of time for **four-turn injection** of EBIS beams. The time axis is marked in turns, where one turn is $10.276 \mu\text{s}$. The beam pulse occurs between the two violet lines. The horizontal and vertical tunes are $Q_H = 4.75$ and $Q_V = 4.81$, and the MAD program gives $\alpha_I = -1.733$ and $\beta_I = 11.033 \text{ m}$. The magnetic rigidity is taken to be 1.255 Tm which is close to the expected maximum for EBIS beams.

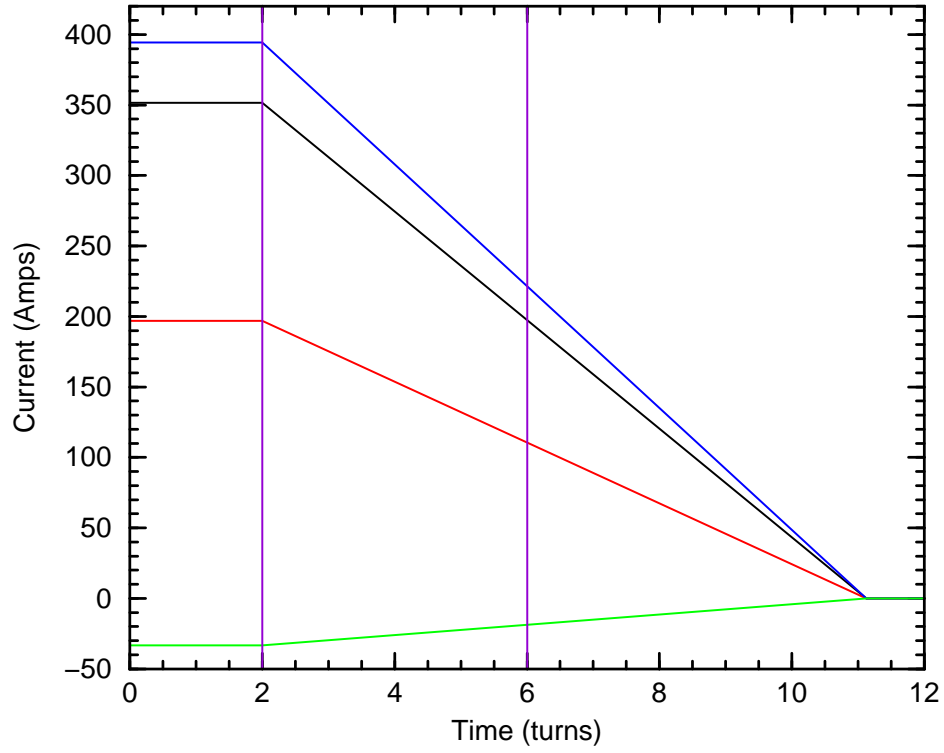


Figure 2: Here the black, red, blue, and green curves are the C1, C3, C7, and D1 dipole currents, respectively, for the injection bump function of **Figure 1**. The four-turn EBIS beam pulse occurs between the two violet lines. The **rate of fall** of the C7 dipole current (blue curve) is $4.19 \text{ A}/\mu\text{s}$.

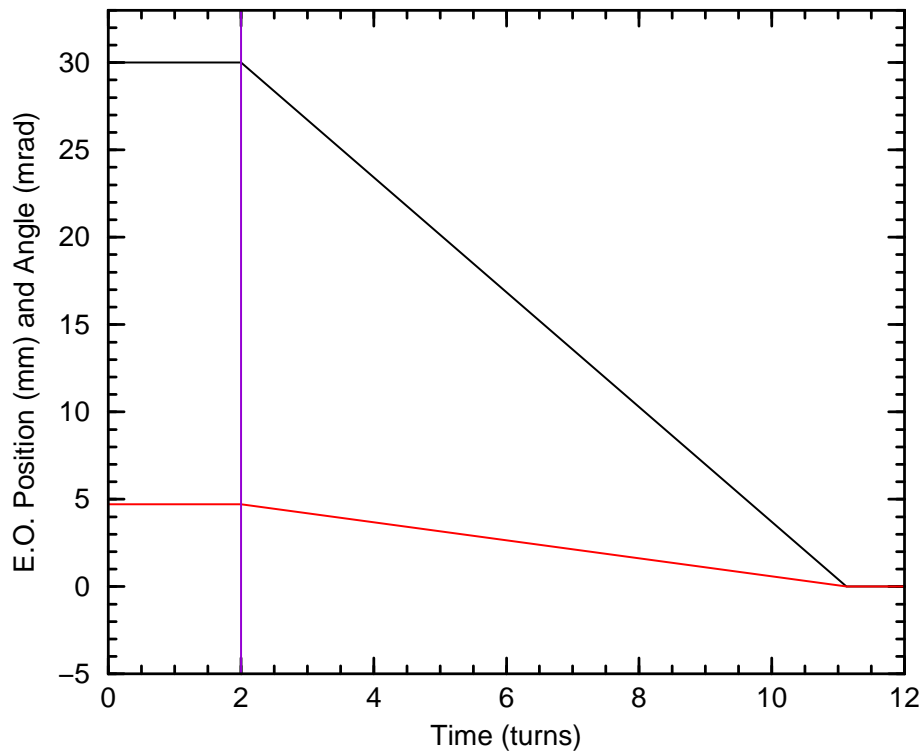


Figure 3: We consider the evolution of a **beam ellipse launched** from the injection point (i.e. the exit of the C3 inflector) **at time 2.0 turns** as indicated by the violet line above. **Figures 4** through **7** show the evolution of the beam ellipse. The necessary computations were carried out with Fortran program “EBinject” using MAD Twiss file TwissEBinject75.

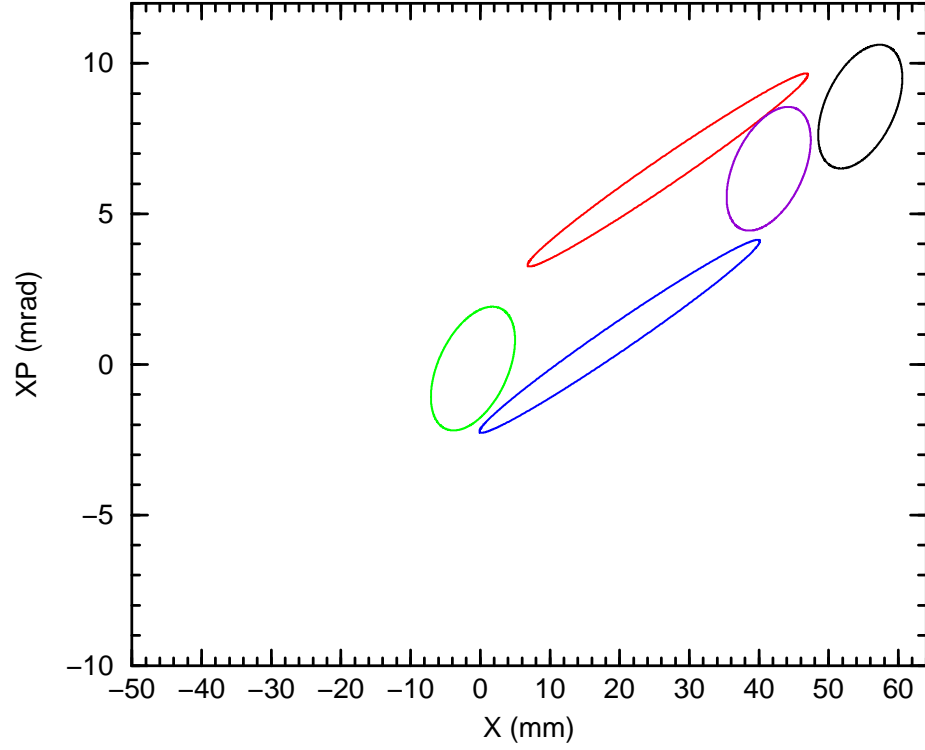


Figure 4: The black, red, green, blue, and violet curves are the beam ellipse after 0, 1, 2, 3, and 4 turns, respectively, from launch time 2.0 turns. The initial (black) ellipse has parameter $B = 0.3$ and area $\pi\epsilon_0 = 11.0\pi$ mm milliradians. The outer side of the 1 mm thick inflector septum is located at $X = 48.5$ mm. The tunes are $Q_H = 4.75$ and $Q_V = 4.81$.

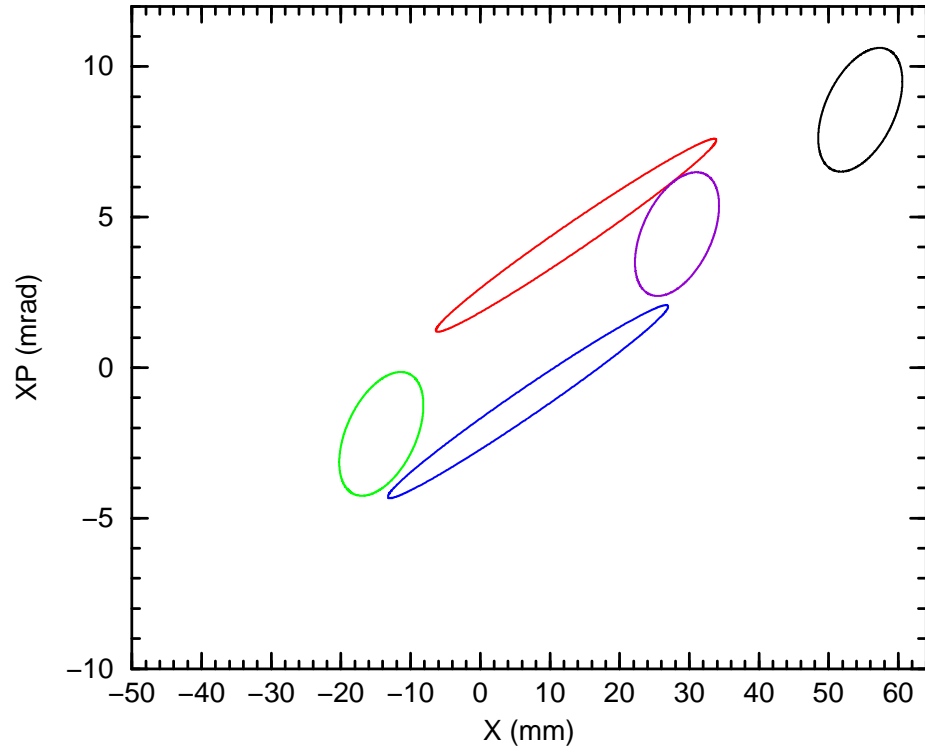


Figure 5: The black, red, green, blue, and violet curves are the beam ellipse after 0, 5, 6, 7, and 8 turns, respectively, from launch time 2.0 turns. Note that the injected ellipse moves with the falling bump.

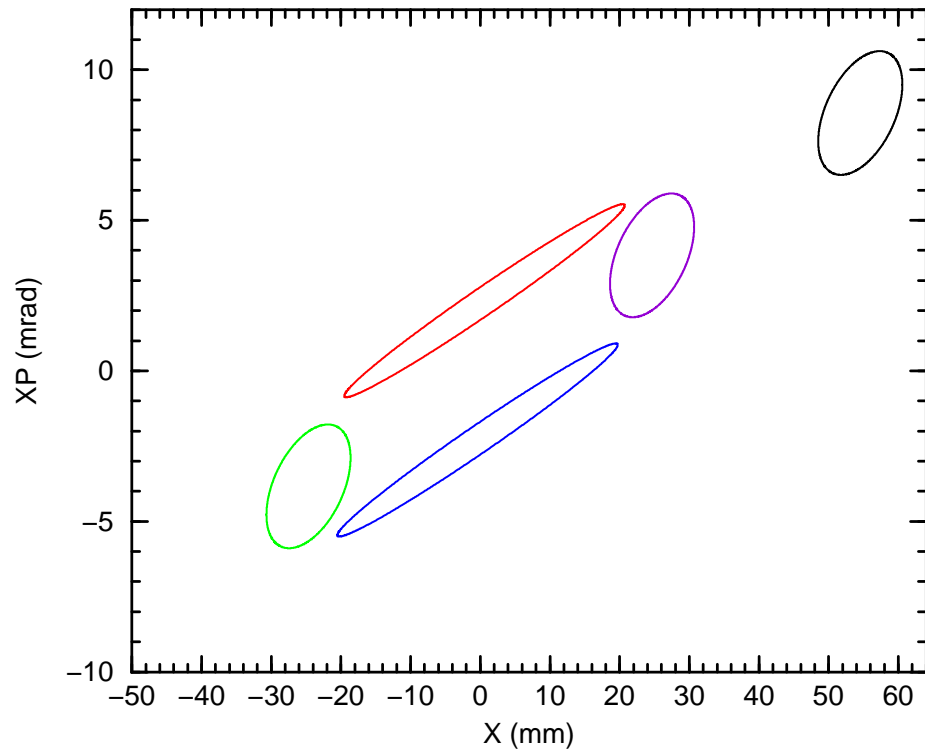


Figure 6: The black, red, green, blue, and violet curves are the beam ellipse after 0, 9, 10, 11, and 12 turns, respectively, from launch time 2.0 turns.

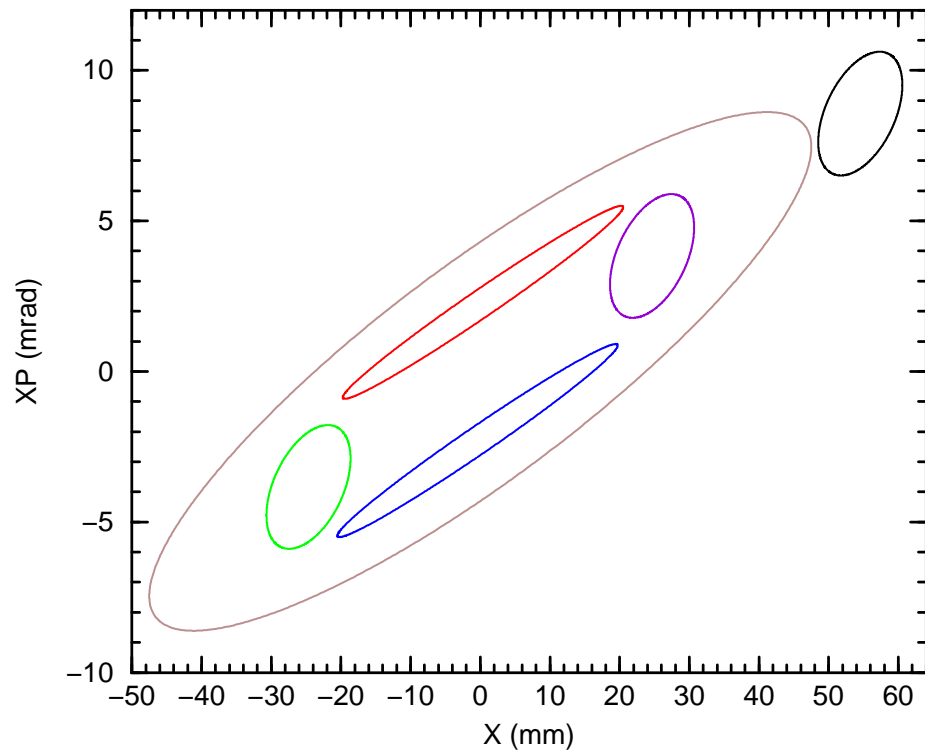


Figure 7: The black, red, green, blue, and violet curves are the beam ellipse after 0, 13, 14, 15, and 16 turns, respectively, from launch time 2.0 turns. The large brown ellipse is the machine acceptance, taken to be 204.5π mm milliradians. The initial (black) ellipse launched at time 2.0 turns therefore ends up well inside the machine acceptance after the bump has collapsed.

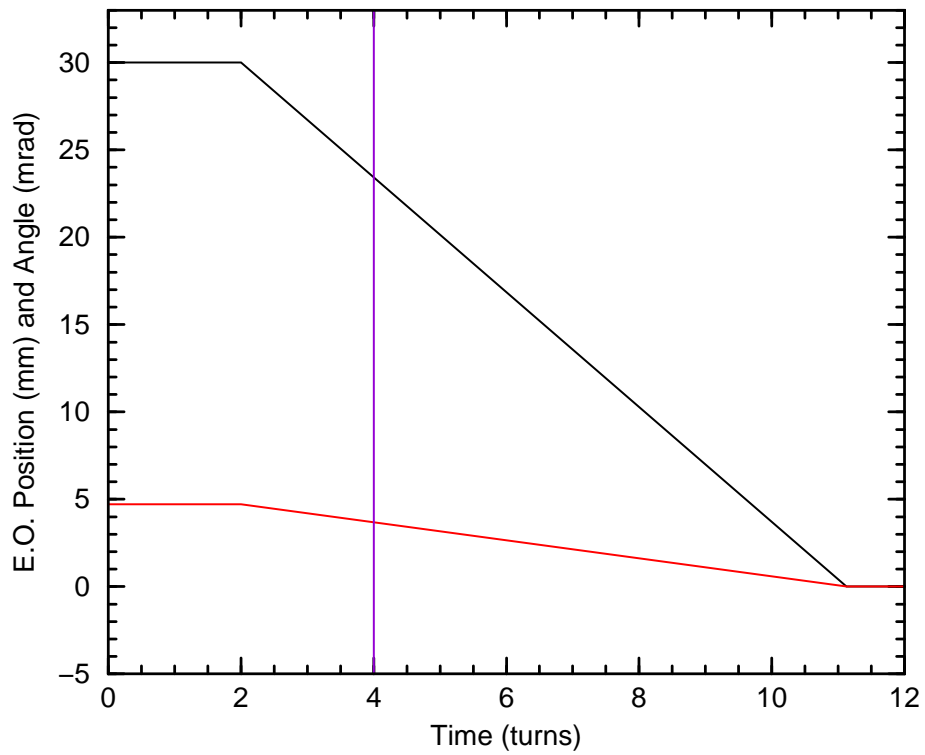


Figure 8: Now consider the evolution of a **beam ellipse launched** from the injection point **at time 4.0 turns** as indicated by the violet line above. **Figures 9 through 11** show the evolution of the beam ellipse. As before, the necessary computations were carried out with Fortran program “EBinject” using MAD Twiss file TwissEBinject75.

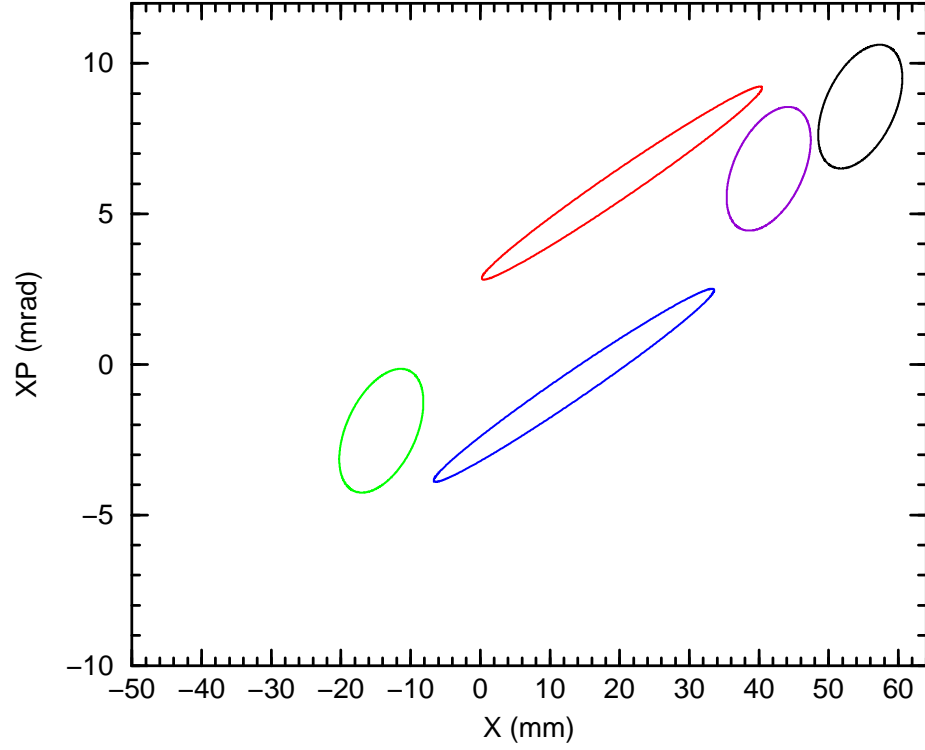


Figure 9: The black, red, green, blue, and violet curves are the beam ellipse after 0, 1, 2, 3, and 4 turns, respectively, from launch time 4.0 turns. As before, the initial (black) ellipse has parameter $B = 0.3$ and area $\pi\epsilon_0 = 11.0\pi$ mm milliradians. The outer side of the 1 mm thick inflector septum is located at $X = 48.5$ mm. The tunes are $Q_H = 4.75$ and $Q_V = 4.81$.

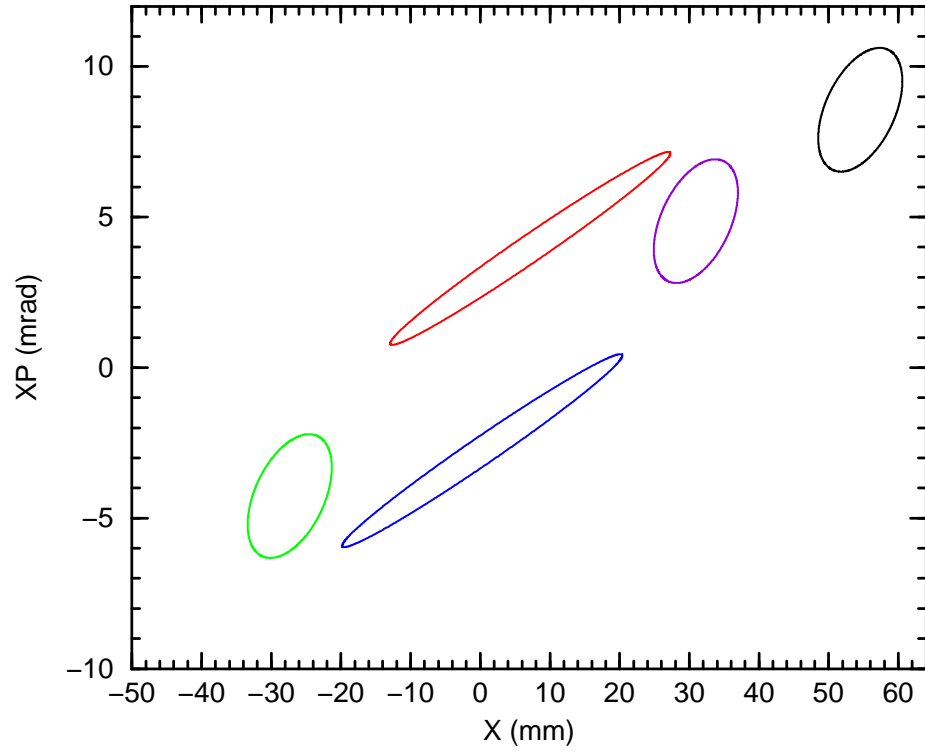


Figure 10: The black, red, green, blue, and violet curves are the beam ellipse after 0, 5, 6, 7, and 8 turns, respectively, from launch time 4.0 turns. Note again that the injected ellipse moves with the falling bump.

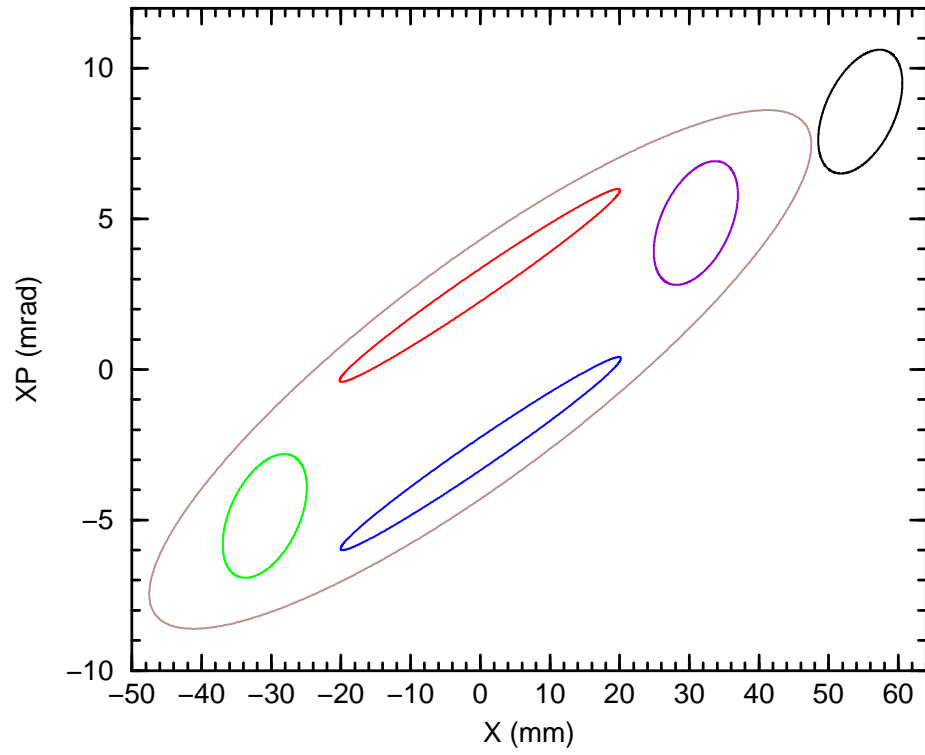


Figure 11: The black, red, green, blue, and violet curves are the beam ellipse after 0, 9, 10, 11, and 12 turns, respectively, from launch time 4.0 turns. The large brown ellipse is the machine acceptance, taken to be 204.5π mm milliradians. The initial (black) ellipse launched at time 4.0 turns therefore ends up well inside the machine acceptance after the bump has collapsed.

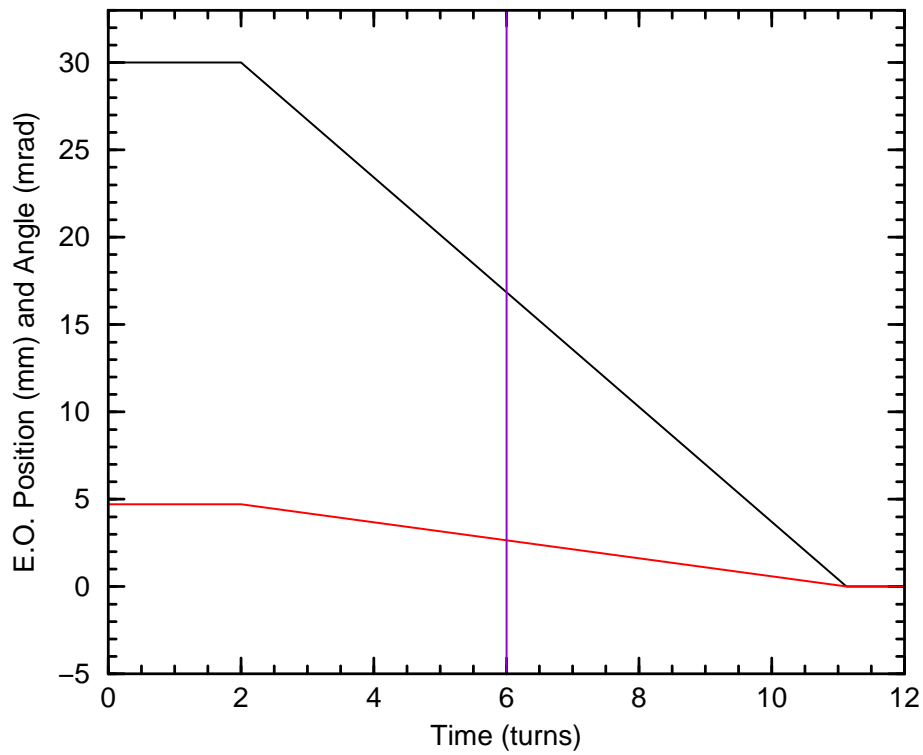


Figure 12: Now consider the evolution of a **beam ellipse launched** from the injection point **at time 6.0 turns** as indicated by the violet line above. **Figures 13** and **14** show the evolution of the beam ellipse. As before, the necessary computations were carried out with Fortran program “EBinject” using MAD Twiss file TwissEBinject75.

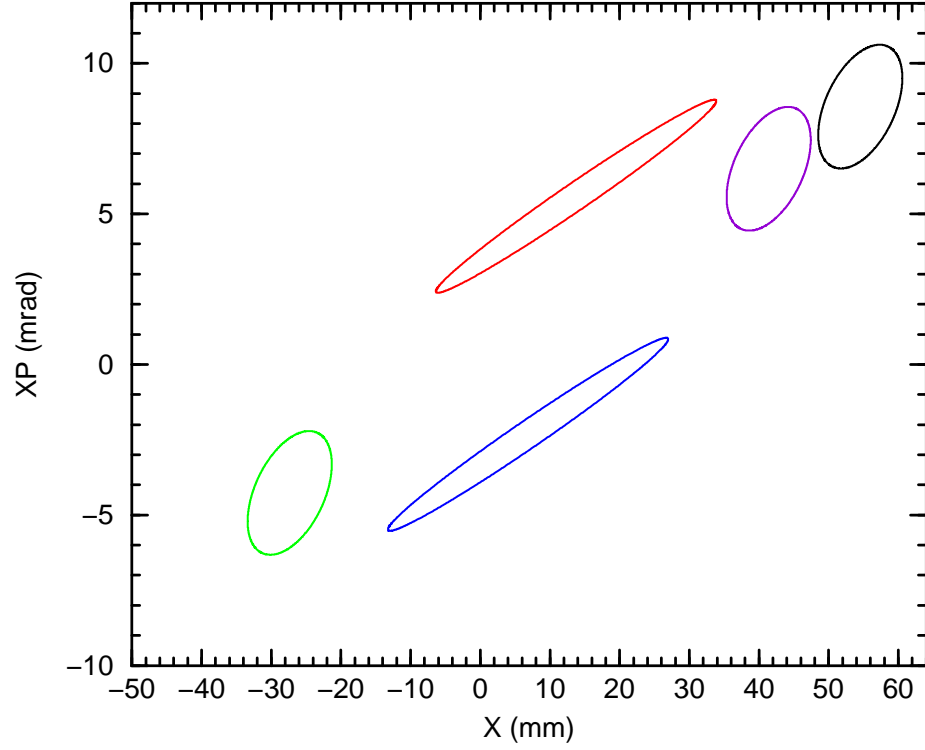


Figure 13: The black, red, green, blue, and violet curves are the beam ellipse after 0, 1, 2, 3, and 4 turns, respectively, from launch time 6.0 turns. As before, the initial (black) ellipse has parameter $B = 0.3$ and area $\pi\epsilon_0 = 11.0\pi$ mm milliradians. The outer side of the 1 mm thick inflector septum is located at $X = 48.5$ mm. The tunes are $Q_H = 4.75$ and $Q_V = 4.81$.

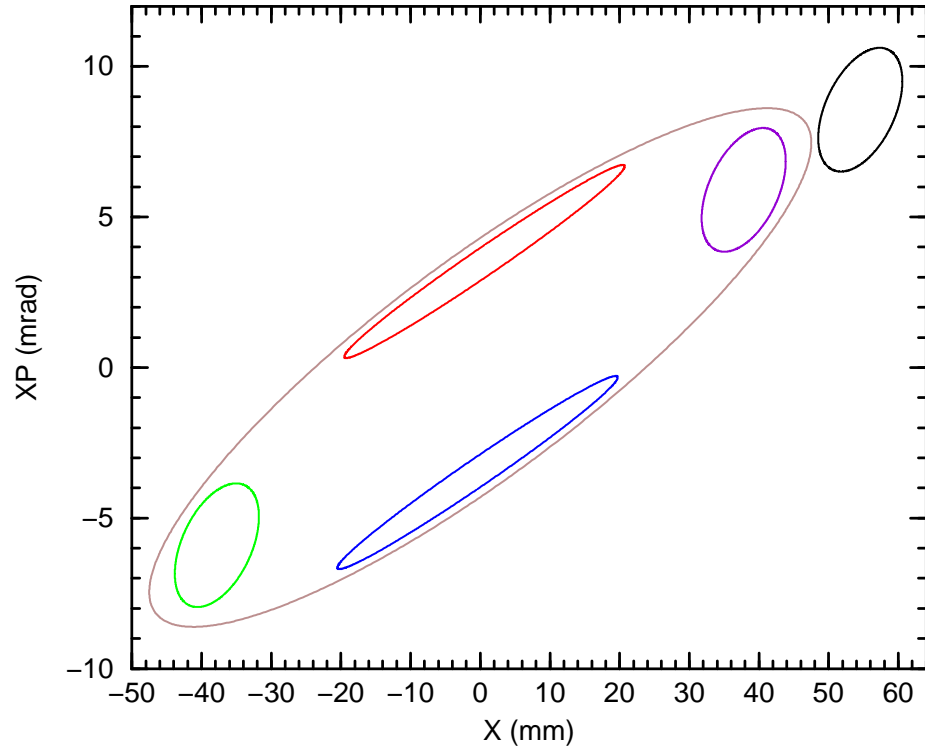


Figure 14: The black, red, green, blue, and violet curves are the beam ellipse after 0, 5, 6, 7, and 8 turns, respectively, from launch time 6.0 turns. The large brown ellipse is the machine acceptance, taken to be 204.5π mm milliradians. The initial (black) ellipse launched at time 6.0 turns therefore ends up inside but close to the edge of the machine acceptance after the bump has collapsed.

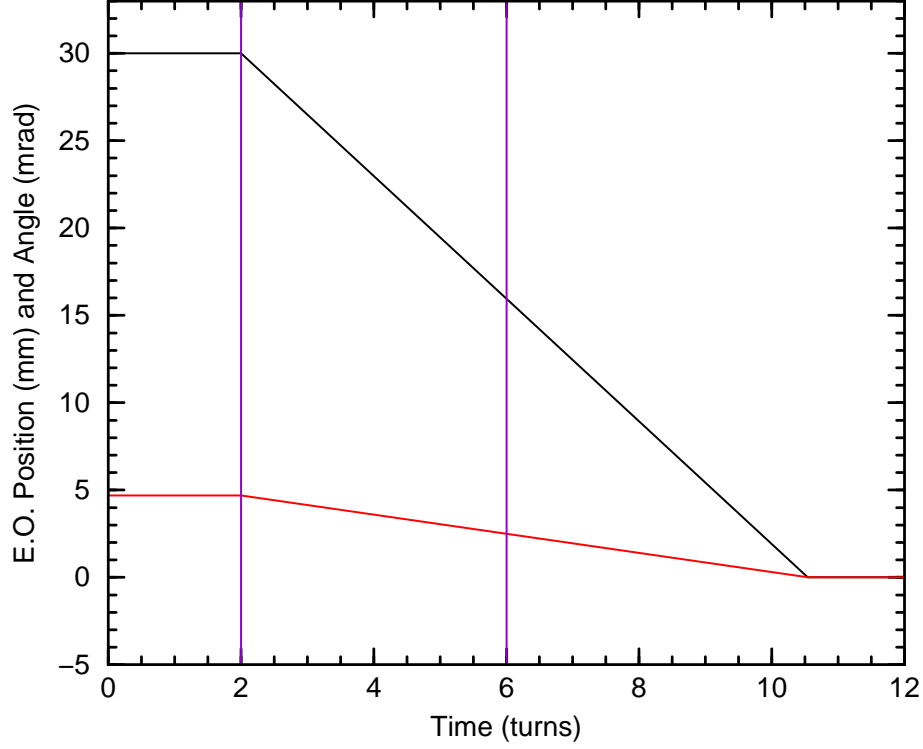


Figure 15: Here again the black and red curves are the injection bump position X_c and angle $X'_c = -\alpha_I X_c / \beta_I$ as functions of time for **four-turn injection** of EBIS beams. The time axis is marked in turns, where one turn is $10.276 \mu\text{s}$. The beam pulse occurs between the two violet lines as before, **but the horizontal and vertical tunes are now** $Q_H = 4.74$ and $Q_V = 4.81$. The MAD program gives $\alpha_I = -1.732$ and $\beta_I = 11.047 \text{ m}$. The magnetic rigidity is taken to be 1.255 Tm which is the expected maximum for EBIS beams.

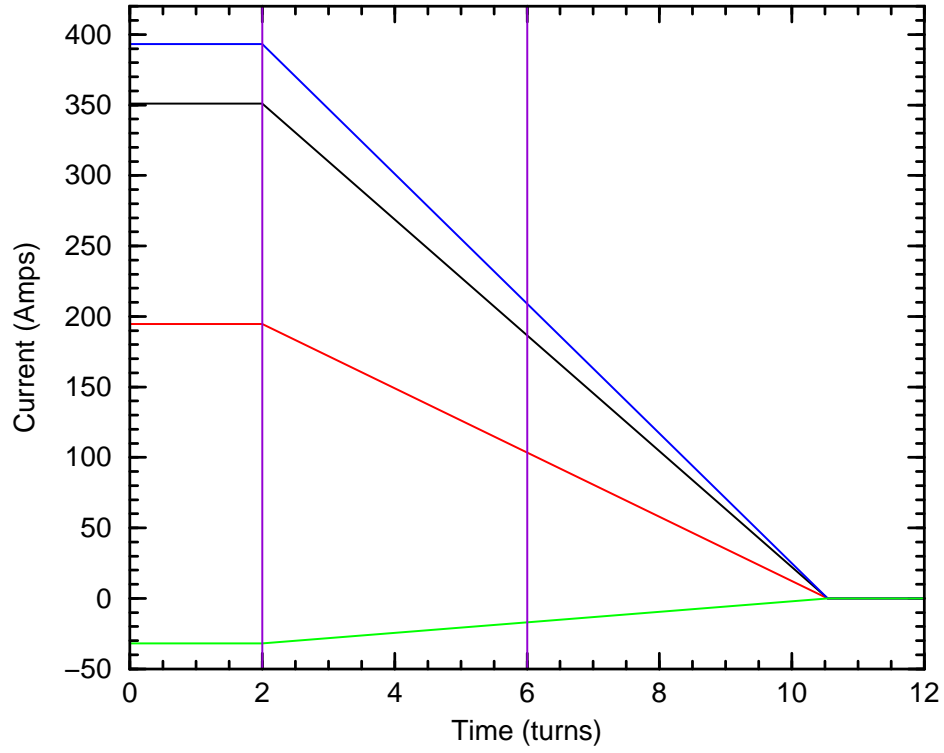


Figure 16: Here the black, red, blue, and green curves are the C1, C3, C7, and D1 dipole currents, respectively, for the injection bump function of **Figure 15**. The four-turn EBIS beam pulse occurs between the two violet lines. The **rate of fall** of the C7 dipole current (blue curve) is $4.47 \text{ A}/\mu\text{s}$.

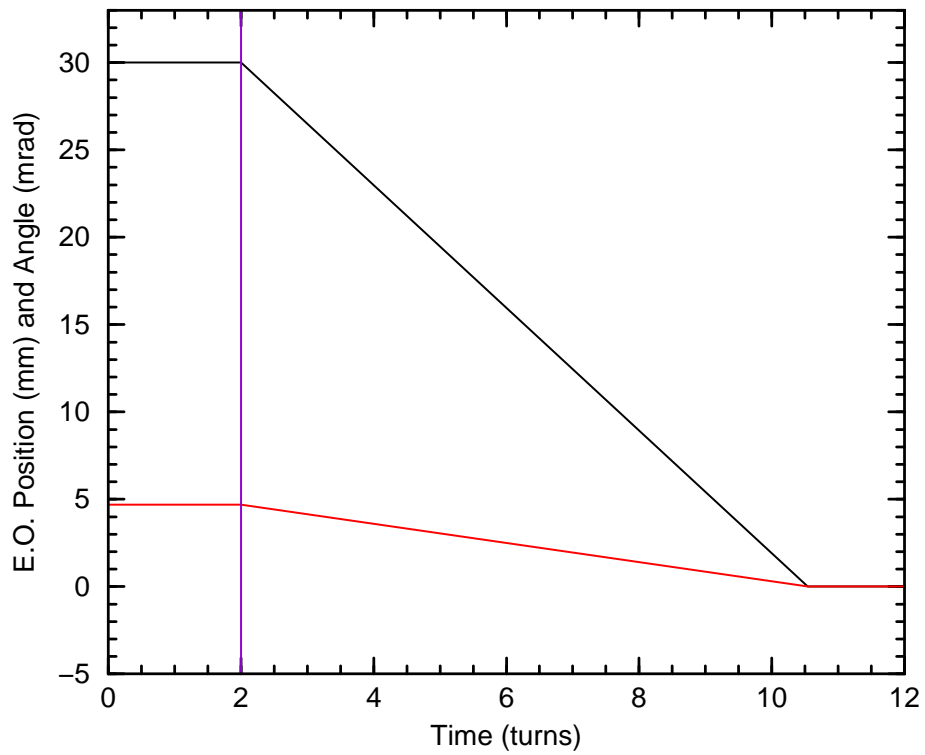


Figure 17: We consider the evolution of a **beam ellipse launched** from the injection point (i.e. the exit of the C3 inflector) **at time 2.0 turns** as indicated by the violet line above. **Figures 18** through **21** show the evolution of the beam ellipse. The necessary computations were carried out with Fortran program “EBinject” using MAD Twiss file TwissQH4740000.

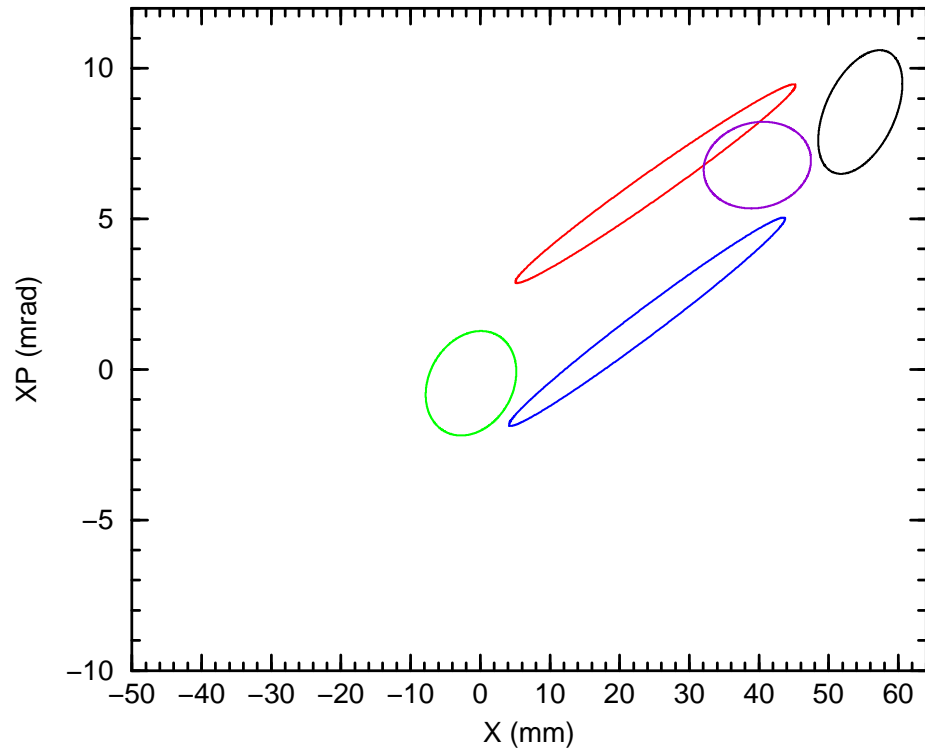


Figure 18: The black, red, green, blue, and violet curves are the beam ellipse after 0, 1, 2, 3, and 4 turns, respectively, from launch time 2.0 turns. The initial (black) ellipse has parameter $B = 0.3$ and area $\pi\epsilon_0 = 11.0\pi$ mm milliradians. The outer side of the 1 mm thick inflector septum is located at $X = 48.5$ mm. The tunes are $Q_H = 4.74$ and $Q_V = 4.81$.

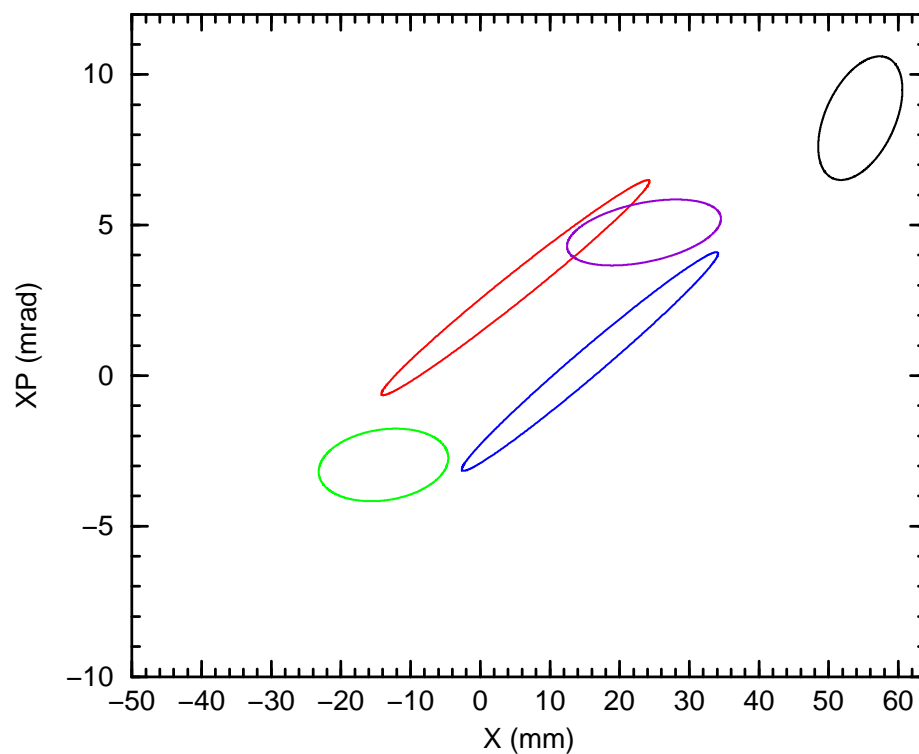


Figure 19: The black, red, green, blue, and violet curves are the beam ellipse after 0, 5, 6, 7, and 8 turns, respectively, from launch time 2.0 turns. Note again that the injected ellipse moves with the falling bump.

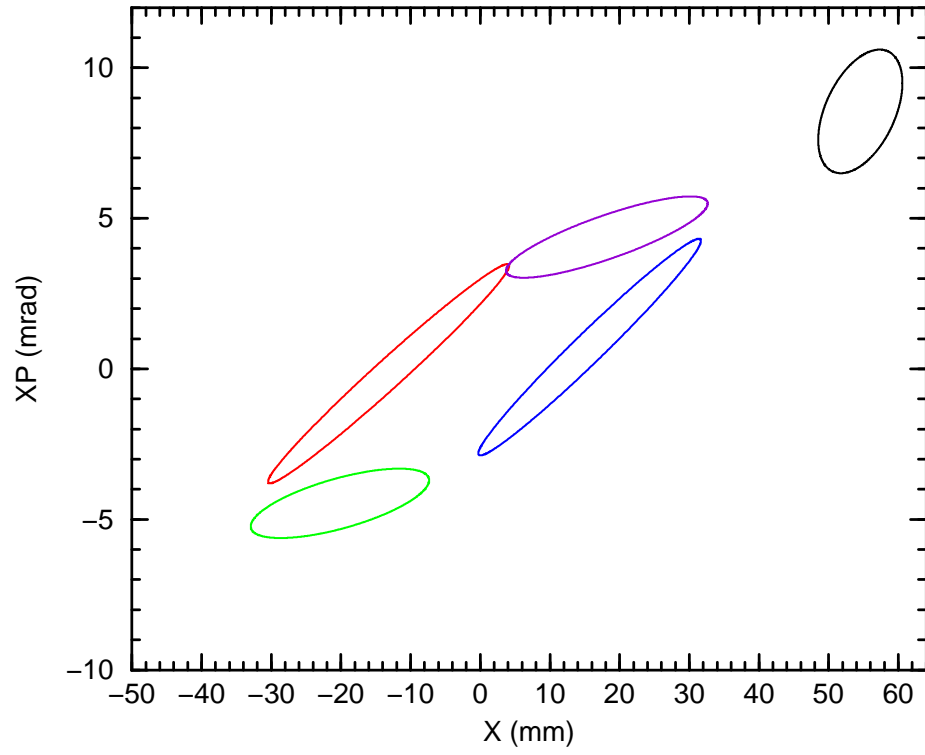


Figure 20: The black, red, green, blue, and violet curves are the beam ellipse after 0, 9, 10, 11, and 12 turns, respectively, from launch time 2.0 turns.

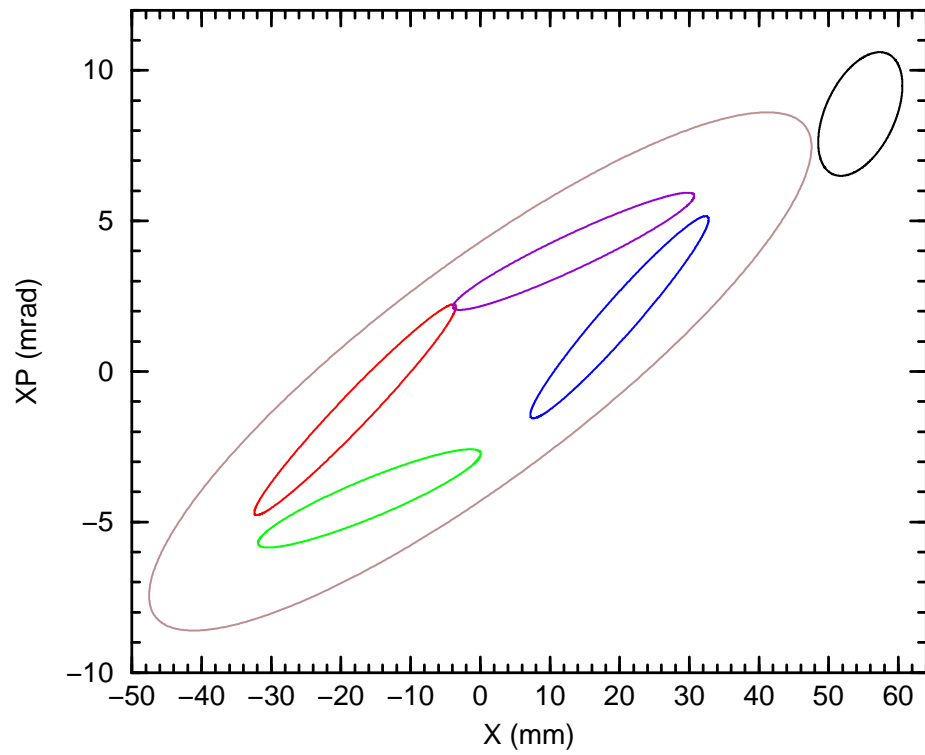


Figure 21: The black, red, green, blue, and violet curves are the beam ellipse after 0, 13, 14, 15, and 16 turns, respectively, from launch time 2.0 turns. The large brown ellipse is the machine acceptance, taken to be 204.5π mm milliradians. The initial (black) ellipse launched at time 2.0 turns therefore ends up well inside the machine acceptance after the bump has collapsed.

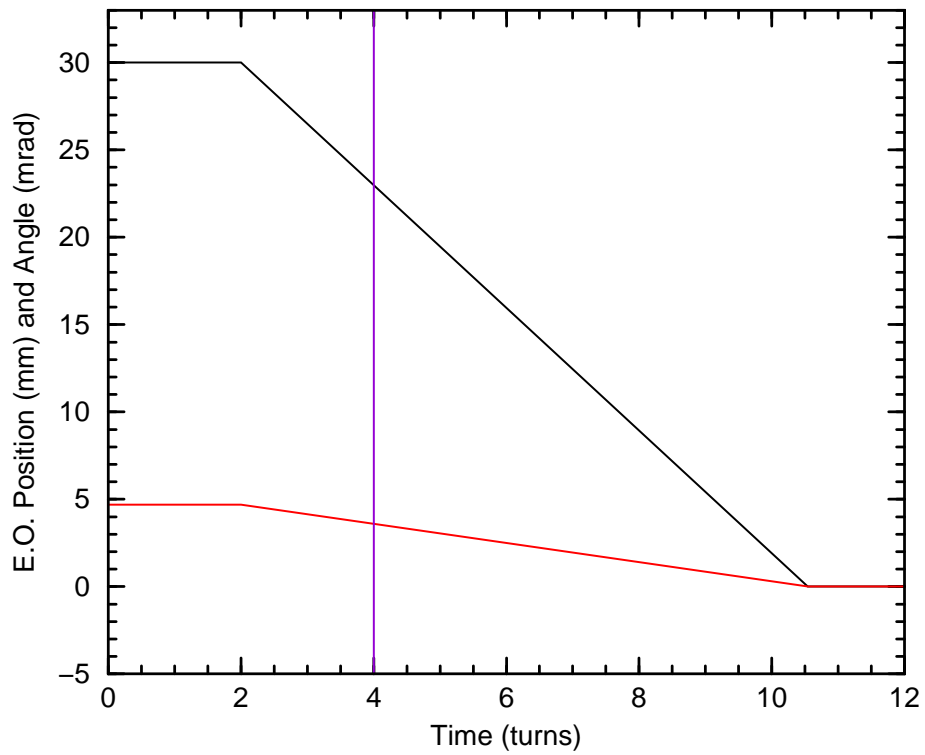


Figure 22: Now consider the evolution of a **beam ellipse launched** from the injection point **at time 4.0 turns** as indicated by the violet line above. **Figures 23** through **26** show the evolution of the beam ellipse. As before, the necessary computations were carried out with Fortran program “EBin-ject” using MAD Twiss file TwissQH4740000.

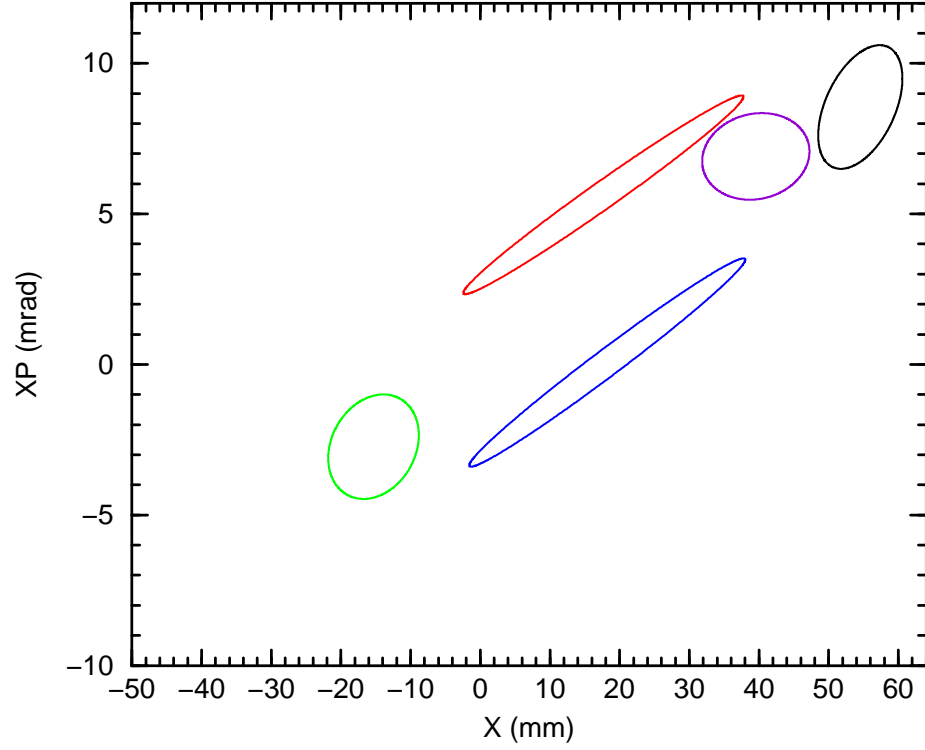


Figure 23: The black, red, green, blue, and violet curves are the beam ellipse after 0, 1, 2, 3, and 4 turns, respectively, from launch time 4.0 turns. As before, the initial (black) ellipse has parameter $B = 0.3$ and area $\pi\epsilon_0 = 11.0\pi$ mm milliradians. The outer side of the 1 mm thick inflector septum is located at $X = 48.5$ mm. The tunes are $Q_H = 4.74$ and $Q_V = 4.81$.

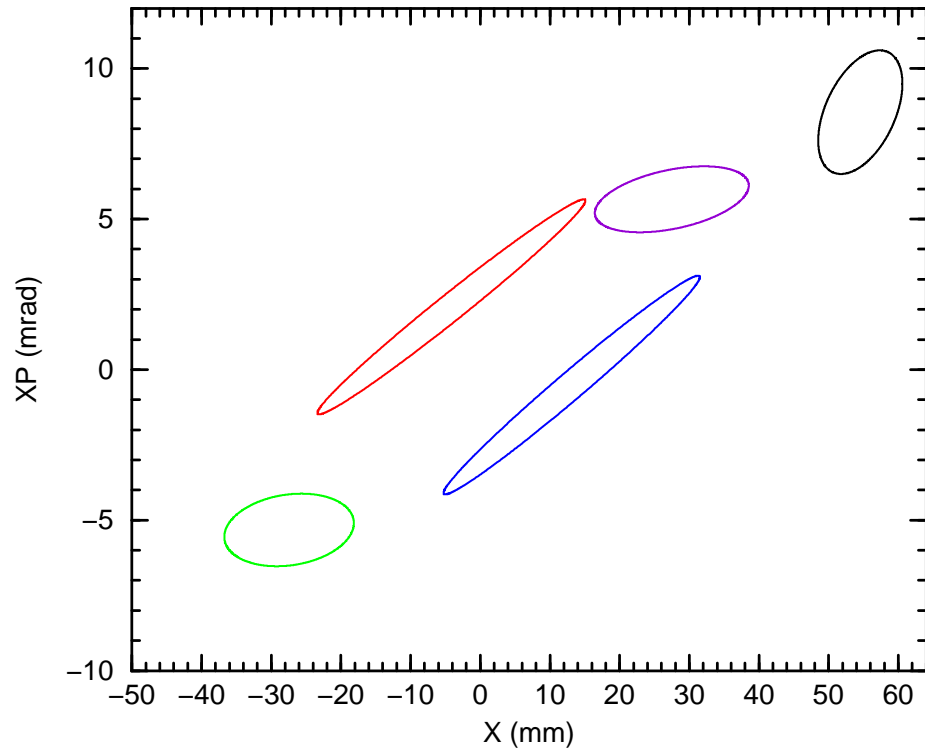


Figure 24: The black, red, green, blue, and violet curves are the beam ellipse after 0, 5, 6, 7, and 8 turns, respectively, from launch time 4.0 turns. Note again that the injected ellipse moves with the falling bump.

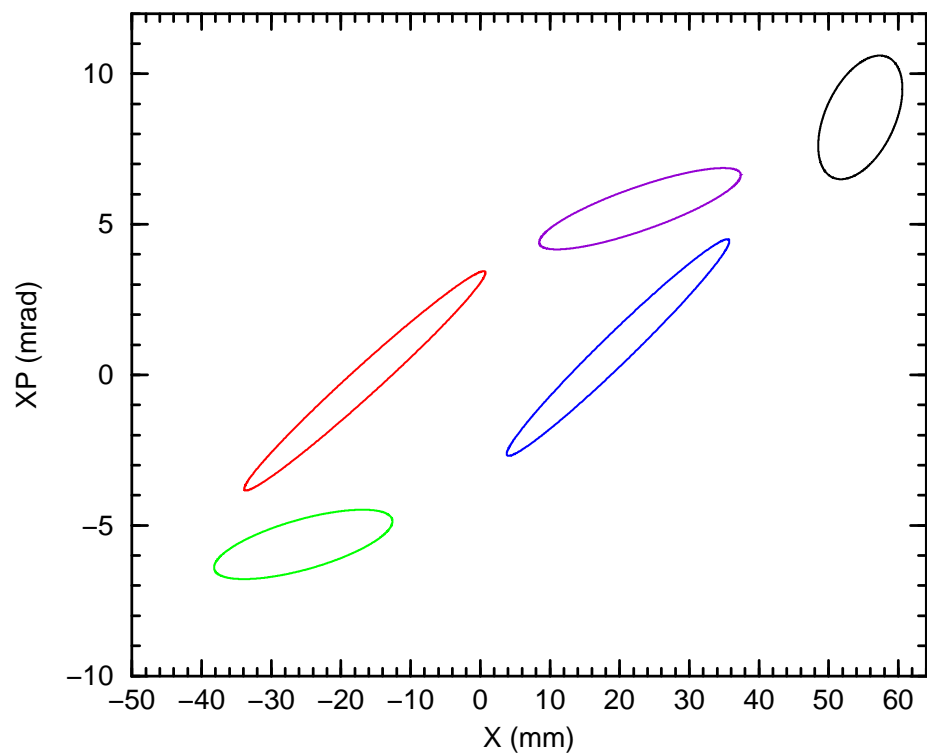


Figure 25: The black, red, green, blue, and violet curves are the beam ellipse after 0, 9, 10, 11, and 12 turns, respectively, from launch time 4.0 turns.

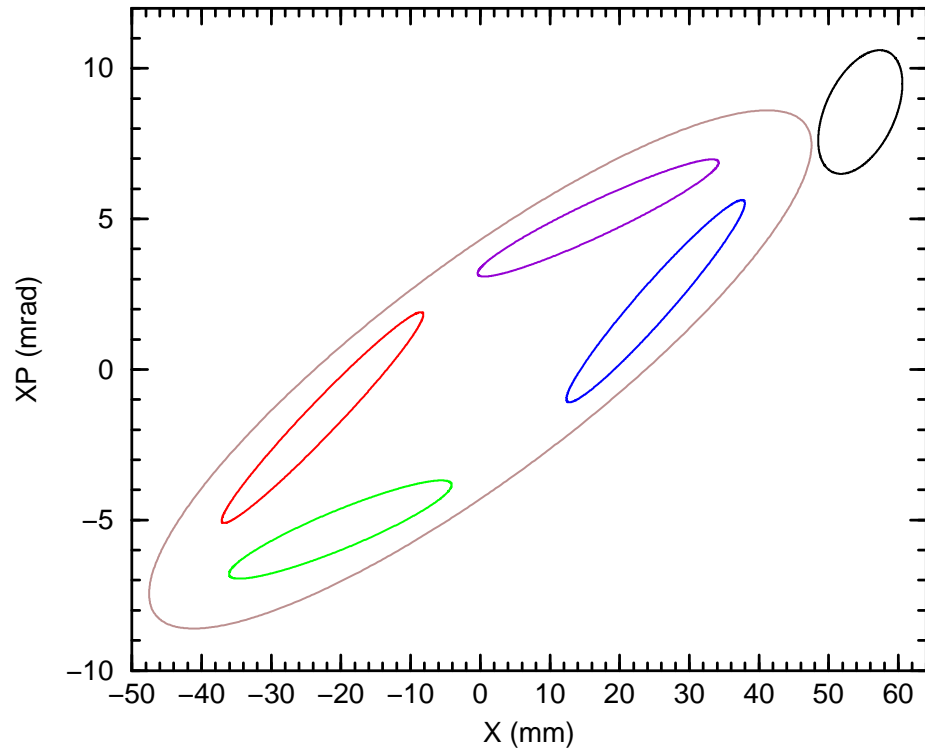


Figure 26: The black, red, green, blue, and violet curves are the beam ellipse after 0, 13, 14, 15, and 16 turns, respectively, from launch time 4.0 turns. The large brown ellipse is the machine acceptance, taken to be 204.5π mm milliradians. The initial (black) ellipse launched at time 4.0 turns therefore ends up well inside the machine acceptance after the bump has collapsed.

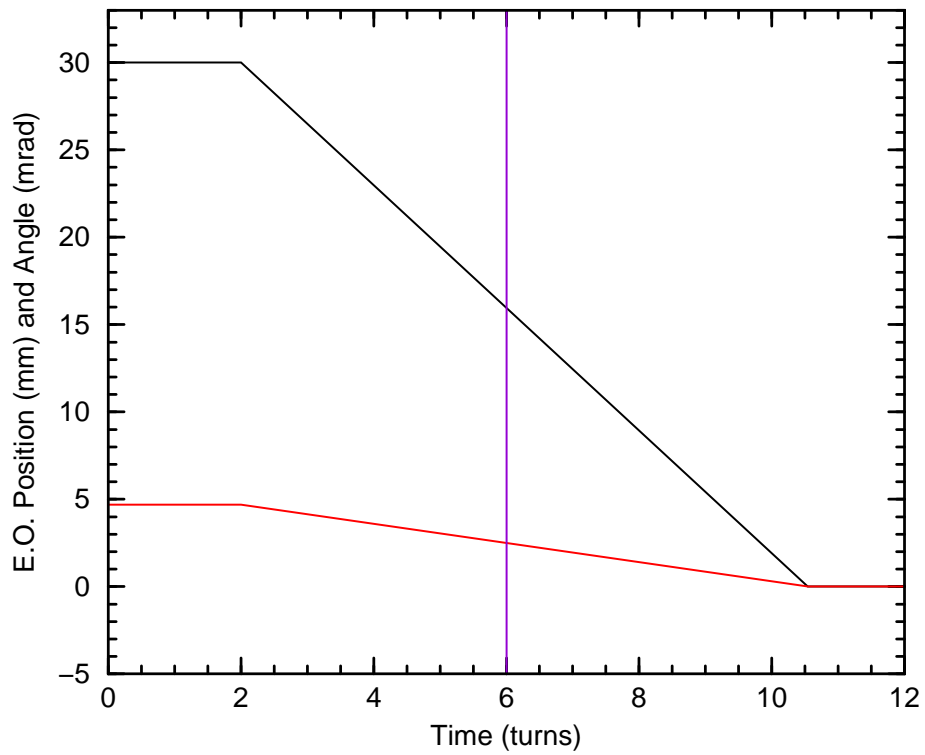


Figure 27: Now consider the evolution of a **beam ellipse launched** from the injection point **at time 6.0 turns** as indicated by the violet line above. **Figures 28** and **29** show the evolution of the beam ellipse. As before, the necessary computations were carried out with Fortran program “EBinject” using MAD Twiss file TwissQH4740000.

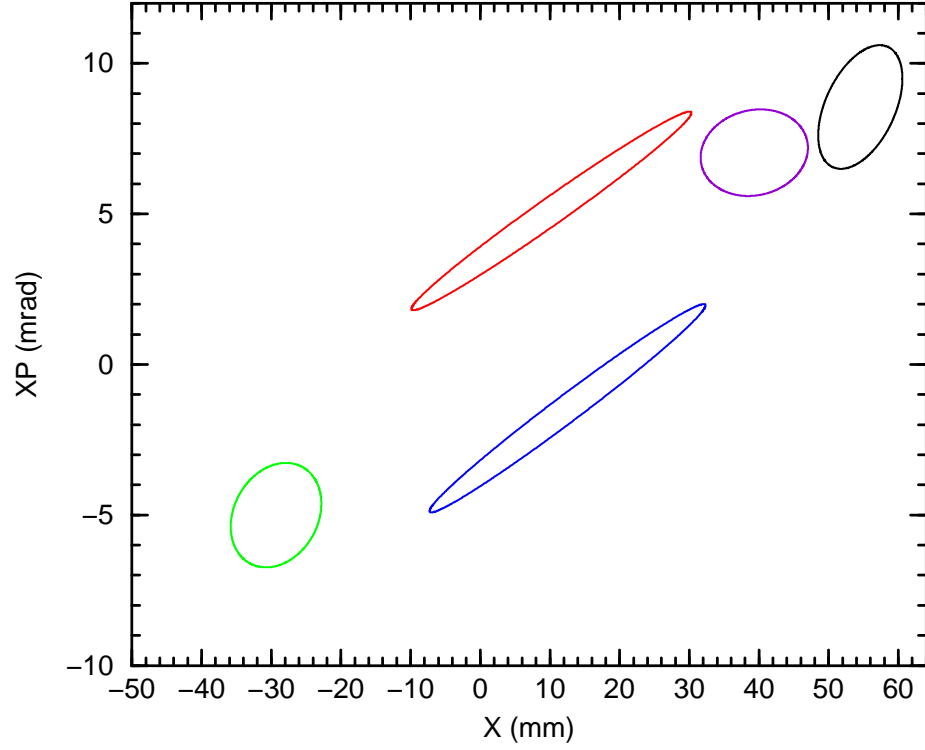


Figure 28: The black, red, green, blue, and violet curves are the beam ellipse after 0, 1, 2, 3, and 4 turns, respectively, from launch time 6.0 turns. As before, the initial (black) ellipse has parameter $B = 0.3$ and area $\pi\epsilon_0 = 11.0\pi$ mm milliradians. The outer side of the 1 mm thick inflector septum is located at $X = 48.5$ mm. The tunes are $Q_H = 4.74$ and $Q_V = 4.81$.

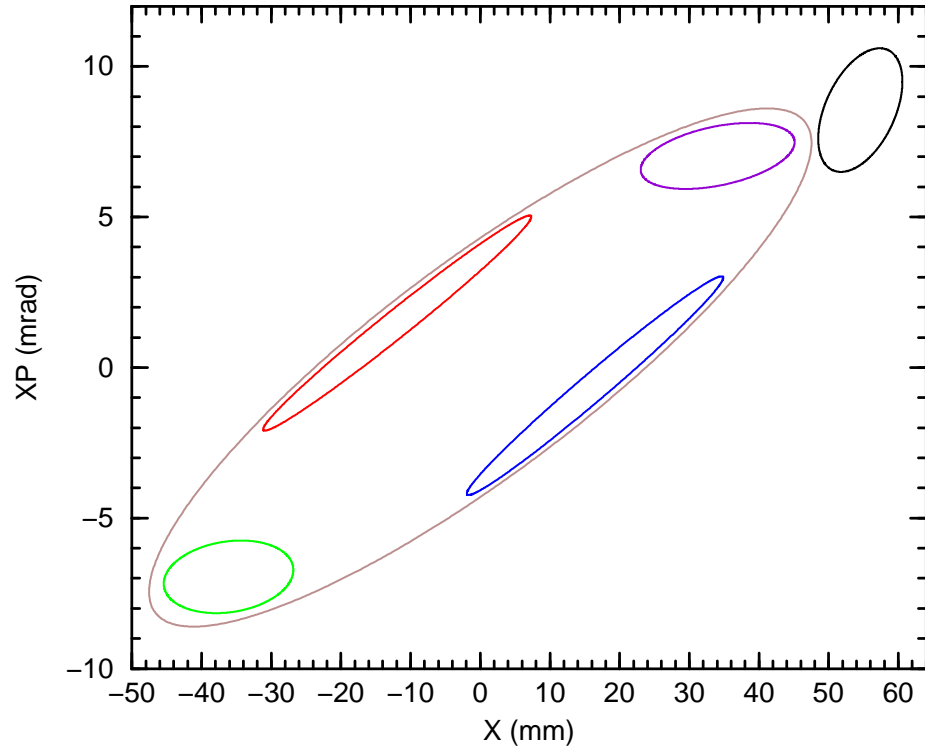


Figure 29: The black, red, green, blue, and violet curves are the beam ellipse after 0, 5, 6, 7, and 8 turns, respectively, from launch time 6.0 turns. The large brown ellipse is the machine acceptance, taken to be 204.5π mm milliradians. The initial (black) ellipse launched at time 6.0 turns therefore ends up inside but close to the edge of the machine acceptance after the bump has collapsed.

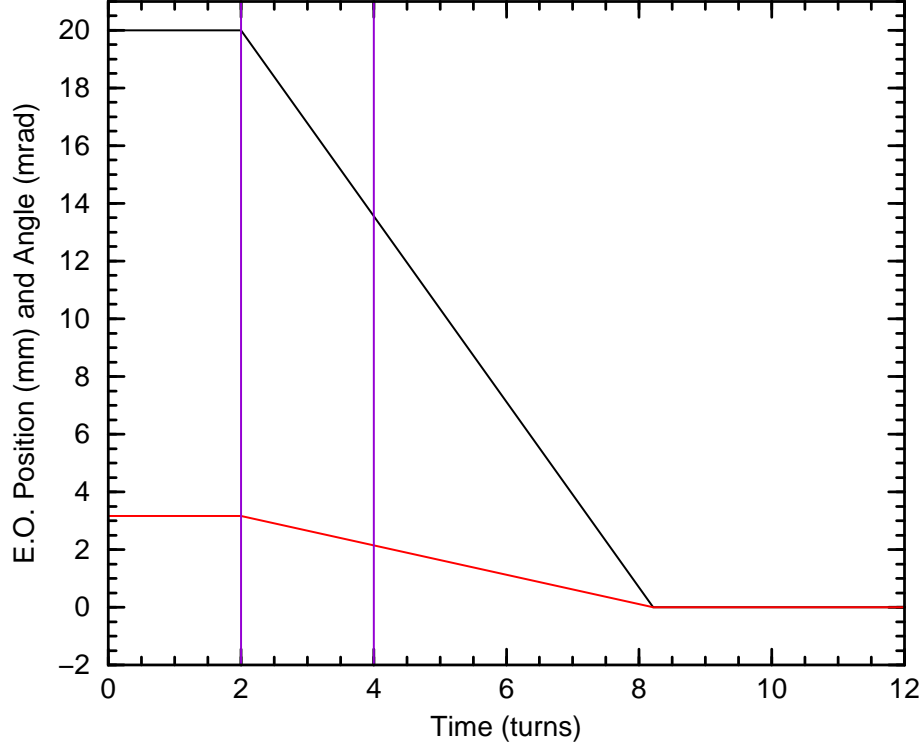


Figure 30: The black and red curves are the injection bump position X_c and angle $X'_c = -\alpha_I X_c / \beta_I$ as functions of time for **two-turn injection** of EBIS beams. The time axis is marked in turns, where one turn is $10.276 \mu\text{s}$. The beam pulse occurs between the two violet lines. **The horizontal and vertical tunes are now $Q_H = 4.80$ and $Q_V = 4.81$.** The MAD program gives $\alpha_I = -1.737$ and $\beta_I = 10.969 \text{ m}$. The magnetic rigidity is taken to be 1.255 Tm which is the expected maximum for EBIS beams.

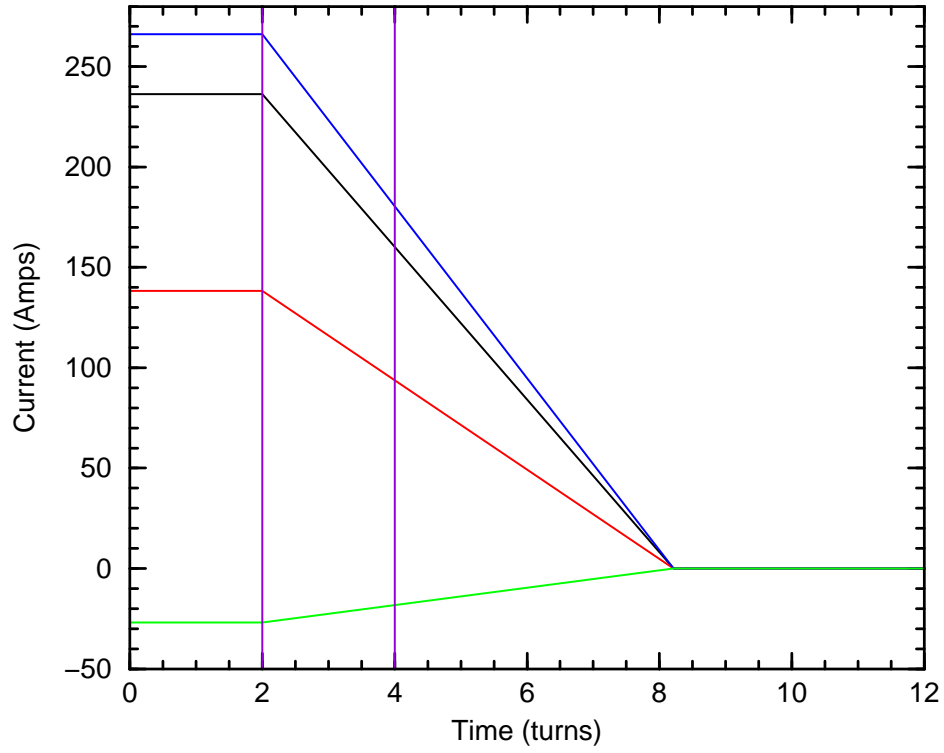


Figure 31: The black, red, blue, and green curves are the C1, C3, C7, and D1 dipole currents, respectively, for the injection bump function of **Figure 30**. The two-turn EBIS beam pulse occurs between the two violet lines. The **rate of fall** of the C7 dipole current (blue curve) is $4.16 \text{ A}/\mu\text{s}$.

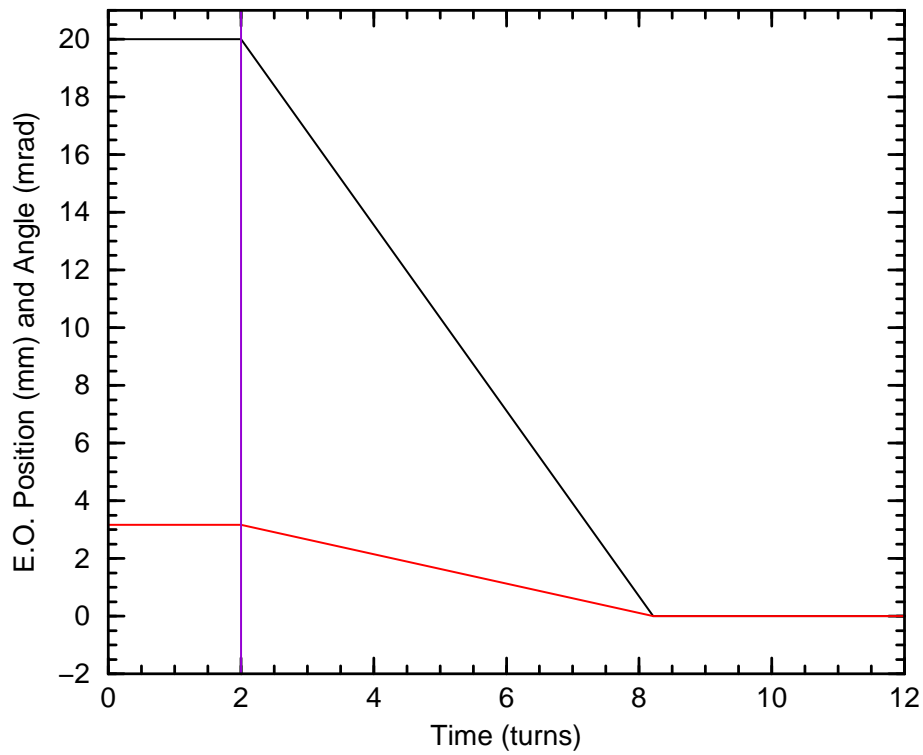


Figure 32: We consider the evolution of a **beam ellipse launched** from the injection point (i.e. the exit of the C3 inflector) **at time 2.0 turns** as indicated by the violet line above. **Figures 33** and **34** show the evolution of the beam ellipse. The necessary computations were carried out with Fortran program “EBinject” using MAD Twiss file TwissEBinject80.

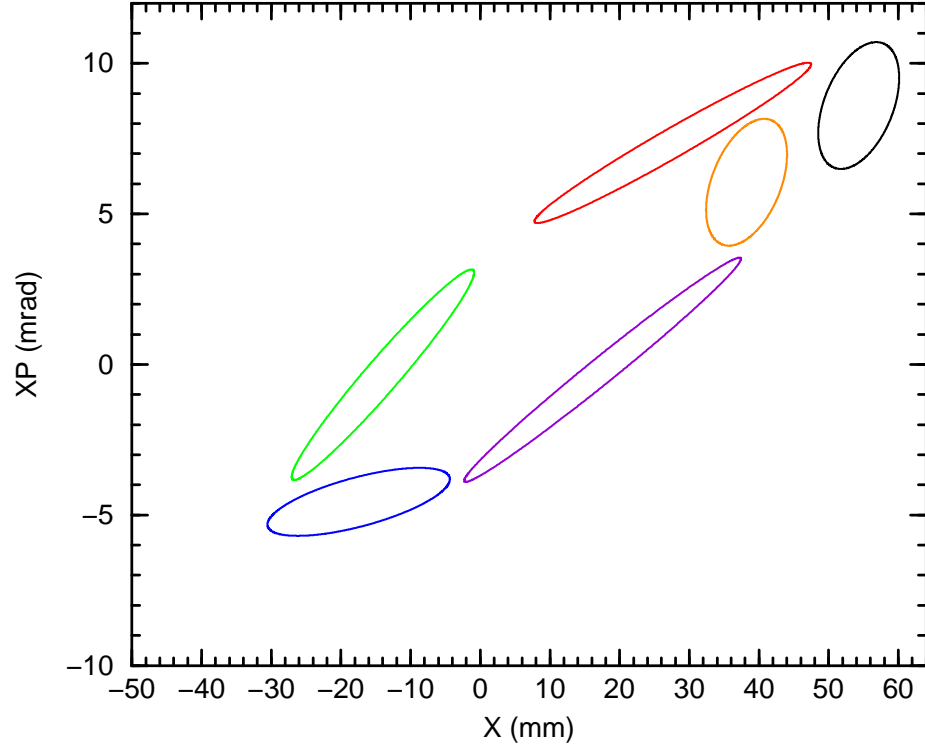


Figure 33: The black, red, green, blue, violet, and orange curves are beam ellipse after 0, 1, 2, 3, 4, and 5 turns, respectively, from launch time 2.0 turns. The initial (black) ellipse has parameter $B = 0.2793$ and area $\pi\epsilon_0 = 11.0\pi$ mm milliradians. The outer side of the 1 mm thick inflector septum is located at $X = 48.5$ mm. The tunes are $Q_H = 4.800$ and $Q_V = 4.810$.

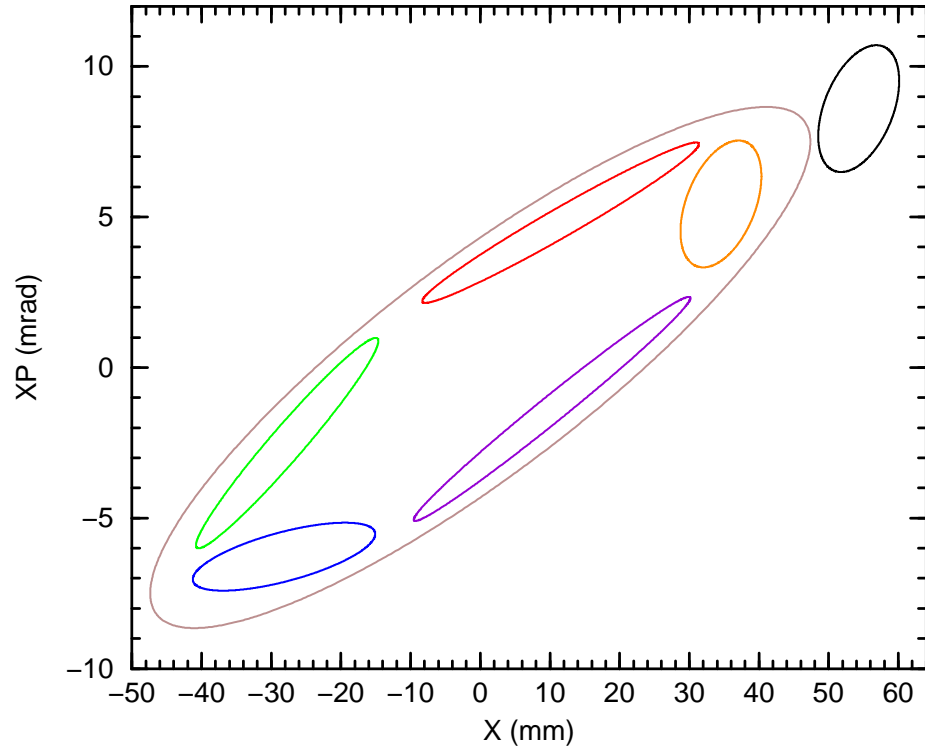


Figure 34: The black, red, green, blue, violet, and orange curves are the beam ellipse after 0, 6, 7, 8, 9, and 10 turns, respectively, from launch time 2.0 turns. The large brown ellipse is the machine acceptance, taken to be 204.5π mm milliradians. The initial (black) ellipse launched at time 2.0 turns therefore ends up well inside the machine acceptance after the bump has collapsed.

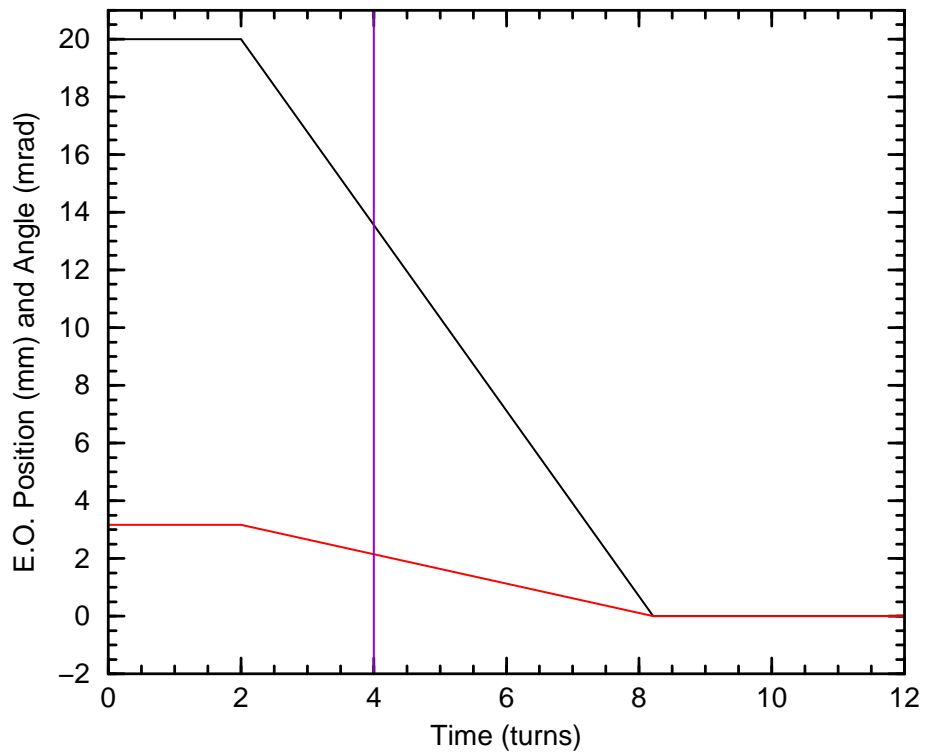


Figure 35: Now consider the evolution of a **beam ellipse launched** from the injection point **at time 4.0 turns** as indicated by the violet line above. **Figures 36** and **37** show the evolution of the beam ellipse. As before, the necessary computations were carried out with Fortran program “EBinject” using MAD Twiss file TwissEBinject80.

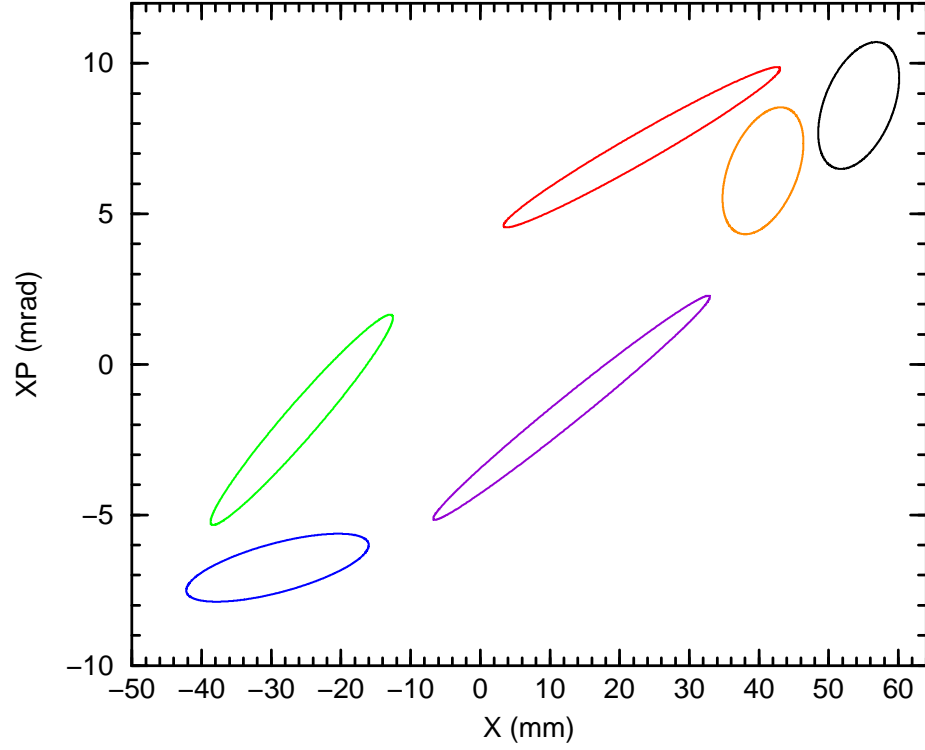


Figure 36: The black, red, green, blue, violet, and orange curves are the beam ellipse after 0, 1, 2, 3, 4, and 5 turns, respectively, from launch time 4.0 turns. The initial (black) ellipse has parameter $B = 0.2793$ and area $\pi\epsilon_0 = 11.0\pi$ mm milliradians. The outer side of the 1 mm thick inflector septum is located at $X = 48.5$ mm. The tunes are $Q_H = 4.800$ and $Q_V = 4.810$.

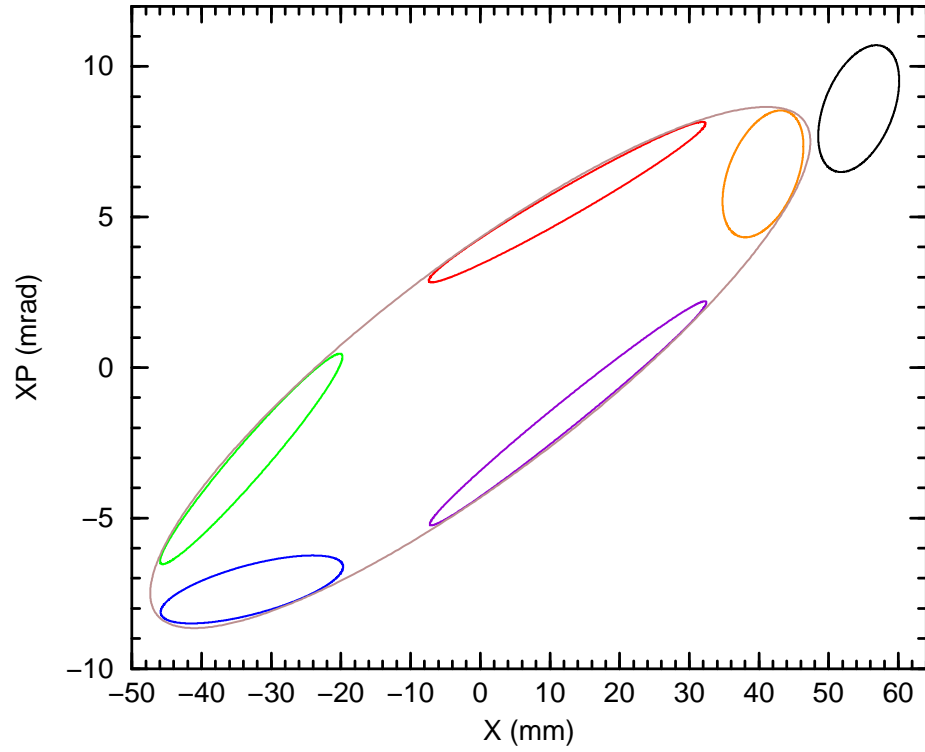


Figure 37: The black, red, green, blue, violet, and orange curves are the beam ellipse after 0, 6, 7, 8, 9, and 10 turns, respectively, from launch time 4.0 turns. The large brown ellipse is the machine acceptance, taken to be 204.5π mm milliradians. The initial (black) ellipse launched at time 4.0 turns therefore ends up inside but very close to the edge of the machine acceptance after the bump has collapsed.

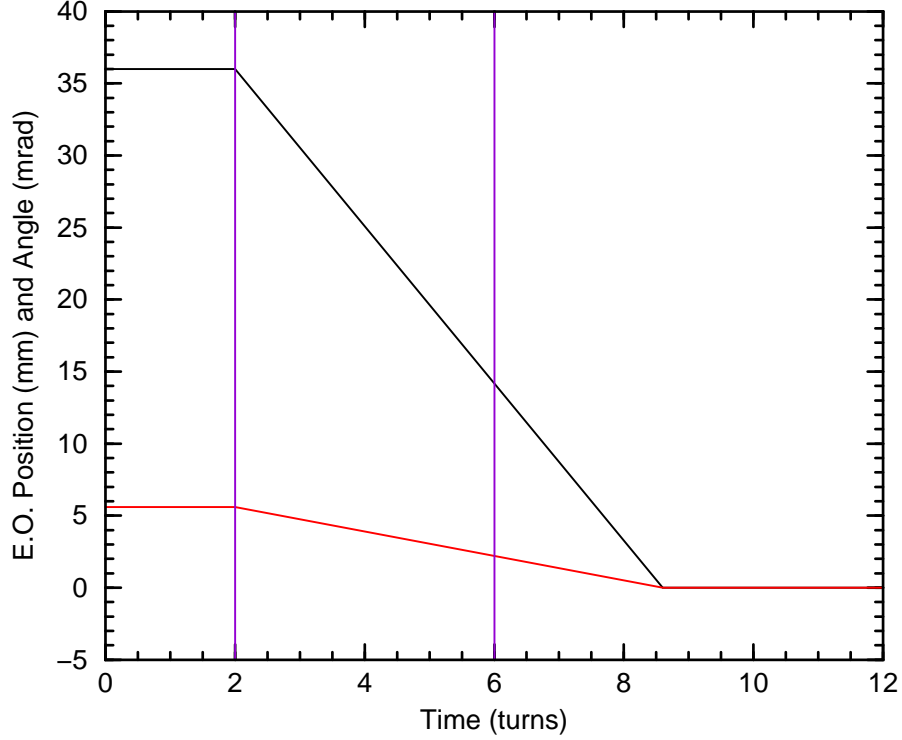


Figure 38: Here the black and red curves are the injection bump position X_c and angle $X'_c = -\alpha_I X_c / \beta_I$ as functions of time for **four-turn injection** of EBIS beams. The time axis is marked in turns, where one turn is $10.276 \mu\text{s}$. The beam pulse occurs between the two violet lines. **The horizontal and vertical tunes are now $Q_H = 4.70$ and $Q_V = 4.81$.** The MAD program gives $\alpha_I = -1.729$ and $\beta_I = 11.101 \text{ m}$. The magnetic rigidity is taken to be 1.255 Tm which is the expected maximum for EBIS beams.

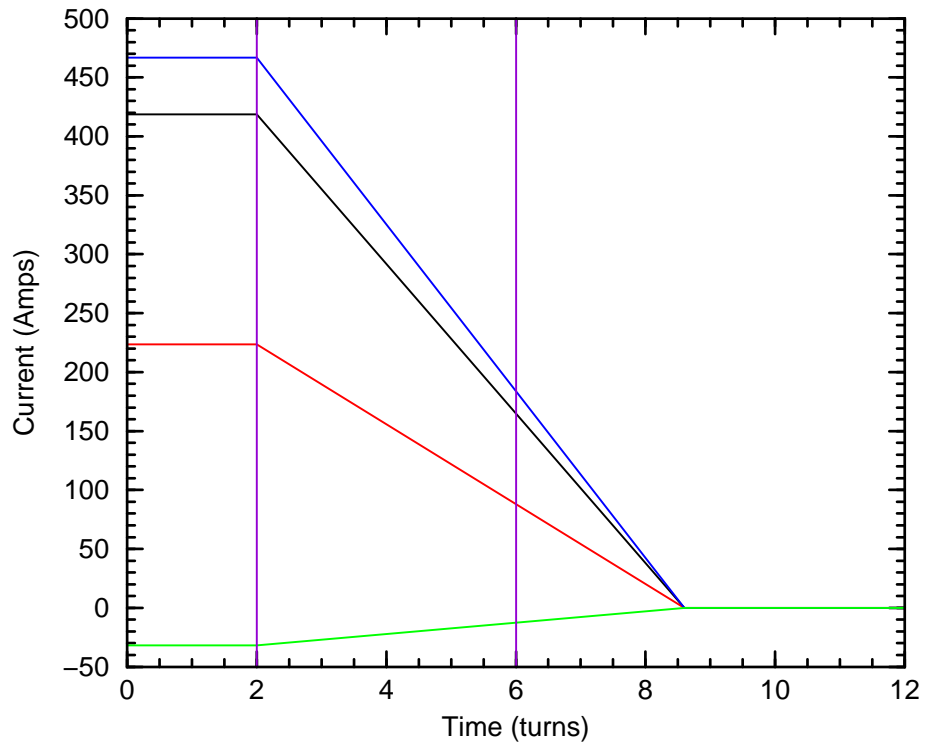


Figure 39: Here the black, red, blue, and green curves are the C1, C3, C7, and D1 dipole currents, respectively, for the injection bump function of **Figure 38**. The four-turn EBIS beam pulse occurs between the two violet lines. The **rate of fall** of the C7 dipole current (blue curve) is $6.87 \text{ A}/\mu\text{s}$.

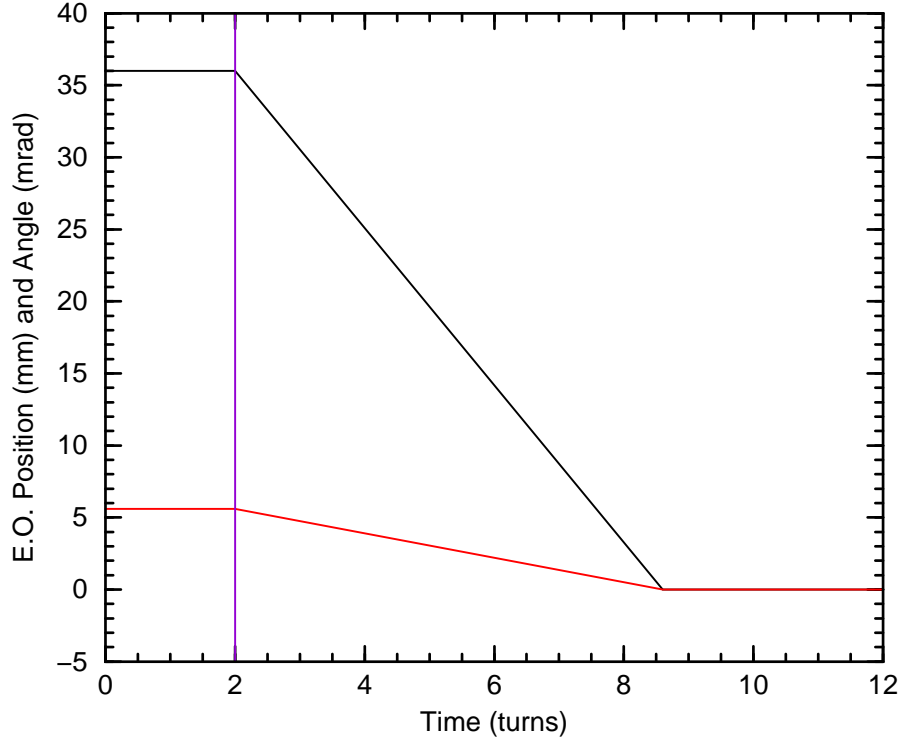


Figure 40: We consider the evolution of a **beam ellipse launched** from the injection point (i.e. the exit of the C3 inflector) **at time 2.0 turns** as indicated by the violet line above. **Figures 41** through **43** show the evolution of the beam ellipse. The necessary computations were carried out with Fortran program “EBinject” using MAD Twiss file TwissQH47QV481.

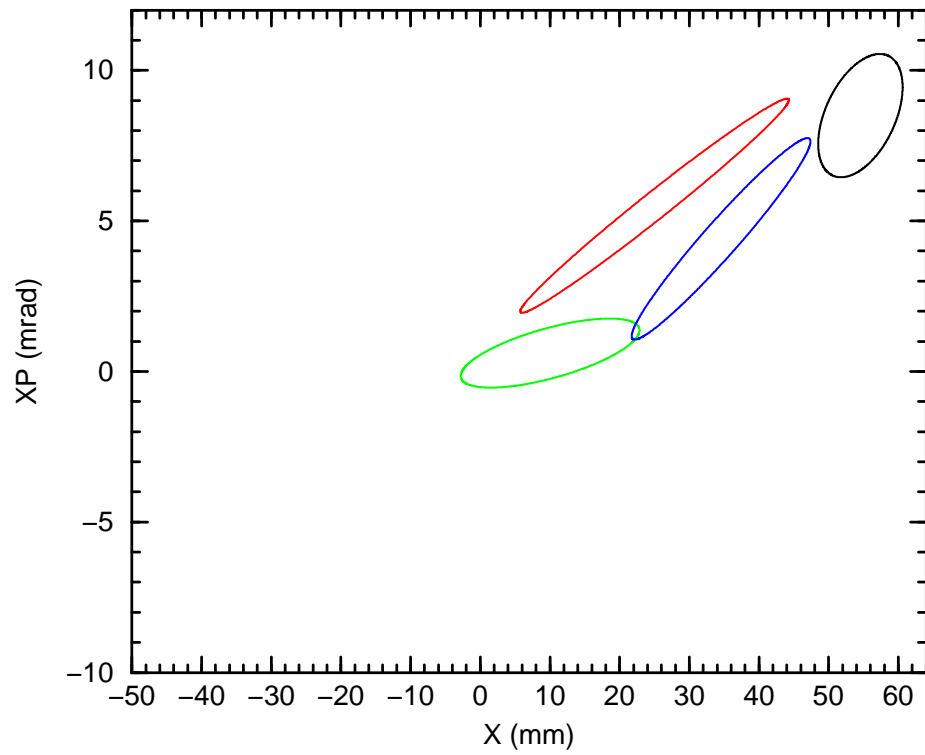


Figure 41: The black, red, green, and blue curves are the beam ellipse after 0, 1, 2, and 3 turns, respectively, from launch time 2.0 turns. The initial (black) ellipse has parameter $B = 0.3$ and area $\pi\epsilon_0 = 11.0\pi$ mm milliradians. The outer side of the 1 mm thick inflector septum is located at $X = 48.5$ mm. The tunes are $Q_H = 4.70$ and $Q_V = 4.81$.

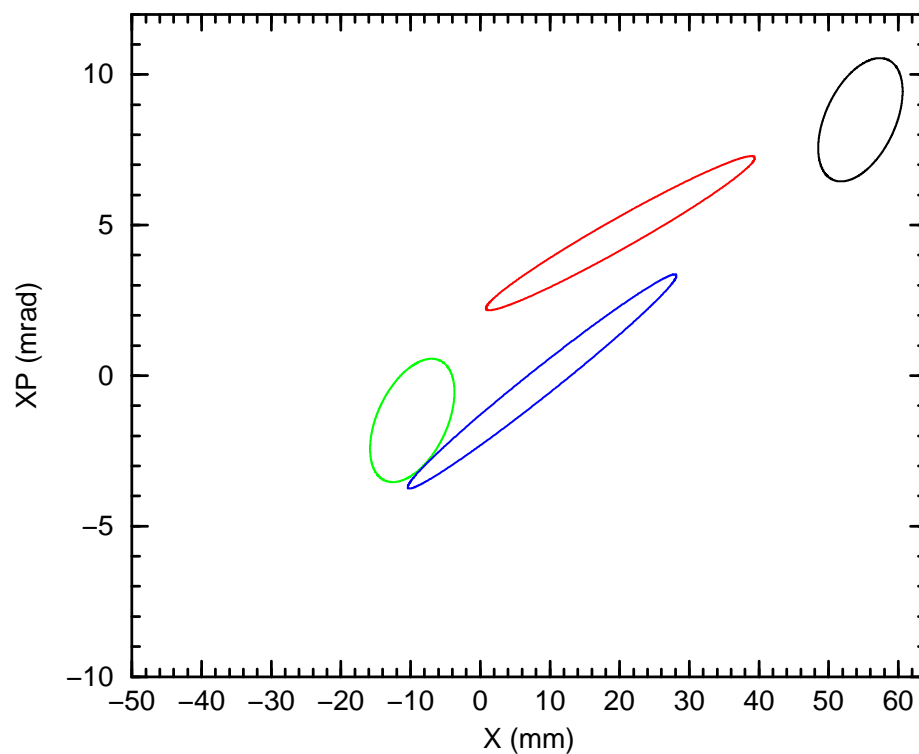


Figure 42: The black, red, green, blue, and violet curves are the beam ellipse after 0, 4, 5, and 6 turns, respectively, from launch time 2.0 turns. Note again that the injected ellipse moves with the falling bump.

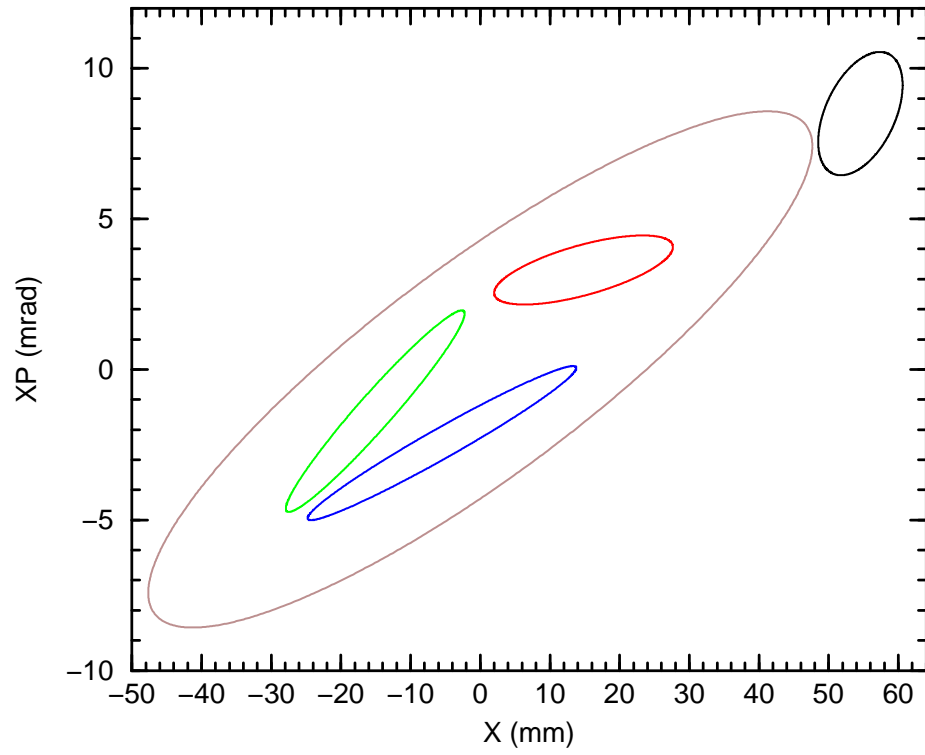


Figure 43: The black, red, green, and blue curves are the beam ellipse after 0, 7, 8, and 9 turns, respectively, from launch time 2.0 turns. The large brown ellipse is the machine acceptance, taken to be 204.5π mm milliradians. The initial (black) ellipse launched at time 2.0 turns therefore ends up well inside the machine acceptance after the bump has collapsed.

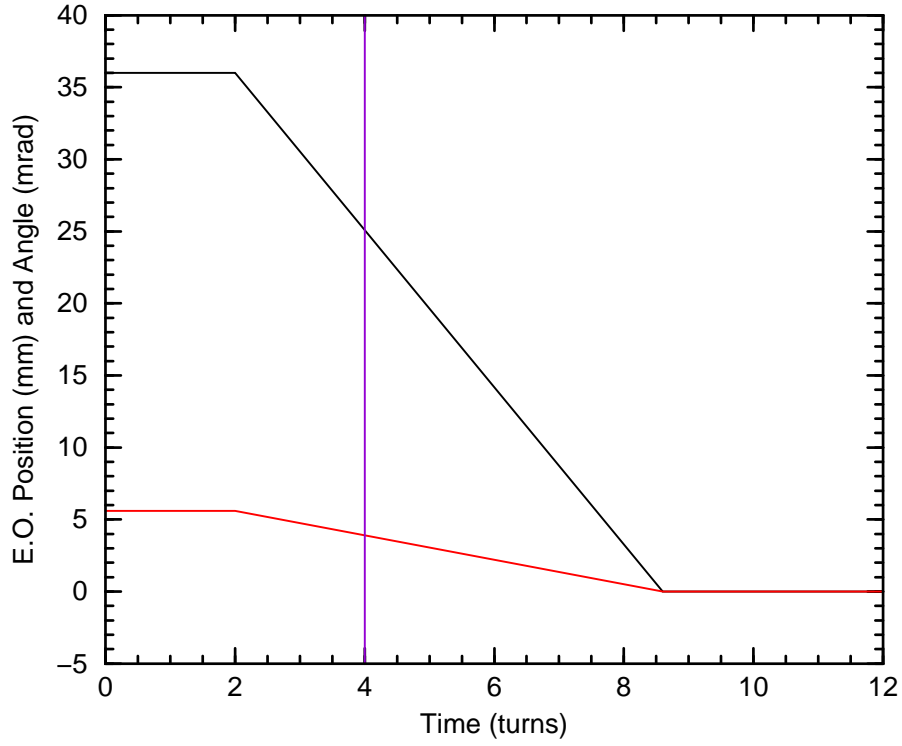


Figure 44: Now consider the evolution of a **beam ellipse launched** from the injection point **at time 4.0 turns** as indicated by the violet line above. **Figures 45** and **46** show the evolution of the beam ellipse. The necessary computations were carried out with Fortran program “EBinject” using MAD Twiss file TwissQH47QV481.

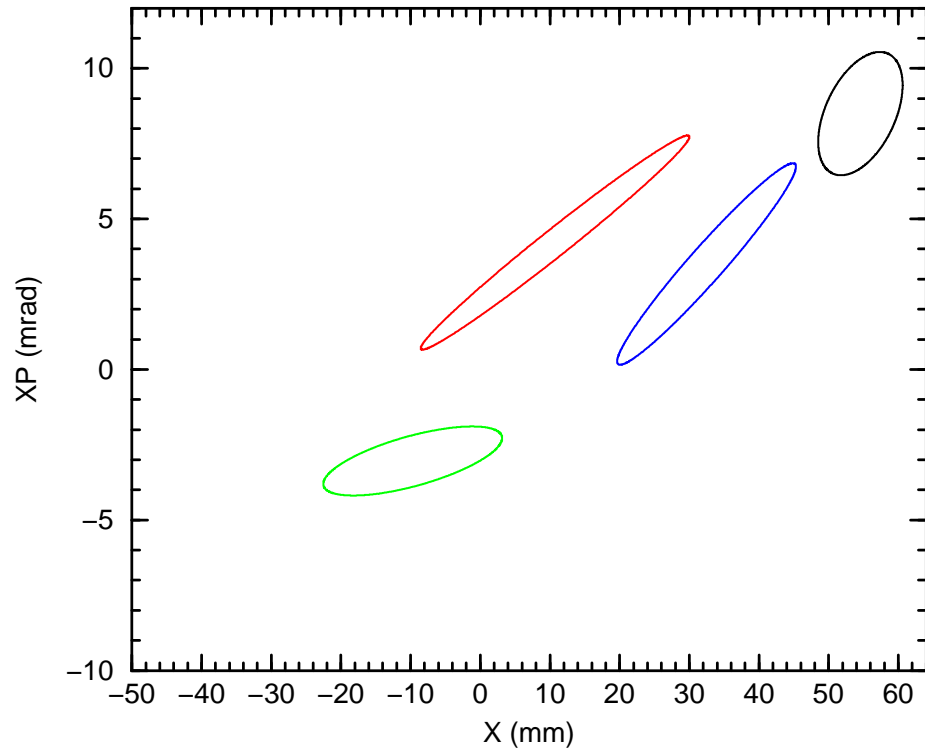


Figure 45: The black, red, green, and blue curves are the beam ellipse after 0, 1, 2, and 3 turns, respectively, from launch time 4.0 turns. As before, the initial (black) ellipse has parameter $B = 0.3$ and area $\pi\epsilon_0 = 11.0\pi$ mm milliradians. The outer side of the 1 mm thick inflector septum is located at $X = 48.5$ mm. The tunes are $Q_H = 4.70$ and $Q_V = 4.81$.

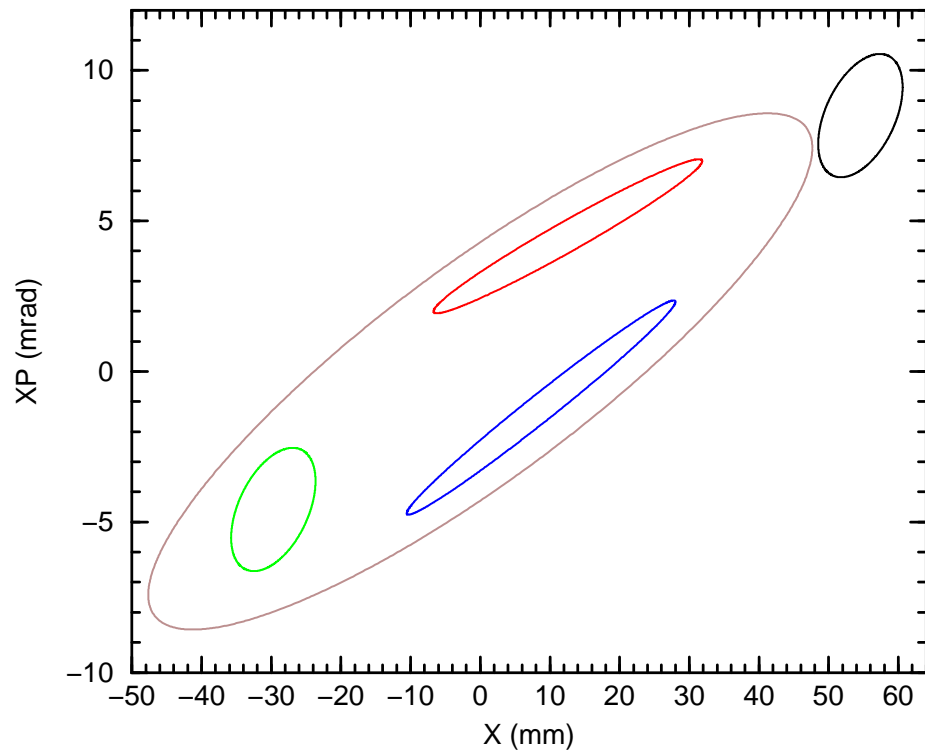


Figure 46: The black, red, green, and blue curves are the beam ellipse after 0, 4, 5, and 6 turns, respectively, from launch time 4.0 turns. The large brown ellipse is the machine acceptance, taken to be 204.5π mm milliradians. The initial (black) ellipse launched at time 4.0 turns therefore ends up well inside the machine acceptance after the bump has collapsed.

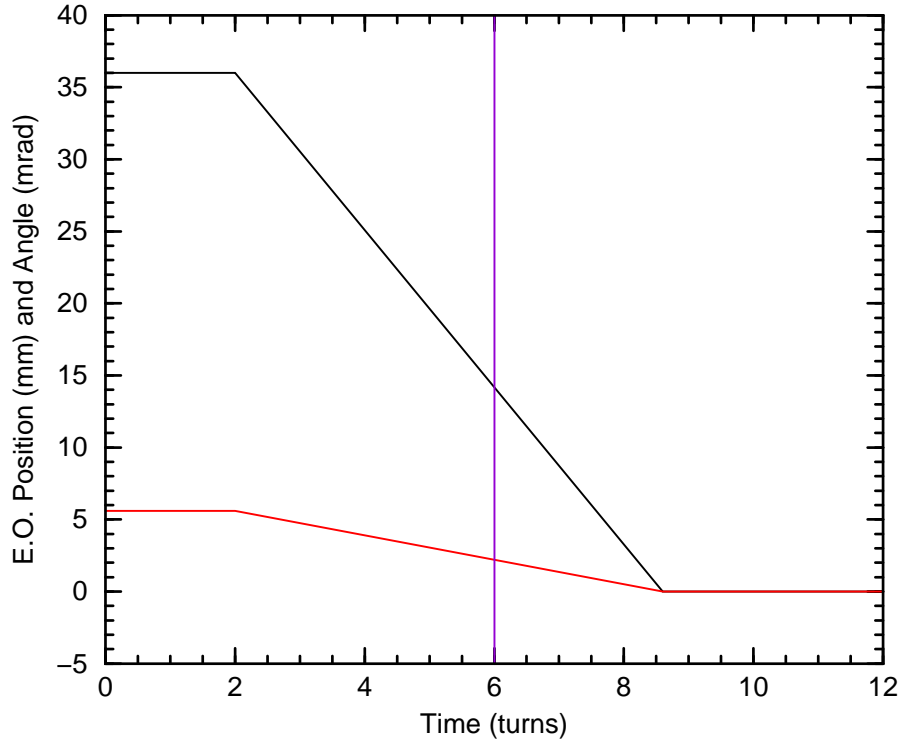


Figure 47: Now consider the evolution of a **beam ellipse launched** from the injection point **at time 6.0 turns** as indicated by the violet line above. **Figures 48** and **49** show the evolution of the beam ellipse. The necessary computations were carried out with Fortran program “EBinject” using MAD Twiss file TwissQH47QV481.

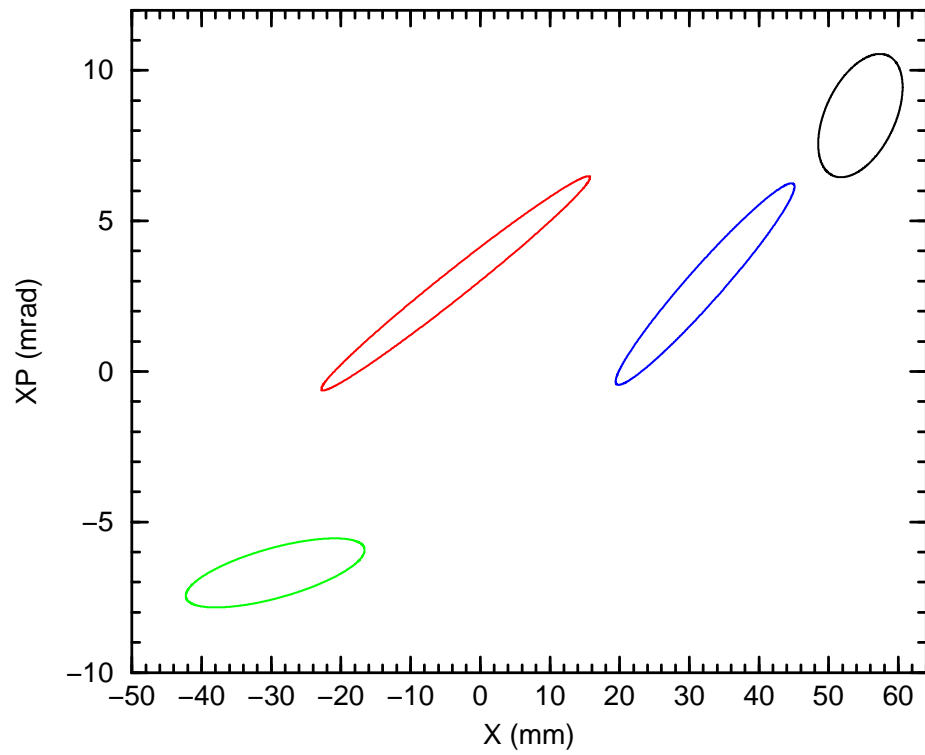


Figure 48: The black, red, green, and blue curves are the beam ellipse after 0, 1, 2, and 3 turns, respectively, from launch time 6.0 turns. As before, the initial (black) ellipse has parameter $B = 0.3$ and area $\pi\epsilon_0 = 11.0\pi$ mm milliradians. The outer side of the 1 mm thick inflector septum is located at $X = 48.5$ mm. The tunes are $Q_H = 4.70$ and $Q_V = 4.81$.

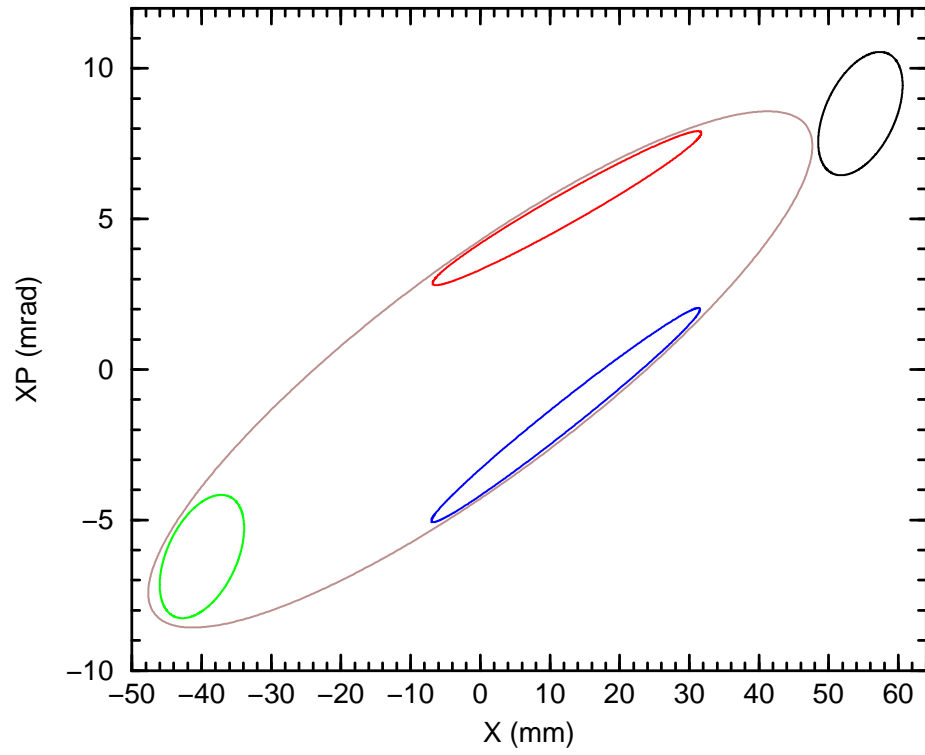


Figure 49: The black, red, green, and blue curves are the beam ellipse after 0, 4, 5, and 6 turns, respectively, from launch time 6.0 turns. The large brown ellipse is the machine acceptance, taken to be 204.5π mm milliradians. The initial (black) ellipse launched at time 6.0 turns therefore ends up inside but close to the edge of the machine acceptance after the bump has collapsed.