

# Numerical Study of Spin Depolarization in RHIC Due to Beam-Beam Collision

Y. Batygin

April 1997

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Alternating Gradient Synchrotron Department  
Relativistic Heavy Ion Collider Project  
BROOKHAVEN NATIONAL LABORATORY  
Upton, New York 11973

*Spin Note*

AGS/RHIC/SN No. 053

**Numerical Study of Spin Depolarization in  
RHIC Due to Beam-Beam Collision**

Y. Batygin and T. Katayama

April 25, 1997

*For Internal Distribution Only*

## Numerical study of spin depolarization in RHIC due to beam-beam collision

### 1. Beam parameters

Effect of beam-beam interaction on spin in RHIC was studied with beam parameters, presented in Table 1.

Table 1. Parameters of the interacted beams

Colliding particles	proton
Particle energy	250 GeV
Normalized emittance, 95%	$1 \pi$ cm mrad
Rms beam size at interaction point (IP), $\sigma$	0.08 mm
Collision angle	0
Number of IP's	2
Beam-beam tune shift per collision $\xi$	0.0125
Betatron tune per turn	$Q_x = 28.19$ $Q_y = 29.18$

Accelerator ring contains two interaction points (IP). In simulation, ring is represented as a combination of arc lattice and two short nonlinear lenses, which describe interaction points (see Fig. 1).

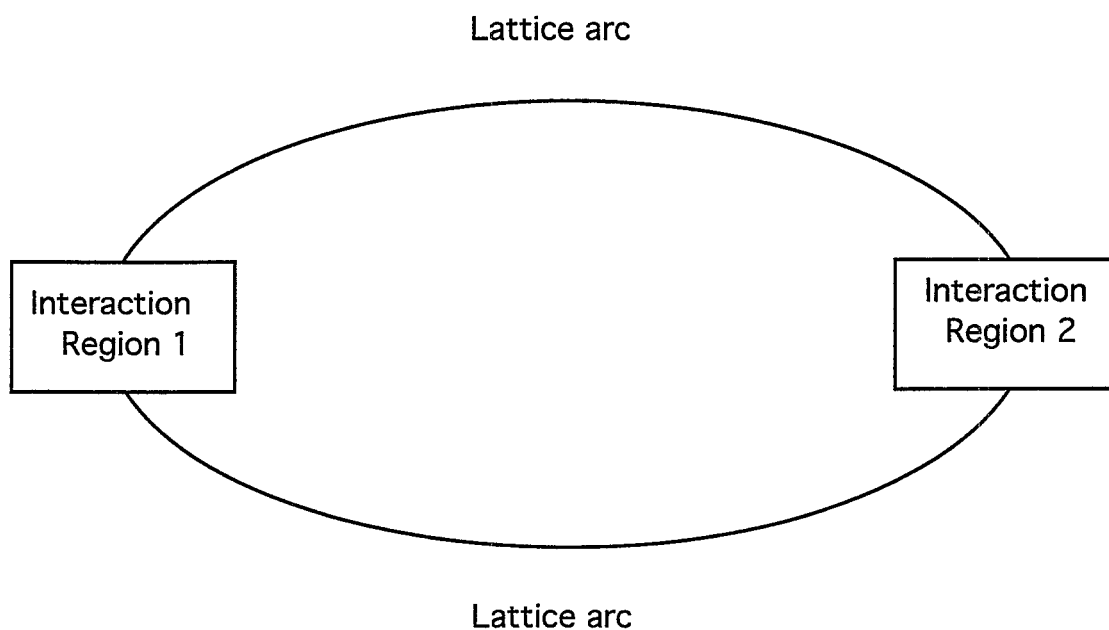


Fig. 1. Accelerator ring with 2 interaction points.

## 2. Numerical model

We use a two-dimensional particle model in coordinates  $(x, p_x = \beta^* \frac{dx}{dz})$ ,  $(y, p_y = \beta^* \frac{dy}{dz})$ , where  $\beta^*$  is a beta-function of the ring. The ring is supposed to have two colliding points, therefore the tune shift between sequent beam-beam interactions is equal to half of their values  $Q_x^* = \frac{Q_x}{2} = 14.095$ ;  $Q_y^* = \frac{Q_y}{2} = 14.59$ . Particle motion between subsequent collisions combines linear matrix with betatron angle  $\theta_x = 2\pi Q_x^*$  and matrix of beam-beam interaction, treated as a thin nonlinear lens

$$\begin{pmatrix} x_{n+1} \\ p_{x, n+1} \end{pmatrix} = \begin{pmatrix} \cos \theta_x & \sin \theta_x \\ -\sin \theta_x & \cos \theta_x \end{pmatrix} \begin{pmatrix} x_n \\ p_{x, n} + \Delta p_{x, n} \end{pmatrix}, \quad (1)$$

analogously for  $(y, p_y)$ . Beam-beam kick  $\Delta p_x$  is expressed as a result of interaction of test particle with opposite beam with Gaussian distribution function

$$\Delta p_x = 4\pi\xi x \frac{1 - \exp(-\frac{r^2}{2\sigma^2})}{(\frac{r^2}{2\sigma^2})}, \quad (2)$$

and similar for  $\Delta p_y$ . Parameter  $\xi$  is a beam-beam parameter, which characterizes strength of interaction :

$$\xi = \frac{N r_o \beta^*}{4\pi \sigma^2 \gamma}, \quad (3)$$

where  $N$  is a number of particles per bunch,  $r_o = \frac{q^2}{4\pi\epsilon_0 mc^2}$  is a classical particle radius,  $\sigma$  is a transverse standard deviation and  $\gamma$  is a particle energy.

Advance of spin vector  $\vec{S} = (S_x, S_y, S_z)$  is described by subsequent matrix transformation in lattice arc and in interaction point [1]. Matrix of spin advance in the arc between collisions is described by matrix of dipole magnet with bending angle  $\delta\theta = \pi$  :

$$\begin{pmatrix} S_x \\ S_y \\ S_z \end{pmatrix} = \begin{pmatrix} \cos(\omega\delta s) & 0 & \sin(\omega\delta s) \\ 0 & 1 & 0 \\ -\sin(\omega\delta s) & 0 & \cos(\omega\delta s) \end{pmatrix} \begin{pmatrix} S_{x,0} \\ S_{y,0} \\ S_{z,0} \end{pmatrix}, \quad (4)$$

$$\omega\delta s = (1+G\gamma) \delta\theta, \quad G = 1.7928.$$

Spin advance after crossing the interaction point is described as follow:

$$\begin{pmatrix} S_x \\ S_y \\ S_z \end{pmatrix} = \begin{pmatrix} 1 - a(B^2 + C^2) & ABa + Cb & ACa + Bb \\ ABa - Cb & 1 - a(A^2 + C^2) & BCa - Ab \\ ACa - Bb & BCa + Ab & 1 - a(A^2 + B^2) \end{pmatrix} \begin{pmatrix} S_{x,0} \\ S_{y,0} \\ S_{z,0} \end{pmatrix}, \quad (5)$$

$$A = \frac{P_x}{P_0}, \quad B = \frac{P_y}{P_0}, \quad C = \frac{P_z}{P_0}, \quad P_0 = \sqrt{P_x^2 + P_y^2 + P_z^2}, \quad (6)$$

$$a = 1 - \cos(P_0 \delta z), \quad b = \sin(P_0 \delta z), \quad (7)$$

where  $\delta z$  is an interaction distance, defined below. Vector  $\vec{P} = (P_x, P_y, P_z)$  in case of head-on beam-beam collision is as follow:

$$P_x = \frac{1}{B\rho} \left[ (1+G\gamma)B_x + \left(G\gamma + \frac{\gamma}{1+\gamma}\right) \frac{\beta E_y}{c} \right],$$

$$P_y = \frac{1}{B\rho} \left[ (1+G\gamma)B_y - \left(G\gamma + \frac{\gamma}{1+\gamma}\right) \frac{\beta E_x}{c} \right], \quad (8)$$

$$P_z = 0,$$

where  $B\rho$  is a rigidity of particles,  $\vec{E} = (E_x, E_y, 0)$  is an electrical field and  $\vec{B} = (B_x, B_y, 0)$  is a magnetic field of the opposite bunch. Due to Lorentz transformations, components of electromagnetic field of the opposite bunch are connected via relationships

$$B_x = \beta \frac{E_y}{c}, \quad B_y = -\beta \frac{E_x}{c}. \quad (9)$$

Taking into account, that interacted particles are ultra relativistic  $\beta \approx 1$ ,  $\gamma \gg 1$  and particle rigidity is  $B\rho = m_0 c \beta \gamma / q$ , the vector  $\vec{P}$  is simplified:

$$P_x = \frac{q E_y}{m_0 c^2 \gamma} \left[ (1+G\gamma) + \left(G\gamma + \frac{\gamma}{1+\gamma}\right) \right] \approx 2 G \frac{q E_y}{m_0 c^2},$$

$$P_y = \frac{q E_x}{m_0 c^2 \gamma} \left[ - (1+G\gamma) - \left(G\gamma + \frac{\gamma}{1+\gamma}\right) \right] \approx - 2 G \frac{q E_x}{m_0 c^2}. \quad (10)$$

Let us express matrix parameters  $(P_x \delta z)$ ,  $(P_y \delta z)$  via beam-beam parameter  $\xi$ . Electrostatic field of the opposite bunch in the laboratory frame can be approximated as a round Gaussian bunch with length  $l$  and peak current  $I = \frac{q N \beta c}{l}$ :

$$E_r = \frac{q_1 N}{2\pi\epsilon_0 l r} [1 - \exp(-\frac{r^2}{2\sigma^2})] = \frac{I}{2\pi\epsilon_0 \beta c r} [1 - \exp(-\frac{r^2}{2\sigma^2})]; \quad (11)$$

$$E_x = E_r \frac{x}{r}, \quad E_y = E_r \frac{y}{r}. \quad (12)$$

Substitution of the expression of electrostatic field into eq. (10) gives expression for vector  $\vec{P}$

$$P_x = 4G \frac{I}{I_c} \frac{y}{r^2} [1 - \exp(-\frac{r^2}{2\sigma^2})], \quad (13)$$

$$P_y = -4G \frac{I}{I_c} \frac{x}{r^2} [1 - \exp(-\frac{r^2}{2\sigma^2})],$$

where  $I_c = 4\pi\epsilon_0 m_0 c^3/q = (A/Z) \cdot 3.13 \cdot 10^7$  Amp is a characteristic value of the beam current. Beam-beam parameter  $\xi$  in eq. (3) can be rewritten as follow:

$$\xi = \frac{\beta^*}{4\pi} \frac{I}{I_c} \frac{l}{\gamma \sigma^2}. \quad (14)$$

To define the interaction distance  $\delta z$ , let us suppose, that at the time moment  $t = 0$  test particle enters the opposite bunch (Fig. 2a). Equation of motion of test particle is  $z_1 = v_1 t$ . Equation of motion of the right edge of the bunch is  $z_2 = l - v_2 t$ . Test particle will leave opposite bunch, when  $z_1 = z_2$ , or after time interval  $t = \frac{l}{v_1 + v_2}$  (Fig. 2 b). Therefore, the coordinate of test particle at this moment  $z_1 = v_1 t$ , which is equal to the interaction distance  $\delta z$ , will be

$$\delta z = v_1 t = l \frac{v_1}{v_1 + v_2} = \frac{l}{2}. \quad (15)$$

Taking into account eqs.(14), (15), the parameters of spin matrix  $P_x \delta z$ ,  $P_y \delta z$  can be expressed as follow

$$P_x \delta z = P_x \frac{l}{2} = 4\pi G \gamma \xi \frac{y}{\beta^*} \left[ \frac{1 - \exp(-\frac{r^2}{2\sigma^2})}{(\frac{r^2}{2\sigma^2})} \right], \quad (16)$$

$$P_y \delta z = P_y \frac{l}{2} = -4\pi G \gamma \xi \frac{x}{\beta^*} \left[ \frac{1 - \exp(-\frac{r^2}{2\sigma^2})}{(\frac{r^2}{2\sigma^2})} \right].$$

### 3. Results of simulations

Numerical simulation of spin depolarization in presence of beam-beam interaction was performed for two regimes:

- (i) without noise in beam-beam kick (see Figs. 4-7) ,
- (ii) with 1% noise in parameter  $\sigma$ , eq. (2) (see Figs. 8-11).

In previous note [2] it was demonstrated, that incorporation of noise in beam-beam kick results in slow diffusion of beam sizes and expansion of beam emittances.

Beam was represented as a combination of 5000 modeling particles. Particle distribution in real space (see Fig.3) as well as in phase space was Gaussian. Initial conditions for spin were chosen as follow:

$$S_x = 0, \quad S_y = 1, \quad S_z = 0 . \quad (17)$$

The given value of normalized beam emittance  $\varepsilon = 1 \pi \text{ cm mrad}$  contains 95% of particles, which is supposed to be 6 times larger, than rms beam emittance

$$\varepsilon = 6 \sqrt{\langle x^2 \rangle \langle p_x^2 \rangle - \langle xp_x \rangle^2} . \quad (18)$$

Therefore, the value of beta -function is defined via beam parameters as follow

$$\beta^* = \frac{6 \sigma^2 \gamma}{\varepsilon} = 1.02 \text{ m} . \quad (19)$$

In Fig. 4 stable particle motion in phase space in presence of beam-beam interaction without noise is shown. Particles move along tilted ellipses in phase space and trajectories remain closed, which results in stable values of beam envelopes and beam emittances (Fig.5). Spin distribution quickly stabilized and remains approximately the same (Figs. 6 a-d). Meanwhile, the tail of distribution of  $S_y$  component become longer (not visible in Figs. 6 a-d). It is confirmed by calculation of average values of spin components (Fig. 7). The average value of  $S_y$  component slowly decreases, while average values of  $S_x$ ,  $S_z$  remain close to zero.

Introduction of noise in beam-beam kick results in beam-beam instability. Particle trajectories in phase space become unclosed (Fig. 8). Beam envelopes and beam emittances increase with time (Fig. 9). Spin distribution becomes wider, than in the case of absence of noise (Figs. 10 a-d). Decreasing of average of  $S_y$  component is faster and oscillation of average values of  $S_x$ ,  $S_z$  around zero are larger (Fig. 11). But in both regimes the spin distribution after long-term interaction ( $0.5 \cdot 10^6$  turns) is close to the initial spin distribution. Finally one can conclude, that beam-beam interaction has a little effect on spin depolarization.



## References

1. T.Katayama, "Basic Theory of Spin Dynamics in RHIC", RIKEN Internal Note.
2. Y.Batygin and T.Katayama, "Beam-beam simulation at RHIC". Spin Note AGS/RHIC/SN No. 052, February 24, 1997

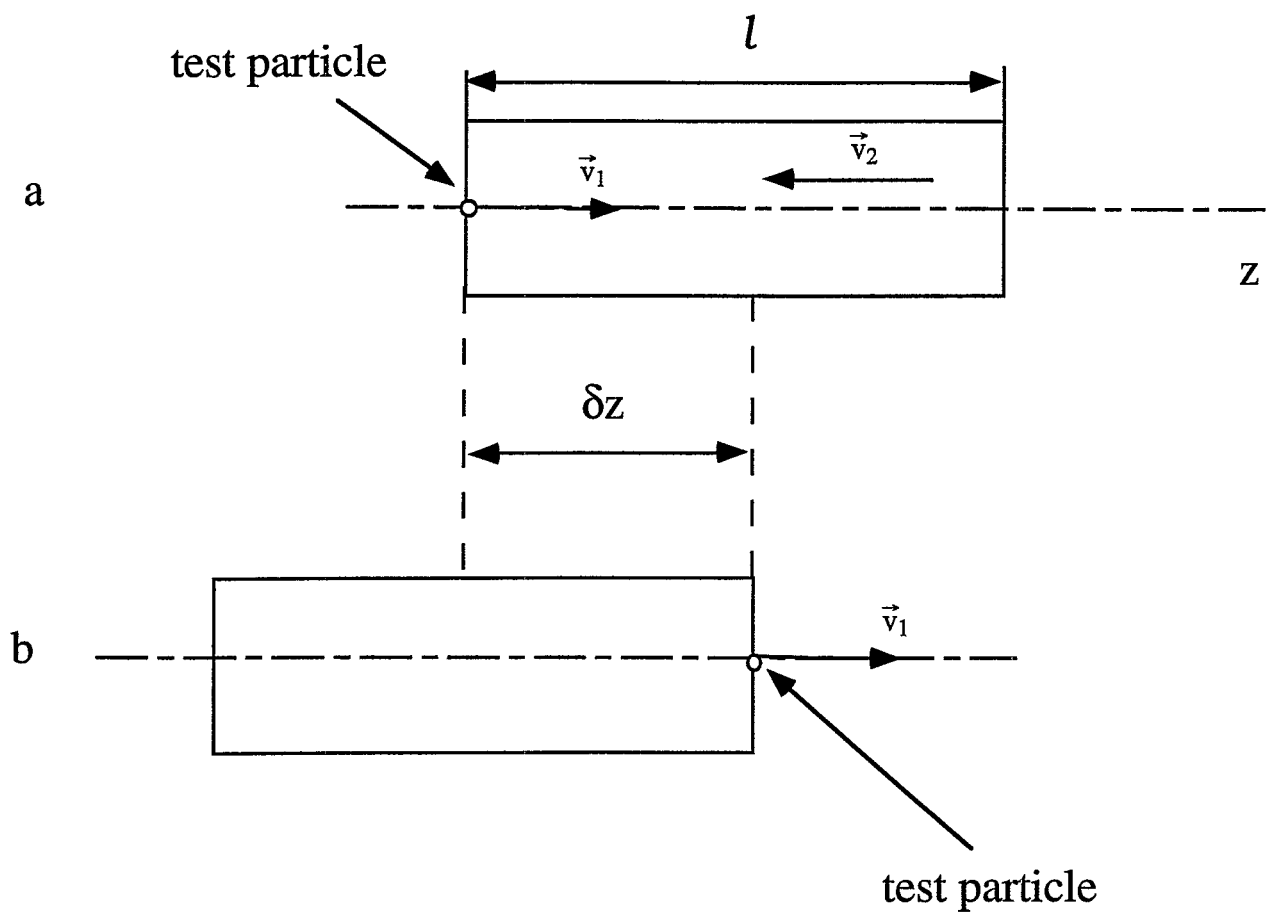
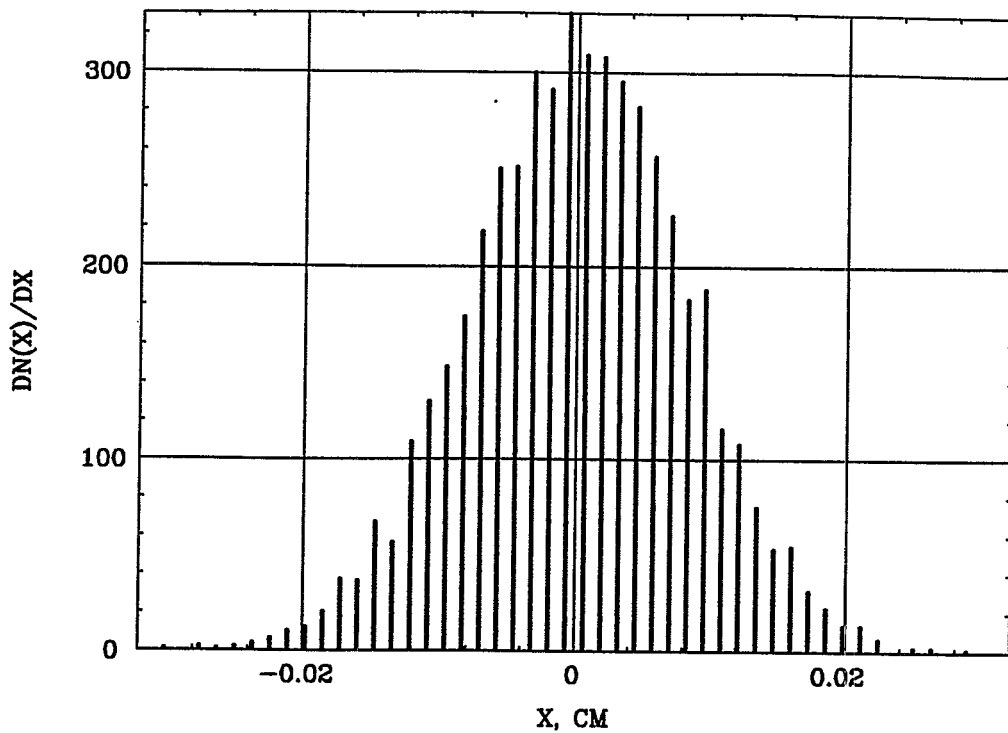


Fig. 2. Position of test particle with respect to opposite bunch:  
(a) before interaction;  
(b) after interaction.

### Particle X-Distribution



### Particle Y-Distribution

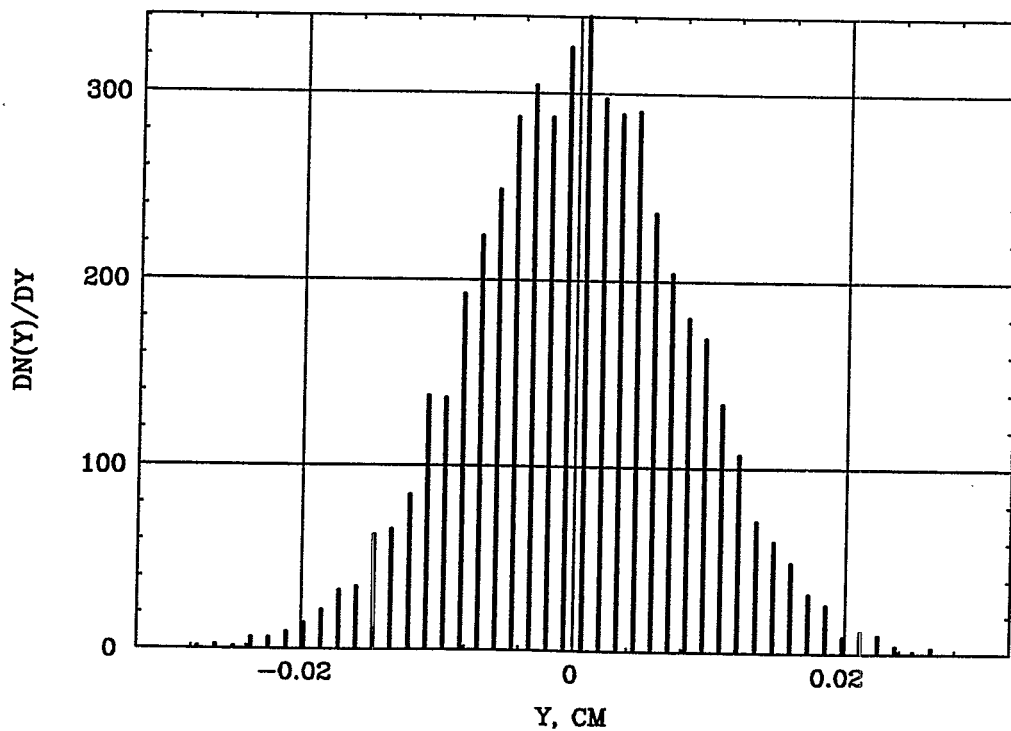


Fig. 3. Gaussian particle distribution in real space

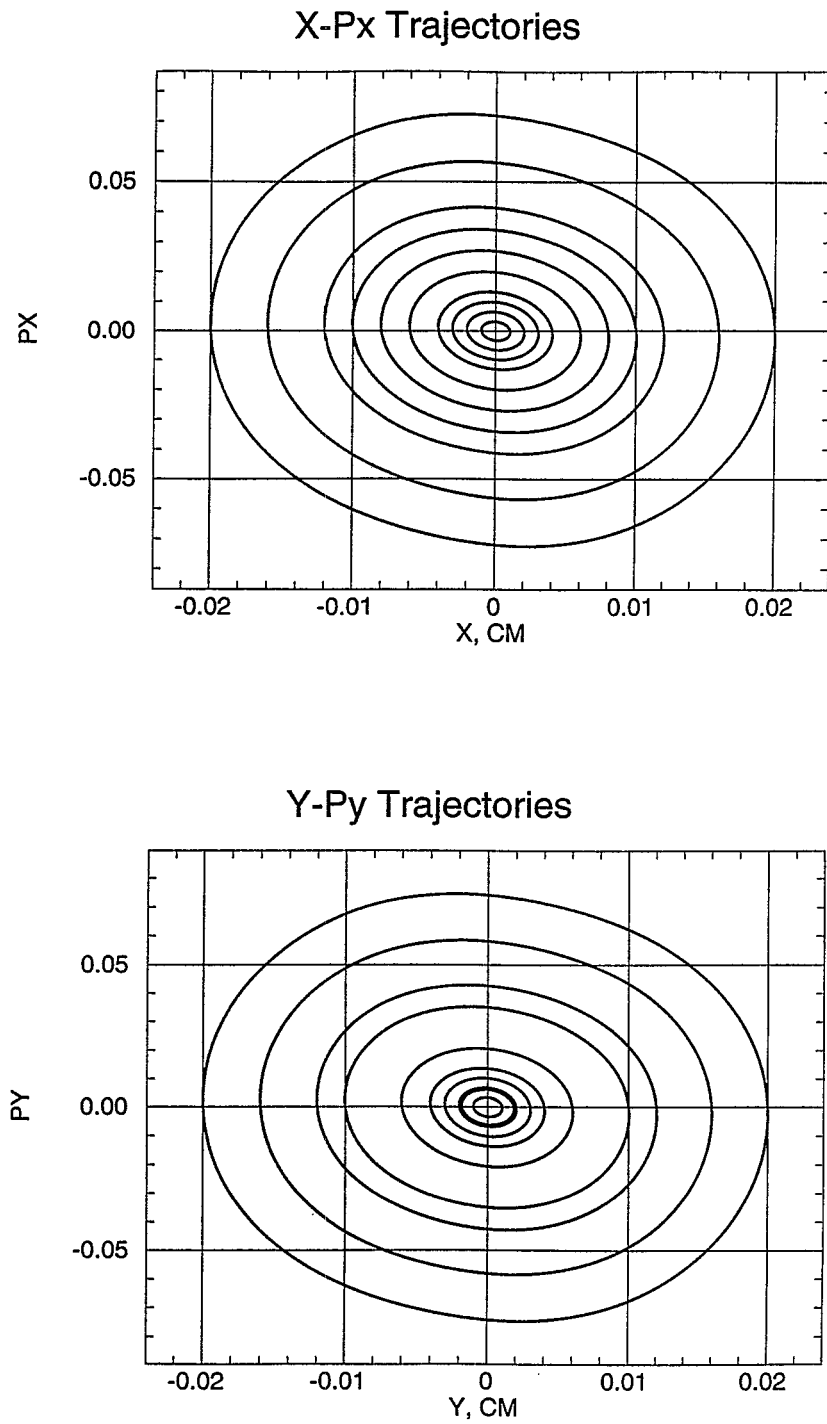


Fig. 4. Stable particle trajectories in phase space in presence of beam-beam interaction without noise.

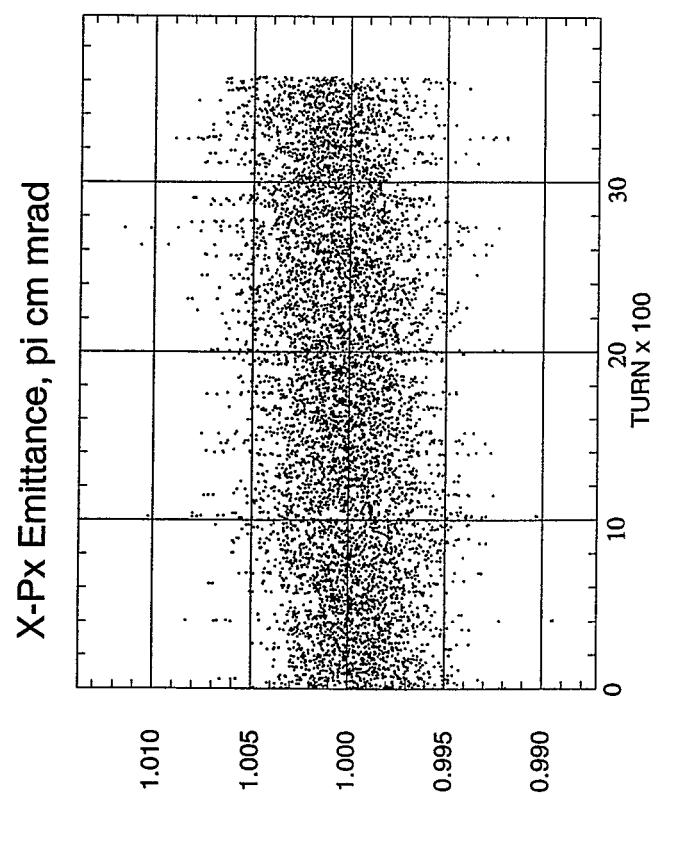
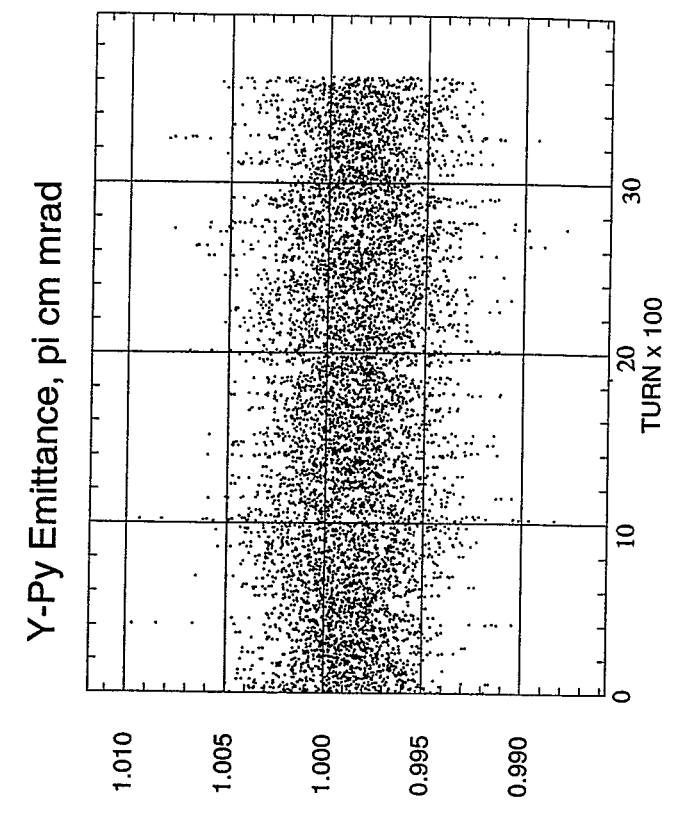
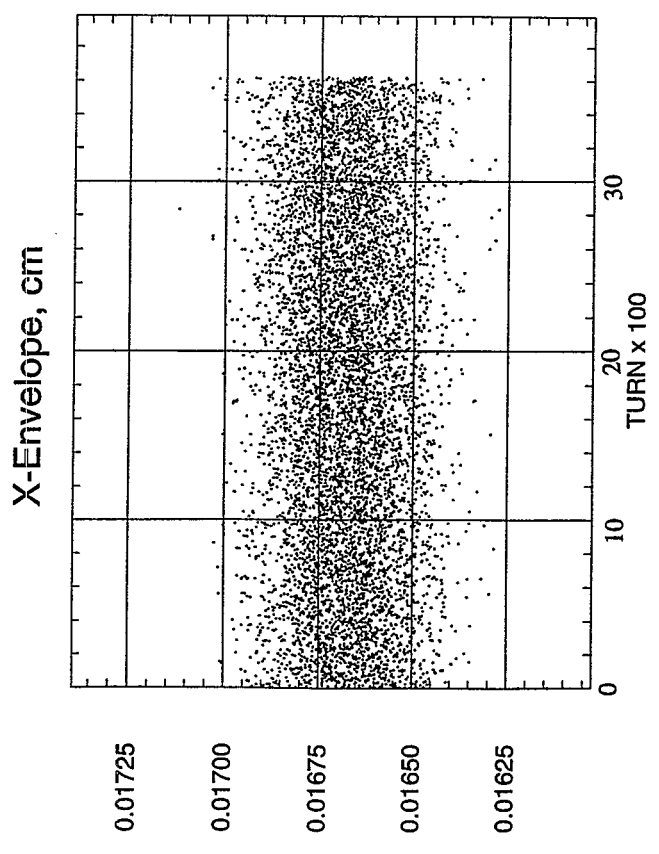
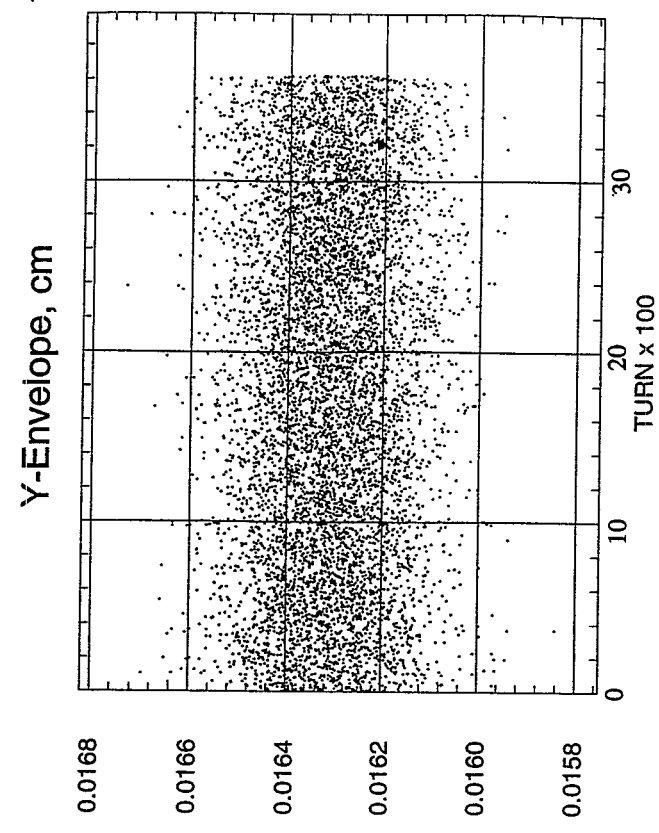
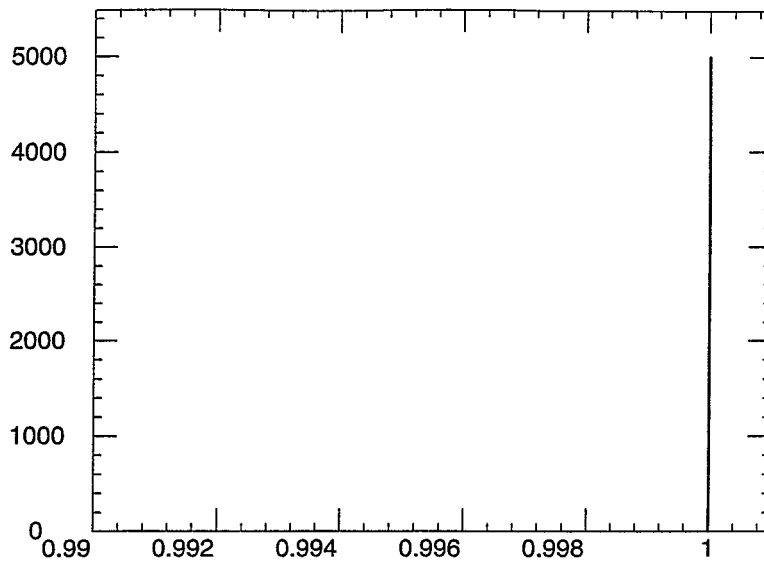
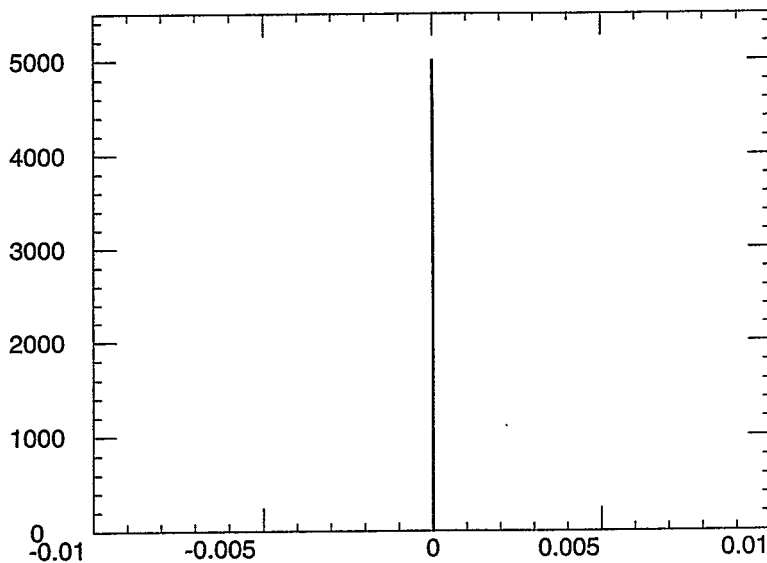


Fig. 5. Envelopes and beam emittances in presence of beam-beam interaction without noise.

Spin distribution  $dN/dS_y$



Spin distribution  $dN/dS_x$



Spin distribution  $dN/dS_z$

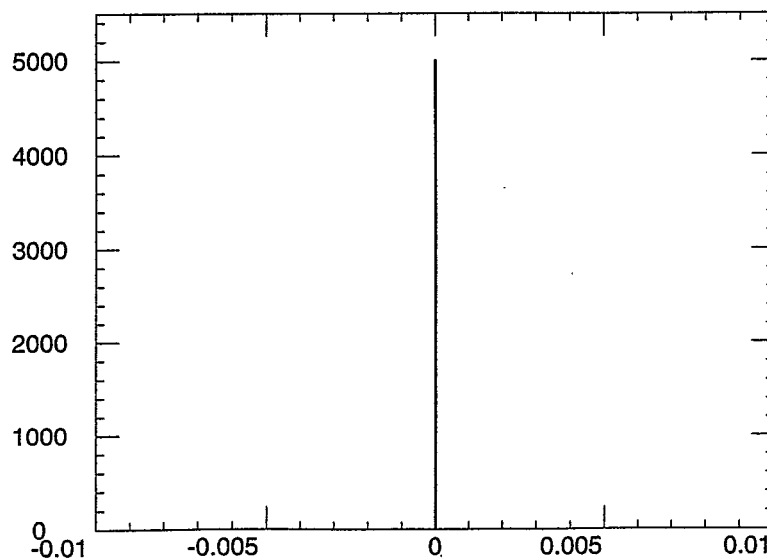


Fig. 6a. Initial spin distribution.

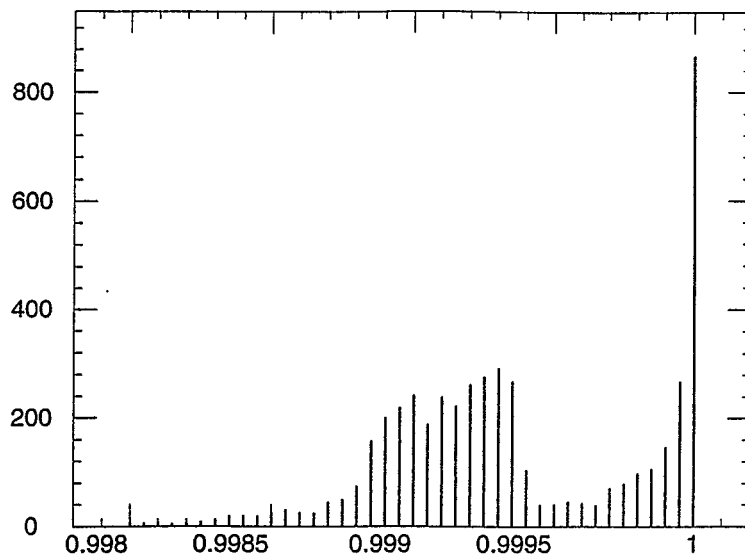
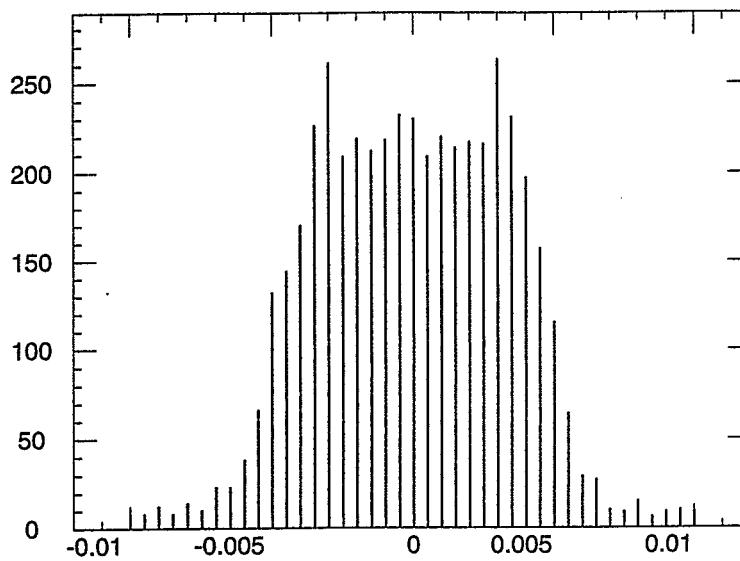
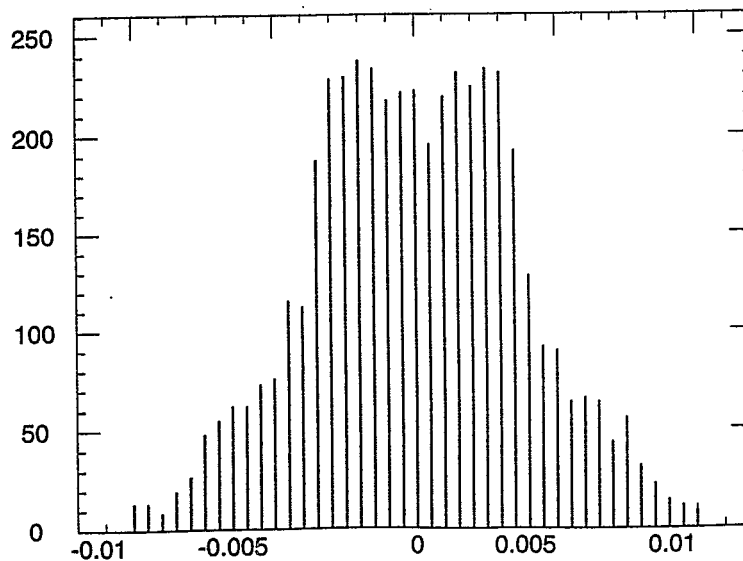
Spin distribution  $dN/dS_x$ Spin distribution  $dN/dS_z$ 

Fig. 6b. Spin distribution after 125 000 turns in presence of beam-beam interaction without noise.

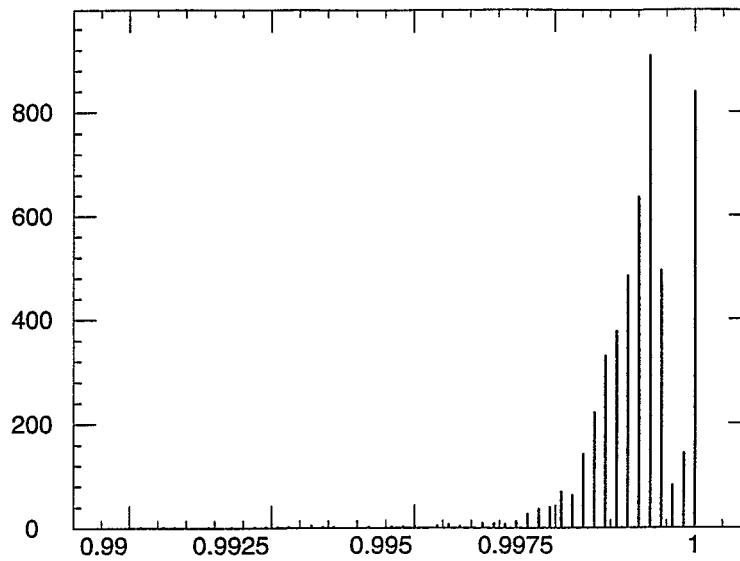
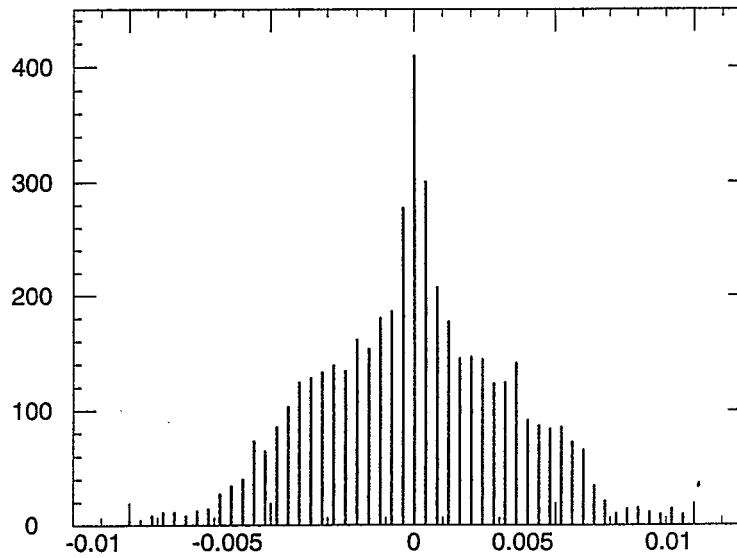
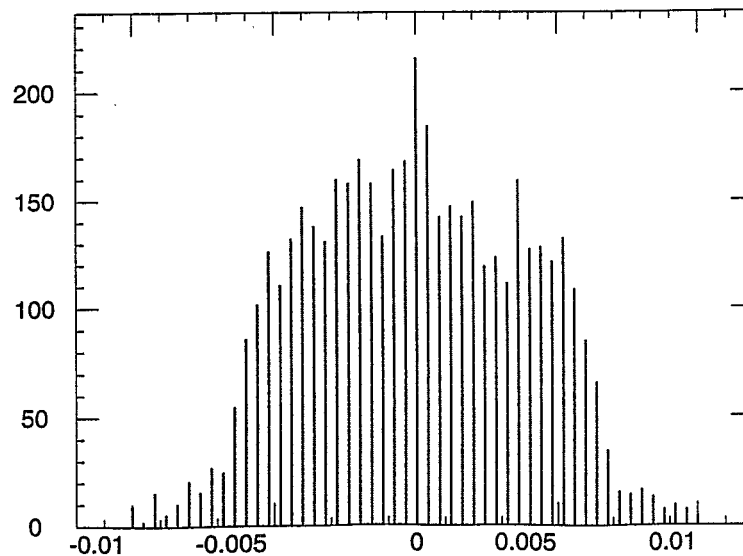
Spin distribution  $dN/dSx$ .Spin distribution  $dN/dSz$ .

Fig. 6c. Spin distribution after 250 000 turns in presence of beam-beam interaction without noise.



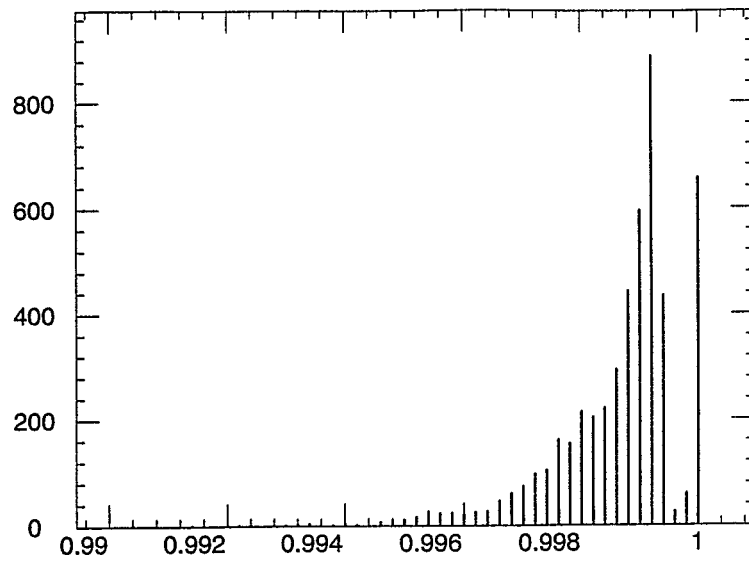
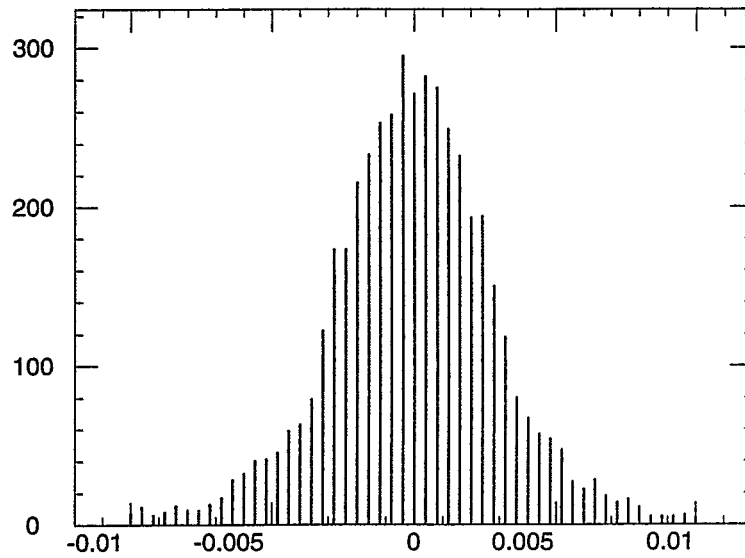
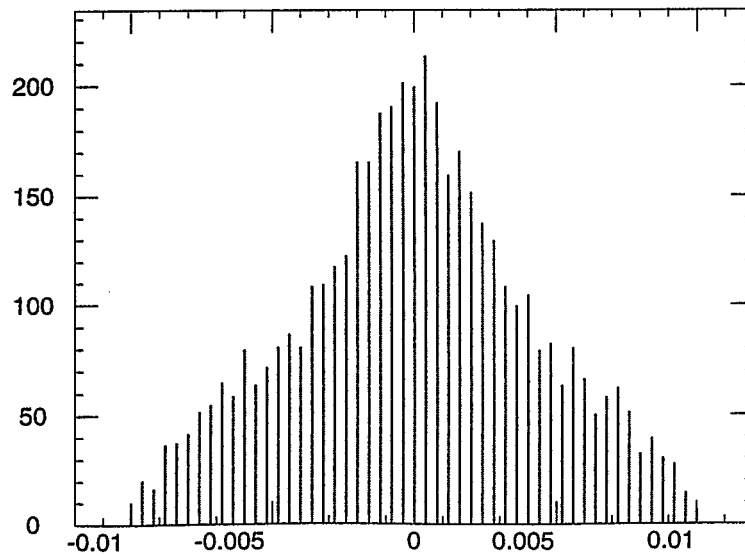
Spin distribution  $dN/dS_x$ Spin distribution  $dN/dS_z$ 

Fig. 6d. Spin distribution after 500 000 turns in presence of beam-beam interaction without noise

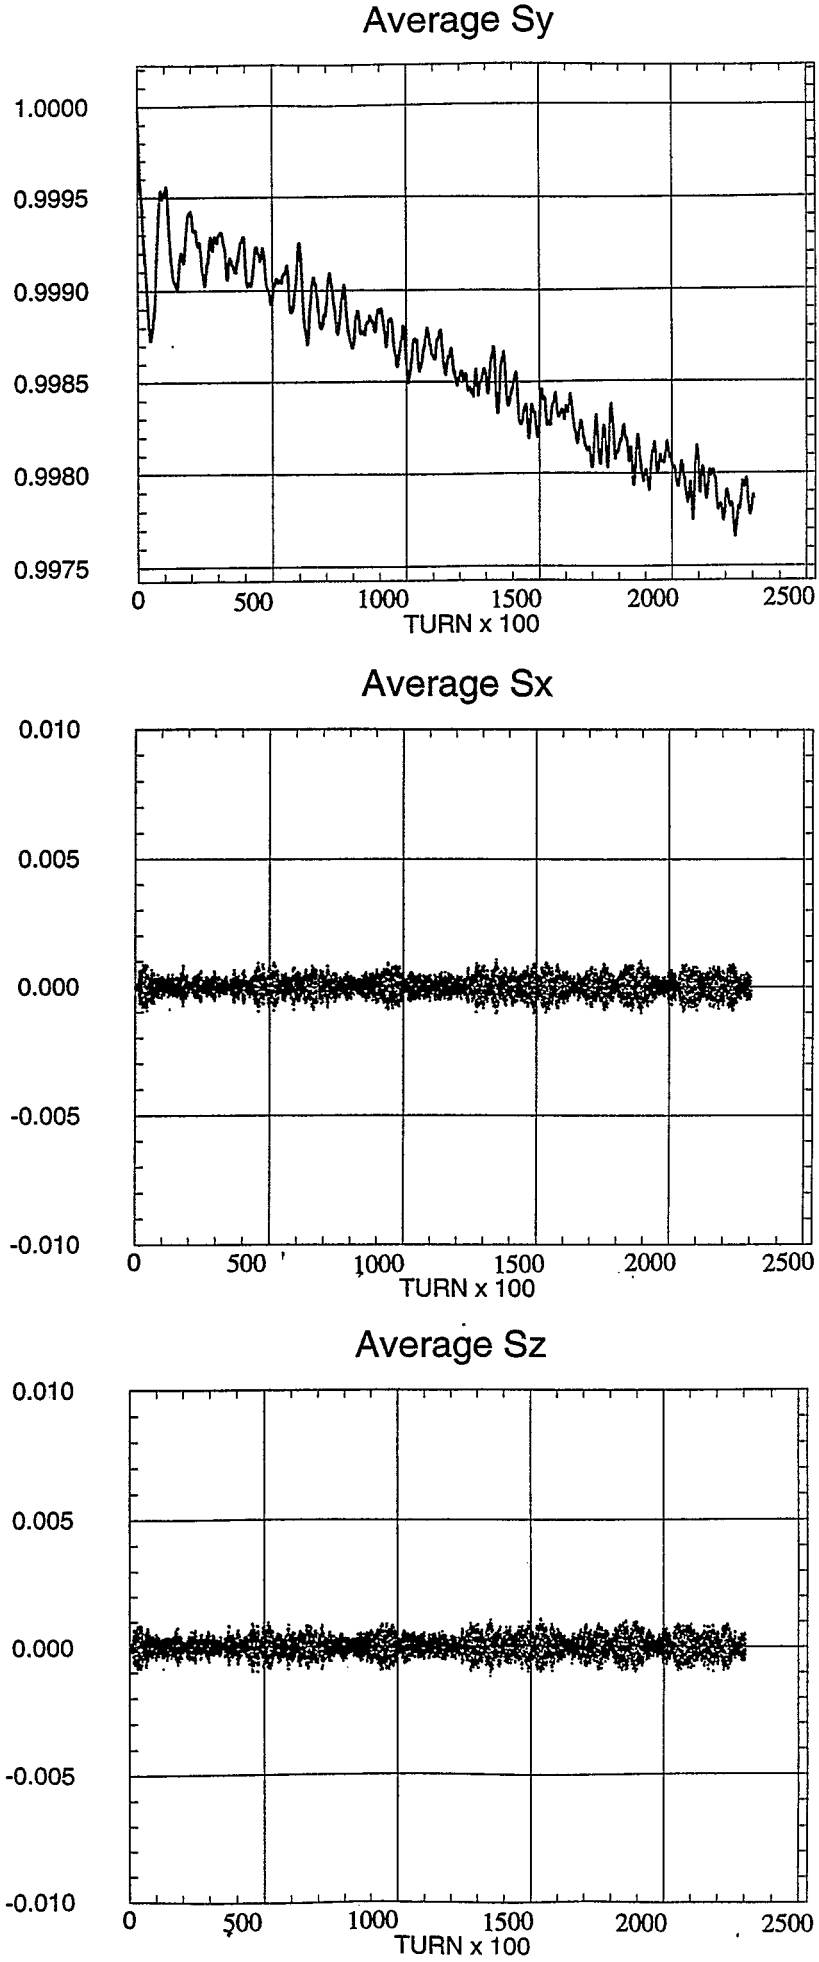


Fig. 7. Average values of spin components  $S_x$ ,  $S_y$ ,  $S_z$  as functions of turn number in presence of beam-beam interaction without noise .

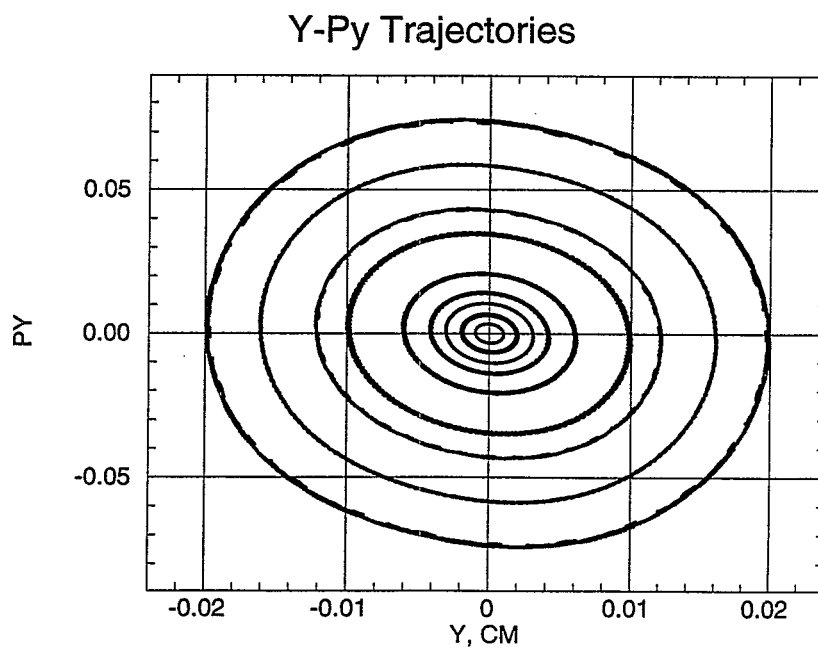
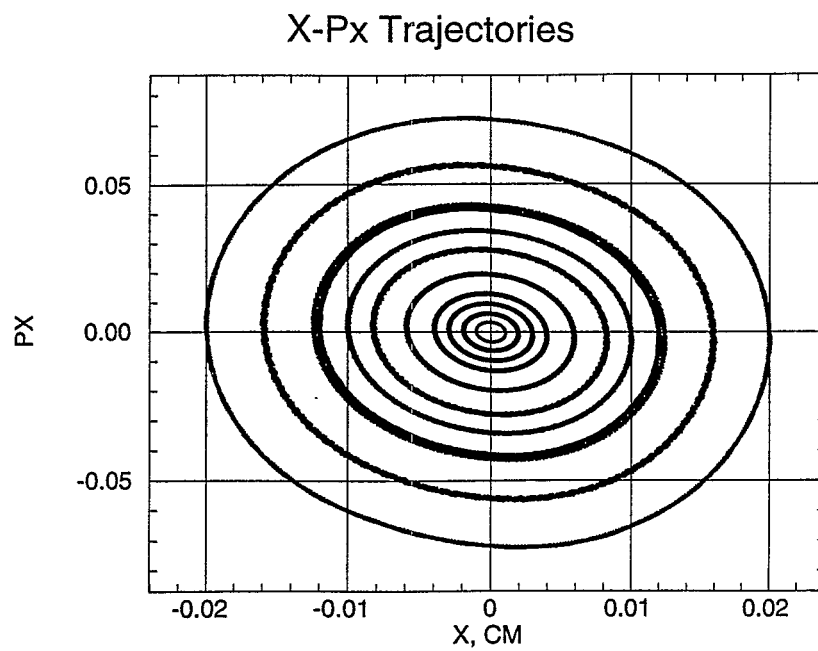


Fig. 8. Unstable particle trajectories in presence of 1% noise in parameter  $\sigma$  in beam-beam kick, eq. (2).

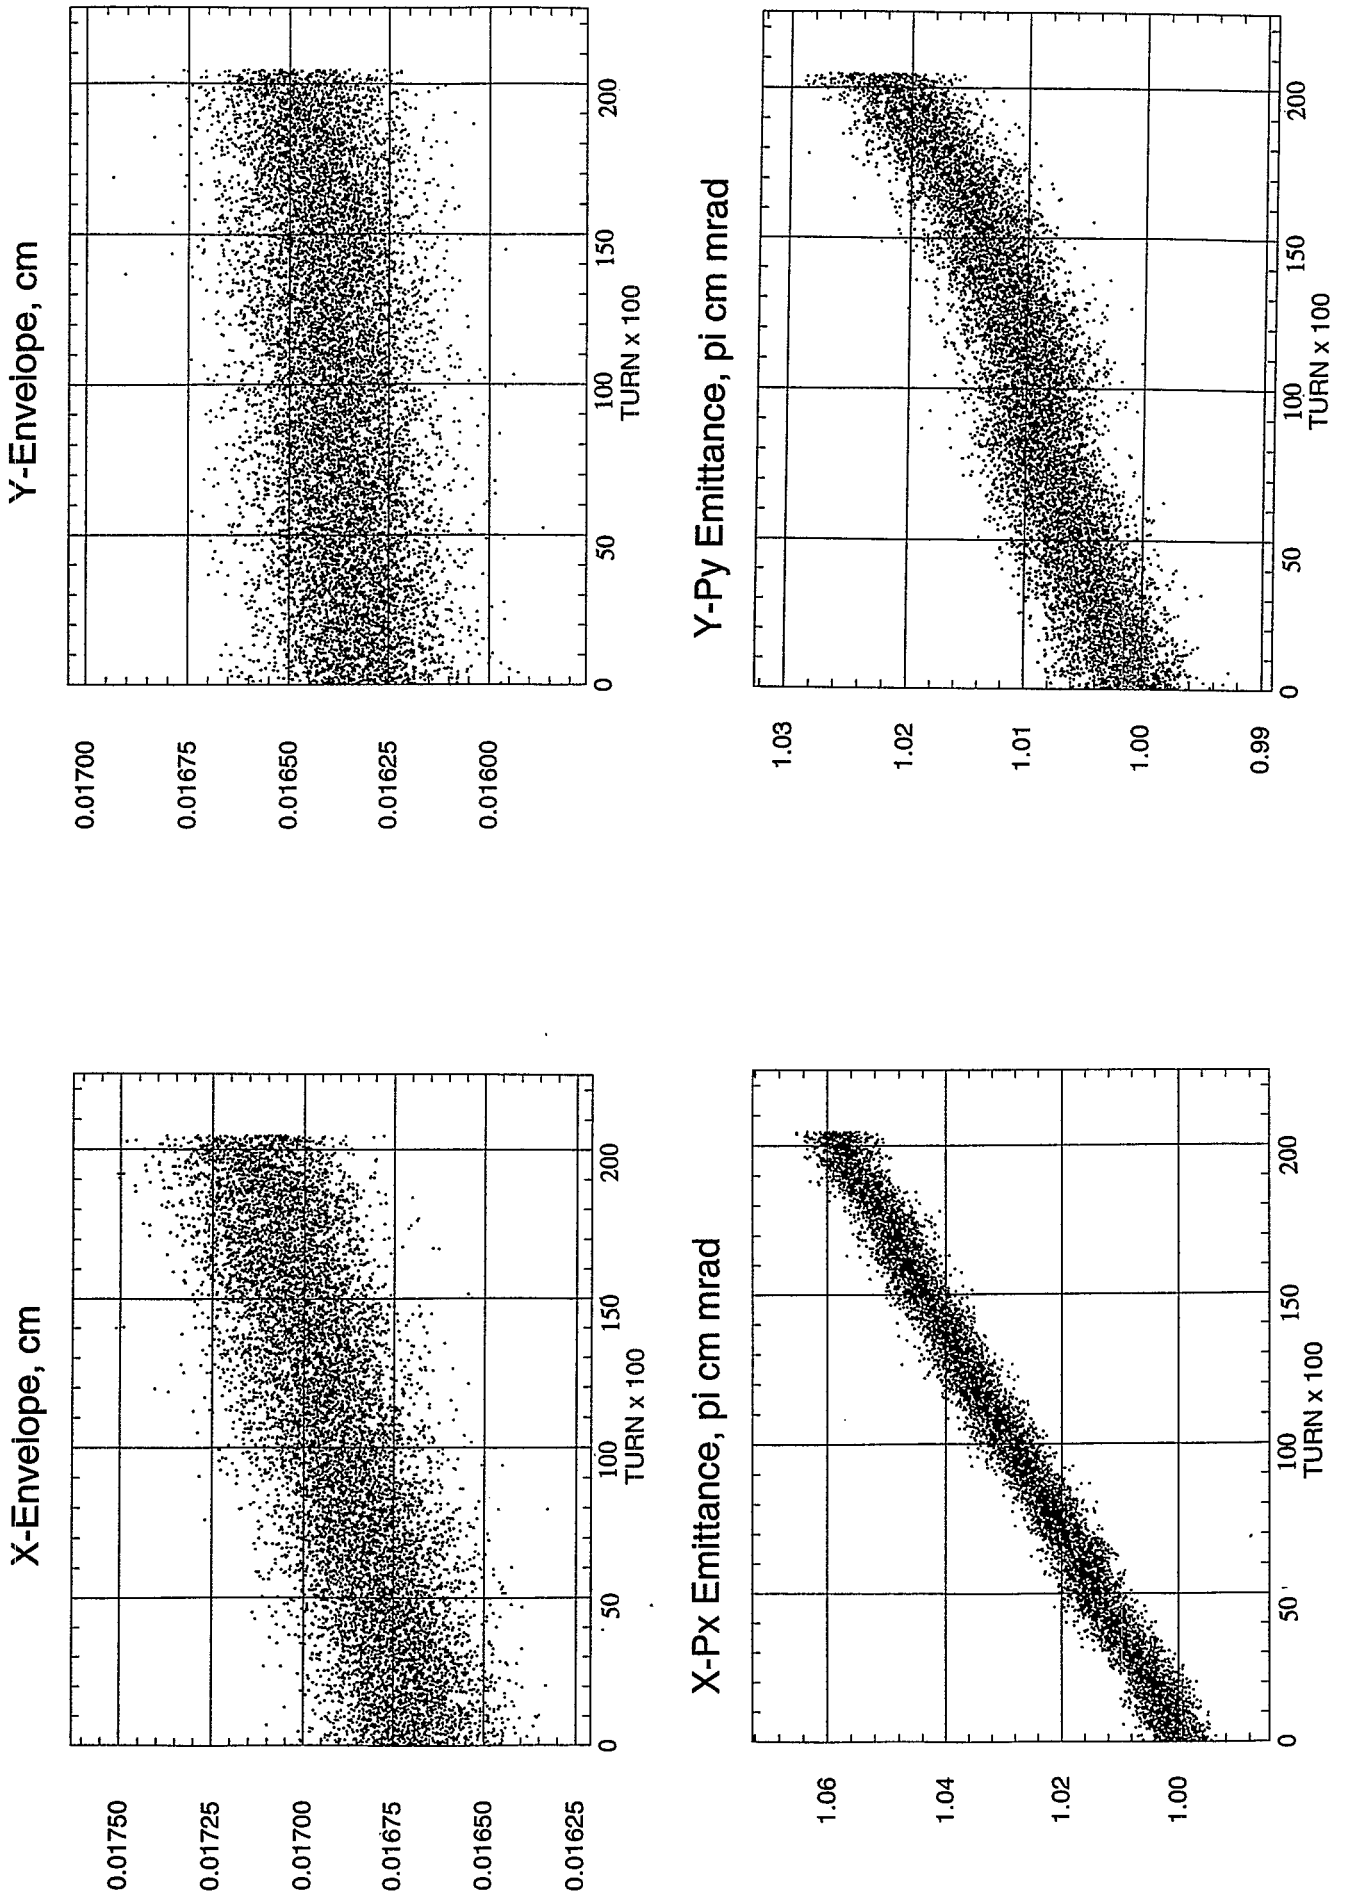


Fig. 9. Envelopes and beam emittances in presence of 1% noise in parameter  $\sigma$  in beam-beam kick, eq. (2).

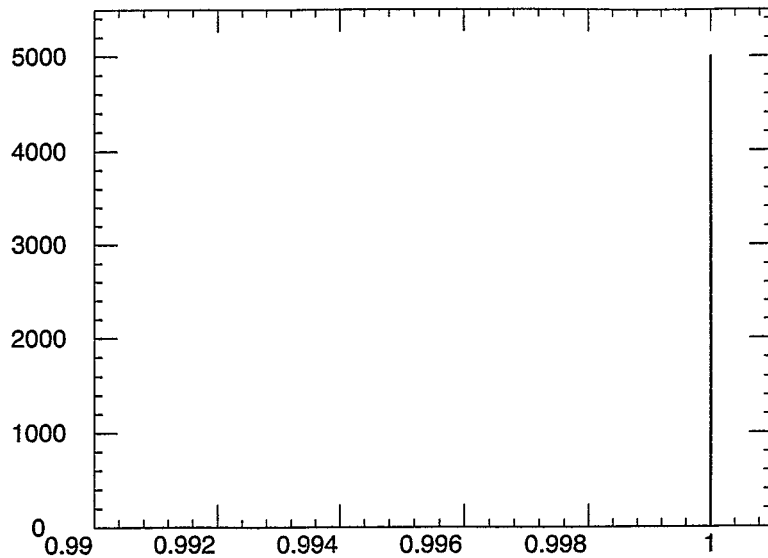
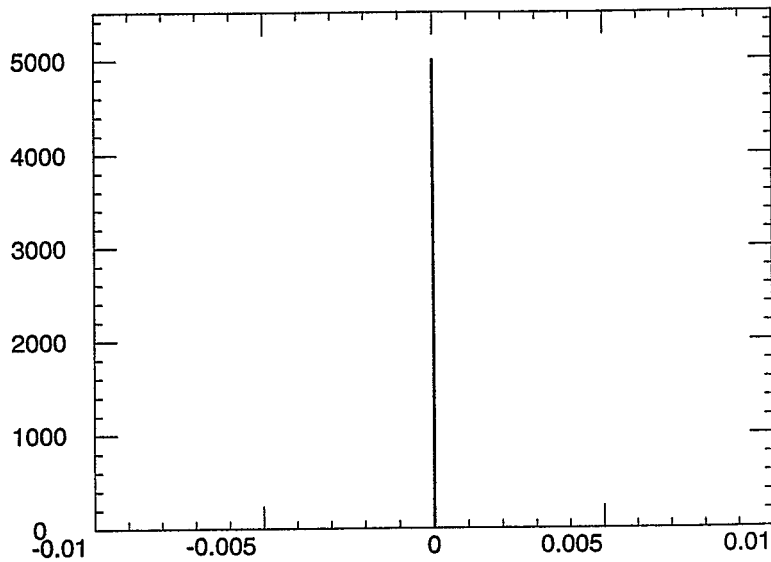
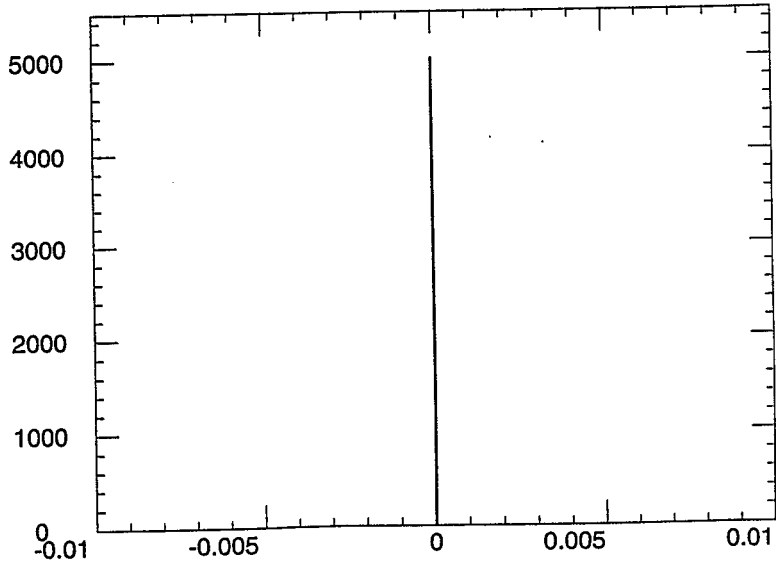
Spin distribution  $dN/dS_y$ Spin distribution  $dN/dS_x$ Spin distribution  $dN/dS_z$ 

Fig. 10a. Initial spin distribution.

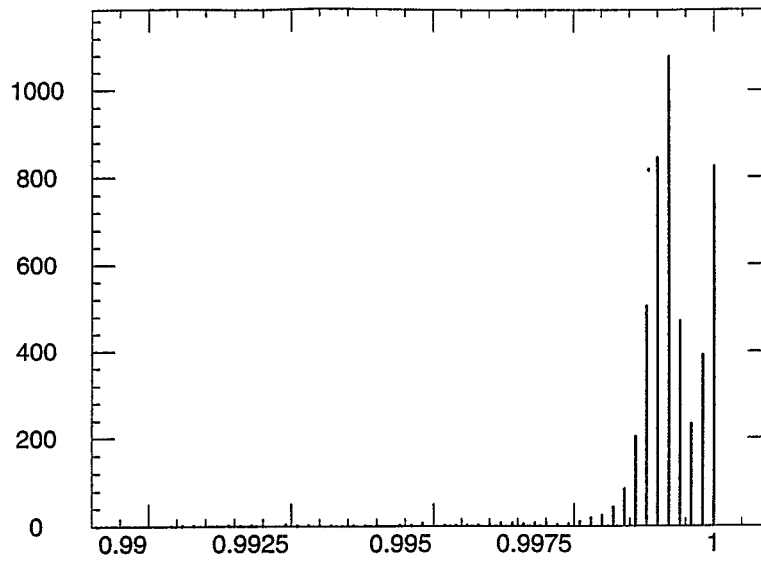
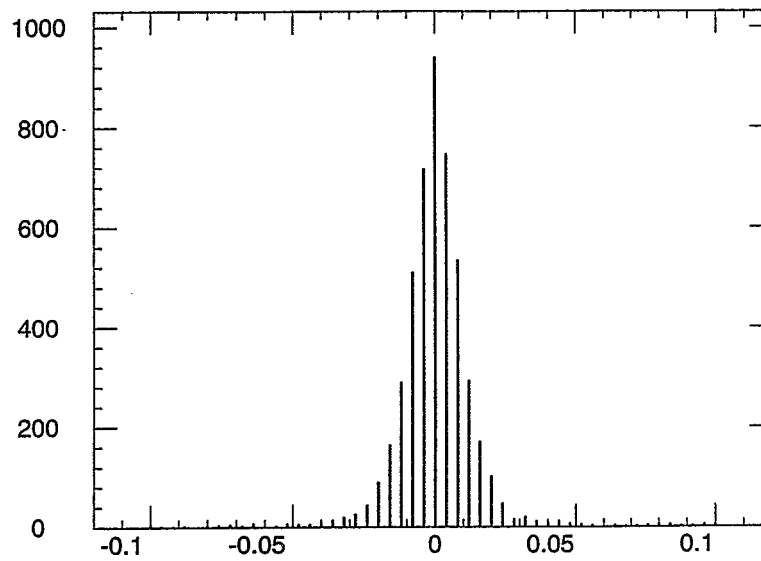
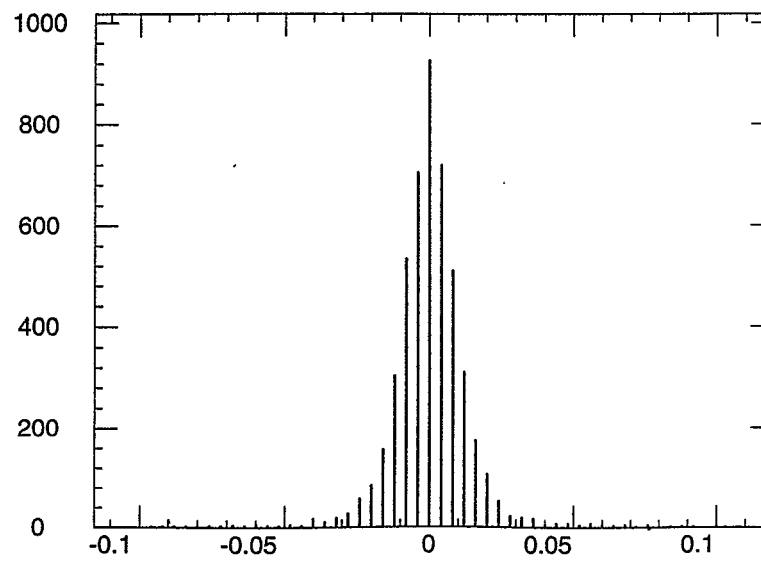
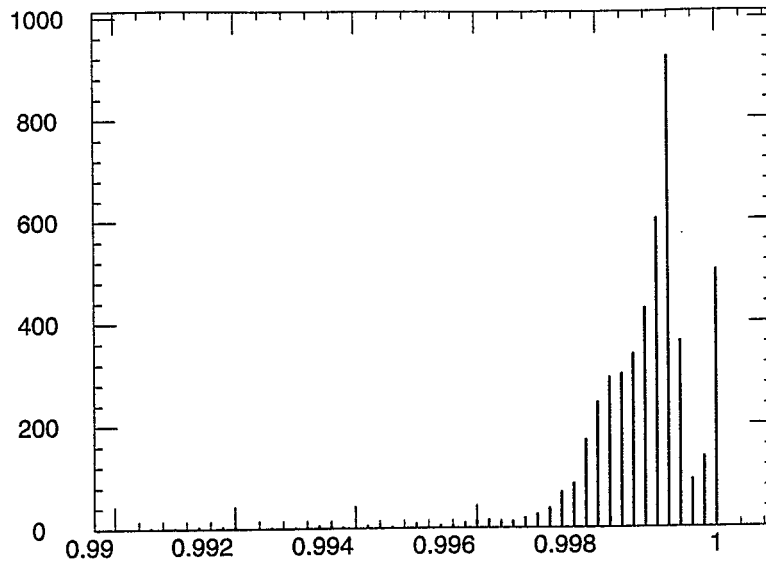
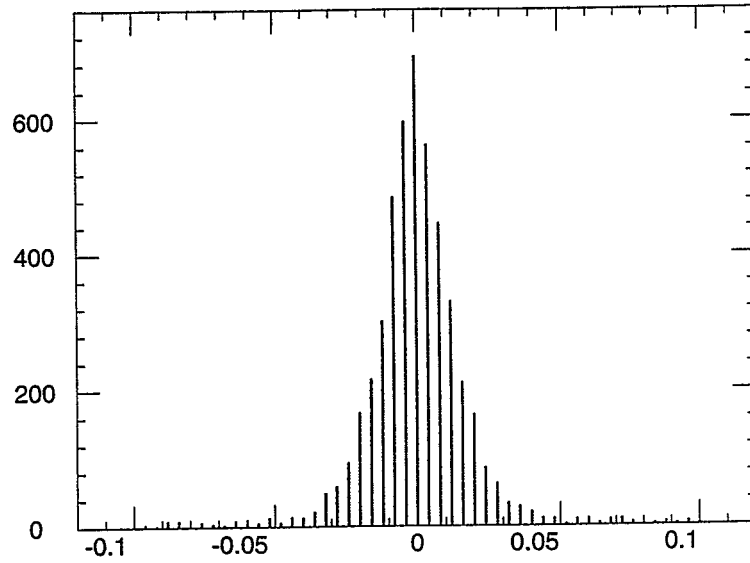
Spin distribution  $dN/dS_x$ Spin distribution  $dN/dS_z$ 

Fig. 10b. Spin distribution after 125 000 turns in presence of 1% noise in parameter  $\sigma$  in beam-beam kick, eq. (2).

Spin distribution  $dN/dS_y$



Spin distribution  $dN/dS_x$



Spin distribution  $dN/dS_z$

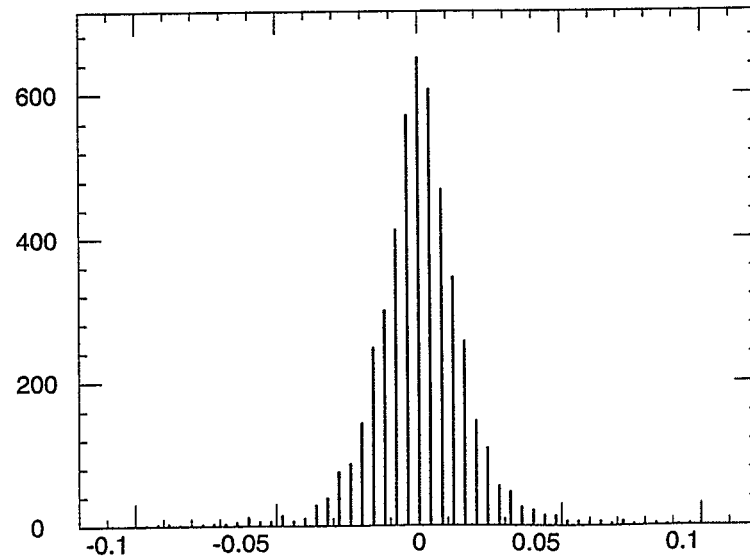


Fig. 10c. Spin distribution after 250 000 turns in presence of 1% noise in parameter  $\sigma$  in beam-beam kick, eq. (2).

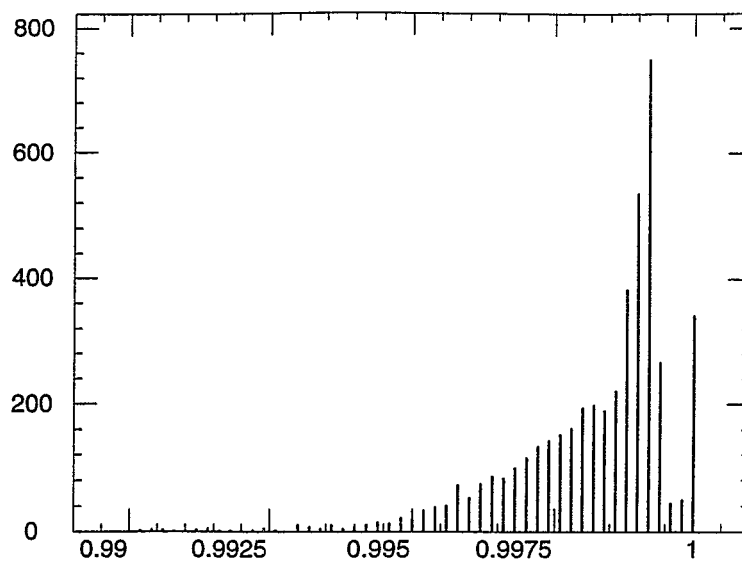
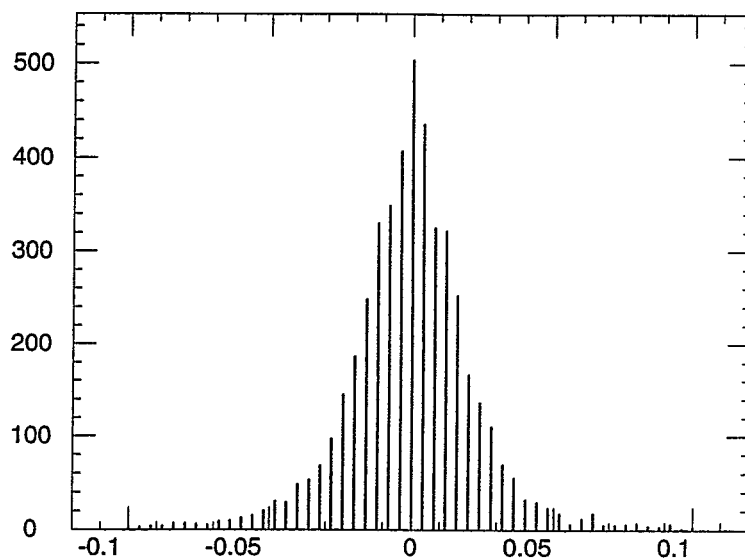
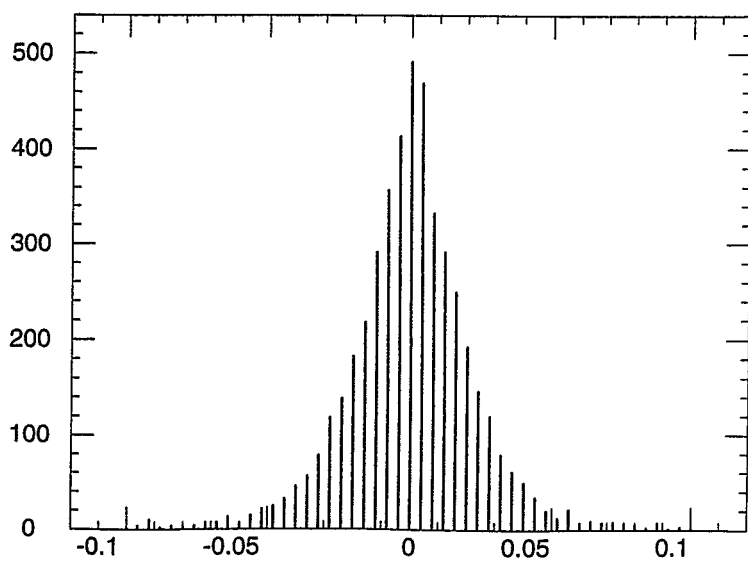
Spin distribution  $dN/dS_x$ Spin distribution  $dN/dS_z$ 

Fig. 10d. Spin distribution after 500 000 turns in presence of 1% noise in parameter  $\sigma$  in beam-beam kick, eq. (2).



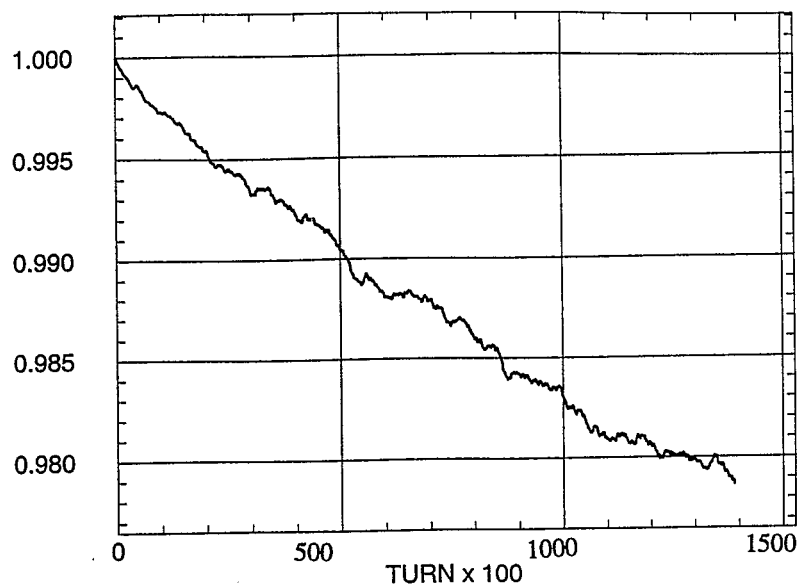
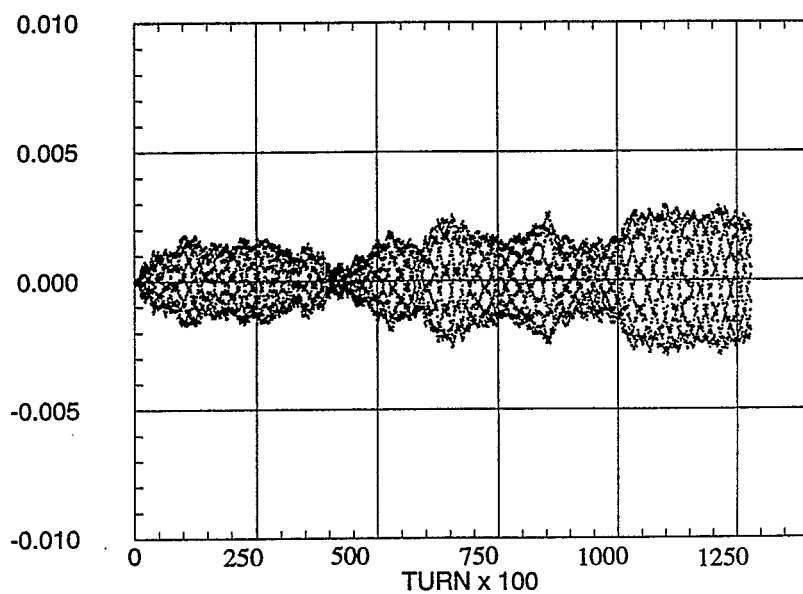
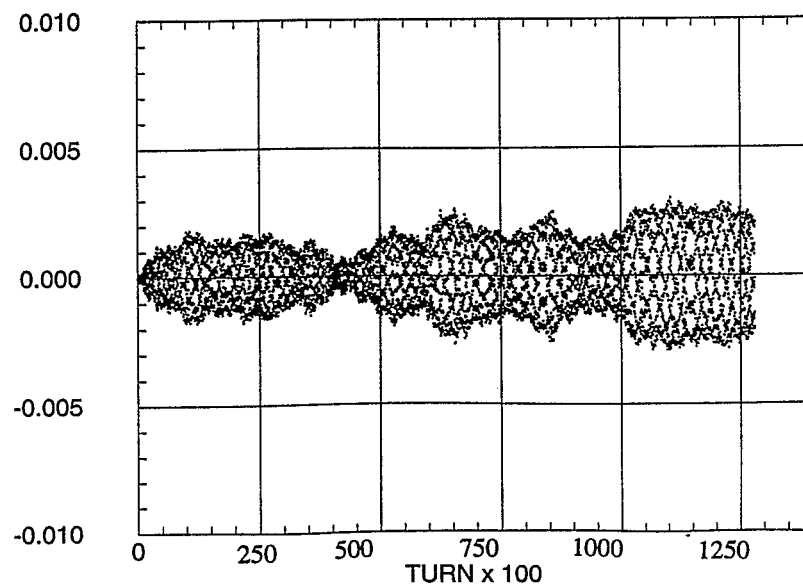
Average  $S_x$ Average  $S_z$ 

Fig. 11. Average values of spin components  $S_x$ ,  $S_y$ ,  $S_z$  as functions of turn number in presence of 1% noise in parameter  $\sigma$  in beam-beam kick, eq. (2).