



BNL-103702-2014-TECH

AGS/RHIC/SN 077;BNL-103702-2014-IR

Ion Optics Calculation of Polarized H- Ion Source for RHIC

T. Takeuchi

September 1998

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-98CH10886 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Alternating Gradient Synchrotron Department
Relativistic Heavy Ion Collider Project
BROOKHAVEN NATIONAL LABORATORY
Upton, New York 11973

Spin Note

AGS/RHIC/SN No. 077

**Ion Optics Calculation of Polarized H⁻ Ion Source
For RHIC**

T. Takeuchi, et. al.
Department of Physics, Konan University,
Higashinada, Kobe, 658 Japan

September 10, 1998

Ion Optics Calculation of Polarized H^- Ion Source for RHIC

T. Takeuchi^a, M. Okamura^b, A. Zelenski^c, and C.D.P. Levy^c

^a*Department of Physics, Konan University, Higashinada, Kobe, 658 Japan*

^b*The Institute of Physical and Chemical Research (RIKEN), Hirosawa, Wako,
Saitama 351-01, Japan*

^c*TRIUMF, 4004 Wesbrook Mall, Vancouver, B.C., Canada V6T2A3*

1 Introduction

The RHIC polarized H^- ion source, so called BOPPIS (Brookhaven Optical Pumped Polarized Ion Source), is being developed at TRIUMF. This report describes ion optics calculations for BOPPIS.

A simple schematic of BOPPIS is shown by Fig.1. Polarized H^- ion beam is produced by following method[1]: H^+ ions extracted from the ECR cavity enter the rubidium cell and capture polarized electrons from optically pumped rubidium vapor in a 2.5T magnetic field. As a result, they become hydrogen atoms having a polarized electron. Then, the hydrogen atoms pass through a Sona region where the polarization is transferred from electron spin to nuclear spin. The nuclear spin polarized hydrogen atoms capture an unpolarized electron from the sodium vapor in the sodium jet ionizer cell and become nuclear spin polarized H^- ions. The required beam parameter value

of BOPPIS are shown by Table. 1.

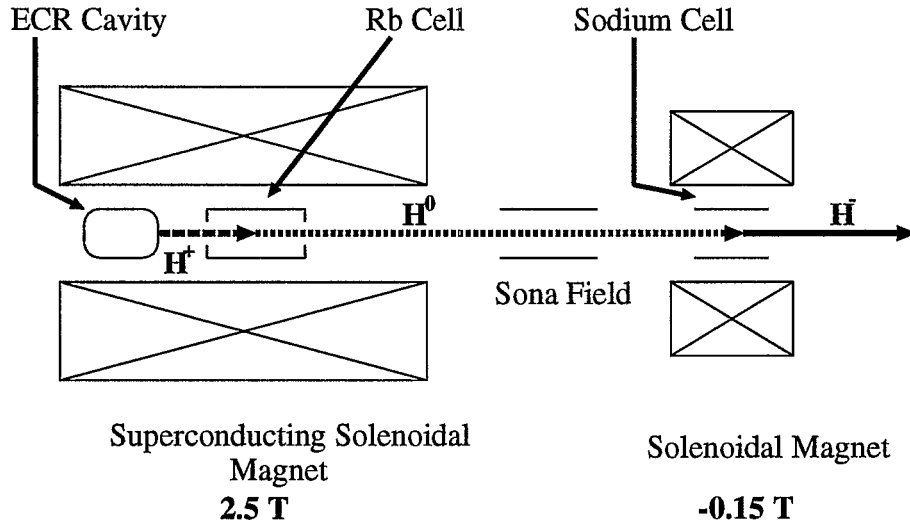


Figure 1: Schematic of BOPPIS.

| | |
|---------------------------------|-------------|
| Current (mA) | 0.5~1.5 |
| Pulse duration (μs) | 100~300 |
| Charge/pulse (mA $\cdot\mu s$) | ≥ 150 |
| Polarization (%) | ≥ 80 |
| Normalized emittance (mm mrad) | $\leq 2\pi$ |
| Repetition rate (Hz) | 7.5 |

Table. 1 The requirements for BOPPIS.

The H^- ion beam extracted from the sodium jet ionizer cell is influenced by the fringing field of the solenoidal magnet surrounding Na. On the other hand, the incident beam is not affected by the fringing field, because of the beam is in a neutral charge state. Moreover, since multiple charge exchange processes between the beam and the sodium vapor occur, the beam emittance cannot be conserved. In spite of its importance, it is impossible to calculate

the ion optics of the Na cell in a simple way. Therefore, we carried out a detailed ion optics calculation in this region.

Our operation is mainly 3 points on follows:

1. To estimate the H^- yield ($H^0 \rightarrow H^-$) at the exit of the sodium jet ionizer cell.
2. To investigate how the beam profile (x,y) and the beam emittance (x,x') are affected by the fringe field at the exit of the sodium jet ionizer cell.
3. To learn how to optimize BOPPIS. The optimization of beam line components is very important because the beam emittance at the exit of the BOPPIS dominates the direction later beam line design will take.

2 Calculational Method

We assume the following initial conditions for performing the ion optics calculation. H^0 atoms (number = 5000) originate 10 cm upstream of the sodium jet ionizer cell ($20\text{cm} \times \phi 2.0 \text{ cm}$). The incident H^0 beam emittance ($\pm 10\text{mm: circle}$) \times ($\pm 1\text{mrad}$), the almost parallel beam, is assumed and looks like the parallel beam. The H^0 atoms enter the sodium jet ionizer cell. We calculate the beam emittance and the beam profile 30 cm downstream of the sodium jet ionizer cell. We include the contribution of the sodium vapor density distribution. As boundary conditions, we assume that the total sodium vapor thickness is 10^{15} atoms/cm². And, we assume a Gaussian distribution for the sodium vapor density distribution and operate the sigma (σ) of the Gaussian distribution as a parameter.

We assume $H^0 \rightarrow H^-$ and $H^- \rightarrow H^0$ as charge exchange processes between hydrogen and

Na atoms, with cross sections of about $0.03 \times 10^{-14} \text{ cm}^2$ and $0.30 \times 10^{-14} \text{ cm}^2$, respectively.

At the present beam energy (3.5 keV), other charge exchange cross sections are some orders smaller than the cross sections of the above processes and are negligible for this calculation.

The calculation program using a combination of the Runge Kutta method and the Monte Carlo method. The former is used for the particle tracking. When we calculate the particle tracking, components (r, z, B_r, B_z) are precisely calculated by the magnetic field calculation program [OPERA2D] are used as the space mesh of the Runge Kutta calculation. Monte Carlo method is done for the charge exchange. Further details about the calculation of the charge exchange by means of the Monte Carlo method has already been published [2].

3 Results

First, we show the beam trajectory along the solenoid axis. Figure 2(i)-2(iii) show the calculated results of the beam trajectory as a function of Z (along the solenoid axis), the solenoidal magnetic field distribution and the sodium vapor density distribution. $Z=0$ is the center of the sodium vapor cell (length = 20.0 cm). Figure 2(i), 2(ii), and 2(iii) have the difference of the sodium vapor density distribution, and those are Gaussian ($\sigma=1.0\text{cm}$), Gaussian ($\sigma=5.0\text{cm}$), and the uniform distribution in the sodium vapor cell, respectively. In Figures (a), thick and thin solid line are the magnetic field distribution and the sodium vapor density distribution, respectively. Figures (b) and (c) are H^0 and H^- trajectory of the transverse X projection, respectively, where the number of 100 particles is traced. It is clearly seen that H^- ion diverge from Z axis at the fringing field of the solenoidal magnetic field. On the other hand, many of H^0 atoms pass straight through the sodium jet ionizer cell.

The point of charge exchange of $H^0 \rightarrow H^-$ or $H^- \rightarrow H^0$ is plotted in figures (d).

In the previous paragraph, we saw that H^- ions are diverging by the fringing field of the solenoidal magnetic field. As the next step, it is informative to see the beam at the final point (30 cm point toward downstream of the sodium jet ionizer cell). The beam profile (x,y) and the beam emittance (x,x') are shown by figure 3. Figure 3(i), 3(ii), and 3(iii) are results of Gaussian ($\sigma=1.0\text{cm}$), Gaussian ($\sigma=5.0\text{cm}$), and the uniform distribution in the sodium vapor cell, respectively. The beam profile (x,y) and the beam emittance (x,x') are shown by the figures 3(a)-(b) and 3(c)-(d), respectively. The figures on left (a) and (c) are for H^0 and those on the right (b) and (d) are for H^- . It seems that the beams of H^0 and H^- are clearly separated. From comparison of (ii) and (iii), it is possible to understand that some H^0 atoms of the far point from the center of figures is due to the charge exchange at the fringing field. In figures (ii) and (iii), the shape of the beam profile and emittance is diffused due to the multiple charge exchange [2]. In this case, a number of diffused H^0 are less than 10% of particles (about 4500) of the center region. The beam radius and the normalized beam emittance for the H^- ion are about 13 mm and 2.4π mm mrad, respectively. We regard the normalized beam emittance as an 100% area of an ellipse on the phase space coordinate.

The charge exchange rate ($H^0 \rightarrow H^-$) for (i), (ii), and (iii) is 9.12, 8.42, and 9.26 %, respectively. We found that the dependence on the shape of the sodium vapor distribution is relative small.



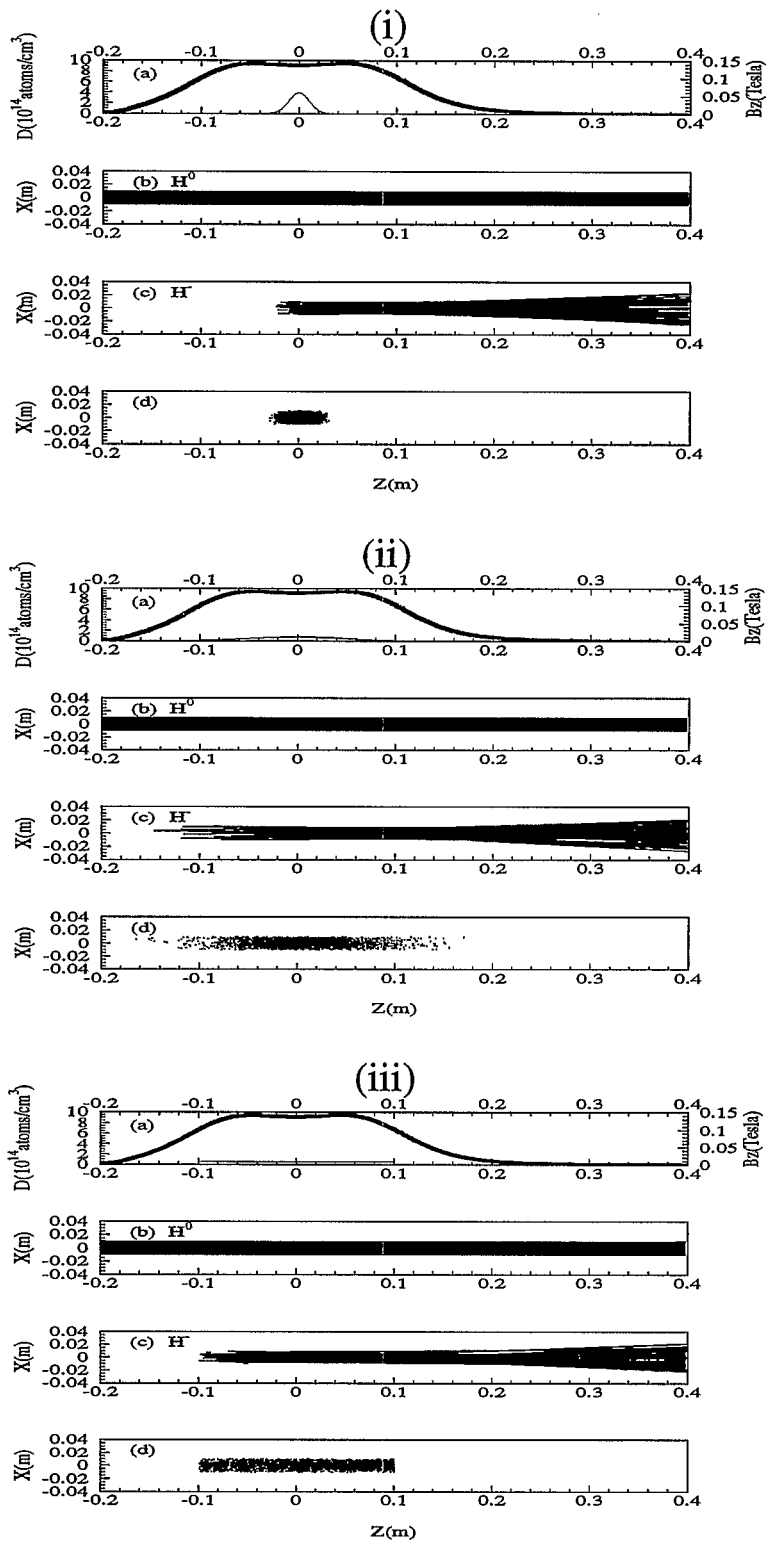


Figure 2: The beam trajectory, the solenoidal magnetic field distribution and the sodium vapor density distribution.

(i)

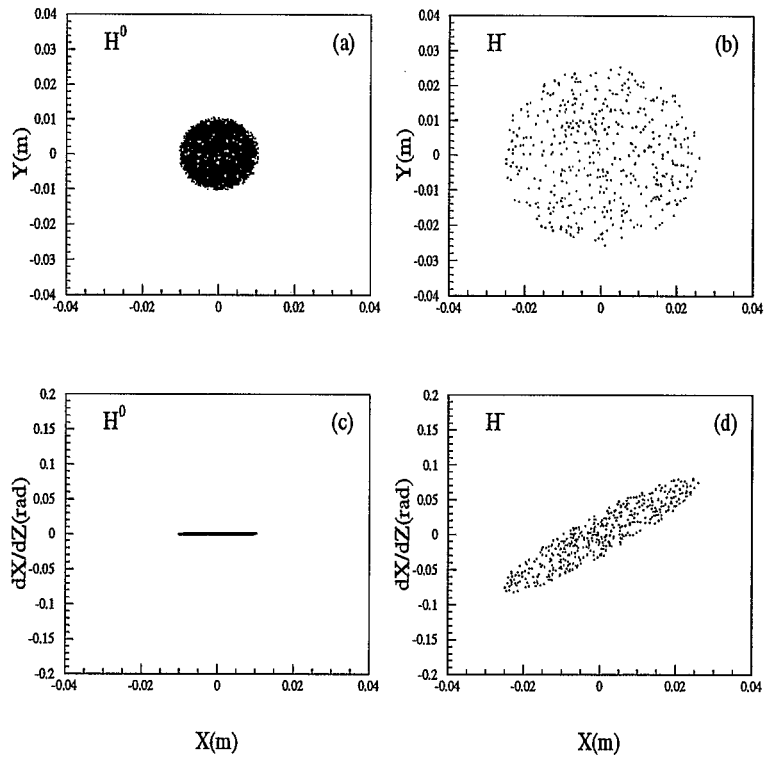

(ii)

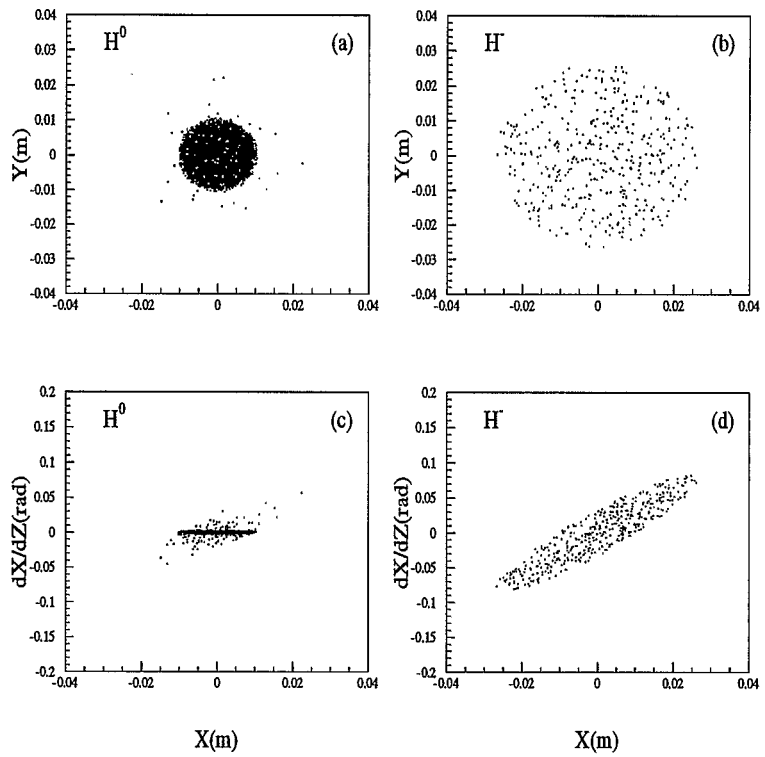

(iii)

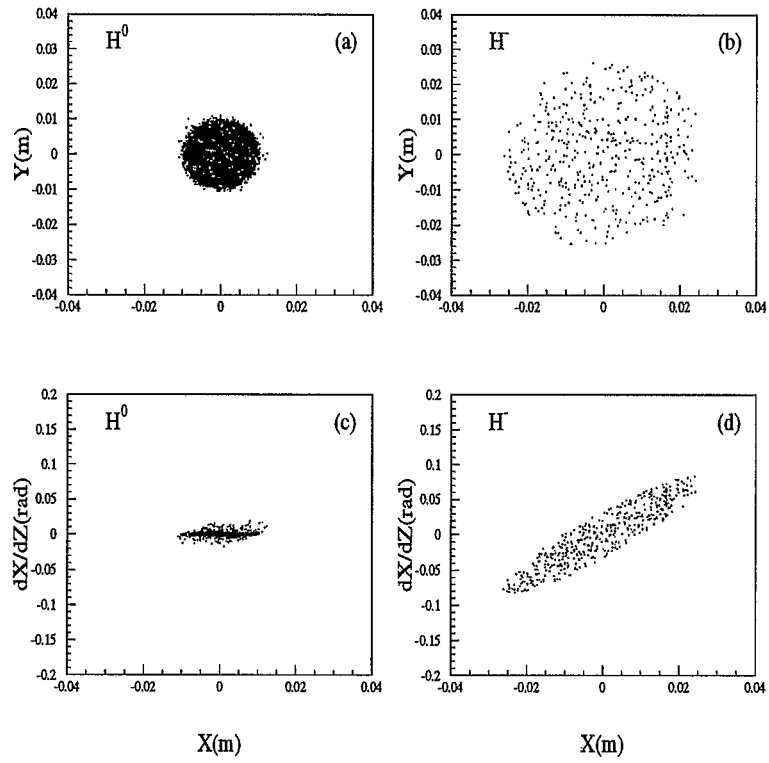


Figure 3: The beam profile (x, y) and the beam emittance (x, x') .

4 Conclusion and Future Prospects

The results of the previous section are summarized in Table. 2. As a future prospect, it is raised to extend the calculation to the whole BOPPIS beam transport. With the extension of the calculation, we will be able to design an accelerating column and an electrostatic magnet injecting the beam into the high energy beam line.

| | |
|--|---------|
| H ⁻ yield[H ⁰ → H ⁻] (%) | 8.4~9.2 |
| Beam Radius (mm) | 13 |
| Normalized Beam Emittance (mm mrad) | 2.4π |

Table. 2 The results of the ion optics calculation for BOPPIS. We regard the normalized beam emittance as an 100% area of an ellipse on the phase space coordinate.

Acknowledgement

The authors express thanks to Dr. Jim Alessi for his valuable suggestions. The authors also express their gratitude to Dr. Gerard Dutto and the staff of TRIUMF for their warm hospitality.

References

- [1] G. Dutto, C. D. P. Levy, G. W. Wight, A. N. Zelenski, V. Klenov, V. I. Davydenko, J. Alessi, M. Okamura, Y. Mori, and T. Takeuchi, EPAC 1998 to be published.
- [2] T. Takeuchi, T. Yamagata, K. Yonehara, Y. Arimoto, and M. Tanaka, Rev. Sci. Instr **69** (1998) pp. 412-417.