



Brookhaven
National Laboratory

BNL-105121-2014-TECH

Booster Technical Note No. 74;BNL-105121-2014-IR

Quick reference guide for the Booster lattice and Rf parameters

Z. Parsa

March 1987

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

QUICK REFERENCE GUIDE FOR THE
BOOSTER LATTICE AND RF PARAMETERS

AD

Booster Technical Note

No. 74

ZOHREH PARSA

MARCH 6, 1987

ACCELERATOR DEVELOPMENT DEPARTMENT
Brookhaven National Laboratory
Upton, N.Y. 11973

QUICK REFERENCE GUIDE FOR THE BOOSTER LATTICE
AND RF PARAMETERS

Zohreh Parsa
Accelerator Development Department
Brookhaven National Laboratory
Upton, New York 11973

This is a brief summary of the parameters for the
Booster lattice and RF system (which indicates the
present status of the Booster as of 3/6/87).

We acknowledge the assistance of E.Courant and G.
Cottingham with this list.

QUICK REFERENCE
AGS BOOSTER PARAMETER LIST

	Protons	Polarized Protons	Heavy Ions
Energy			
Injection	200 MeV	200 MeV	> 1 MeV/nucleon
Ejection	1.5 GeV	1.5 GeV	$p = 5.25 Q/A$ (GeV/c)/nucleon
No. of Particles/Pulse	$1.5 - 3 \times 10^{13}$	$\sim 10^{12}$	15×10^9 (S), 3×10^9 (Au)
Lattice			
Circumference		201.78 m (1/4 AGS)	
Magnetic bend radius		13.75099 m	
Periodicity		6	
Number of cells		24 FODO	
Cell length		8.4075 m	
Phase advance/cell		$72.3^\circ / 72.45^\circ$	
ν_x / ν_y (nominal)		4.82/4.83	
β_y max/min		13.6/3.7 m	
z_p max		2.95 m	
transition γ		4.881	
RF System			
Number of stations	2	2	2
Harmonic number	3	3	3
Frequency range (MHz)	2.5 — 4.11	2.5 — 4.11	0.200 — 2.5
Peak RF voltage	90	90	17
Acceleration time (ms)	62	62	500
Repetition rate	7.5 Hz (4/AGS pulse)	1 Hz (1/AGS)	1 Hz (1/AGS)
Dipoles			
Number		36	
Length (magnetic)		2.4 m	
Gap		82.55 mm	
Vacuum chamber aperture		66 mm	
Good field region ($< 10^{-4}$)		16×6.6 cm	
Injection field (kG)	1.56	1.56	0.108 A/Q
Ejection field	5.46	5.46	12.74
Quadrupoles			
Number		48	
Length (magnetic)		50.375 cm	
Aperture		16.5 cm	
Vacuum chamber aperture		15.25 cm	
Injection pole tip field (kG)	1.02	1.02	0.068 A/Q
Ejection pole tip field (kG)	3.6	3.6	8.3
Field Quality 6/2		0.0	
All other harmonics		$< 10^{-4}$	
Chromaticity Sextupoles			
Number		2×12	
Length (magnetic)		10 cm	
Max. pole tip field (kG)		3.0	
Max. Vacuum Pressure		3×10^{-11} torr	

Reference: Z. Parsa, Booster Parameter List, BNL-39311, 1987;
and Design Manual.

TABLE 1. Isotopes, Charge States, and Ionic Masses.

	Q	Z	A	Ionic Rest Mass (u)	Ionic Rest Mass Energy (GeV/nucleon)
p	+1	1	1	1.00728	0.93828
d	+1	1	2	2.01355	0.93781
C	+6	6	12	11.99671	0.93125
S	+14	16	32	31.96439	0.93047
Cu	+21	29	63	62.91808	0.93029
I	+29	53	127	126.88857	0.93068
Au	+33	79	197	196.94846	0.93126

TABLE 2. Injection Energies and Fields

	v/c	f (MHz)	p (GeV/c)	E_{inj}		B_{inj} (kG)
				(MeV)	(MeV/nucleon)	
p	0.5662	2.5235	0.5444	200.0	200.000	1.563
d	0.1767	0.7878	0.3368	30.0	15.000	0.817
C	0.1262	0.5623	1.4211	90.0	7.500	0.575
S	0.1000	0.4457	2.9925	150.0	4.683	0.519
Cu	0.0782	0.3485	4.5969	180.0	2.857	0.531
I	0.0595	0.2653	7.0489	210.0	1.654	0.590
Au	0.0473	0.2131	8.7805	210.0	1.066	0.645

TABLE 3. Ejection Energies and Fields — $B_{max} = 12.74$ kG

	v/c	f (MHz)	p (GeV/c)	E_{eject}		B_{eject} (kG)
				(GeV)	(GeV/nucleon)	
p	0.9230	4.114	2.251	1.500	1.5000	5.459
d	0.8699	3.877	3.308	1.927	0.9635	8.024
C	0.8714	3.884	19.347	11.602	0.9668	8.024
S	0.8716	3.885	52.926	30.952	0.9672	9.170
Cu	0.8534	3.804	95.932	53.310	0.8541	11.081
I	0.7900	3.522	152.345	74.623	0.5380	12.743
Au	0.6863	3.061	173.353	68.050	0.3500	12.743

Reference: Z. Parsa, Booster Parameter List, BNL-39311, 1987;
and Design Manual.

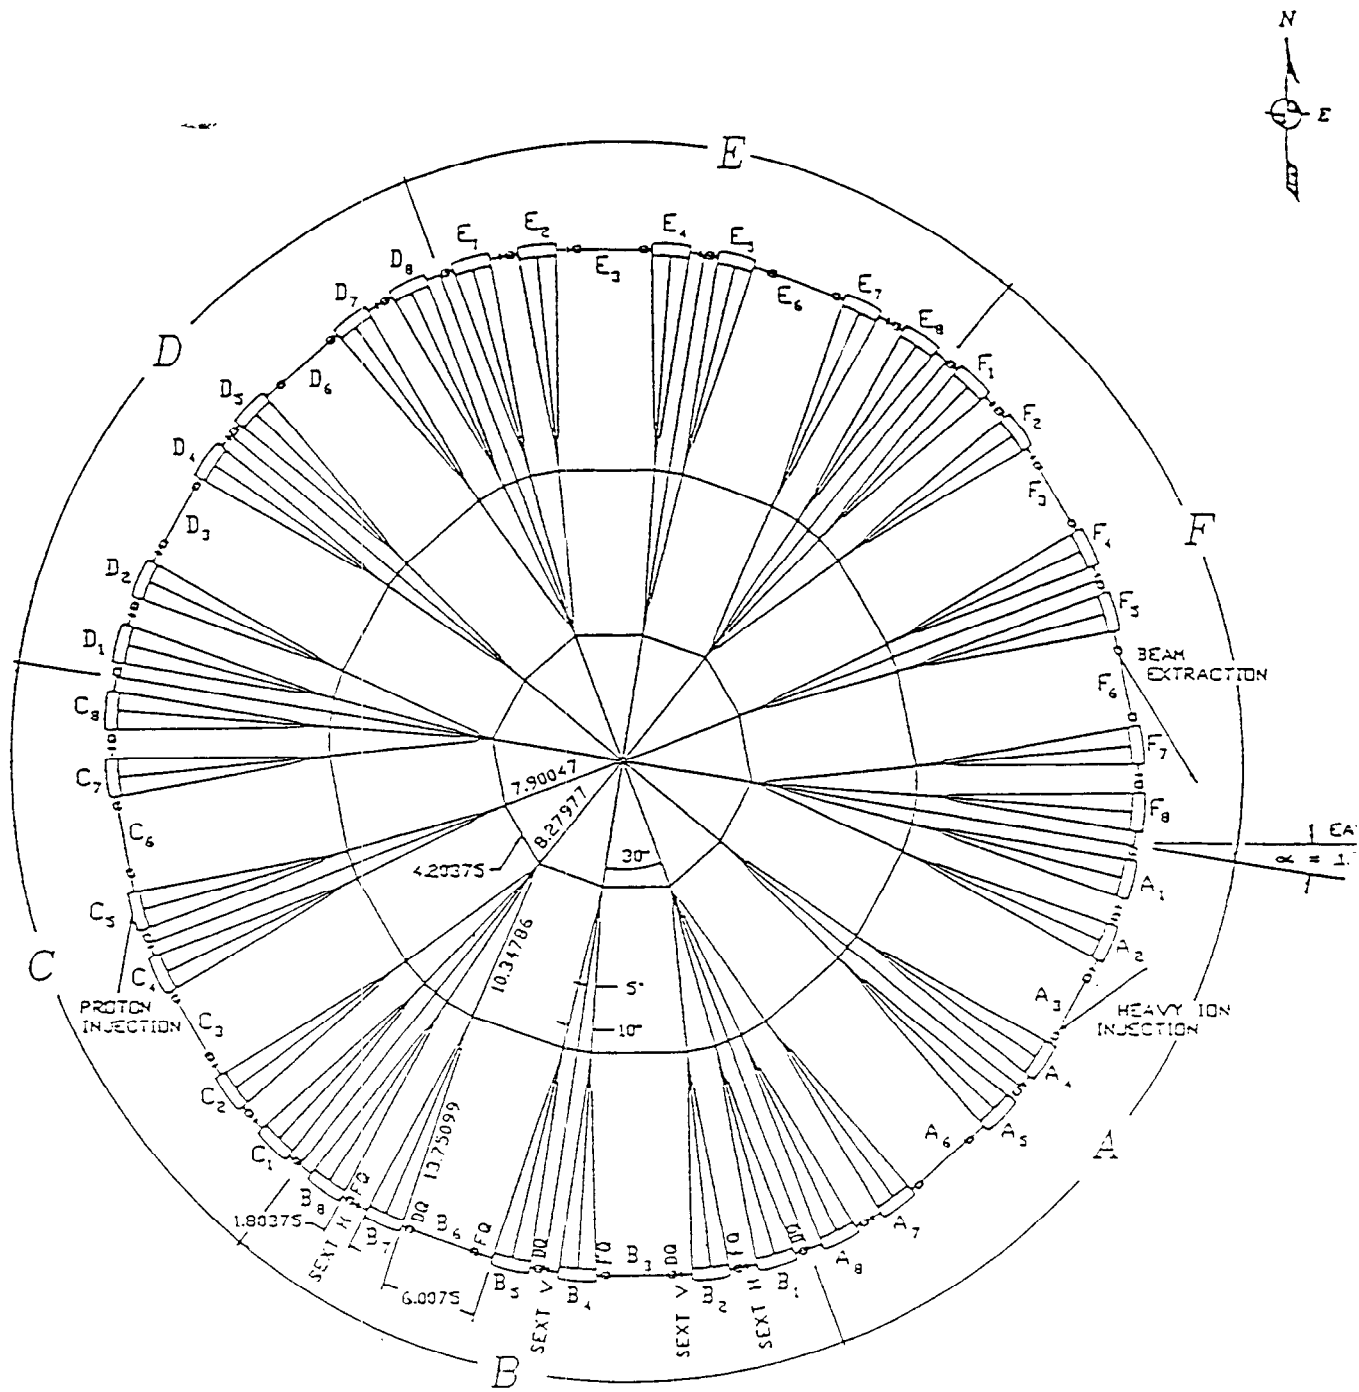


Figure 1. The layout of the Booster.

0 5
METERS
NOTE: ALL DIMENSIONS ARE IN METERS

Reference: Z. Parsa, Booster Parameter List, BNL-39311, 1987;
and Design Manual.

TABLE 4 RF Systems.

	P	pi	S ⁻¹	Au ⁻²³
RF Amplitude				
Injection	90 kV	7.35 kV	0.61 kV	1.5 kV
Ejection	90 kV	40 kV	17 kV	17 kV
Harmonic Number	3	3	3	3
RF Frequency				
Injection	2.5 MHz	2.5 MHz	0.445 MHz	0.206 MHz
E/A	200 MeV	200 MeV	4.69 MeV	1.07 MeV
Ejection	4.11 MHz	4.11 MHz	4.13 MHz	3.06 MHz
Phase Space Area/A	≥ 1.0 eV-s	0.3 eV-s	0.066 eV-s	0.066 eV-s
Intensity (particles (per bunch))	10 ¹³	~1 × 10 ¹¹	5 × 10 ⁹	3 × 10 ⁹
Total Gap Impedance (f _{rf} = 4.1 MHz)	< 24 kΩ	No limit	No limit	No limit
Acceleration Time	62 ms	≤ 0.5 s	≤ 0.5 s	≤ 0.5 s
Maximum Power Delivered to Beam	156 kW	< 2 kW	< 1.0 kW	< 2 kW
Maximum B	9.5 T/s	4.5 T/s	4.5 T/s	4.5 T/s
B _{inj}	1.5 T/s	?	< 0.15 T/s	< 0.15 T/s

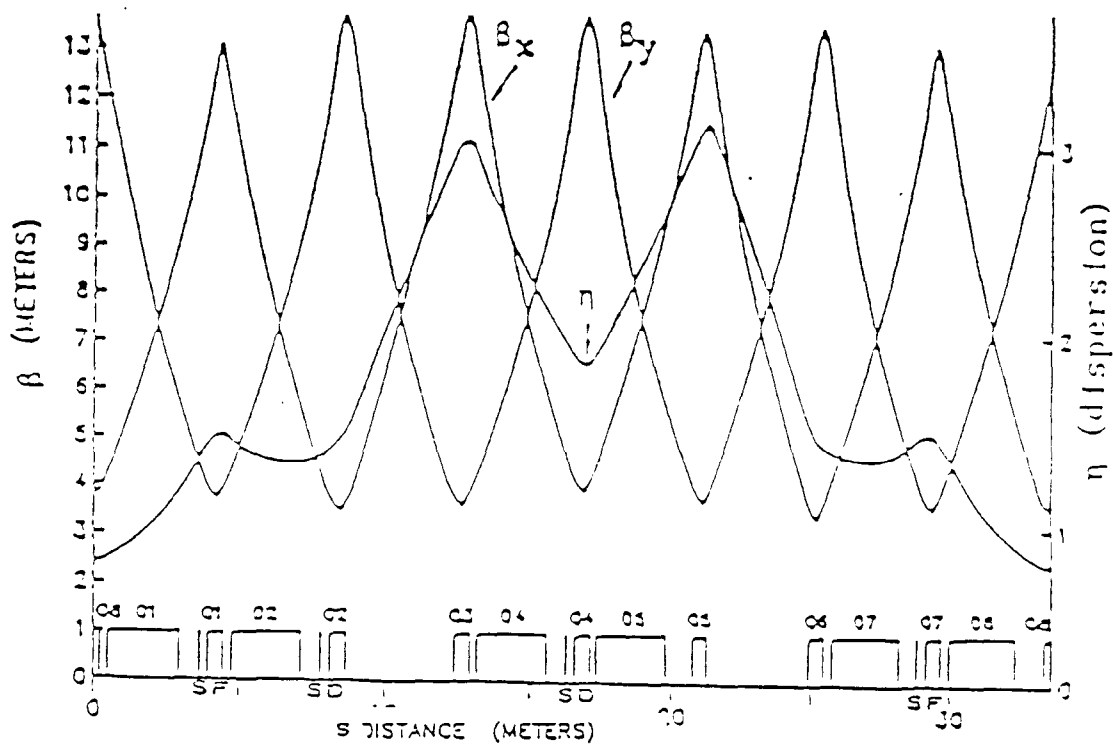


Fig. 2, shows the betatron functions and the amplitude dependence of tunes for the AGS Booster.