

## Combined function lattice for the AGS-RHIC Booster

J. Claus

June 1986

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

COMBINED FUNCTION LATTICE FOR THE  
AGS - RHIC BOOSTER

*Booster Technical Note*  
No. 46

J. CLAUS AND S. Y. LEE  
JUNE 23, 1986

ACCELERATOR DEVELOPMENT DEPARTMENT  
*Brookhaven National Laboratory*  
*Upton, N.Y. 11973*

1

Combined function lattice for the  
AGS-RHIC booster  
-----

J. Claus and S.Y. Lee

Brookhaven National Laboratory

Upton, N.Y. 11973

ABSTRACT  
-----

We studied the option of the combined function lattice for the AGS-Booster design. We found that THE COMBINED FUNCTION LATTICE HAS SEVERAL ADVANTAGES over the present proposed lattice:  
(1) Higher superperiodicity,  $P=12$   
(2) Longer free space available  $L=5$  m.

I) Introduction

The booster lattice is known to suffer two minor difficulties: (1) the tune of the booster is  $Q_x=Q_y=4.83$ , while the systematic fourth order resonance is located at the tune of 4.5. The Laslett tune shift due to the space charge at the injection energy of 200 MeV is of the order of 1, therefore the fourth order resonance may be important in determining the performance of the machine. (2) A longer straight section (5m) would be useful for alternative proton injection schemes and for the low frequency rf systems. In this short note we shall address these problems and study the feasibility of the combined function option for the booster design. Our goal is to design a well behaved lattice with 5m straight section with superperiodicity of 12. For a tune of 4.83, the nearest systematic resonance is located at 4(3rd) and 6(2nd and 4th). The AGS is rather similar since its tune is 8.8 with resonances at 8(3rd) and 9(4th).


II) The Lattice

It is known that combined function magnets can usually give us longer straight sections than separated function magnets. We shall use magnets similar to the CERN-PS. The magnet is designed to contain focusing and defocusing sections in a single magnet, which can be obtained by simply shaping the pole tip of the magnets. To obtain better tuning, we shall consider the option of having quadrupoles in the lattice to obtain the HYBRID design.

The booster lattice of this discussion has the following basic properties:

- C = 201.78 m = 1/4 of AGS
- q = 4.83
- P = 12
- L = 16.815 m in each superperiod.
- $B^{\wedge}$  = 1.00506891 Tesla @ BRHO = 16.7 Tm
- Lb = 2.9 m \* 3 per superperiod.
- Lf = 5.0 m free space for injection for the injection
- Lq = 0.2 m \* 2 per superperiod.

With the above specification, we can set up the basic lattice structure as following.

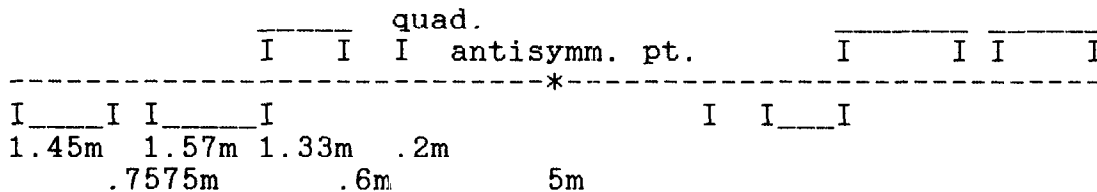

Note here that we have deliberately set the peak field to be around 1 Tesla. The nominal peak field at AGS is about 1.15 T at Brho=98.1 Tm, which corresponds to 28.5 GEV kinetic energy. It is reasonably to assume that the peak field of the present design of combined function magnets can do as well. In this case the length of the magnets can be reduced further, thereby the short straight section can be increased to 1 m or the long

straight section can be increased to 6m. The magnet organization is similar to that of the AGS lattice design( ref1) the space between two defocusing half-dipoles or two focusing half-dipoles can be used efficiently for correction elements, such as sextupoles, correction quads. At these locations the betatron functions in both planes differ substantially.

Fig. 1 shows the betatron functions for the HYBRID lattice in two superperiods. The corresponding betatron phase advance across two superperiods is shown in Fig.2. The extraction kicker and the septum will be located in consecutive superperiod long straight sections. The phase advance from the end of the long straight section to the beginning of the next long straight section is approximately 90 degree (see Fig. 2). Fig. 3 shows the beam size assuming emittances of 50 pi mmmrad and  $dp/p = .5\%$ . Table 1 list the lattice properties of the hybrid lattice with the parameter of the quadrupole gradients. Fig. 4 shows the chromatic variation for tune  $Q_x Q_y$  of the machine and the percentage variation for the betatron amplitudes. To compare these magnets with the AGS magnets, we also list the AGS magnet parameters. Fig.5 also plots the betatron function of the CERN-PS for comparison.

TABLE 1. HYBRID MAGNETS AND LATTICE PROPERTIES

PARAMETER FOR BOOSTER				AGS				
GF =	3.119	T/m	@Brho=16.7	Tm	4.742	T/m@Brho=98.144	Tm	
GD =	-3.169	T/m	@Brho=16.7	Tm	-4.757	T/m@Brho=98.144	Tm	
BZ =	1.005	T	@Brho=16.7	Tm	1.150	T	@Brho=98.144	Tm
QF =	12.477	T/m	@Brho=16.7	Tm				
QD =	-12.677	T/m	@Brho=16.7	Tm				

BETATRON FUNCTIONS OF BST	POS	S(M)	NUX	NUY	BETAX(M)	BETAY(M)	XEQ(M)	Emittance = 50.000 mmmrad		
								2.5sigX	2.5sigY	
								mm	mm	
	0	0.000	0.000	0.000	9.624	9.334	1.428	25.506	21.604	
	1	BDL2	0.725	0.014	0.011	6.905	12.359	1.237	21.674	24.859
	2	BDL2	1.450	0.033	0.019	5.960	13.254	1.201	20.264	25.743
	3	S50	2.208	0.053	0.029	5.814	12.916	1.240	20.151	25.413
	4	BDY	3.778	0.090	0.052	9.280	7.496	1.702	25.795	19.359
	5	BFY	5.108	0.108	0.096	13.174	3.559	2.175	31.103	13.340
	6	STCS	5.408	0.112	0.110	13.196	3.248	2.216	31.226	12.744
	7	SEXF	5.408	0.112	0.110	13.196	3.248	2.216	31.226	12.744
	8	STCS	5.708	0.116	0.125	13.231	3.004	2.256	31.362	12.256
	9	BF2	5.908	0.118	0.136	12.871	2.967	2.249	30.992	12.180
	10	ST	10.908	0.269	0.283	2.943	13.242	1.236	15.221	25.731
	11	BD2	11.108	0.280	0.286	2.995	13.600	1.214	15.272	26.076
	12	STCS	11.408	0.295	0.289	3.263	13.532	1.209	15.795	26.012
	13	SEXD	11.408	0.295	0.289	3.263	13.532	1.209	15.795	26.012
	14	STCS	11.708	0.309	0.293	3.600	13.478	1.204	16.426	25.960
	15	BDX	13.038	0.352	0.310	7.716	9.390	1.438	23.237	21.668
	16	BFX	14.608	0.375	0.347	13.350	5.766	1.734	30.172	16.979
	17	S50	15.365	0.384	0.368	13.701	5.851	1.722	30.479	17.104
	18	BFL2	16.090	0.392	0.387	12.768	6.727	1.641	29.369	18.340
	19	BFL2	16.815	0.403	0.402	9.624	9.334	1.428	25.506	21.604

III) EXTRACTION CONSIDERATION

We observe that the phase advance between the consecutive straight sections is about 90 degree from QD to QF. It is more advantageous to have the 90 degree phase advance from QF to QF for the extraction consideration. Therefore the hybrid machine might be better to be operated at  $Q_x=3.83$ . The phase advance between the extraction kicker and the extraction septum will be nearly 90 degree and the betafunctor will be maximum at both of these locations. Table 2. lists the parameters relevant to these two hybrid lattices. Another advantage for the smaller tune is that the gradient of the dipoles will be slightly smaller. The aperture requirement is however increased by 3 mm in the x-plane and .5 mm in the y-plane(with the assumption of 50 pimmrad of emittance and .25% of momentum variation). Figs. 6,7,8 and 9 show respectively the betatron amplitudes, the beam size, the chromatic variation of the machine functions and the phase advance in two superperiods.

IV) Conclusion

In conclusion, we have derived a resonably behaved combined function lattice for the Booster. We found that the basic lattice properties are good. The lattice has several interesting features, 5m long straight section can be obtained without much penalty. The machine, with some tuning quadrupoles, should be able to tuned within  $\pm .25$  easily. In Table 2 we compare the lattice parameters with those of the proposed lattice(ref. 2)

Table 2. Comparison of booster lattices

	STANDARD SEP.FN.	HYBRID COMB.FN.		AGS	CERN-PS
Circumference (m)	1/4AGS 201.78	1/4AGS 201.78	1/4AGS 201.78	807.12	628.3185
SUPERPERIOD	6	12	12	12	10
TUNE( $Q_x, Q_y$ )	4.8	4.8	3.83	8.8	6.28
Phase/cell(deg.)	72				
Systmatic stop bands					
order 2	3,6,9	6,12	6,12	6,12	5,10
order 3	4,6,8	4,8	4,8	8	6+2/3
order 4	4+1/2,6	3,6	3,6	9	5,7+1/2
Magnet specifications					
BRHO(T-m)	16.7	16.7	16.7	98.1	81.35
dip.length(m)	2.4	2.9	2.7		4.403185
No. dipoles	36	36	36	240	100
$B^{\wedge} @ brho=16.7Tm$	1.214	1.005	1.0795	1.14952	1.16
quad.length(m)	0.50375	0.2	0.2		
No. quads.	48	24	24		
quad.gradients					
QF(T/m)	9.84	12.5	10.82277		
QD(T/m)	-10.1	-12.7	-11.0504		
dipol.grad.					
BF(T/m)	0	3.12	2.705693	4.742195	4.7771
BD(T/m)	0	-3.17	-2.76262	-4.75737	-4.7771
$B''/B(m^{-1})$	0	3.104477	2.506431	4.125370	4.118189

## REFERENCES.

- 1) E. D. Courant, AGS lattice. private communication.
- 2) Y. Y. Lee, Private communication and BNL-34989 R April 1985  
AGS BOOSTER CONCEPTUAL DESIGN REPORT vol. 1.

## APPENDIX: SOME VARIATIONS OF THE COMBINED FUNCTION LATTICES


## Figures Caption:

- Fig.1 The betatron functions is plotted in the two superperiods. The dispersion function about 2.26m and the maximum beta function is about 13.7m. At the short spaces between magnets, the ratio of maximum to the minimum beta function is 2:1 and 4:1 respectively. At these locations corection elements can be used to tune the machine without inducing large coupling between the transverse planes.
- Fig.2 The phase advance of the horizontal plane is plotted as a function of magnet elements. From the end of the long straight section to the begining of the next straight section is not very far away from the optimal 90 degree phase advance for the beam extraction into the AGS.
- Fig.3 The beam size ( $2.5\sigma$ ) is calculated for the emittance of 50  $\pi$  mmmrad and  $dp/p = .25\%$ .
- Fig.4 The chromatic variation of the tune, betatron amplitudes(in percentage) as a function of  $dp/p$ .
- Fig.5 The betatron function of the CERN-PS is shown for comparison.
- Fig.6 The betatron amplitude of the HYBRID lattice at  $Q=3.83$ .
- Fig.7 The beam size of  $Q=3.83$  in mm with emittance of 50 mmmrad and  $dp/p = .25\%$ .
- Fig.8 The chromatic variation of the lattice with  $Q=3.83$ .
- Fig.9 The phase advance of the lattice with  $Q=3.83$  across two superperiods.



### BOOSTER HYBRID LATTICE


Q=4.83 P=12 ST=5m

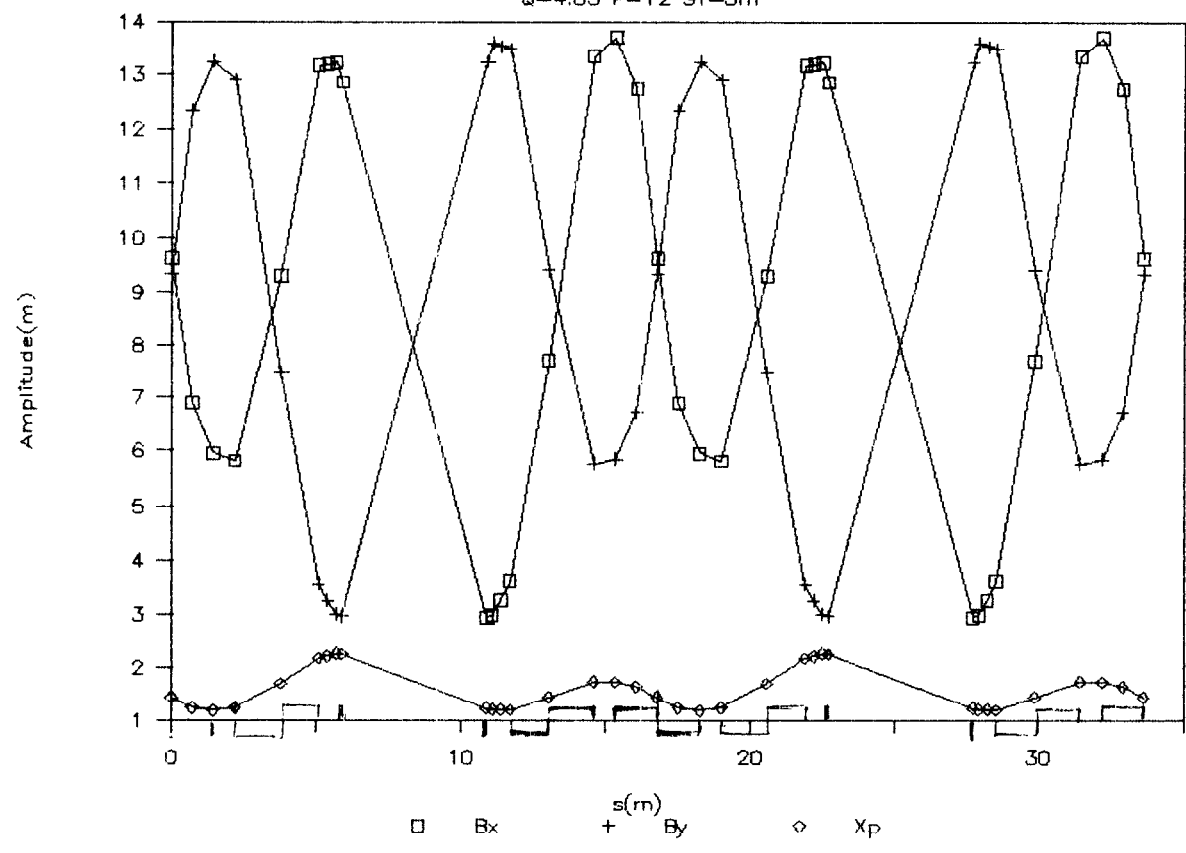

1

### BOOSTER HYBRID LATTICE


Q=4.83 P=12 ST=5m

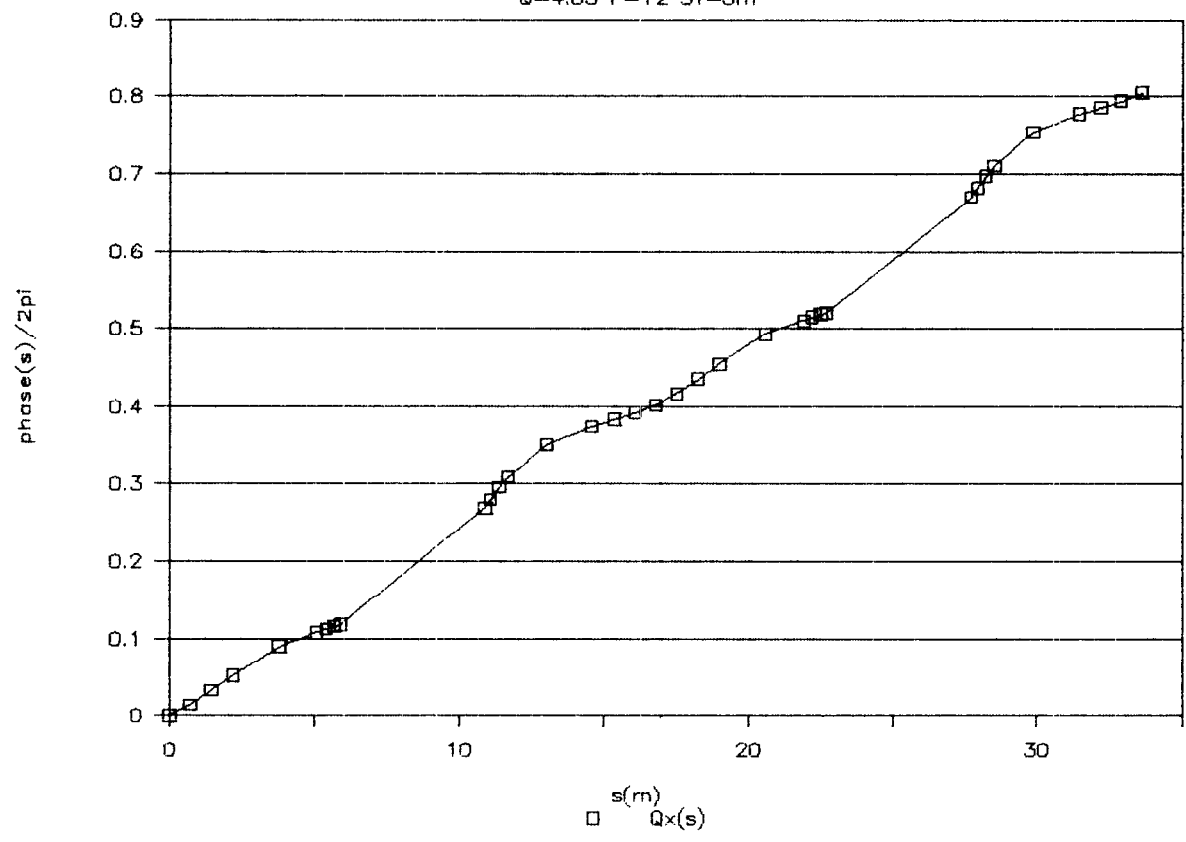

2


# BOOSTER HYBRID LATTICE

Q=4.83 P=12 ST=5m

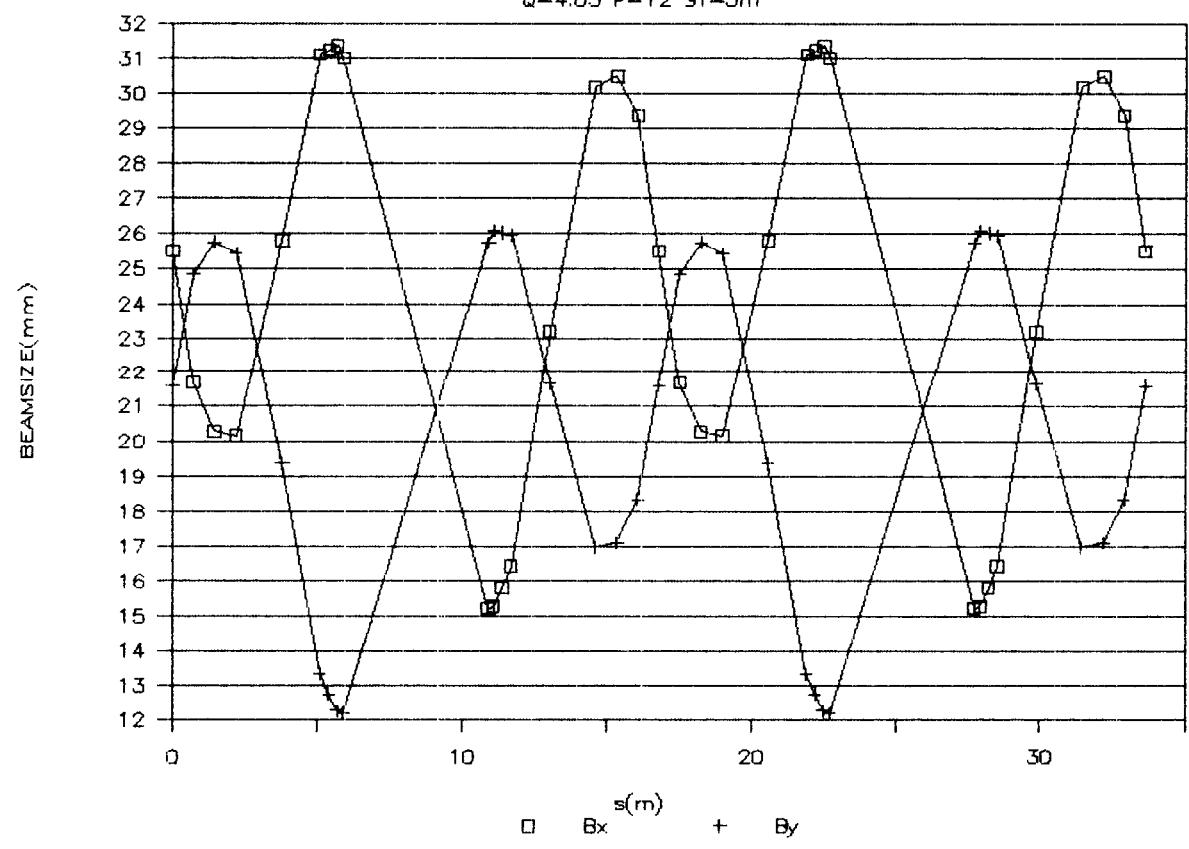

# HYBRID LATTICE


q=4.83, P=12

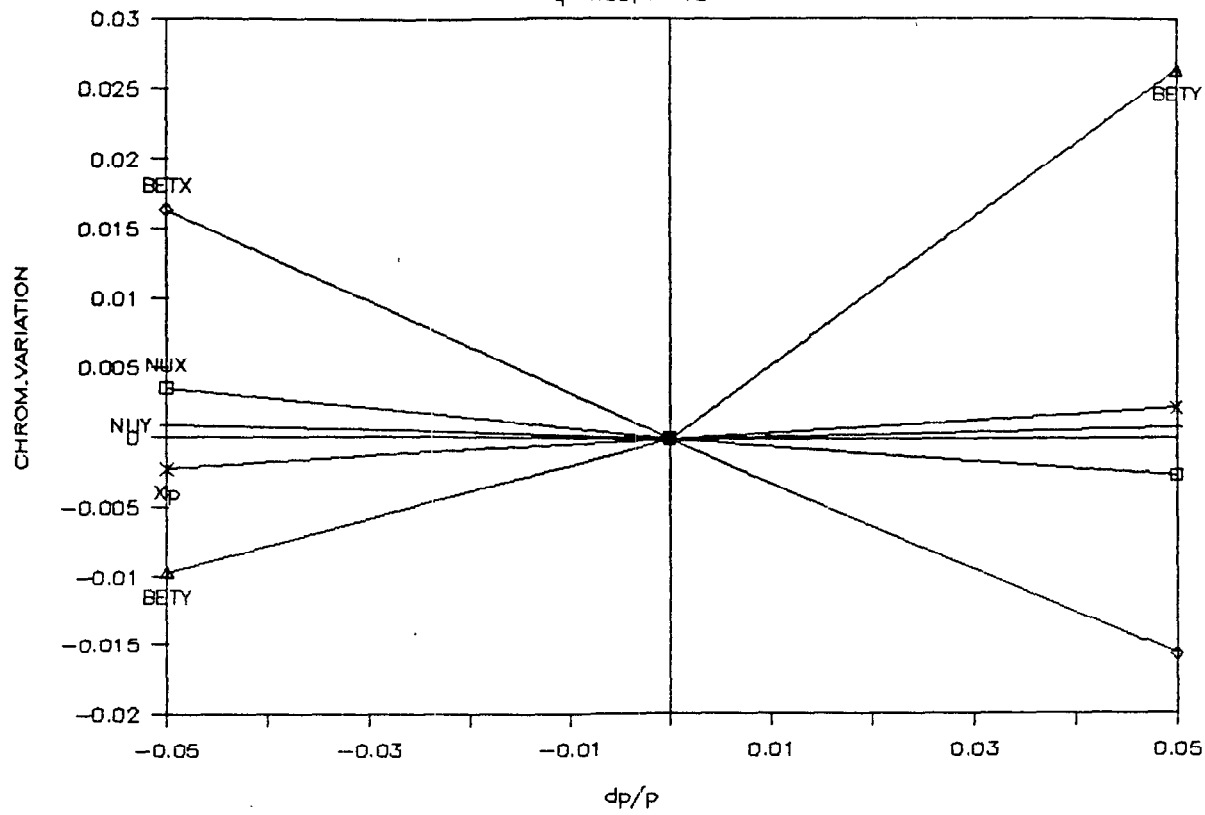

4

# CERN-PS LATTICE


P=10 q=(6.247,6.298)

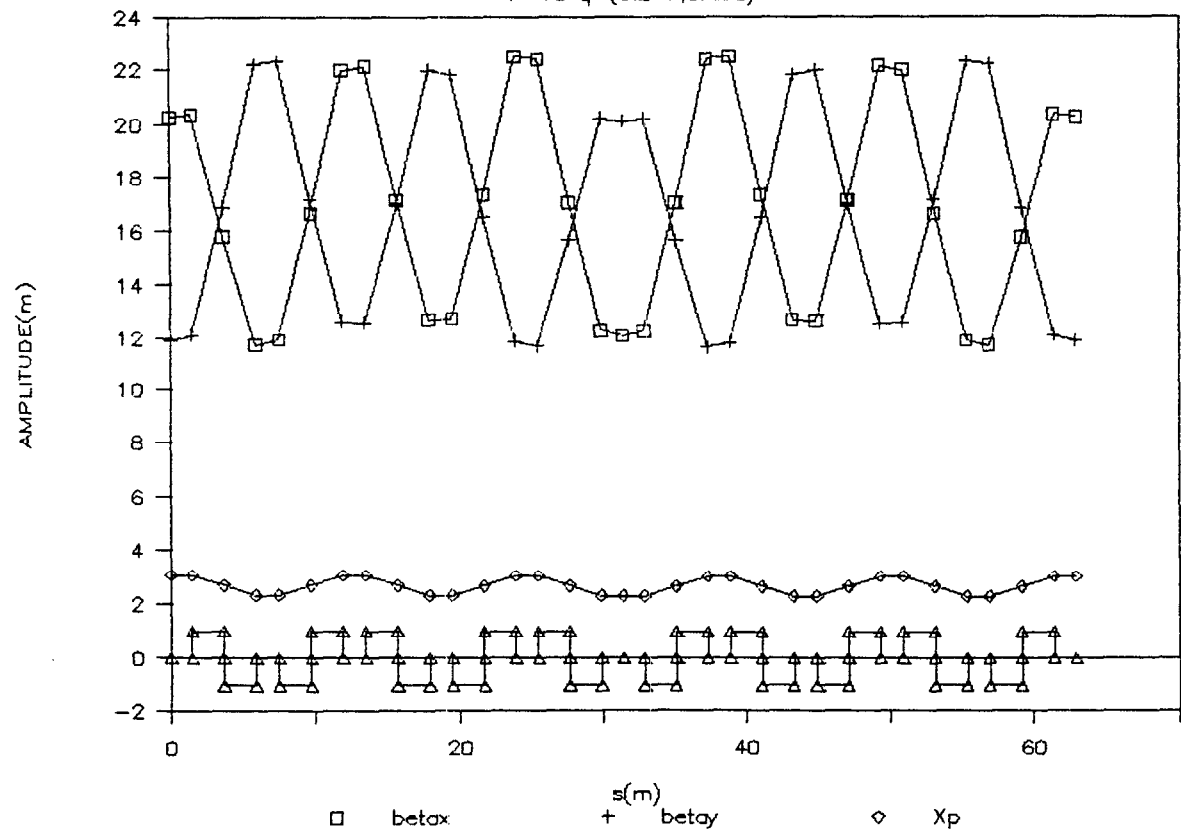

5

### BOOSTER HYBRID LATTICE


q=3.23, P=12, C=1/4AGS

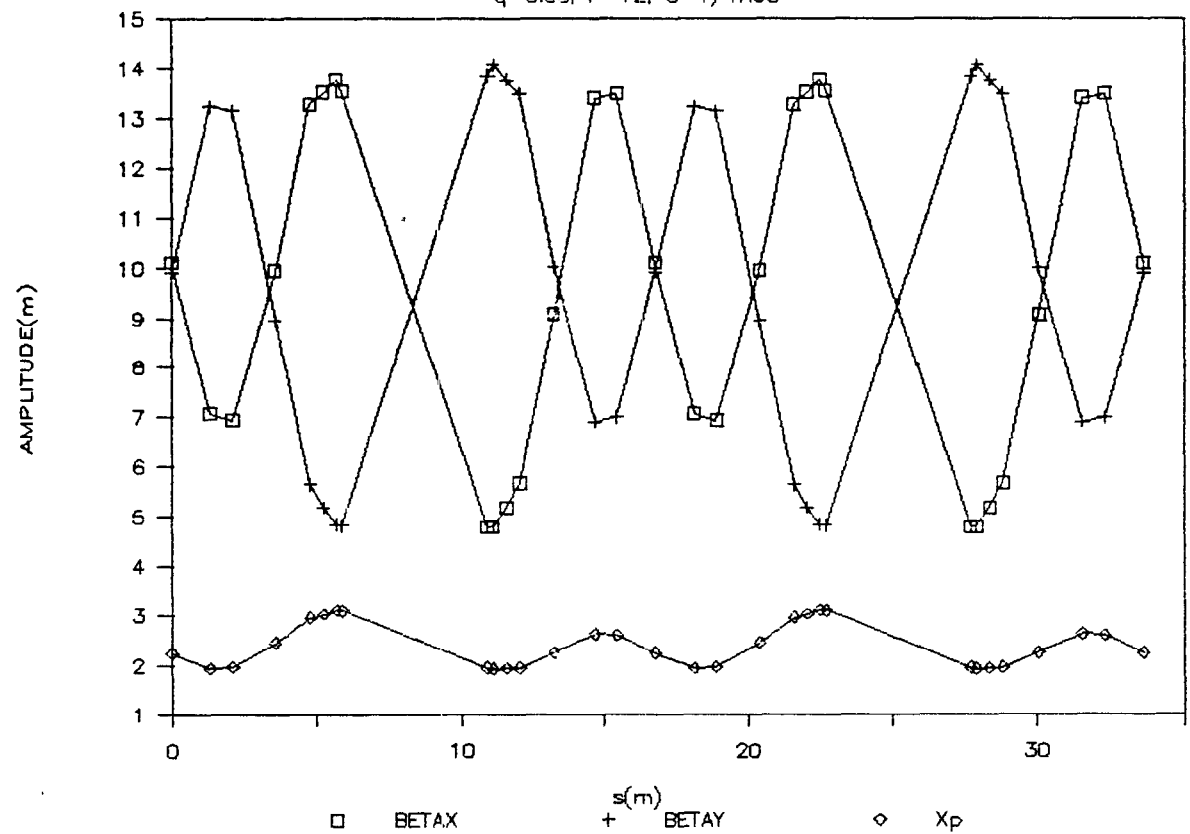

6

### BOOSTER HYBRID LATTICE


q=3.23, P=12, C=1/4AGS

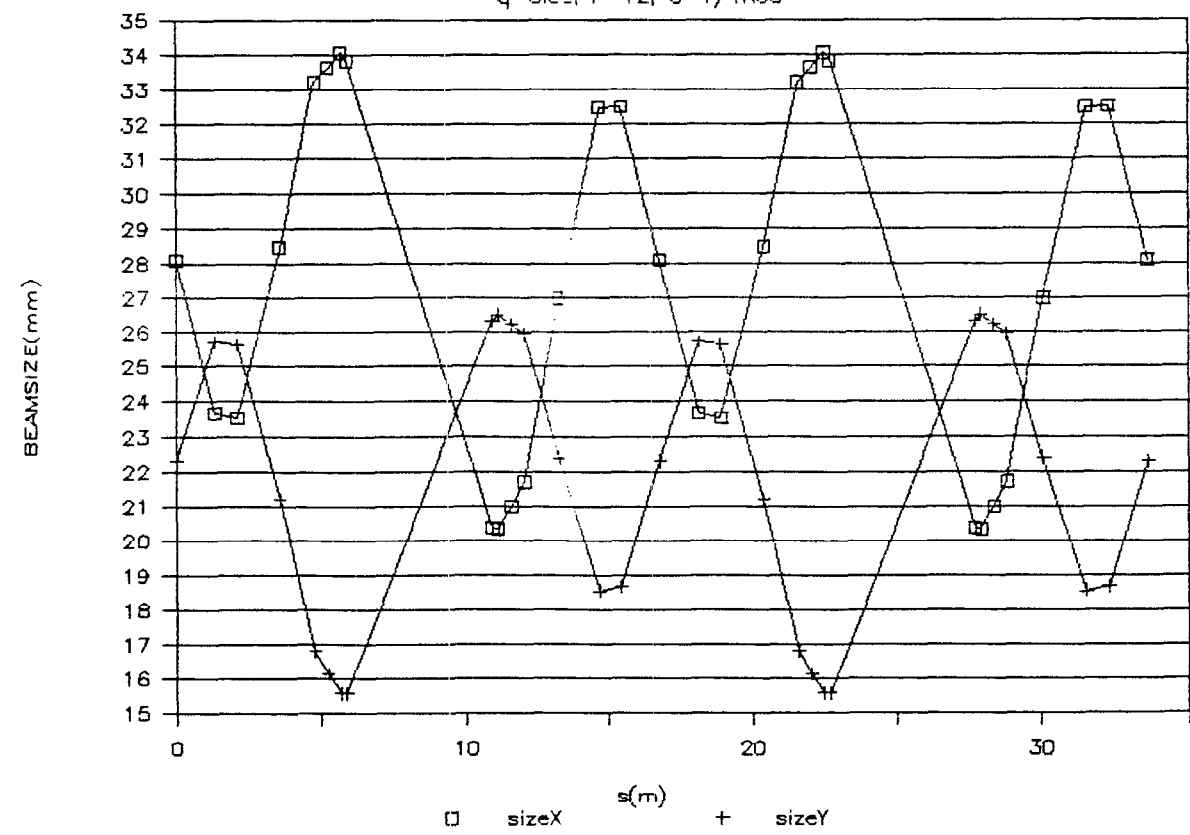

7

# BOOSTER HYBRID LATTICE


q=3.83, P=12, C=1/4AGS

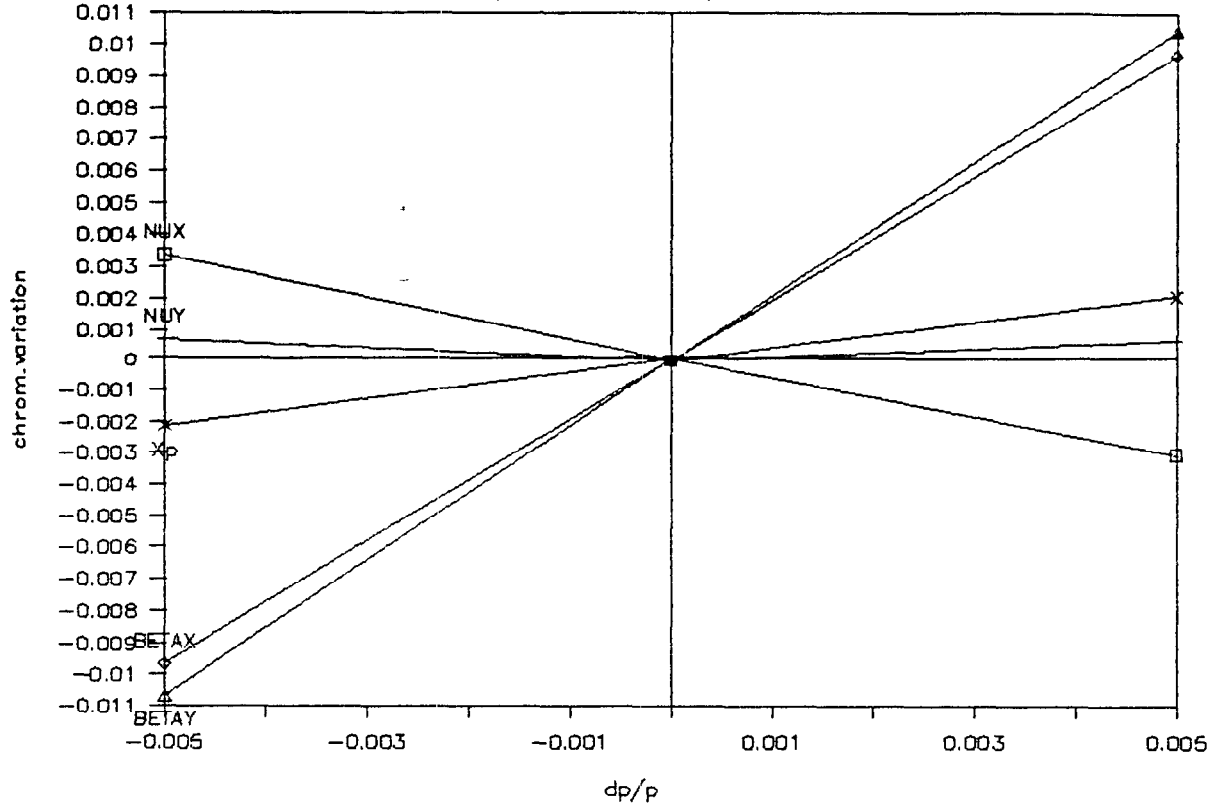

8

# BOOSTER HYBRID LATTICE

q=3.83, P=12, C=1/4AGS

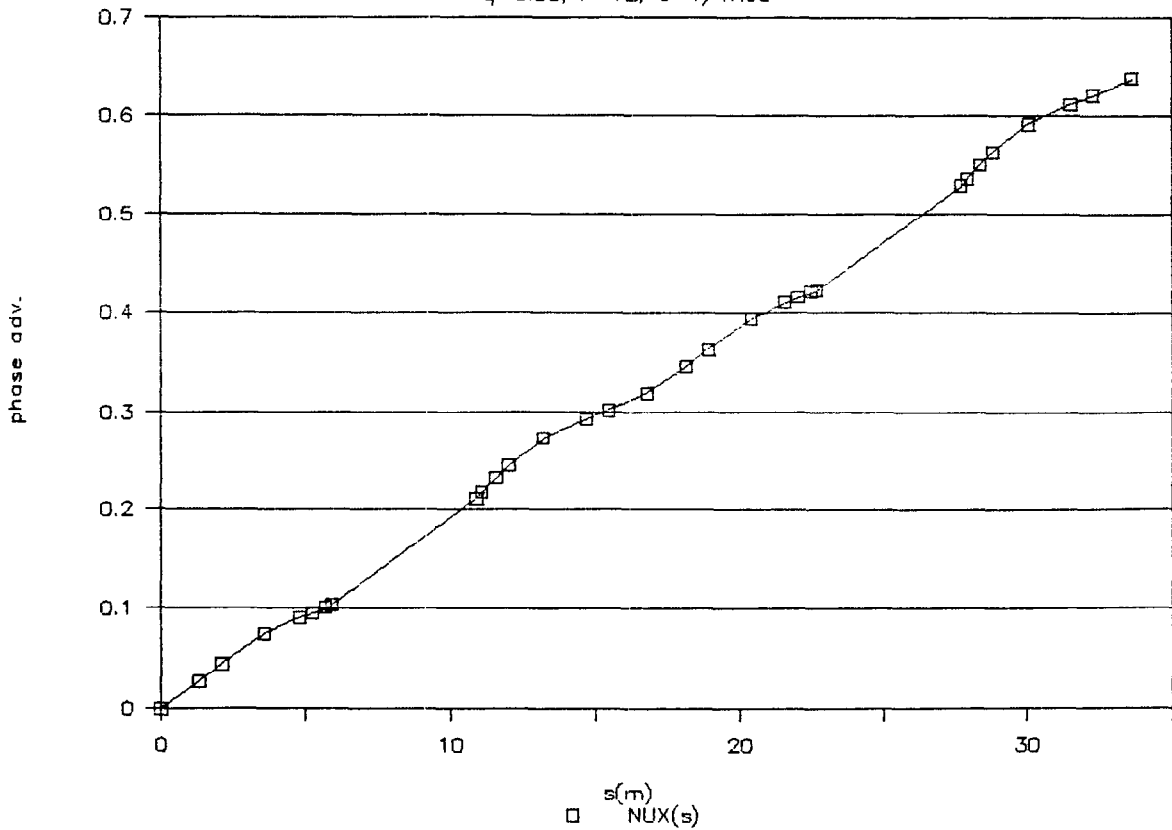

9


\*\*

## APPENDIX: Combined function Lattice for the 1/3 AGS circumference

- Fig.10 The betatron functions is plotted for the combined function magnets for 1/3 Circumference of AGS at the tune of 4.83 with 16 superperiodicity.
- Fig.11 The beam size (in mm) is plotted for the lattice shown in Fig.10 for emittance of 50 pi mm mrad in both the horizontal and vertical plane and  $dp/p=.25\%$ .
- Fig.12 Chromatic properties with the sextupoles of Fig.10.
- Fig.13 Phase advance acrosses two superperiods to demonstrate the extraction feasibility of the lattice of Fig.10.
- Fig.14 Tunability of the machine is demonstrated that the machine tune can be changed by 2 tuning quadrupoles at 20cm long and 5T/m at  $BRHO=16.7 Tm$ .

### BOOSTER HYBRID LATTICE


q=4.83 P=16 C=1/3AGS

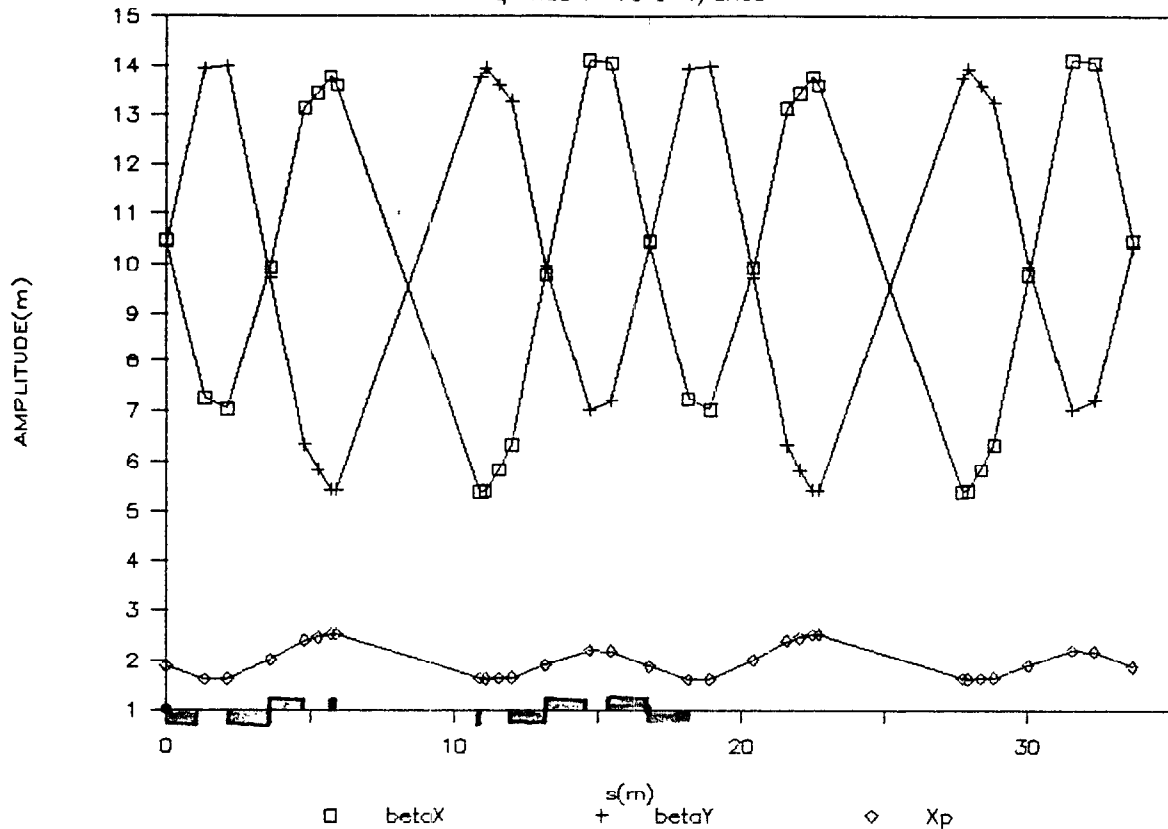

10

### BOOSTER HYBRID LATTICE


q=4.83 P=16 C=1/3AGS

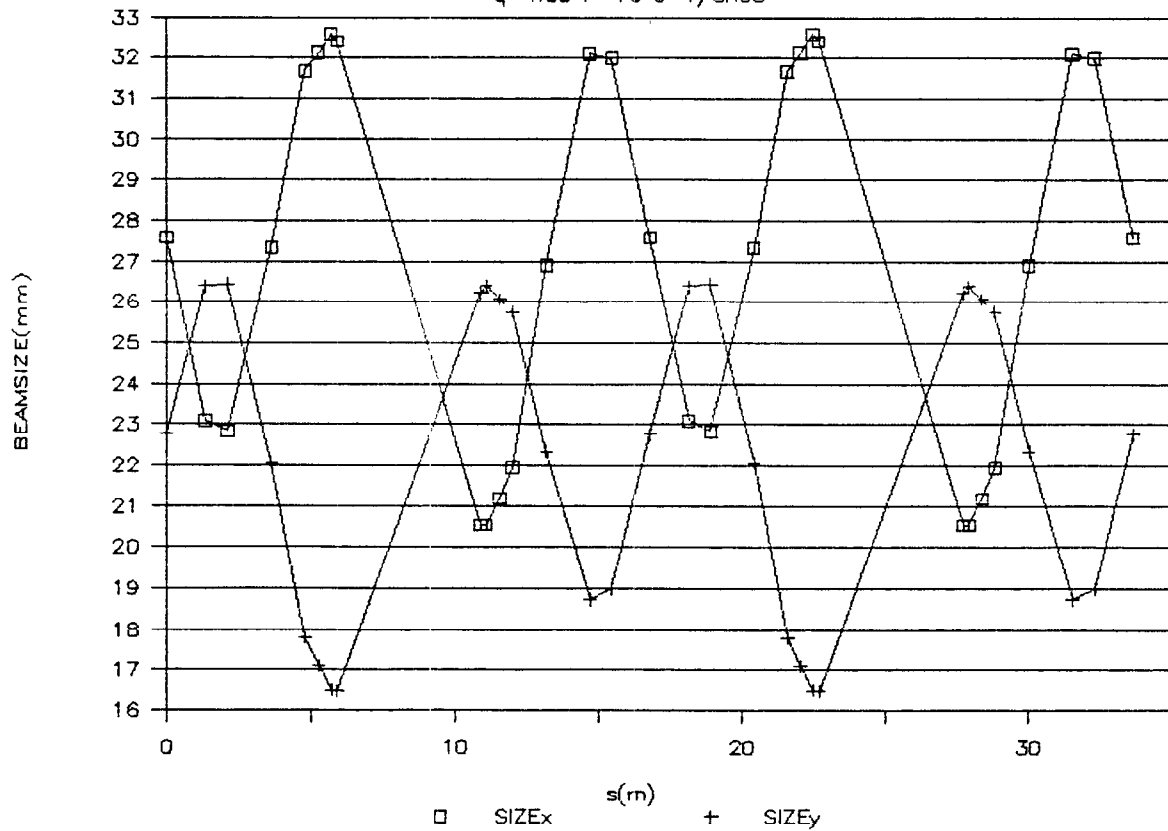

11

# BOOSTER HYBRID LATTICE


q=4.83 P=16 C=1/3AGS

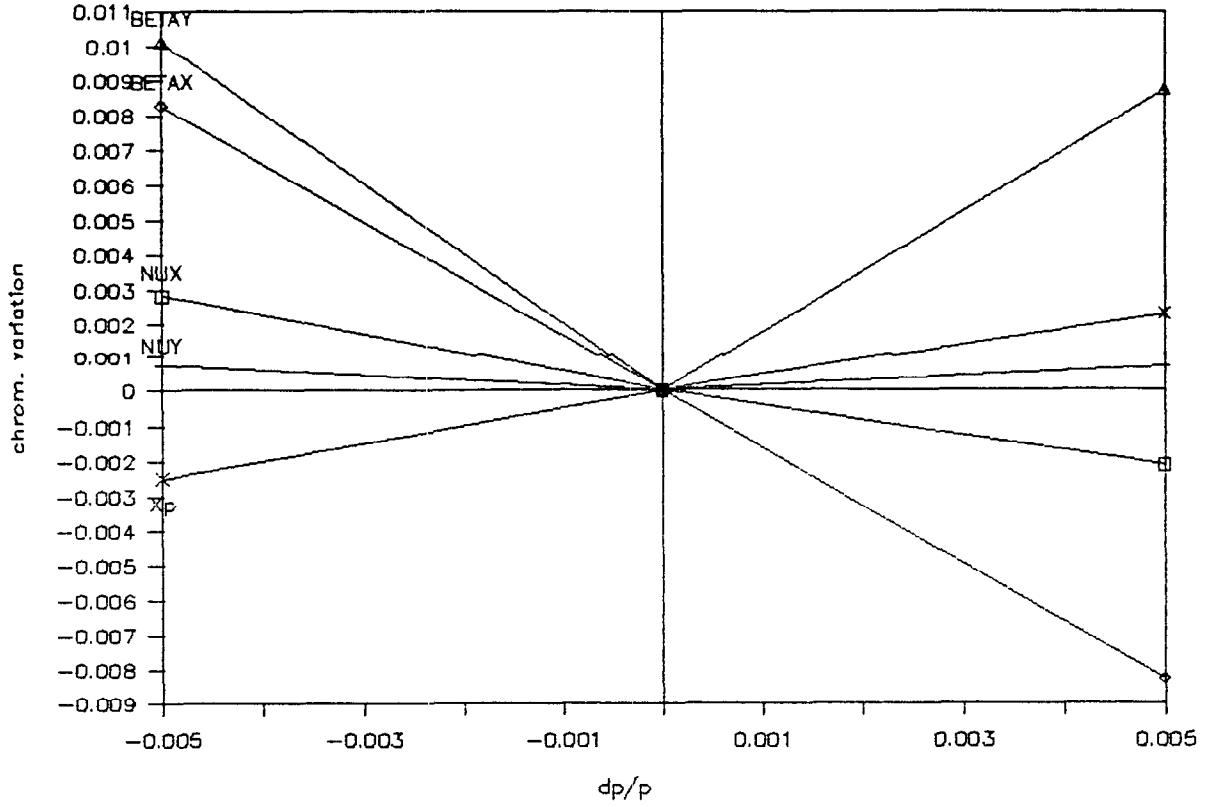

12

# BOOSTER HYBRID LATTICE

q=4.83 P=16 C=1/3AGS

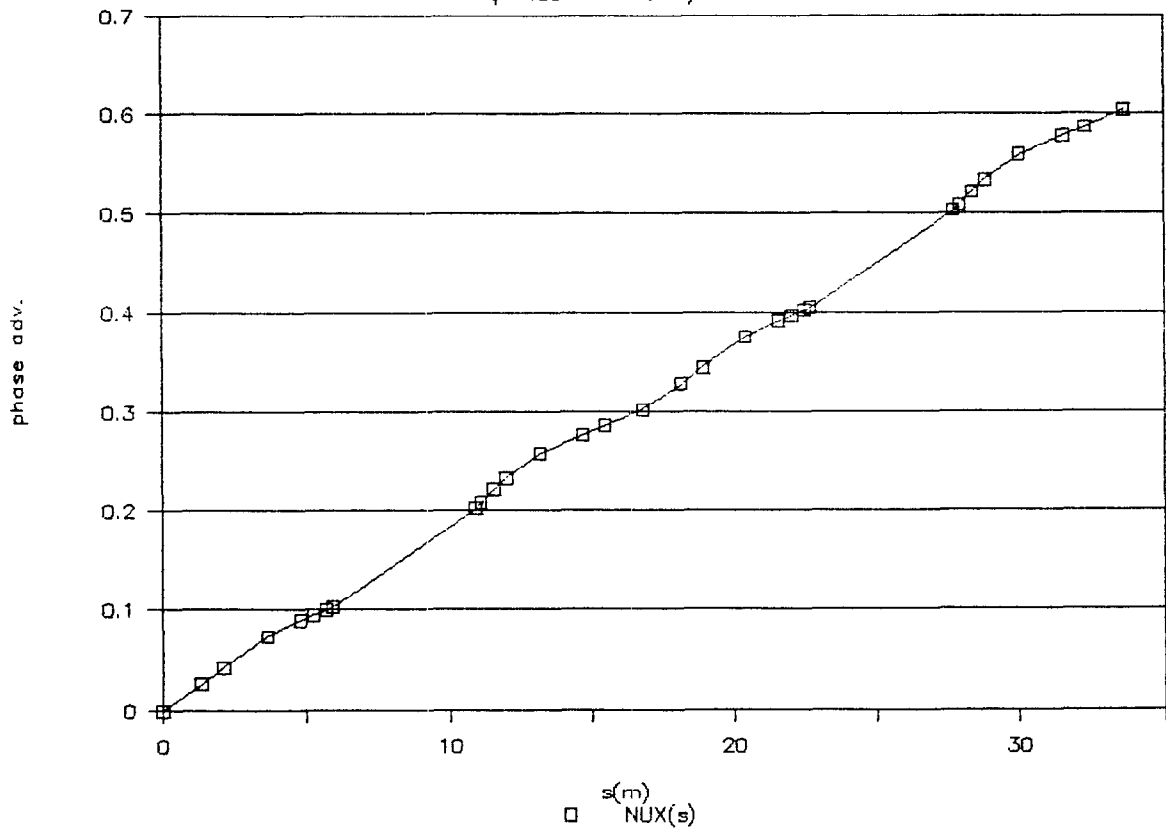

13



# HYBRID P=12 C=1/4AGS LATTICE

q=3.83 and 4.83 with tuning quads

