

ACCELERATION PARAMETERS FOR THE AGS-BOOSTER

Z. Parsa

September 1987

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

ACCELERATION PARAMETERS FOR THE AGS-BOOSTER

AD

Booster Technical Note

No. 91

ZOHREH PARSA AND EUGENE RAKA

SEPTEMBER 17, 1987

ACCELERATOR DEVELOPMENT DEPARTMENT
Brookhaven National Laboratory
Upton, N.Y. 11973

Acceleration Parameters for the AGS-Booster

Zohreh Parsa and Eugene Raka

Brookhaven National Laboratory
Upton, NY 11973

I. Introduction

This note includes the acceleration parameters for the AGS-Booster [1], assuming a uniform distribution in longitudinal phase space using the formulation given in section II. Some of the values used in our calculation were extrapolated from the tabulated information given in Reference [2]. Our results for the AGS-Booster are given in section III.

II. Summary of the Formulation

The phase area of a "stationary bucket" ($\phi_s = 0$) is given by

$$A_o = \frac{8}{h(w_s/\beta)} \sqrt{\frac{2eVE_s}{\pi h|\eta|}}$$

This is the area of one of the h buckets of the h th harmonic [2]. Where (the subscript) s refers to the synchronous particle;

eV is the maximum energy gain per turn;

E_s is the synchronous energy;

h is the harmonic number;

$\beta = v/c$ (c = velocity of light) and $\gamma = 1/\sqrt{1 - v^2/c^2}$ are the relativistic factors;

ϕ is the phase of a particle relative to r-f wave;

w is the angular frequency and

$$w_{rf} = hw_s$$

$$\eta = 1/\gamma_{tr}^2 - 1/\gamma^2 \quad [\eta < 0 \text{ below transition } (\equiv tr)]$$

$$w_s/\beta = c/2\pi R \quad (c = 3 \times 10^8 \text{ m/s}),$$

R = radius of the ring.

The area of the moving bucket is given by

$$A_b = A_o \alpha(\phi_s)$$

where $\alpha(\phi_s)$ is the moving bucket factor, and the area contained within some curve $H = NH_E$ (H_E is the maximum value of H , $N < 1$) is given by

$$A = A_o \alpha_N(\phi_s)$$

We define the "bunching factor" to be the ratio of the peak to average particle density, for uniform distribution in longitudinal phase space. This is $1/\bar{B}$, the inverse of the bunching factor \bar{B} used in Ref. [2]. Additionally, we define

\hat{I} = peak current,

\bar{I}_b = average (DC component of the beam) current,

\tilde{I}_b = rf component of the beam current,

$P_b = \bar{I}_b \sin\phi_s$, ($P_b \equiv$ power), and

$\Delta r = X_p \Delta p/p$ (Δr is 1/2 of the aperture taken by synchronous oscillation) where
 p = momentum.

III. Booster Acceleration Parameters

	<u>Injection</u>	<u>Ejection</u>
Energy	200 MeV	1.5 GeV
$\beta = v/c$	0.5662	0.9220
p	0.6444 GeV/c	
RF amplitude [$V_{\text{Rf}} = \hat{V}$]	90 kV	70 kV
\bar{I}_b	~3 amp	4.93 amp
Intensity (particle/bunch)	7.5×10^{12}	7.5×10^{12}
Harmonic number [h]	3	3
RF frequency [f_{Rf}]	2.48 Mhz	4.11 Mhz
Rotation frequency [f_0]	826.67 kcycle	1.37 Mhz
ϕ_s	2.6°	22.4°
\dot{B}	1.5 T/s	9.6 T/s
P_b	—	131.8 kW (bucket not full)
Phase space area		
Stationary bucket A_0	1.67 eVsec	5.47 eVsec
Moving bucket A_{bunch}	1.5 eVsec	1.5 eVsec
A_{bucket}	1.5 eVsec	2.46 eVsec
α_1	0.895	0.45
bucket length	320° = 60.55m	216°
bunch length	320° = 60.55m	151°
bunching factor	1.697	3.23
peak bunch current [\hat{I}]	5.1 amp	16 amp
bucket height $\Delta p/p$	0.876×10^{-2} or 3.19 MeV	0.59×10^{-2} or 12.13 MeV
\tilde{I}_b	—	8 amp
N	1	0.66
Δr	2.45 cm	
X_p	2.8m	
η	0.6376	0.09877

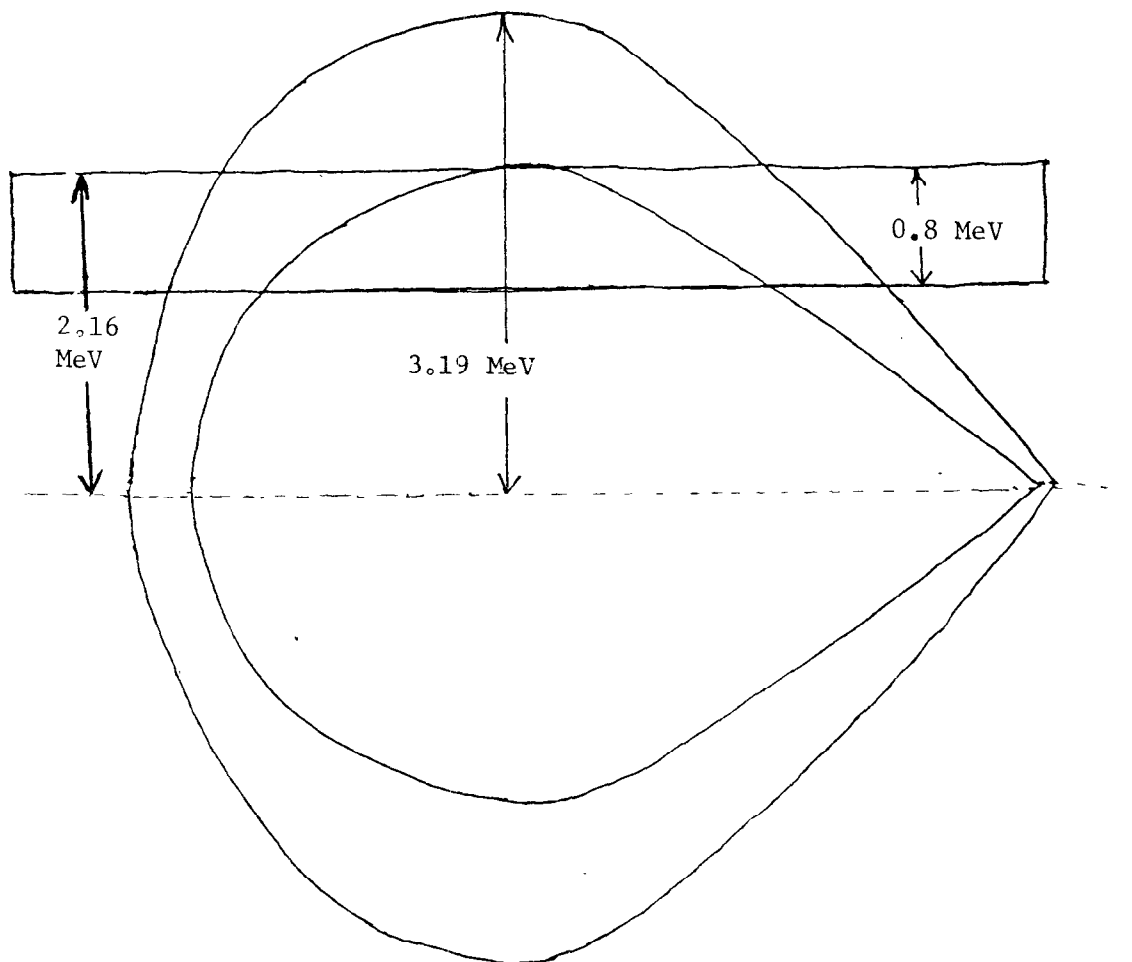


Figure 1. Booster Bucket at injection. Initial and final. Bucket heights at injection are shown.

References

1. Z. Parsa, Booster Parameter List, BNL-39311; and Design Manual.
2. F.T. Cole and P.L. Morton, UCID 10130, ASI Theoretical/02, Sept. 21, 1964.