

# FAST-SLOW EXTRACTION AT F10 INDUCED BY THE FAST KICKER

L. N. Blumberg

January 1969

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.AT-30-2-GEN-16 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Accelerator Department  
BROOKHAVEN NATIONAL LABORATORY  
Associated Universities, Inc.  
Upton, L.I., N.Y.

AGS DIVISION TECHNICAL NOTE

No. 59

L.N. Blumberg and A.V. Soukas  
January 20, 1969

FAST-SLOW EXTRACTION AT F10 INDUCED BY THE FAST KICKER

The purpose of this note is to report the successful accomplishment of fast-kicker-induced resonance extraction<sup>1</sup> in the F10 external beam channel at momentum  $p \approx 30$  BeV/c and spill duration  $\approx 200$   $\mu$ sec. This mode of extraction is of considerable interest for future bubble chamber operations in the H10 external beam, giving the possibility of positioning incident particles in the chamber with a sweeping magnet and thus obtaining optimum track density over a larger fraction of the chamber volume than is presently possible with  $\approx 10$  nsec single bunch extraction<sup>2</sup>. The total number of useful events per picture can thereby be increased. Other advantages of "fast-slow" resonance extraction include (1) smaller horizontal emittance of the extracted beam and thus smaller size of the source for secondaries than can be attained with present FEB extraction; hence, improved mass resolution in separated beams, and (2) ability to control the quantity of extracted protons by varying the magnitude or duration of the fast kicker pulse, making possible a small spill ( $\sim 10^{10}$  protons) presently accomplished with poor efficiency by diffraction scattering from an internal target.

The method for stimulating resonance extraction with the fast kicker was as follows: The beam drifted radially outward during "flat-top" toward

the  $\nu_h = 8-2/3$  resonance radius with the slow beam (SEB) sextupoles, backleg windings and ejector magnets energized as in normal SEB extraction<sup>3</sup>. At an appropriate time prior to the point when the beam equilibrium orbit crossed the resonance radius, the fast kicker was energized and imparted an angle increment to protons in a small fraction of the machine azimuth. The particles thus affected continue to execute large amplitude coherent betatron oscillations (there is no mechanism for damping transverse oscillations in the AGS) about the unperturbed equilibrium orbit. As the equilibrium orbit approached the resonance radius, the triangular region of stability in the transverse phase plane (the separatrix) contracts and eventually the "kicked" particles are no longer contained within the separatrix. The particles in the unstable region then execute betatron oscillations of increasing amplitude with the same growth rate (and thus extraction efficiency) as in the normal SEB spill, and are extracted with the F5 and F10 ejector magnets.

For the experiment reported here, flat-top start time was 873 msec, SEB sextupoles, quadrupoles, backleg windings and ejector magnets were fully energized at 900 msec and magnet cycle "invert" time was 1332 msec. The fast kicker was energized at  $t = 1000$  msec in the single bunch mode (170 nsec rise time, 20 nsec flat-top, 300 nsec fall time<sup>4</sup>); thus only a small fraction of the circulating beam (2.69  $\mu$ sec per revolution) was affected by the maximum fast kicker deflection. The fast kicker delay line voltage was 43 kV which corresponds to a peak dipole strength of  $\sim 1$  kG-meter<sup>4</sup> and results in an angle increment of  $\sim 1$  mrad at  $p = 30$  BeV/c. This angle displacement is comparable to the  $\approx 1.34$  mrad angle width of the circulating beam which can be calculated from the relation  $\Delta X' = 2\sqrt{\epsilon}$  with horizontal beam emittance taken as  $E = \pi\epsilon = .102\pi$  inch-mrad and  $\gamma = 4.371 \cdot 10^{-3}$  inch<sup>-1</sup> at straight section L10 obtained from calculated AGS parameters<sup>5</sup>. Finally, the flat-top

slope was empirically adjusted so that the beam equilibrium orbit approached but did not cross the resonance radius; thus, the normal slow spill was suppressed and the part of the beam unaffected by the fast kicker remained in the machine until "invert". We were thus able to readily distinguish the fast-slow spill component at  $t = 1000$  msec.

The spill was observed with a lucite Čerenkov counter positioned near a collimator in the "R" channel approximately 45 ft. downstream of the F10 ejector magnet and with insulated plates at the end of the "S" channel approximately 270 ft. from F10. The counter was terminated with  $470\Omega$  and had adequate frequency response ( $\tau_{rc} \approx 1 \mu\text{sec}$ ); the counter signal was displayed on a Tektronix 422 oscilloscope with horizontal sweep speed of  $100 \mu\text{sec/div}$  and is shown in Fig. 1. The spill exhibits peaks with  $\approx 8 \mu\text{sec}$  spacing as expected since the kicked particles are in the correct radial position for extraction at F5 only once in three revolutions about the AGS. We were unable to make a reliable measurement of the amount of beam extracted with existing instrumentation; the external beam was less than 1% of the normal SEB spill ( $\sim 10^{12}$  protons/pulse) as estimated from the digital readout of an integrated secondary emission counter signal. The spill was observed to be quite reproducible in amplitude, duration and start time for many consecutive AGS pulses.

Other methods have been suggested and utilized for a fast-slow spill. Reich<sup>6</sup> has discussed multiturn and resonance extraction techniques and shows that multiturn extraction would be inefficient for the beam size, septum thickness and spill duration of interest here. Robertson<sup>7</sup> has considered the interesting possibility of stimulating slow extraction by applying an rf perturbation to drive particles into the unstable region of the phase plane. The resulting spill duration and magnitude could be controlled by varying the rate of change of rf frequency and voltage. The spill will exhibit structure

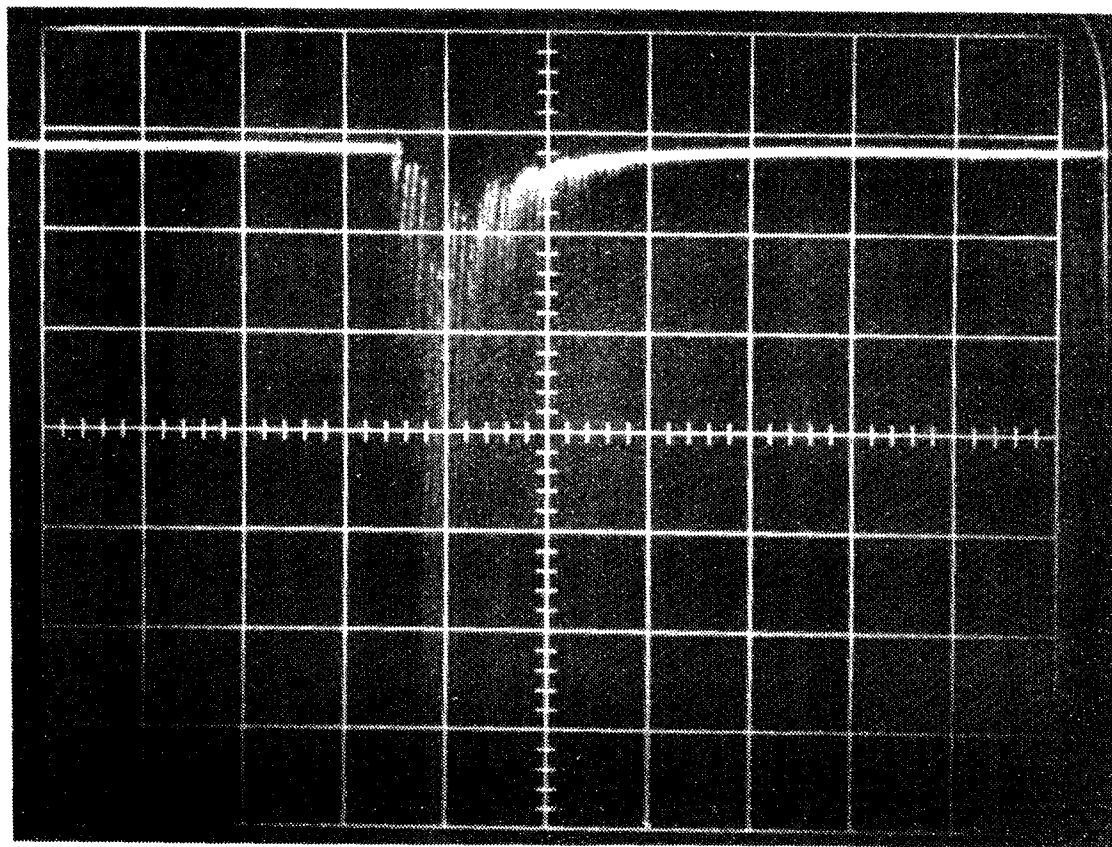


Fig. 1 Fast-slow spill induced by 20 nsec, 43 kV fast kicker pulse. Detector was lucite Čerenkov counter with 470  $\Omega$  termination viewing R20 collimator in slow external beam. Oscilloscope horizontal sweep rate is 100  $\mu$ sec/div.

(4  $\mu$ sec spacing) similar to the fast-kicker-induced spill. For cases where the fast-slow spill precedes a normal AGS slow spill, the rf technique could have an important advantage compared to the fast kicker method--in the latter method a "hole" remains in the circulating beam which could result in objectionable modulation of the SEB. In the rf method the circulating beam is de-populated more uniformly.

The CERN PS method for fast-slow spill has been resonance extraction at "invert" in which particles remaining in the machine after the flat-top SEB are ejected in approximately 1 msec<sup>8</sup>. A similar capability exists at the AGS. This method results in a spill without the structure inherent in the rf and fast kicker techniques and has the additional advantage of not perturbing the normal SEB spill. However, we are limited in this method to one spill per AGS cycle whereas the rf and fast kicker methods are capable of multiple spills per cycle with appropriate programming of the flat-top.

Distr: Department Administration  
AGS Division Staff  
EP & S Division Staff

References

1. Preliminary tests with an internal target by A.W. Maschke established the feasibility of this method prior to the present work (private communication, 1968).
2. J.R. Sanford (private communication, 1968).
3. M.Q. Barton and J. Faure, BNL Accel. Dept. Int. Rep. AADD-131 (1967).
4. E.B. Forsyth, "Characteristics of the Fast Kicker," unpublished report, (November 1966).
5. M.Q. Barton, " $\alpha\beta\gamma$  Version of DATREP Subroutine of BEAM Code," private communication (1967).
6. K.H. Reich, BNL Accel. Dept. Int. Rep. AADD-100 (1966).
7. D.S. Robertson, BNL Accel. Dept. Int. Rep. AADD-97 (1966).
8. D. Dekkers, private communication (1968).



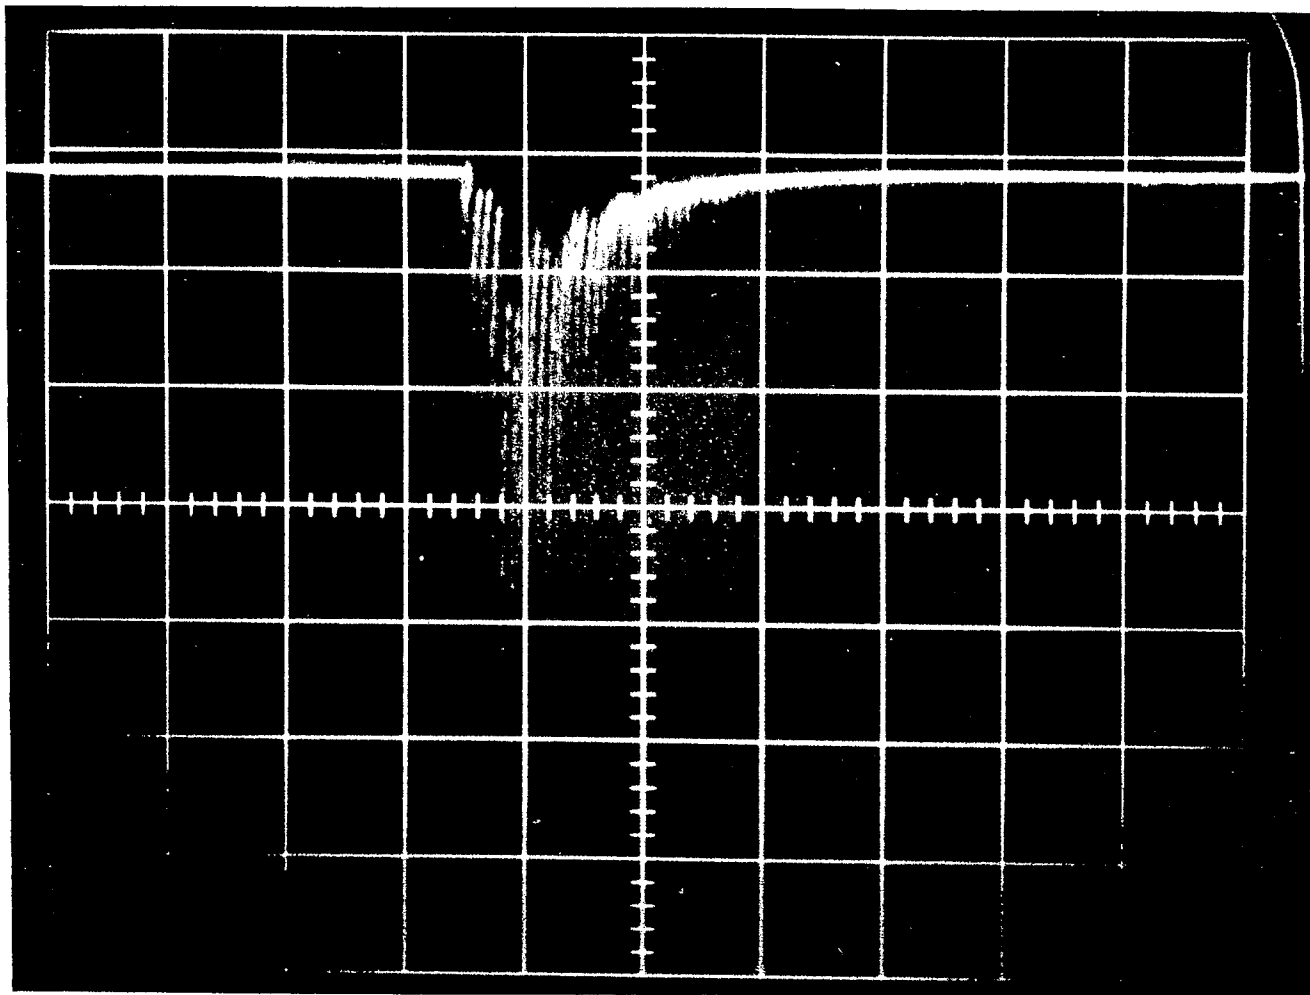


Fig. 1 Fast-slow spill induced by 20 nsec, 43 kV fast kicker pulse. Detector was lucite Čerenkov counter with 470  $\Omega$  termination viewing R20 collimator in slow external beam. Oscilloscope horizontal sweep rate is 100  $\mu$ sec/div.