



BNL-104465-2014-TECH

AGS/AD/Tech Note No. 24;BNL-104465-2014-IR

0-VAL METAL SEALS (Del Mfg.Co)

J. C. Schuchman

August 1966

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.AT-30-2-GEN-16 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Accelerator Department
BROOKHAVEN NATIONAL LABORATORY
Associated Universities, Inc.
Upton, L.I., N.Y.

AGS DIVISION TECHNICAL NOTE

No. 24

J.C. Schuchman
August 23, 1966

O-VAL METAL SEALS (Del Mfg.Co)

A total of ten O-val gaskets, manufactured by Del Mfg. Co., were tested for possible use in the AGS and also in the conversion program. Four variations were tested, the last type being specifically designed for our requirement. The previous rings were also designed for us, but they (Del) somehow misunderstood that we were after low-sealing forces.

Only one gasket sealed. A silver-plated #304 stainless steel ring sealed at 1070 lbs/lin.in. however, the ring was only compressed to .231-in. a total of about .004-in. It must be noted that this seal was not of the latest design which Del claims will compress to .206 at 650/750 lbs/lin. in. We did notice the reduced closing forces for this latest design, but still we were unable to effect a seal.

To sum up, I think we should not rely on Del to produce a reliable gasket for us at the present time. More development work is definitely required on the O-val seal to bring it to a point where it is reliable enough for use at the AGS.

Test results are listed on following page.

Test Results

<u>Gasket Mat'l</u>	<u>Seal No.</u>	<u>Sealed yes/no</u>	<u>Load/lin.in. (lbs)</u>	<u>Initial Hgt.(in.)</u>	<u>Compressed Hgt. (in.)</u>
S/S 304	1	No	976	.232	.231
Silver plate	2	No	1200	.235	.231
	3	Yes	1070	(.235)	.231
Inconel-X	1	No	1200	.239	.225
Silver plate	2(2)	No	1260	.239	.219
	3(2)	No	1330	.239	(.232)
S/S 304	1	No	1330	.236	.234
Copper plate					
Latest Design	1	No	500	.239	(.230)
S/S 304	2	No	623	.242	.226
Indium/Lead plate	3(3)	No	970	.242	.229

NOTE:

1. All gaskets were 9" O.D.
2. Leaked at weld joint.
3. Leaked due to damaged plating.
4. Compressed height was measured with a "feeler" gauge limiting accuracy to about \pm .001 inch.

cc: V. Buchanan
C. Gould
J. Grisoli
D. Hooper
C. Lasky
I. Polk
A. van Steenberg

*H. K. Green
(File in a 18 Tech Note
for SKA)*

BROOKHAVEN NATIONAL LABORATORY

MEMORANDUM

DATE: September 27, 1966

TO: Those listed below

FROM: Th. Sluyters *TS*


SUBJECT: High Gradient Pre-accelerator

We (Vincent Kovarik, Bill Schneider, Ray Abbott, Ron Clipperton, Dick Lane, Bob Boley, Steve Larson and writer) are very pleased to show you on the attached plot, the very first results of the high gradient column operating at 740 kV and about 50 mA beam current.

Encl.

cc: G.K. Green
A. Maschke
J. Spiro
A. van Steenberg
G. Wheeler
V.J. Buchanan
A. Soukas
R. Damm

Emittance and brightness against beam current
measured at 740 kV

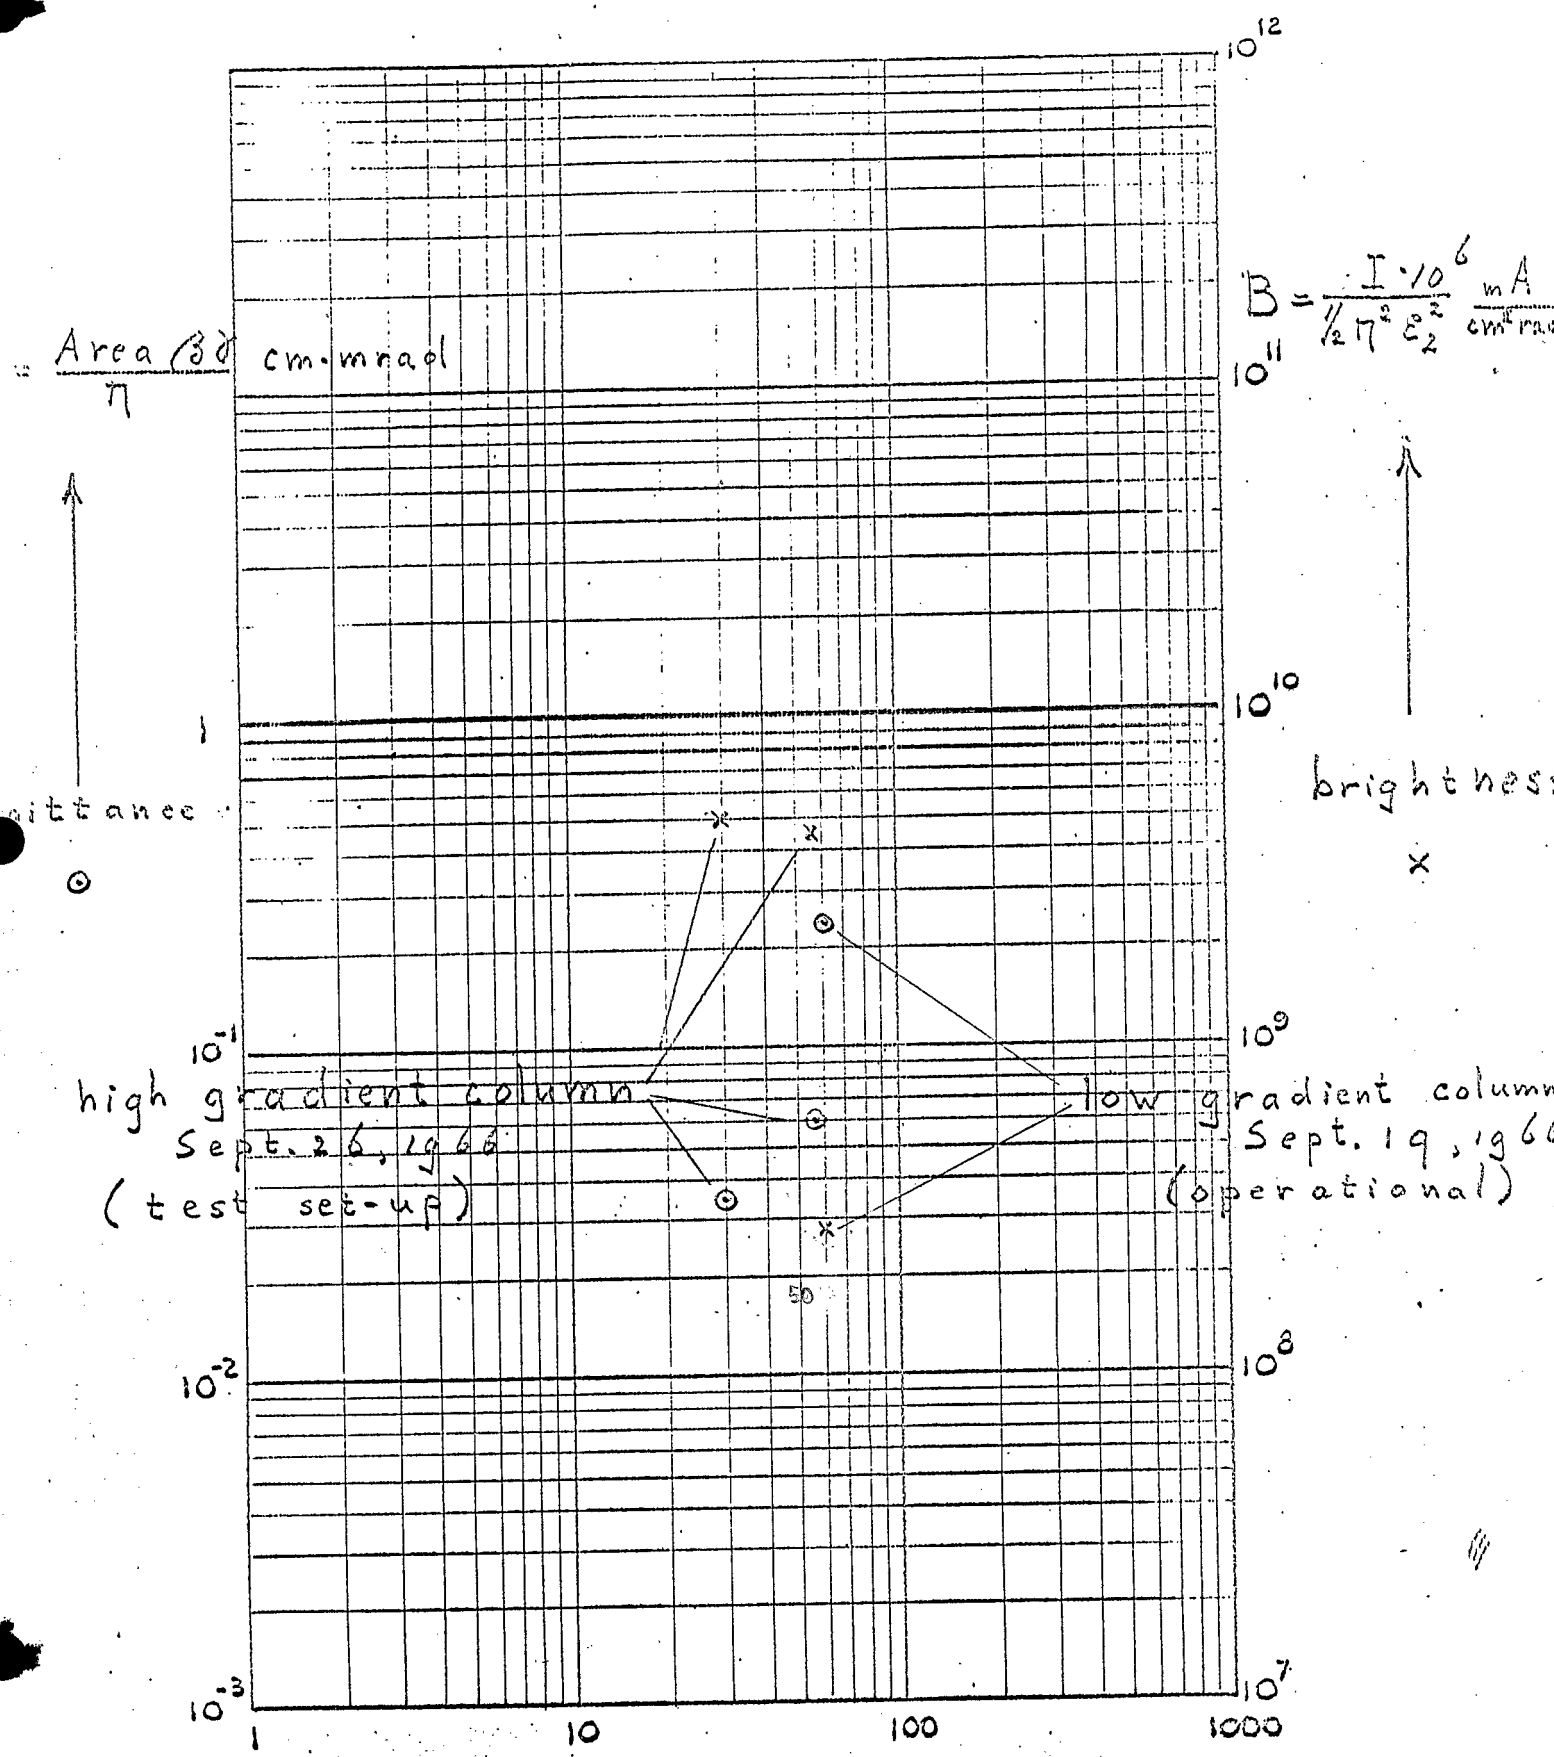

$$B = \frac{I \cdot 10^6}{\frac{1}{2} \pi^2 \epsilon_0^2} \frac{\text{mA}}{\text{cm}^2 \text{rad}^2}$$

10^{12}

10^{11}

10^{10}

10^9

10^8

10^7

10^{-1}

10^{-2}

10^{-3}

10

100

1000