

TEMPERATURE MEASUREMENT OF TUNGSTEN AND BERYLLIUM TARGETS IN AIR

L. E. Repeta

December 1970

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.AT(30-1)-16 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Accelerator Department
 BROOKHAVEN NATIONAL LABORATORY
 Associated Universities, Inc.
 Upton, New York

AGS DIVISION TECHNICAL NOTE

No. 83

L. Repeta and G. Bennett

December 2, 1970


TEMPERATURE MEASUREMENT OF TUNGSTEN AND BERYLLIUM TARGETS IN AIR

We have measured the equilibrium temperature change in air of two typical external beam targets exposed to 28 GeV protons. Iron/Constantan thermocouples of 30 gauge wire were used with the reference junction at ambient temperature. The proton beam pulse duration was ~ 400 msec with a 2.4 sec repetition period. The results and some target characteristics are shown in the table. The time constants, τ , are only approximate.

Tgt	ΔT eq./ 10^{12} ppp	Gross Section	L, length	τ	ρL	ρL dE/dx/Proton
Be	30°C	.1" x .2"	4.72"(12 cm)	≤ 3 min	22 g/cm ²	40 MeV
W	260°C	.1" x .2"	2.5"(6.3 cm)	≈ 1.5 min	122 g/cm ²	180 MeV


Drawings of the target and thermocouple details are shown in the figures. Note that the tungsten target head was separated from its holder by a .040" mica washer, but attached to the holder by stainless steel screws.

Distr.: Department Administration
 AD Physicists
 AD Engineers

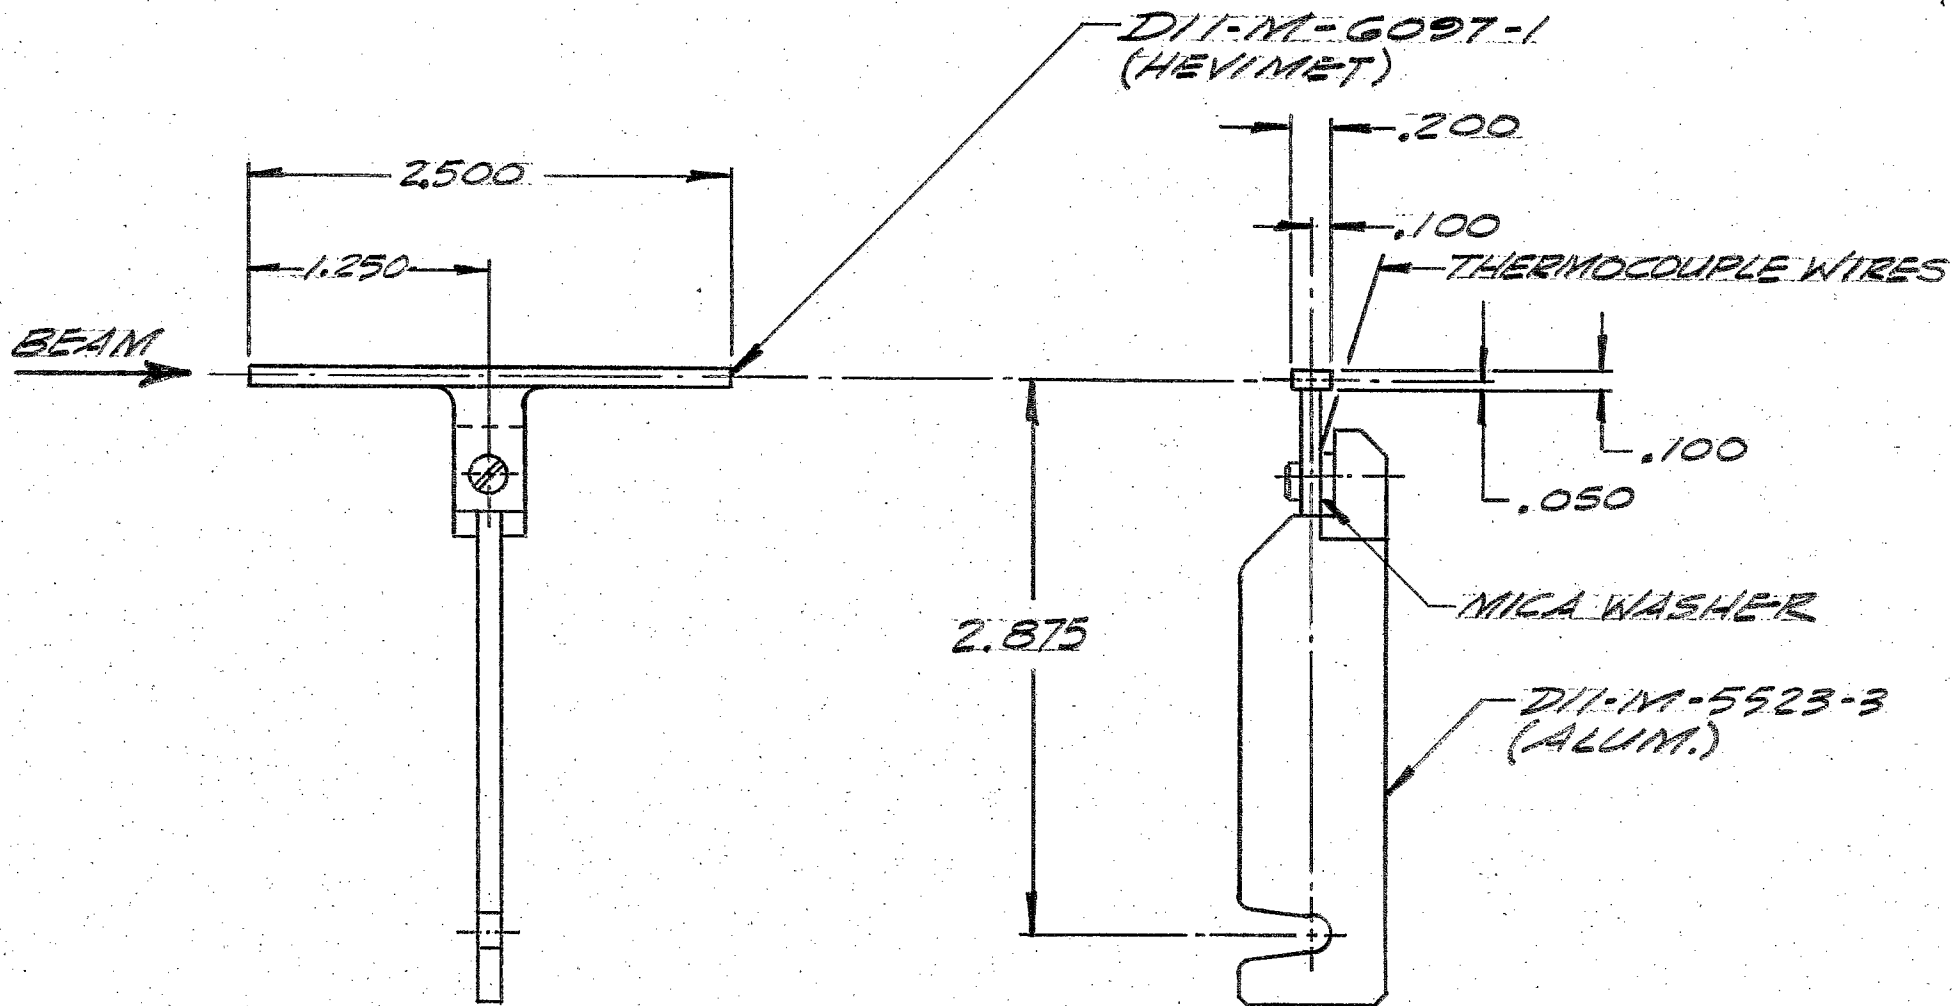

SLOW EXTERNAL BEAM HEVIMET TARGET CONFIGURATION
 USED WITH TARGET TURRET DII-M-5227-5

FIGURE 1

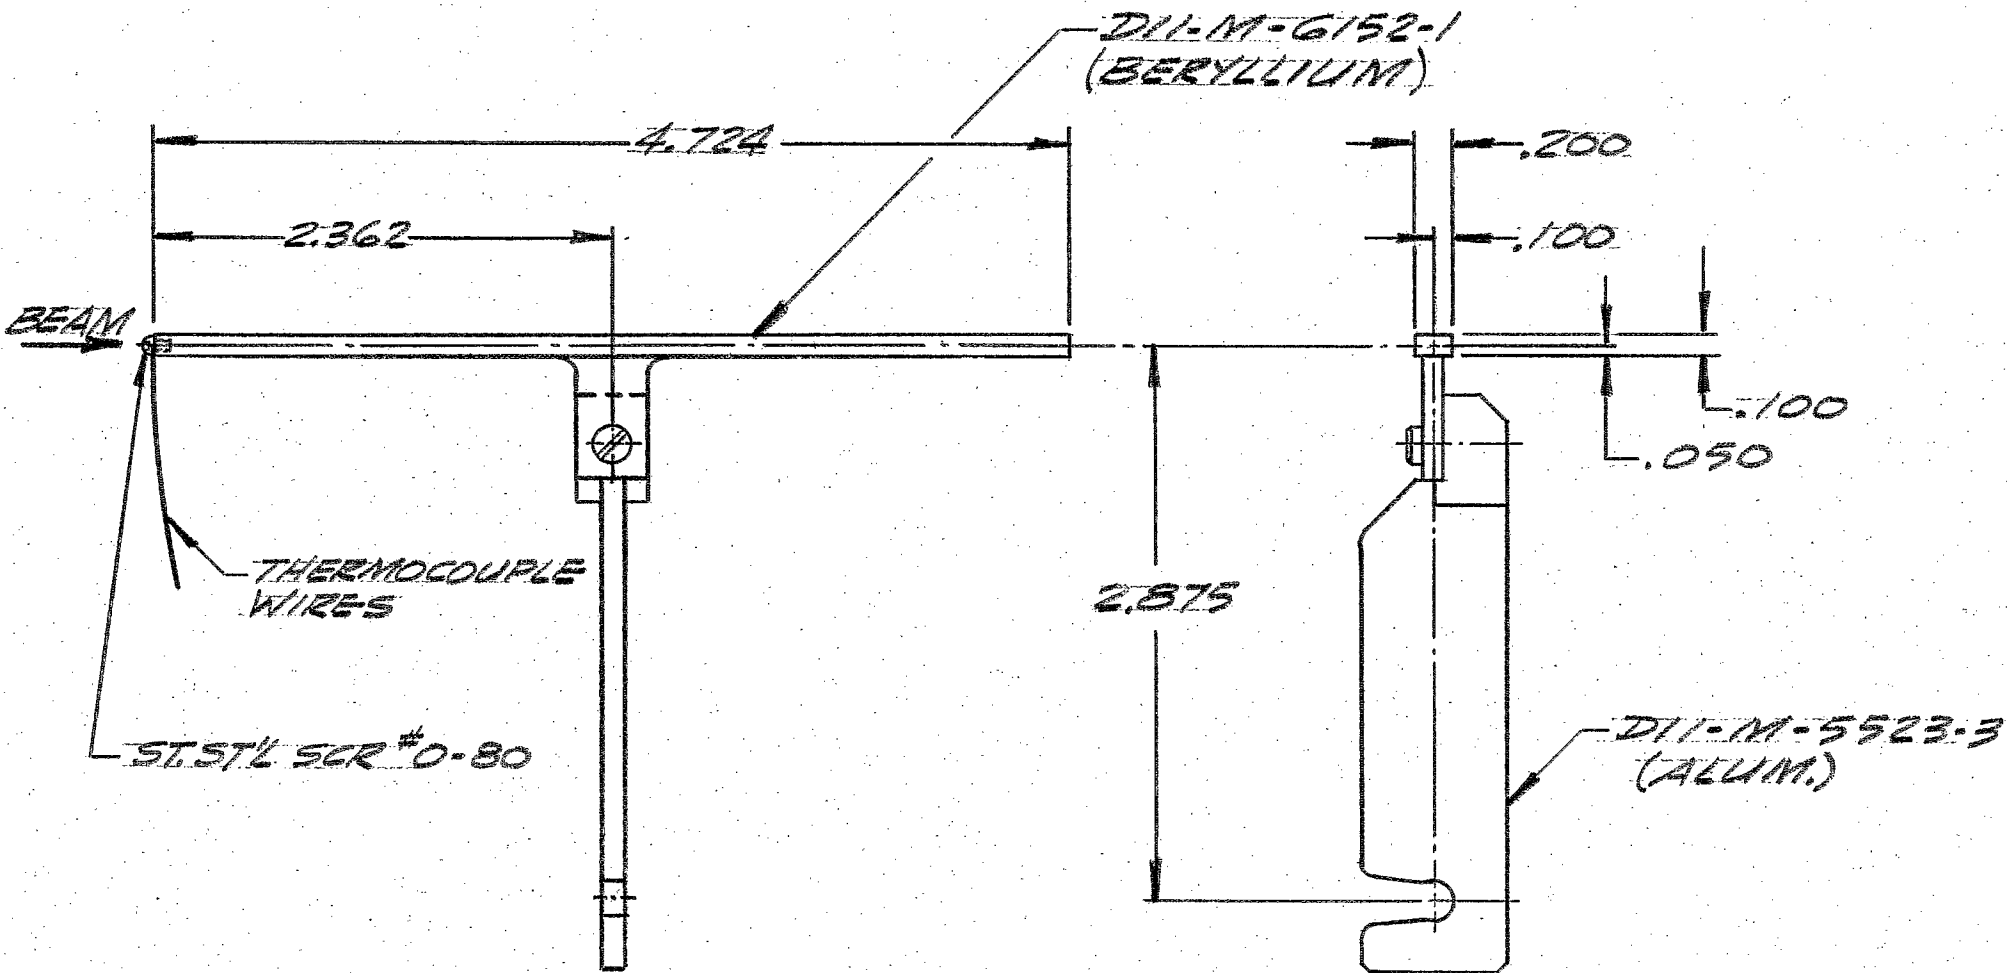

SLOW EXTERNAL BEAM BERYLLIUM TARGET CONFIGURATION
 USED WITH TARGET TURRET DII-M-5227-5

FIGURE 2