

COMMENTS ON CONTINUOUS ASYMMETRY MEASUREMENT DURING POLARIZED PROTON ACCELERATION

H. Sato

June 1989

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy
USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Accelerator Division
Alternating Gradient Synchrotron Department
BROOKHAVEN NATIONAL LABORATORY
Upton, New York 11973

Accelerator Division
Technical Note

AGS/AD/Tech. Note No. 322

COMMENTS ON CONTINUOUS ASYMMETRY MEASUREMENT
DURING POLARIZED PROTON ACCELERATION

H. Sato
KEK/PS Japan

June 9, 1989

Introduction

There are many depolarizing resonances during acceleration of polarized protons at the AGS. It is a serious problem to quickly determine which resonances contribute mainly to depolarization.

Dr. L. Ahrens mentioned that the internal polarimeter was used during acceleration; however, the use of the internal polarimeter in an energy scan mode caused a significant polarization loss due to the emittance blow up by the multiple scattering in the target material.¹

In this report, the performance of the continuous measurement of the asymmetry at the KEK PS and consideration of this measurement at the AGS, will be described.

Measuring System at the KEK PS²

The internal polarimeter at the KEK PS consists of a thin polyethylene string target and a four-arm scintillation counter telescope. The beam polarization can be obtained by measuring the left-right asymmetry of the proton-proton elastic scattering in the polyethylene target. Figures 1 and 2 show a schematic of the counter telescope and mechanics of the target system respectively.

In order to use the four-arm counters, the telescope angles must be adjusted for the energy at which the measurement is made. It is very troublesome to make several fixed energy porches to measure the polarization. However, it is sufficient to measure the relative asymmetry using only backward counter telescopes to determine the depolarizing timing. Two target frames have a

polyethylene string target and a carbon fiber target, respectively, for calibration measurement. On the other hand, for normal acceleration tuning of polarized protons, a thin (approximately 10 - 20 microns) polyethylene string is mounted instead of carbon.

Figures 3 and 4 show the logic and timing of this measurement. Six gates are fed to six CAMAC scalars divided into two groups. While channel 1 of the CAMAC interrupt register reads and clears the group 1 three scalars, channel 2 clears and reads the group 2 three scalars, and then this cycle will be continued sequentially. Data will be stored and analyzed by a personal computer, PC9800.

Figure 5 shows an example of the asymmetry data during acceleration with a 3.5 GeV flat top. We can identify the location of the spin flip resonance at $\gamma G = \nu_z$ and $\gamma G = 7$, and we can see no depolarization during flat top. It takes about 40 minutes to take one data scan. After confirming the resonance timing by this method, a detailed scan of the tune jump or harmonic correction of the closed orbit can be made for each of the resonances.

Emittance Blow Up Due to the String Target

Emittance blow up by the string target due to the effect of multiple scattering is estimated as follows³:

$$\text{Horizontal } n_H = \frac{2}{3} \frac{\pi}{\sqrt{\beta_H}} \frac{W_H^{2/3}}{\langle \theta^2 \rangle d} (m^{3/2} - 1) \quad (1)$$

$$\text{Vertical } n_V = \frac{2}{3} \frac{\pi}{\sqrt{\beta_H}} \frac{1}{\langle \theta^2 \rangle d} \left\{ (2W_V \frac{\beta_H}{\beta_V} + W_H)^{3/2} - W_H^{3/2} \right\} (m^{3/2} - 1) \quad (2)$$

where n_H and n_V are the number of turns until the emittance will blow up to m times, m is the emittance blow up factor, W_H and W_V are the horizontal and vertical emittance, β_H and β_V are the betatron amplitude at the target position and $\langle \theta^2 \rangle$ is the root mean square of the scattering angle in rad:

$$\sqrt{\langle \theta^2 \rangle} = \frac{14.1 \text{ MeV/c}}{P\beta} Z_{\text{inc}} \sqrt{L/L_R} \{1 + 1/9 \log_{10} (L/L_R)\} \quad (3)$$

where L is the target diameter and L_R is the radiation length of target material⁴.

Calculations were performed using parameters as shown in Table I with the assumption of fixed energy.

For the AGS, if the string was flipped into the beam line at two times, 180 ms and 350 ms, from acceleration start, respectively, the time of the emittance blow up to m times is summarized in Table II, and for the KEK PS, the 30 micron target at 500 MeV is in Table III.

Table I

	<u>AGS</u>	<u>KEK PS</u>
target material	nylon	polyethylene
target thickness	6 mil	20 - 50 micron
W_H (π mm. mrad)	30	40
W_V (π mm. mrad)	20	10
β_H	17.4m	20m
β_V	13.5m	5m
Zinc	1	1
L_R	47.9 x 10 ⁻² m (for carbon)	

Table II (AGS 6 mil)

m (blow up factor)		1.1	2.0
Insertion Time (180 ms)	Horz.	1.8 ms	34 ms
	Vert.	6.4 ms	118 ms
Insertion Time (350 ms)	Horz.	4.6 ms	85 ms
	Vert.	16.0 ms	295 ms

Table III (KEK 30 micron)

m (blow up factor)	1.01	1.1
Horz.	267 ms	303 ms
Vert.	395 ms	449 ms

Figure 6 shows typical data of the emittance blow up at the AGS. Target time of flipping into the beam is 180 ms. It took 35 - 50 ms to blow up the emittance by a factor of 2 for horizontal and vertical. This is rather faster than the calculation. However, the emittance blow up was not observed at KEK PS by the beam profile monitor. The calculation is summarized in Table III.

Although the KEK target system has a spooling system to reduce the beam heating, the beam intensity is less than 1.0×10^{10} and it is not necessary to spool the target so the very thin string can be used.

For the high intensity beam at the AGS, it is necessary to use the spooling system so the high tension of the target wire is required.

If the 50 micron or 25 micron string is used in the AGS, the time of 10% emittance blow up ($m = 1.1$) is shown in Table IV.

Table IV

		50 micron	25 micron
180 ms	Horz.	19 ms	92 ms
	Vert.	66 ms	321 ms
350 ms	Horz.	38 ms	173 ms
	Vert.	133 ms	601 ms

These results show that an energy scan mode seems to be worthwhile to measure the asymmetry for some periods during acceleration.

Resonance Strengths by Emittance Blow Up

Asymmetry measurement is a very useful method to quickly show which of the resonances mainly contribute to depolarize the polarized protons. However, there is a fear that intrinsic resonance strength will be increased by the beam size growth.

Figure 7 shows the measured polarization on five interval gates positioned between the intrinsic resonances, $\gamma G = 24 - \nu_z$, $12 + \nu_z$, $36 - \nu_z$, and $24 + \nu_z$ at various target insertion times.¹

Table V

Resonance	ϵ (Strength)	P/P_0 (ϵ)	P/P_0 (2ϵ)	P/P_0 (3ϵ)
12 - ν_z	0.0003	1.000	1.000	0.999
ν_z	0.0154	0.969	0.840	0.673
24 - ν_z	0.0006	1.000	1.000	0.999
12 + ν_z	0.0054	0.996	0.979	0.953
36 - ν_z	0.0137	0.975	0.871	0.732
24 + ν_z	0.0010	1.000	0.999	0.998
48 - ν_z	0.0015	1.000	0.998	0.996

$$P/P_0 = \frac{\delta^2 - \epsilon^2}{\delta^2 + \epsilon^2} \left\{ 2e^{-\frac{\pi\epsilon^2}{2\alpha}} - 1 \right\}$$

where $\delta = 0.125$, $\alpha = 0.0597$, and $\nu_z = 8.75$

Table V shows the calculation of the polarization ratio on passing through resonances depending on the beam size. Resonance strengths are taken from Ref. 5. There are no severe depolarization problems except $\gamma G = \nu_z$ and $36 - \nu_z$, which are very strong resonances. I speculate on the data of Fig. 7, that the denser part of the high polarization beam is spilled out from the bucket due to the energy loss by the target material. Further, it is strange that the depolarization at $\gamma G = 24 + \nu_z$ is larger than that of $\gamma G = 36 - \nu_z$. It is suggested that $\gamma G = 24 + \nu_z$ may not be tuned to jump completely.⁶

Consideration of the Measurement During Acceleration

Spin is a very sensitive probe of the beam optics parameter. For example, if the slow quadrupole will be excited to vary the vertical tune, the timing of the intrinsic resonance will shift. Further, asymmetric excitation of the fast quadrupole causes the deformation of the beta function and emittance blow up⁷ and then the resonance strength would be changed.

So, the continuous measurement of the asymmetry during acceleration is a very attractive method to quickly know the resonance position. The intensity of the AGS polarized beam is higher than that of KEK, and a thin target cannot be used because

of the spooling system which is needed to avoid beam heating. However, even if the measurement period would be 100 ms - 200 ms, the measurement which is performed by narrow gates may give us much information on several resonances, that is, the sequential one intrinsic resonance and 5 or 6 imperfection resonances would be covered by the 100 ms period.

The curve of asymmetry will be decreased gradually versus time due to the kinematics factor and continuous polarization loss. If there are discontinuity positions, it shows the effect of depolarizing resonances or a physical mechanism of scattering.

Furthermore, if the fishing wire which is less than 6 mils, typically 2 mils could be used, multiple scattering and energy loss would be decreased and then the measurement can be made during the full acceleration period and can be performed in one data run.

Acknowledgments

The author wishes to thank Dr. L. Ratner for his suggestion to report on this problem. He is also grateful to Dr. L. Ahrens and Dr. S.Y. Lee for providing data and their helpful discussions.

References

1. L. Ahrens, AGS Studies Report #237 (1988).
2. H. Sato et al., Proc. on the Eighth Intern. Symp. on High Energy Spin Physics, Minneapolis, MN, Sept. 1988.
3. K. Yokoya, Private Communication.
4. Particle Properties Data Booklet published by the Particle Data Group at CERN and Berkeley.
5. K.M. Terwilliger et al., IEEE Trans., NS-28, (1981) 2031.
6. S.Y. Lee, Private Communication.
7. E.D. Courant et al., Acc. Div. Tech. Note #229 (1985)

Figure Captions

- Fig. 1 Schematic of the KEK internal polarimeter.
- Fig. 2 Target system of the KEK internal polarimeter.
- Fig. 3 Logic diagram of the sequential asymmetry measurement during acceleration.
- Fig. 4 Timing chart of the sequential asymmetry measurement during acceleration.
- Fig. 5 Continuous asymmetry measurement data up to 3.5 GeV at KEK PS.
- Fig. 6 Vertical emittance blow up when the insertion time of the target is 180 ms from acceleration start at the AGS.
- Fig. 7 Measured polarization on five interval gates positioned between the intrinsic resonances, $\gamma G = 24 - \nu_z$, $12 + \nu_z$, $36 - \nu_z$, and $24 + \nu_z$ at various target insertion times.

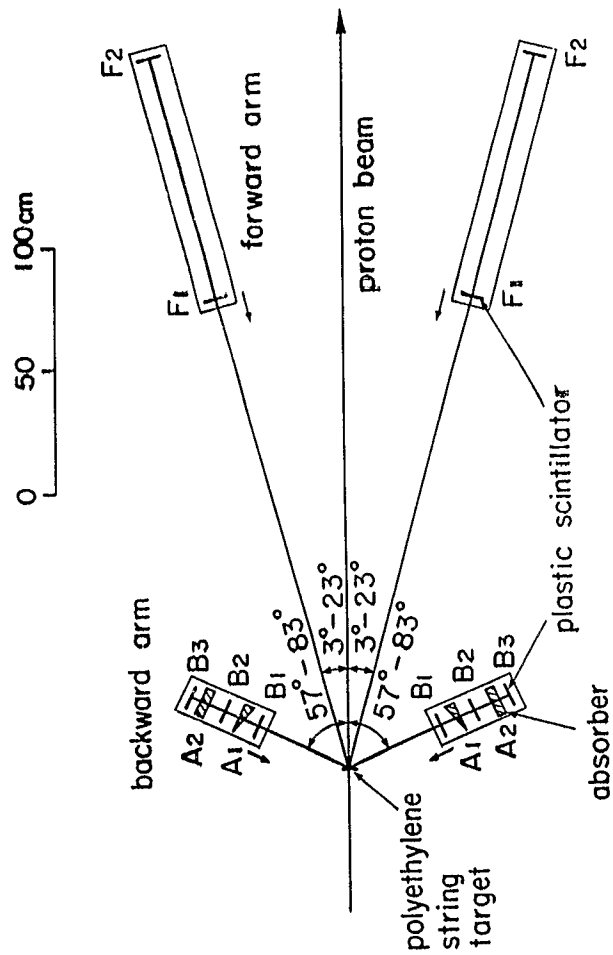


Figure 1

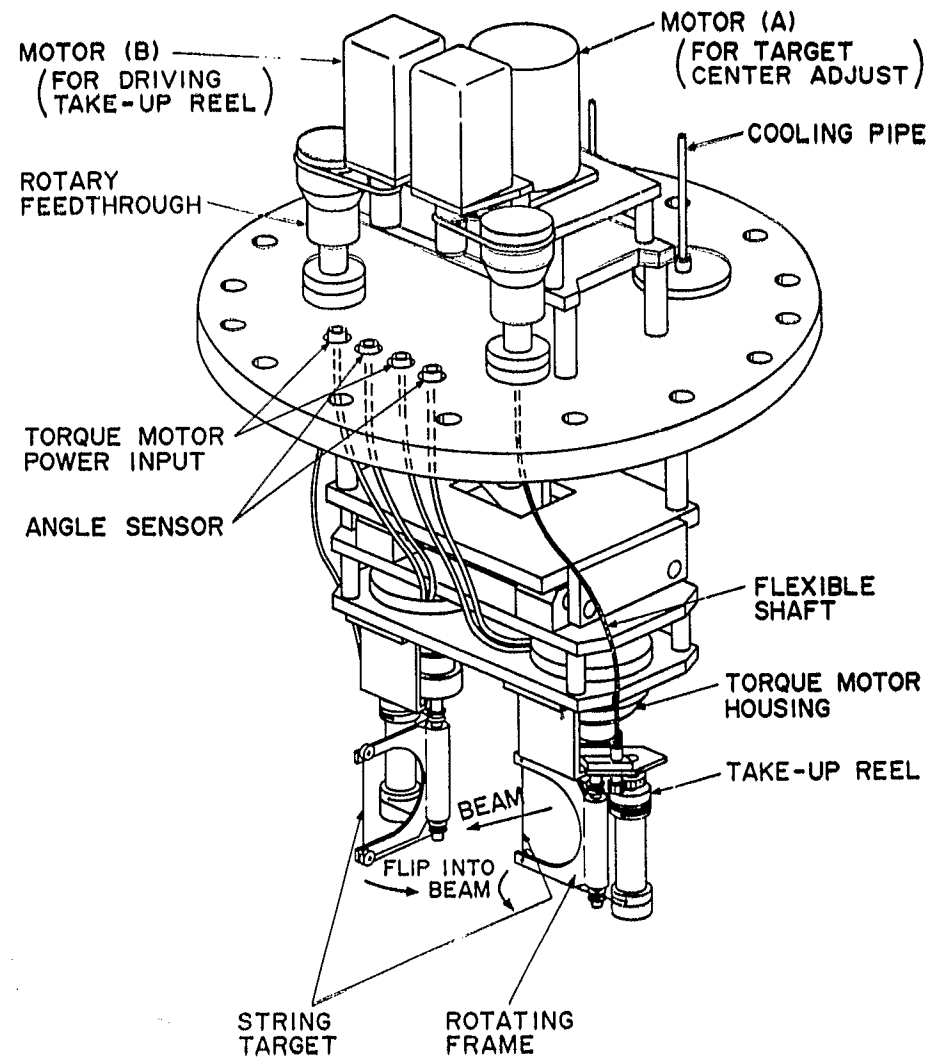


Figure 2

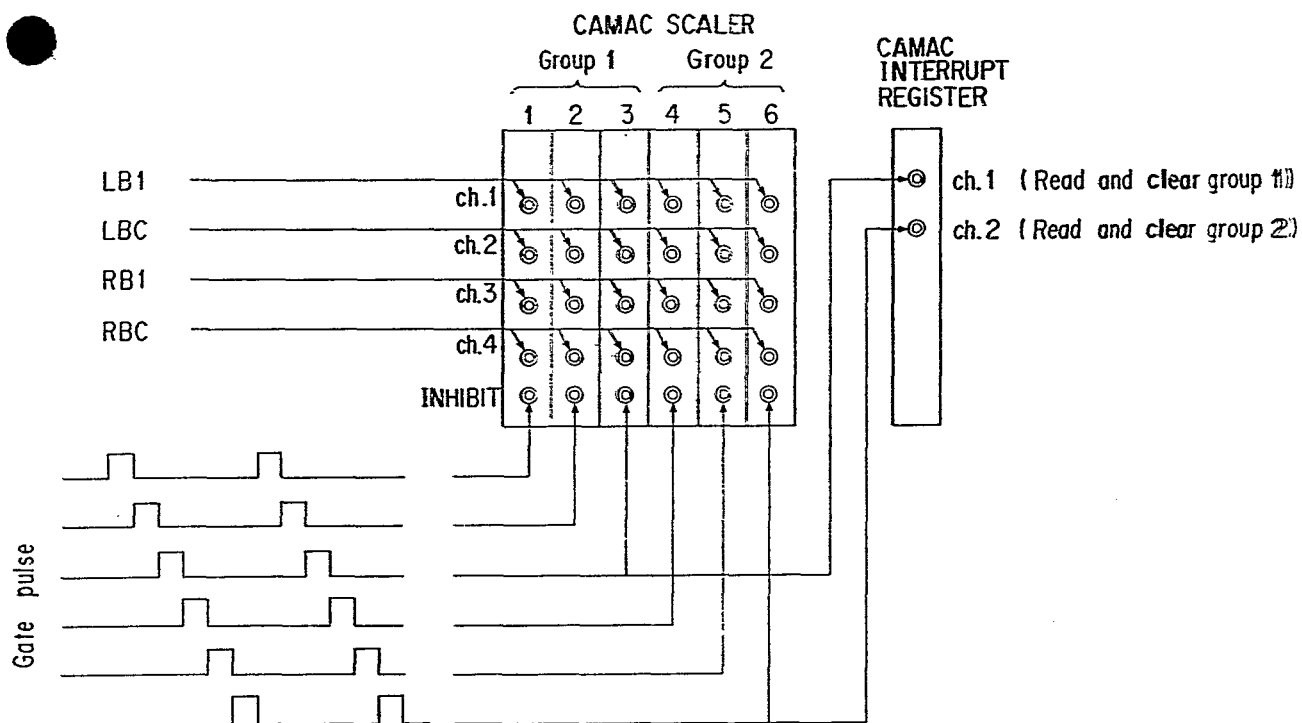


Figure 3

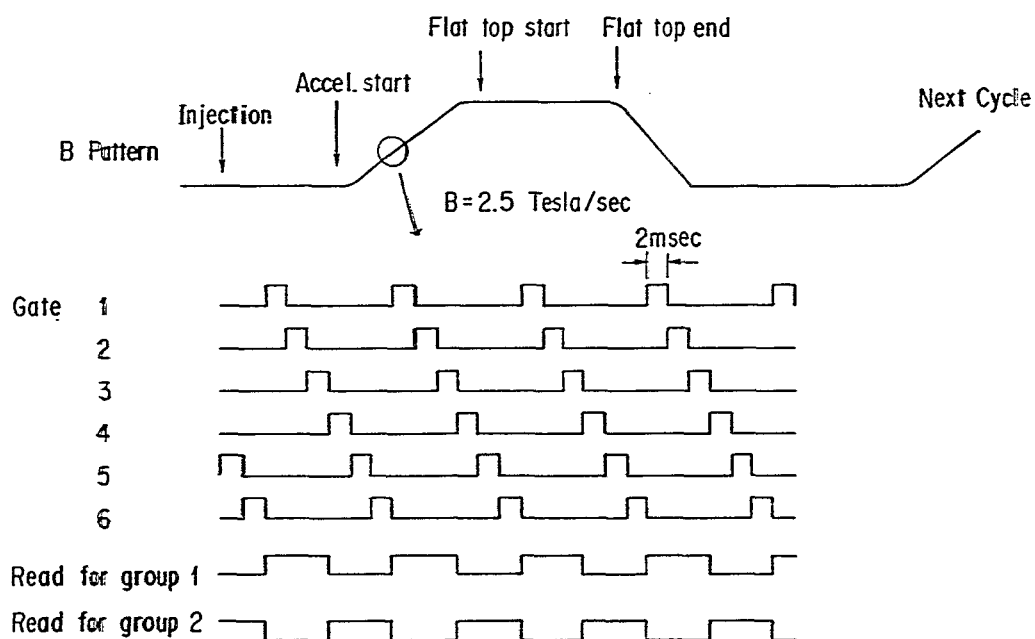


Figure 4

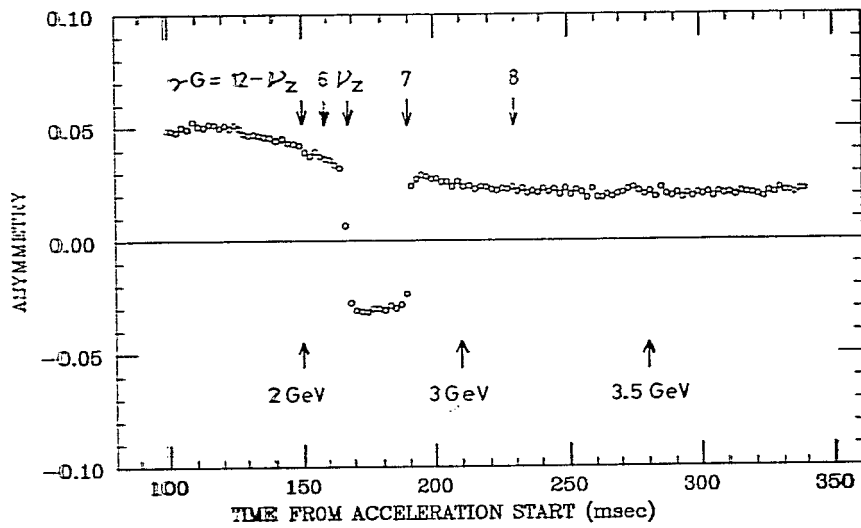


Figure 5

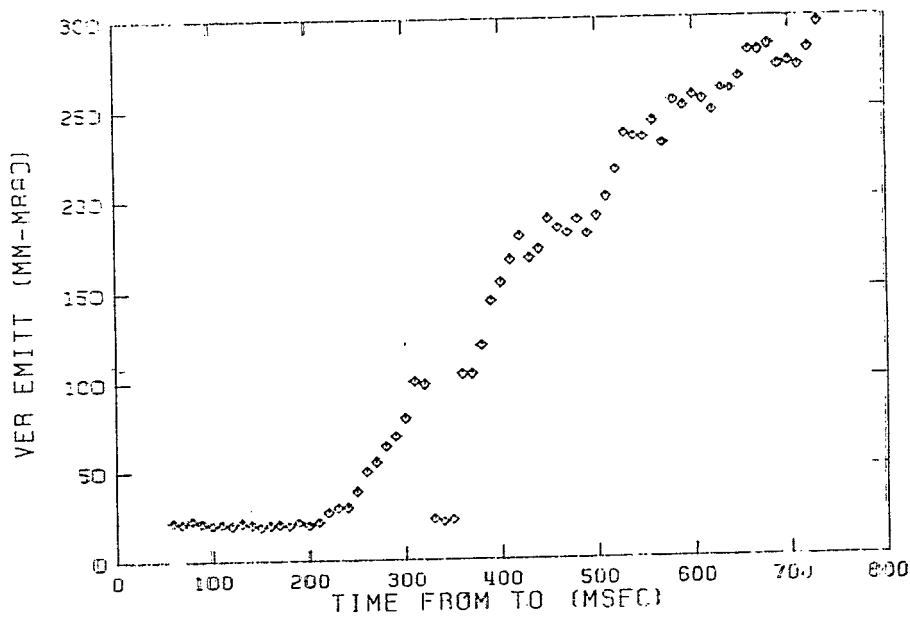


Figure 6

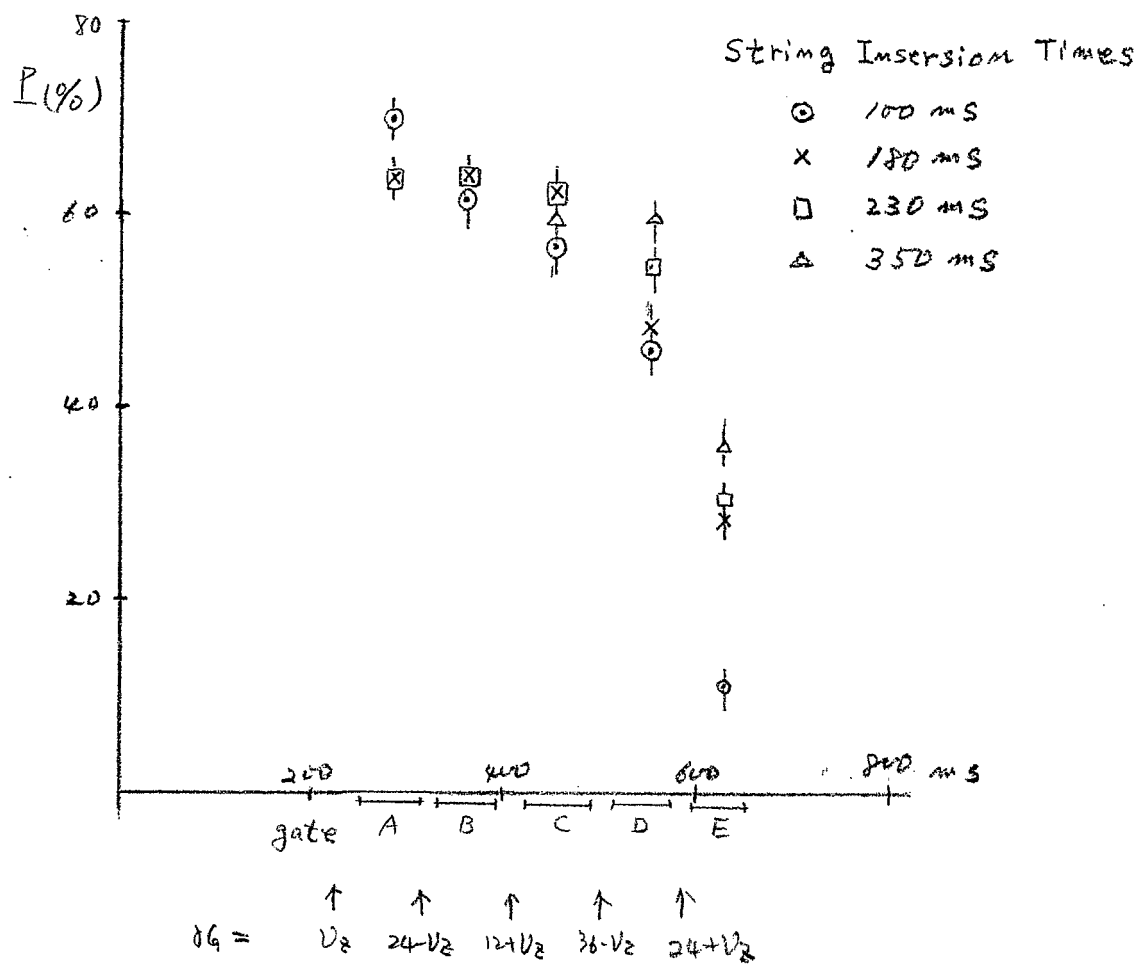


Figure 7