

## LOW ENERGY K BEAM

D. Berley

June 1965

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.AT-30-2-GEN-16 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Accelerator Department  
BROOKHAVEN NATIONAL LABORATORY  
Associated Universities, Inc.  
Upton, L.I., N.Y.

AGS DIVISION TECHNICAL NOTE

No. 25

D. Berley

June 11, 1965

LOW ENERGY K BEAM

A new low energy separated K beam to be used with the 30-in. bubble chamber is being installed at the AGS. The beam will deliver 5-10  $K^-$  at rest in the bubble chamber per  $10^{11}$  protons and can operate parastically on a continuous basis without causing a significant reduction in the AGS intensity available to other users.

The beam has two double foci, the first at 10 meters and the second at 19 meters from the target. A septum C-magnet which deflects the beam away from the synchrotron and a narrow Danby-Jackson<sup>1</sup> quadrupole permit extraction of the beam at a smaller production angle than would otherwise be possible with conventional magnets. Two quadrupoles focus the beam on a slit where a first momentum analysis and mass separation are done. A field lens at the first focus helps contain the beam in the second stage which is nearly a mirror image of the first. At the second double focus there is, therefore, almost no momentum dispersion for particles which originate at the target. Another mass separation is done at the second focus and finally, a single quadrupole shapes the beam for the bubble

---

<sup>1</sup>G. Danby, Private communication.

chamber.

The source of particle flux is confined to a region near the target by the Near Collimator while the solid angle subtended by the system is defined by the First Far Collimator. The Second Far Collimators define the aperture of the second stage. Their purpose is to shadow secondary sources of radiation.

The optical and beam design parameters are shown in Table I. Figure 1 illustrates the beam envelope and Figure 2 is an assembly drawing of the components. Although the beam is not yet operating, estimates of the fluxes have been made. They are listed in Table II.

TABLE I

Beam #2 Parameters

	<u>1st Stage</u>	<u>2nd Stage</u>
Solid Angle	1.0 millist.	
horizontal acceptance	$\pm 36$ mp	
vertical acceptance	$\pm 7$ mp	
horizontal magnification	- 3.6	.68
vertical magnification	- .78	.76
momentum dispersion	1.66 " /%	.14 " /%
separator dispersion	.106 " /mp	.11 " /mp
momentum bite		$\pm .5\%$
{ vertical image size (.1" x .1" target) aberrations (chromatic)	.078 "	.068 "
	.062 "	.129 "
K- $\pi$ Separation (Separator Field 50 kV/cm)		
700 MeV/c	.31 "	.32 "
800 MeV/c	.21 "	.22 "
900 MeV/c	.15 "	.16 "
length		850 " to chamber
maximum momentum	1.2 BeV/c	1.2 BeV/c

TABLE II

Particles at Chamber/ $10^{11}$  Circulating Protons

momentum (BeV/c)	$\pi^{\pm}$	K <sup>-</sup>	K <sup>+</sup>	$\bar{p}$
0		10	40	4
600		35	140	6
800	$\sim 10^5$	180	700	12
1000		750	3000	50

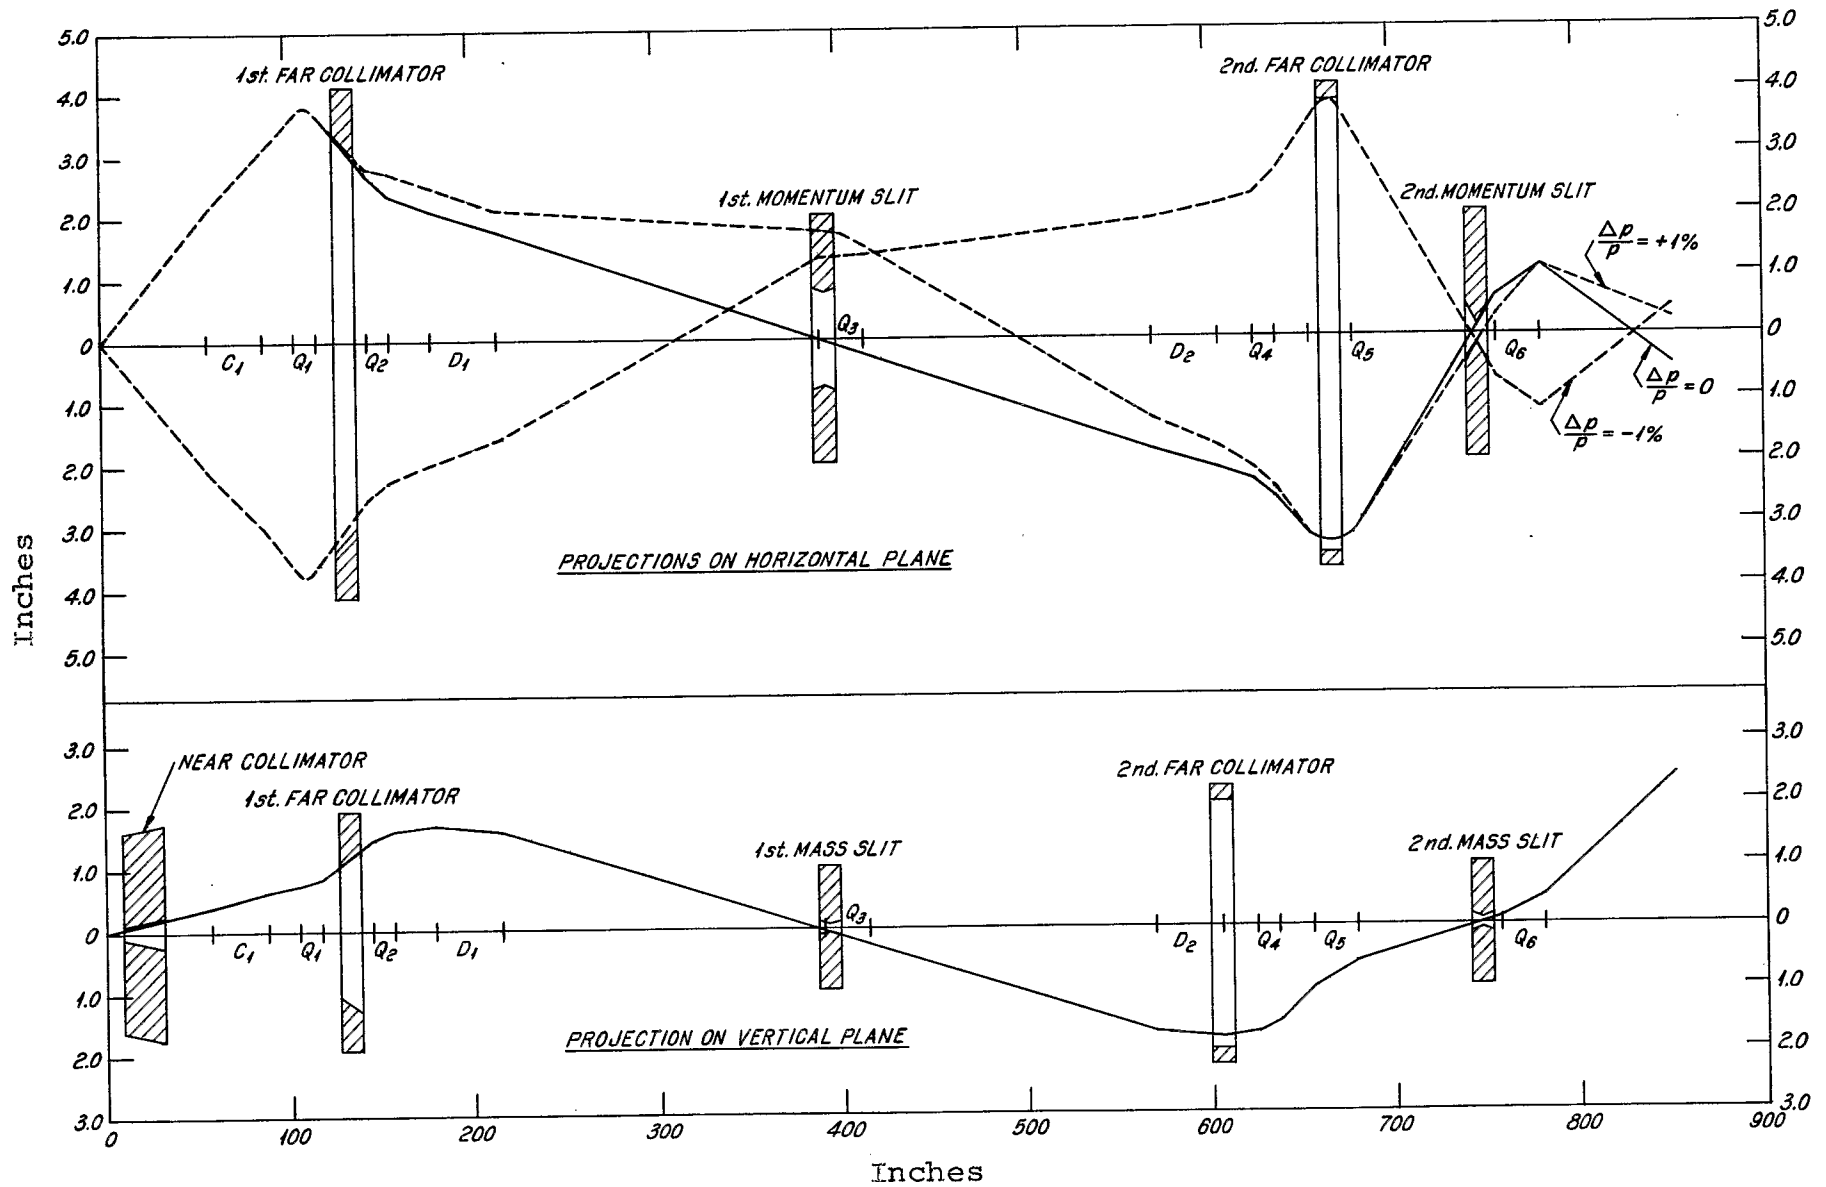


Fig. 1

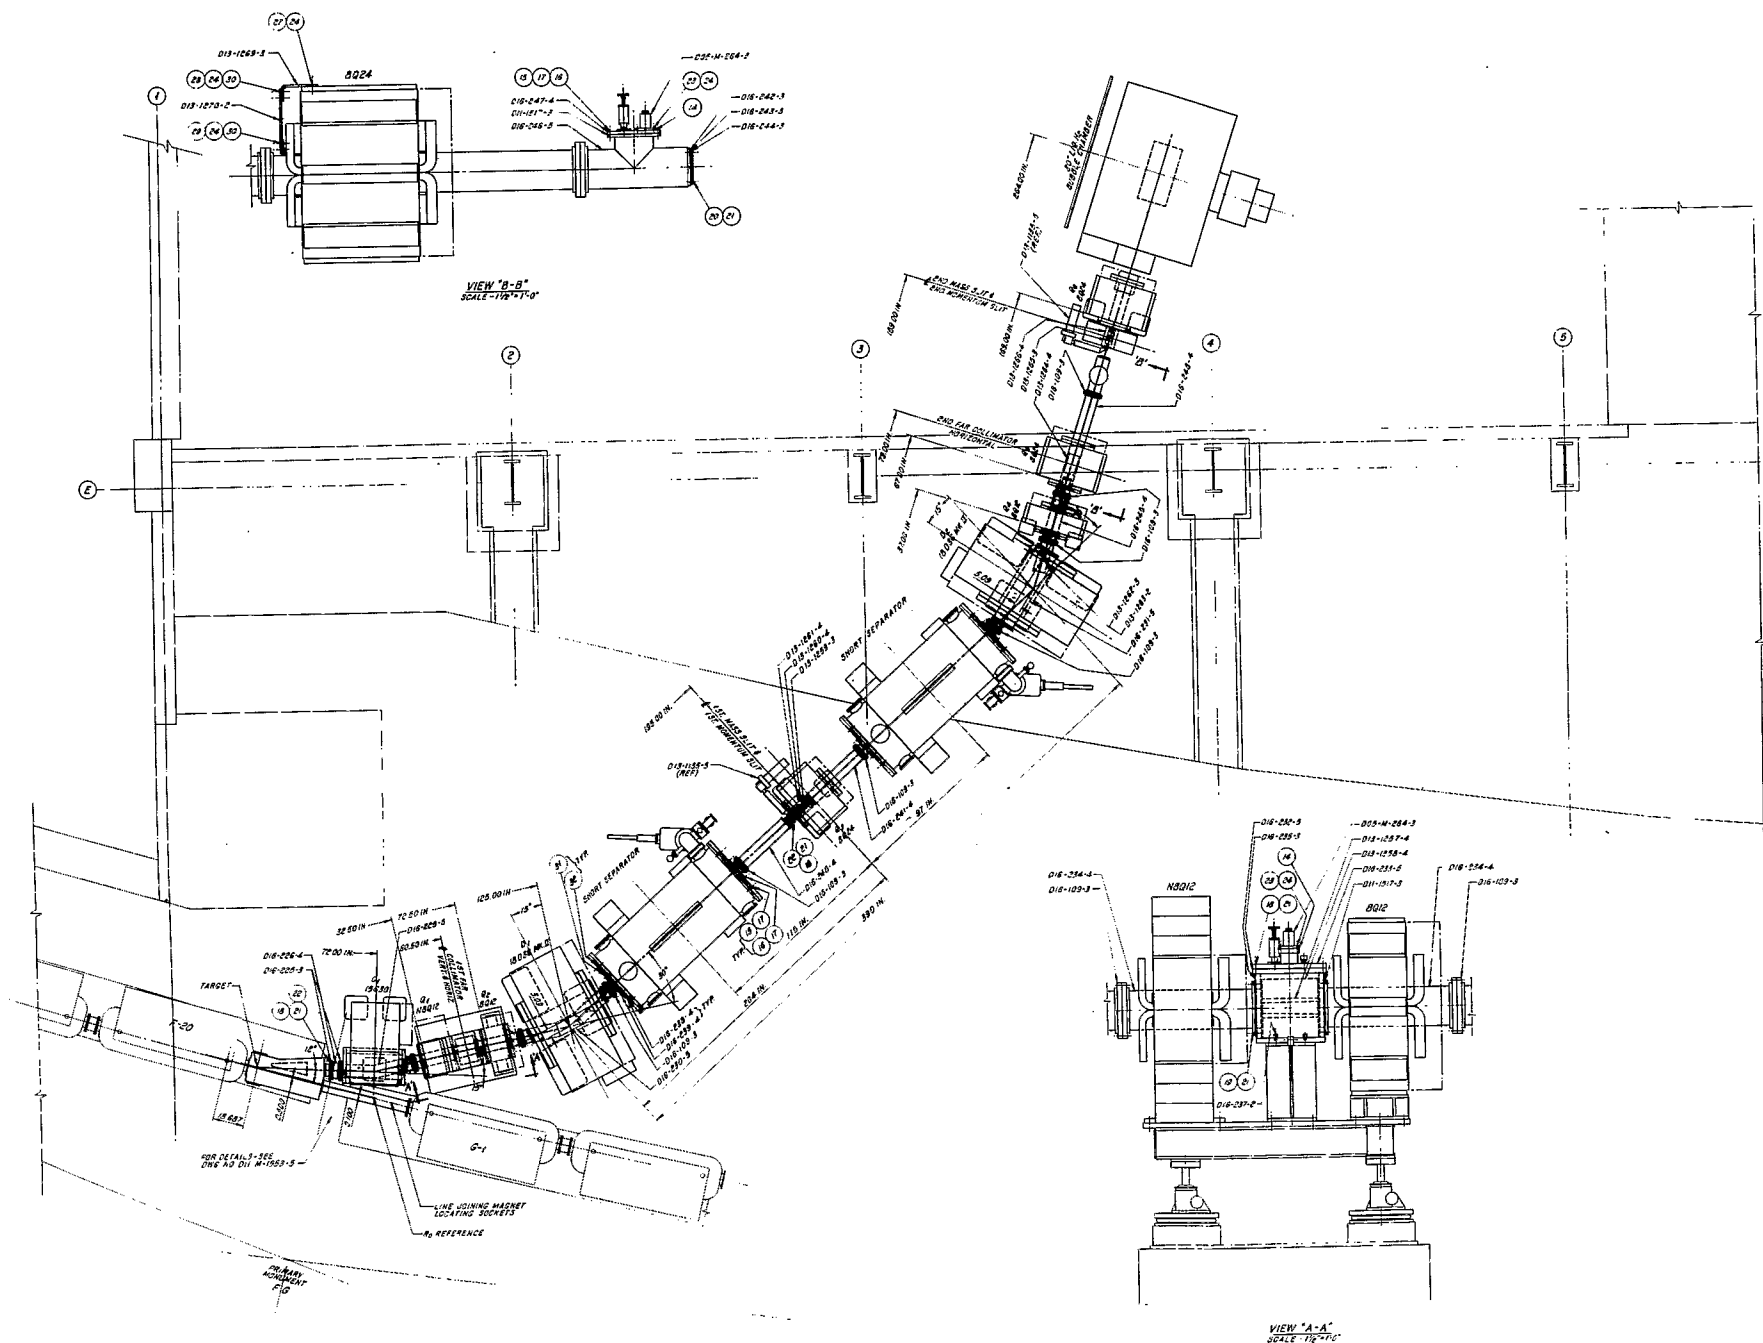


Fig. 2