

BOOSTER CHAMBER APERTURE

A. U. Luccio

November 1991

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

BOOSTER CHAMBER APERTURE

**BOOSTER TECHNICAL NOTE
NO. 202**

A. Luccio

November 13, 1991

**ALTERNATING GRADIENT SYNCHROTRON DEPARTMENT
BROOKHAVEN NATIONAL LABORATORY
UPTON, NEW YORK 11973**

BOOSTER MECHANICAL APERTURE

A.Luccio

The AGS booster vacuum chamber is made of round pipe, bellows and special segments. The physical clearance to the circulating beam is limited by the walls of the chamber and by several specific pieces, like kickers, septa, absorbers. The following figures represent our present understanding of the booster aperture, obtained with a patient review of all the mechanical drawings of the machine.

In the figures, the beam moves from left to right (the opposite convention than on most engineers' drawings)

The distance along the ring, in meters (approximate to one mm), is given with reference with the "standard" MAD output¹. Good reference points for the position of the vacuum chamber segments are the locations of the quadrupole centers. The clearance is given in mm (rounded to 1 mm), from axis to wall.

In the same figures, we have plotted also the beam envelope in the following scale:

$$a_x[\text{mm}] = \frac{\sqrt{\beta_x[\text{m}]}}{80}, \quad a_y[\text{mm}] = \frac{\sqrt{\beta_y[\text{m}]}}{120}$$

i.e. the amplitude of a beam with the following emittance

$$\epsilon_x = \frac{1}{64} 10^{-2} \pi \text{ m-rad} \cong 150 \pi \text{ mm-mrad}, \quad \epsilon_y = \frac{1}{144} 10^{-2} \pi \text{ m-rad} \cong 70 \pi \text{ mm-mrad}$$

Like the reference MAD run, this review is clearly not final. Adjustments will happen because of survey results and because "something" may be moved or changed.

¹ A.Luccio and M.Blaskiewicz *AGS Booster Parameters (MAD Output)*
Booster Technical Note # 196, July 23, 1991

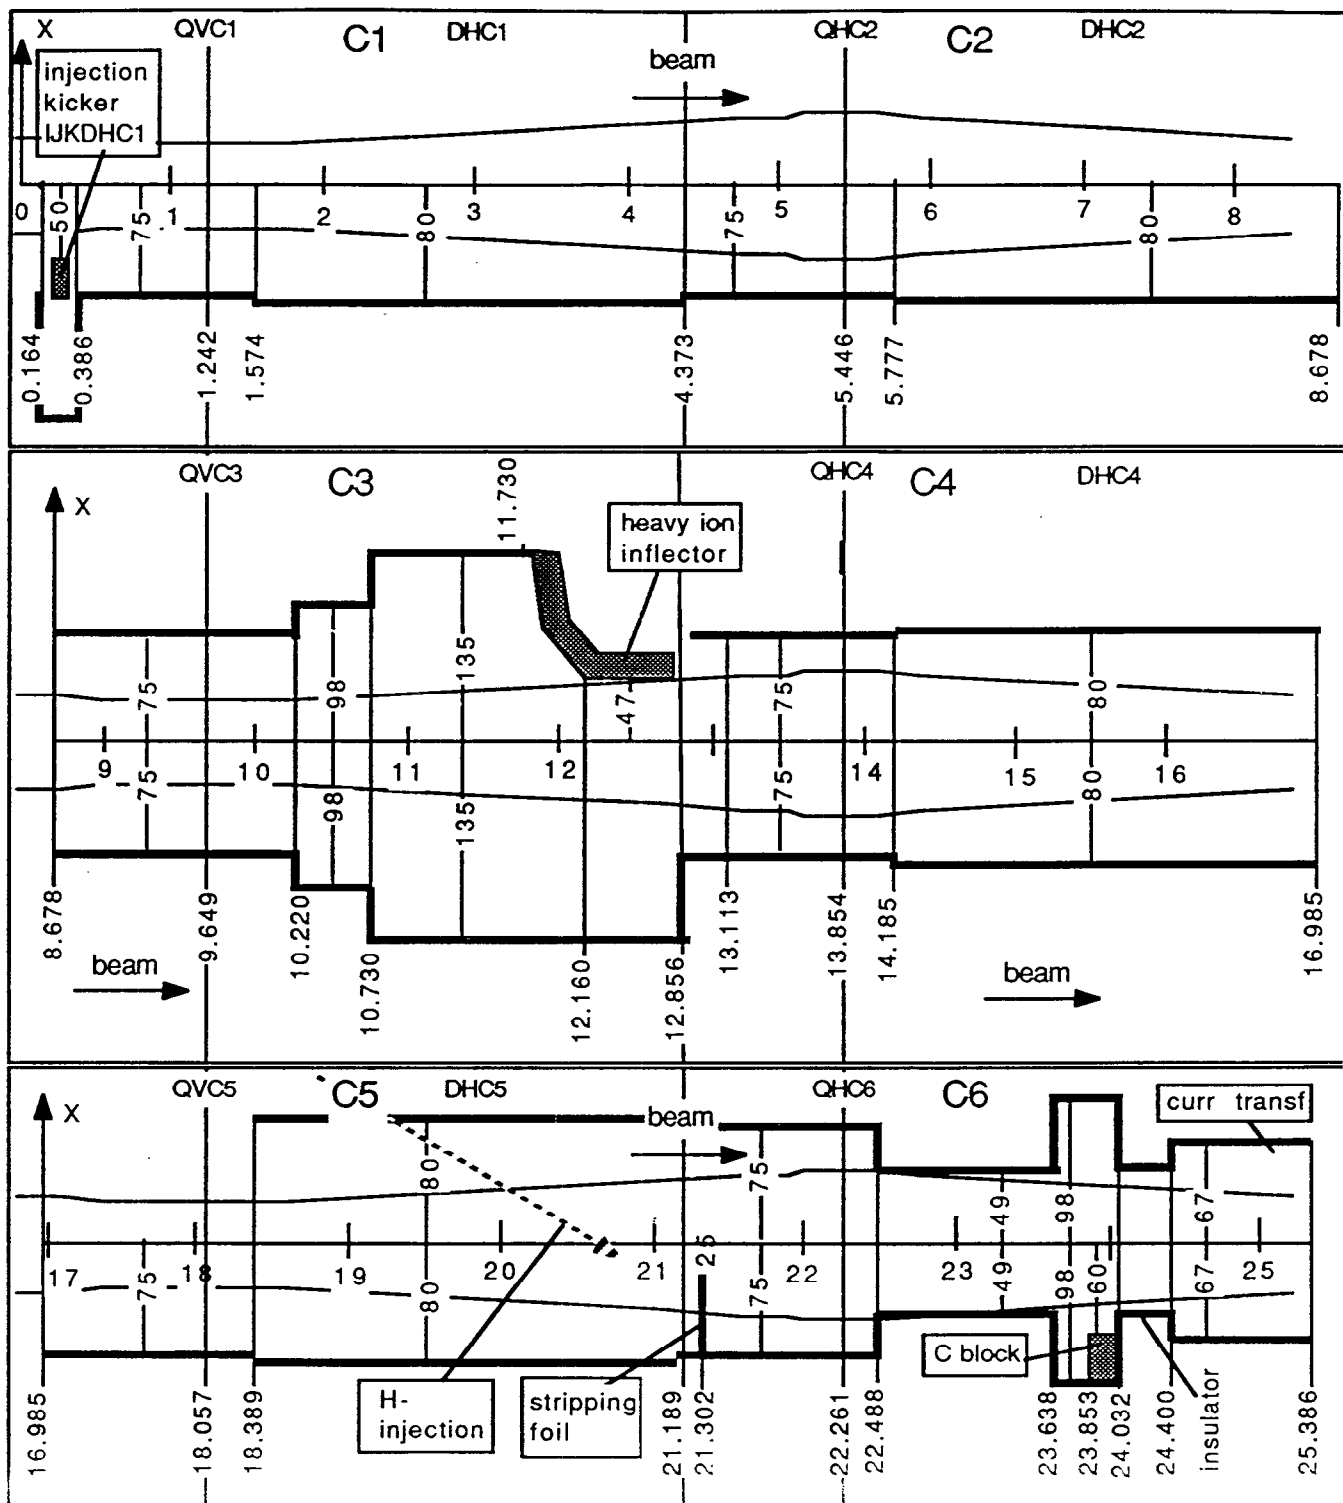


Fig.1. Horizontal aperture. C1 to C6.

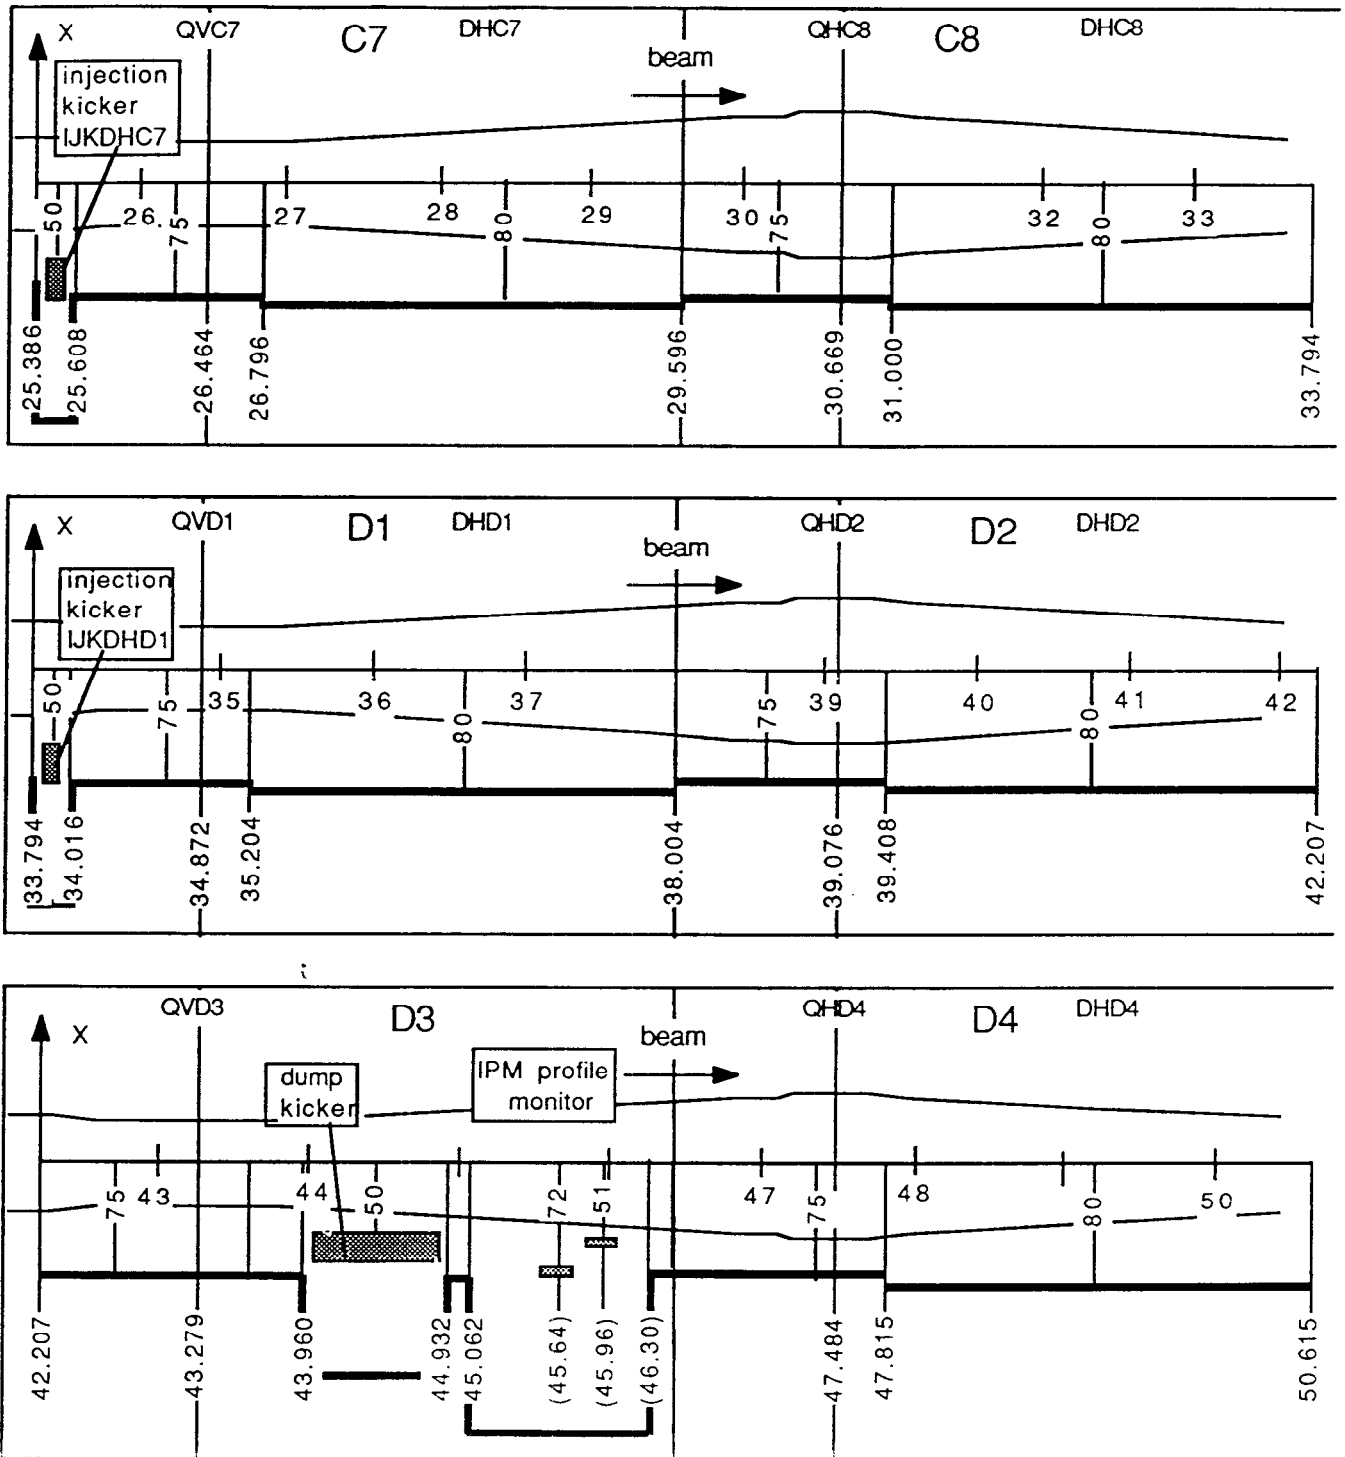


Fig.2. Horizontal aperture. C7 to D4.

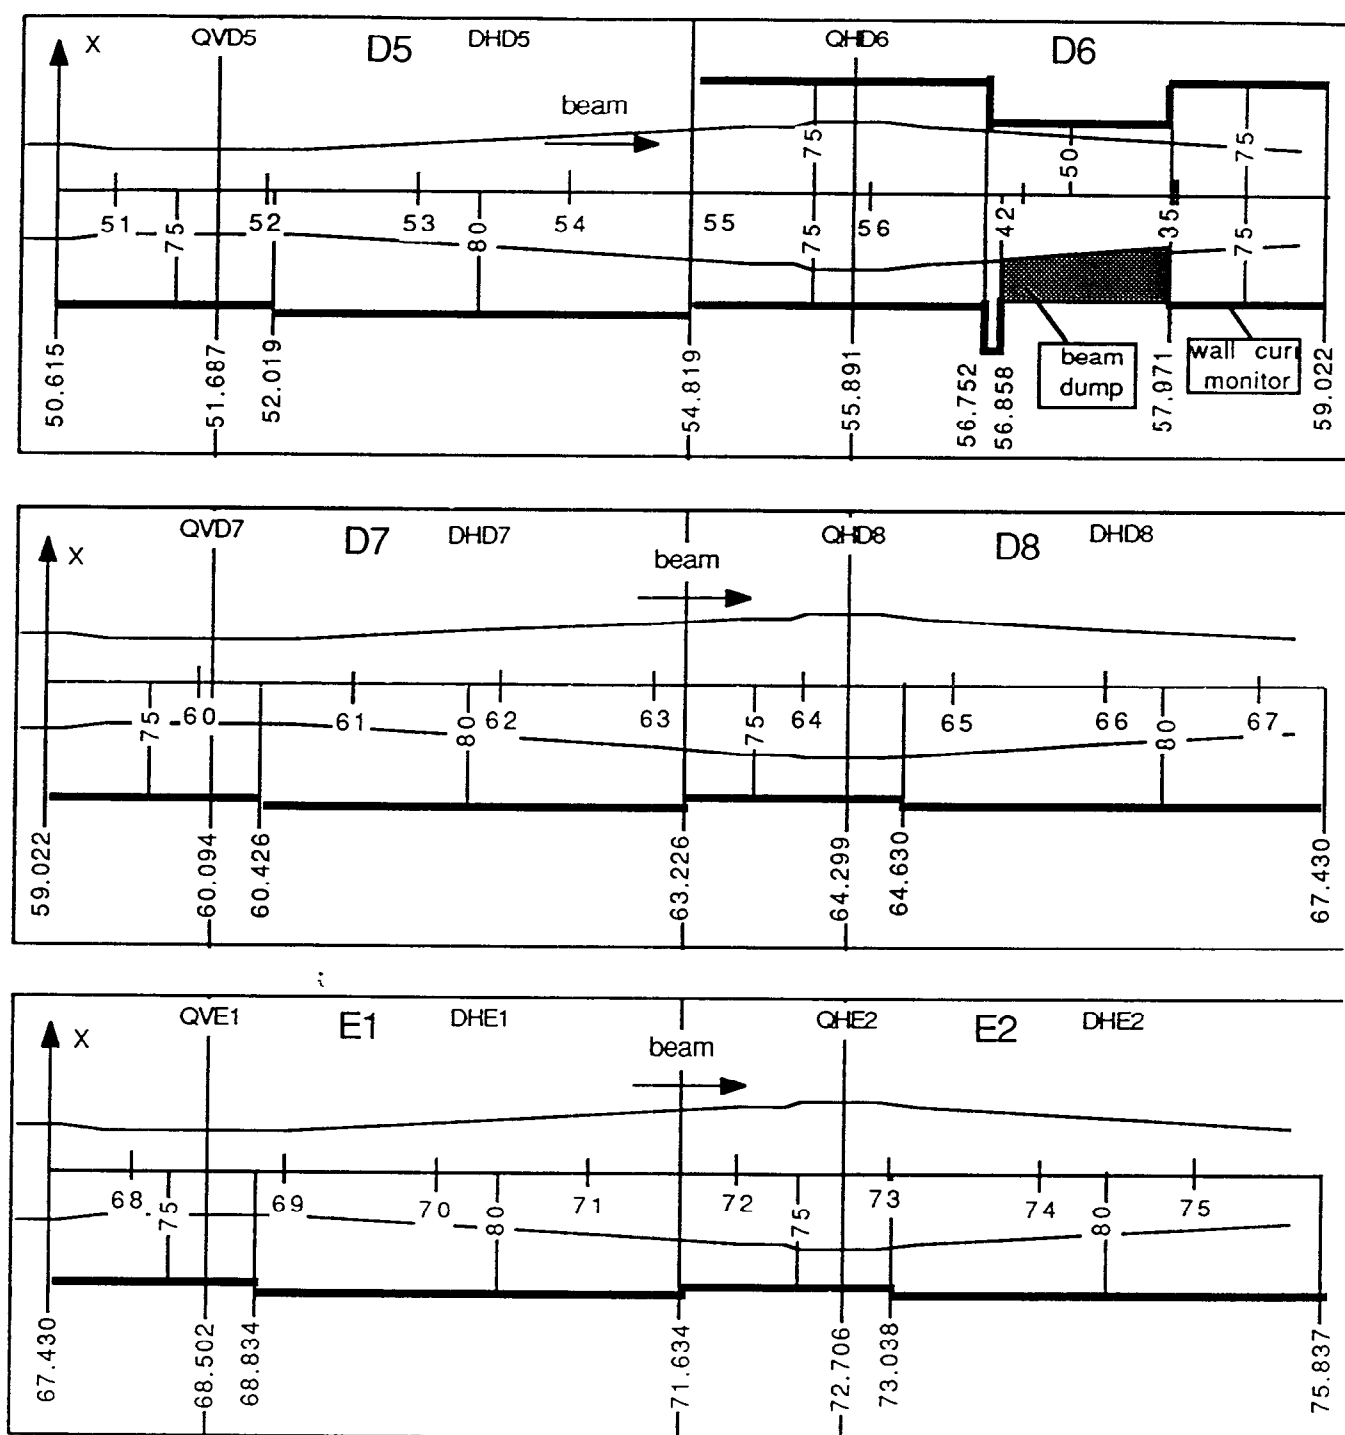


Fig.3. Horizontal aperture. D5 to E2.

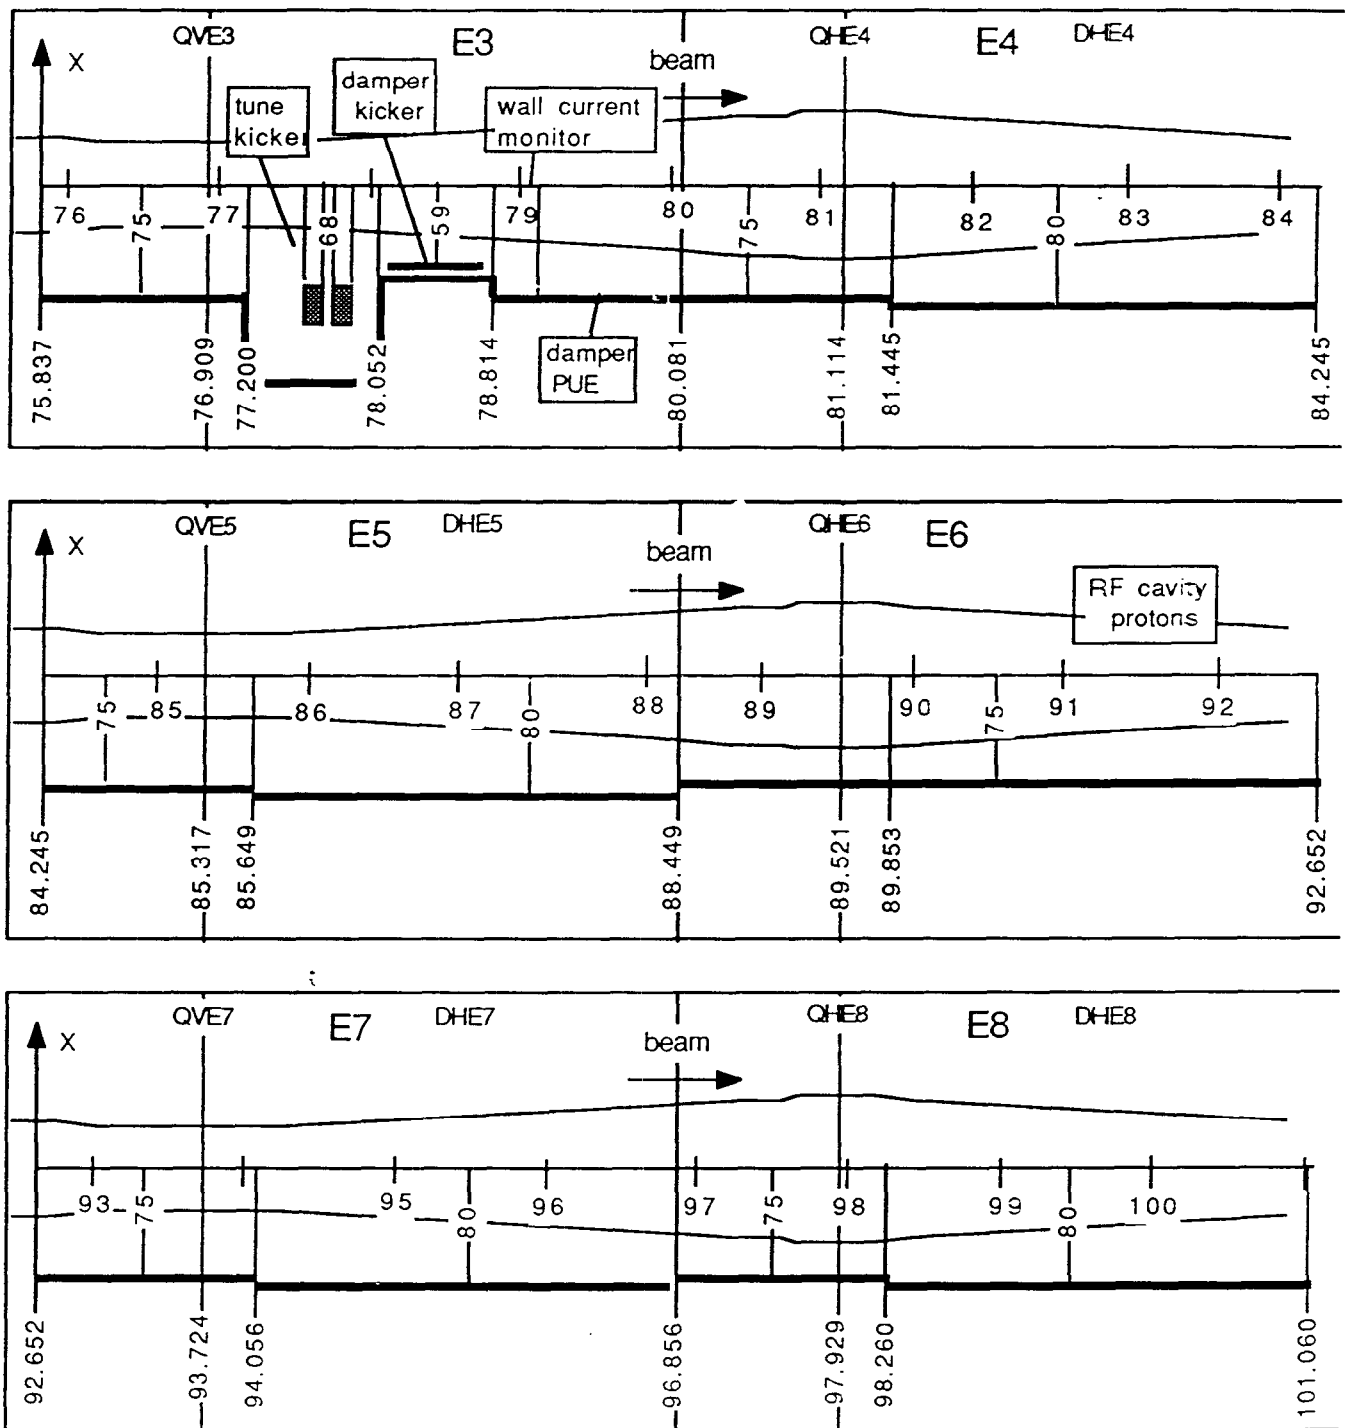


Fig.4. Horizontal aperture. E3 to E8.

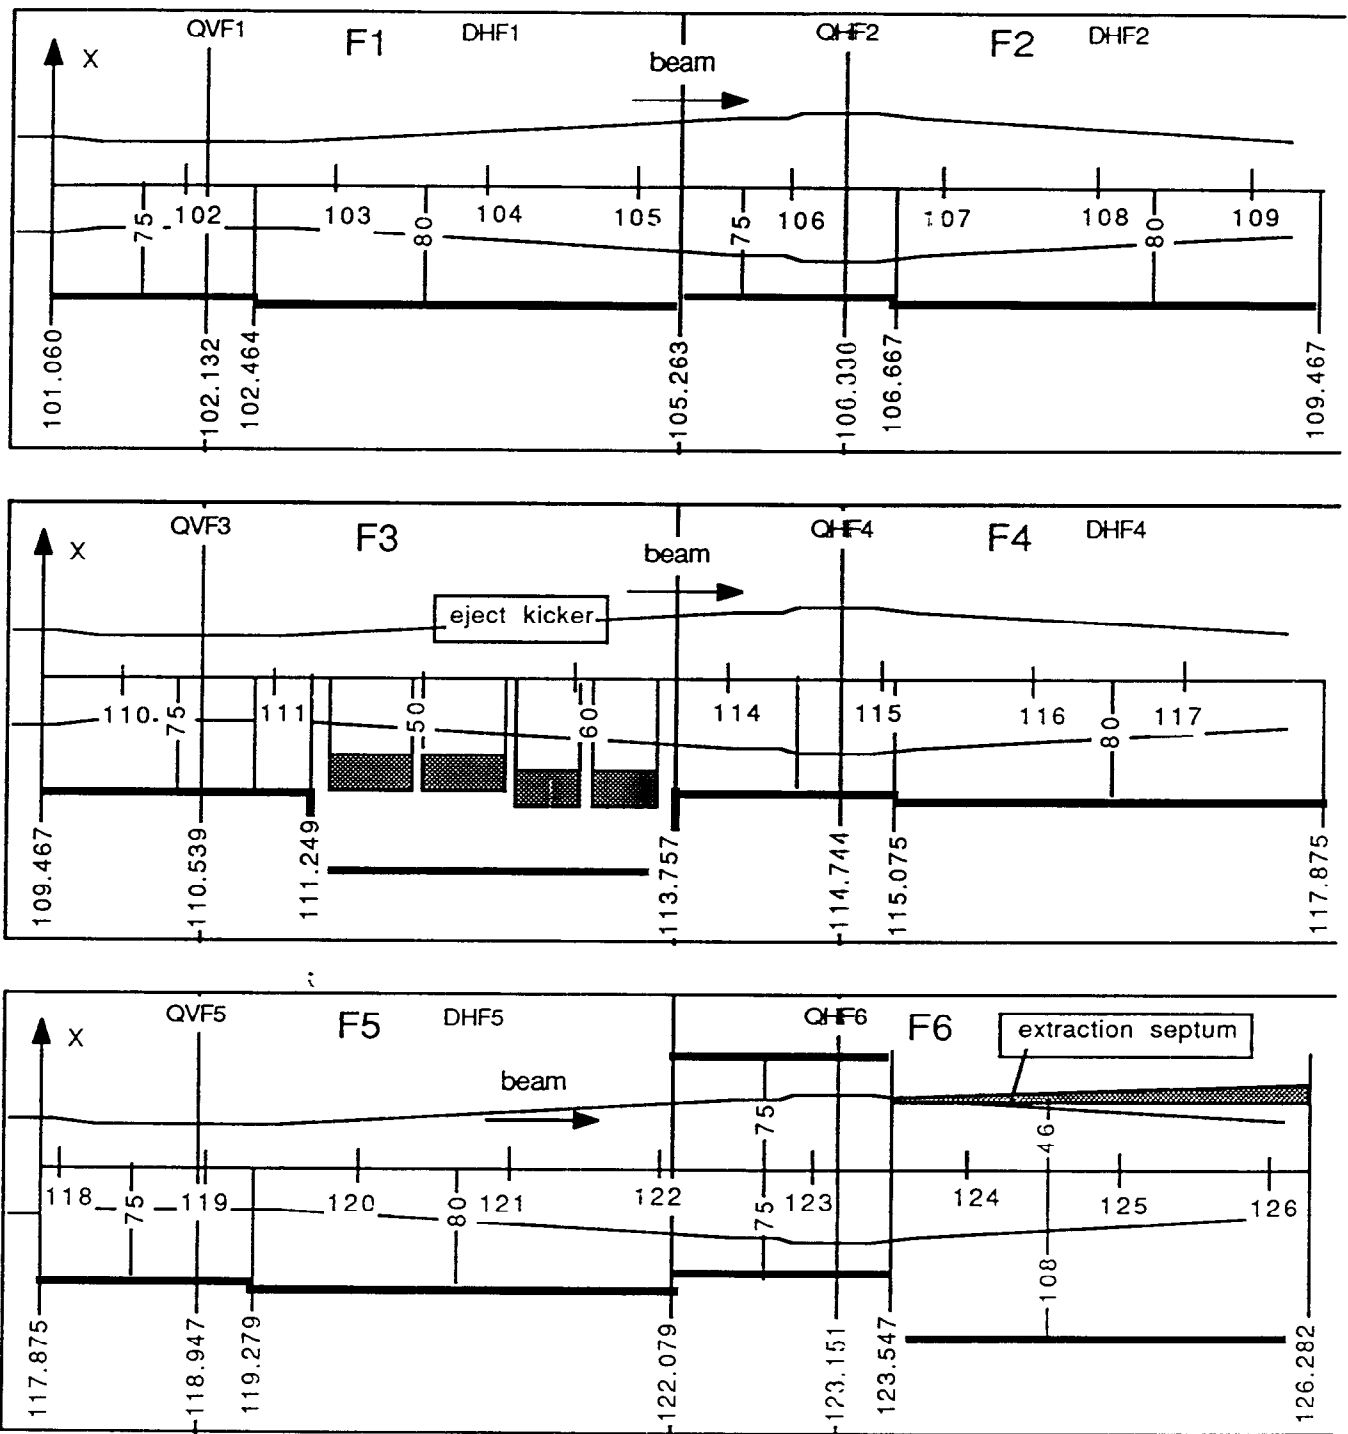


Fig.5. Horizontal aperture. F1 to F6.

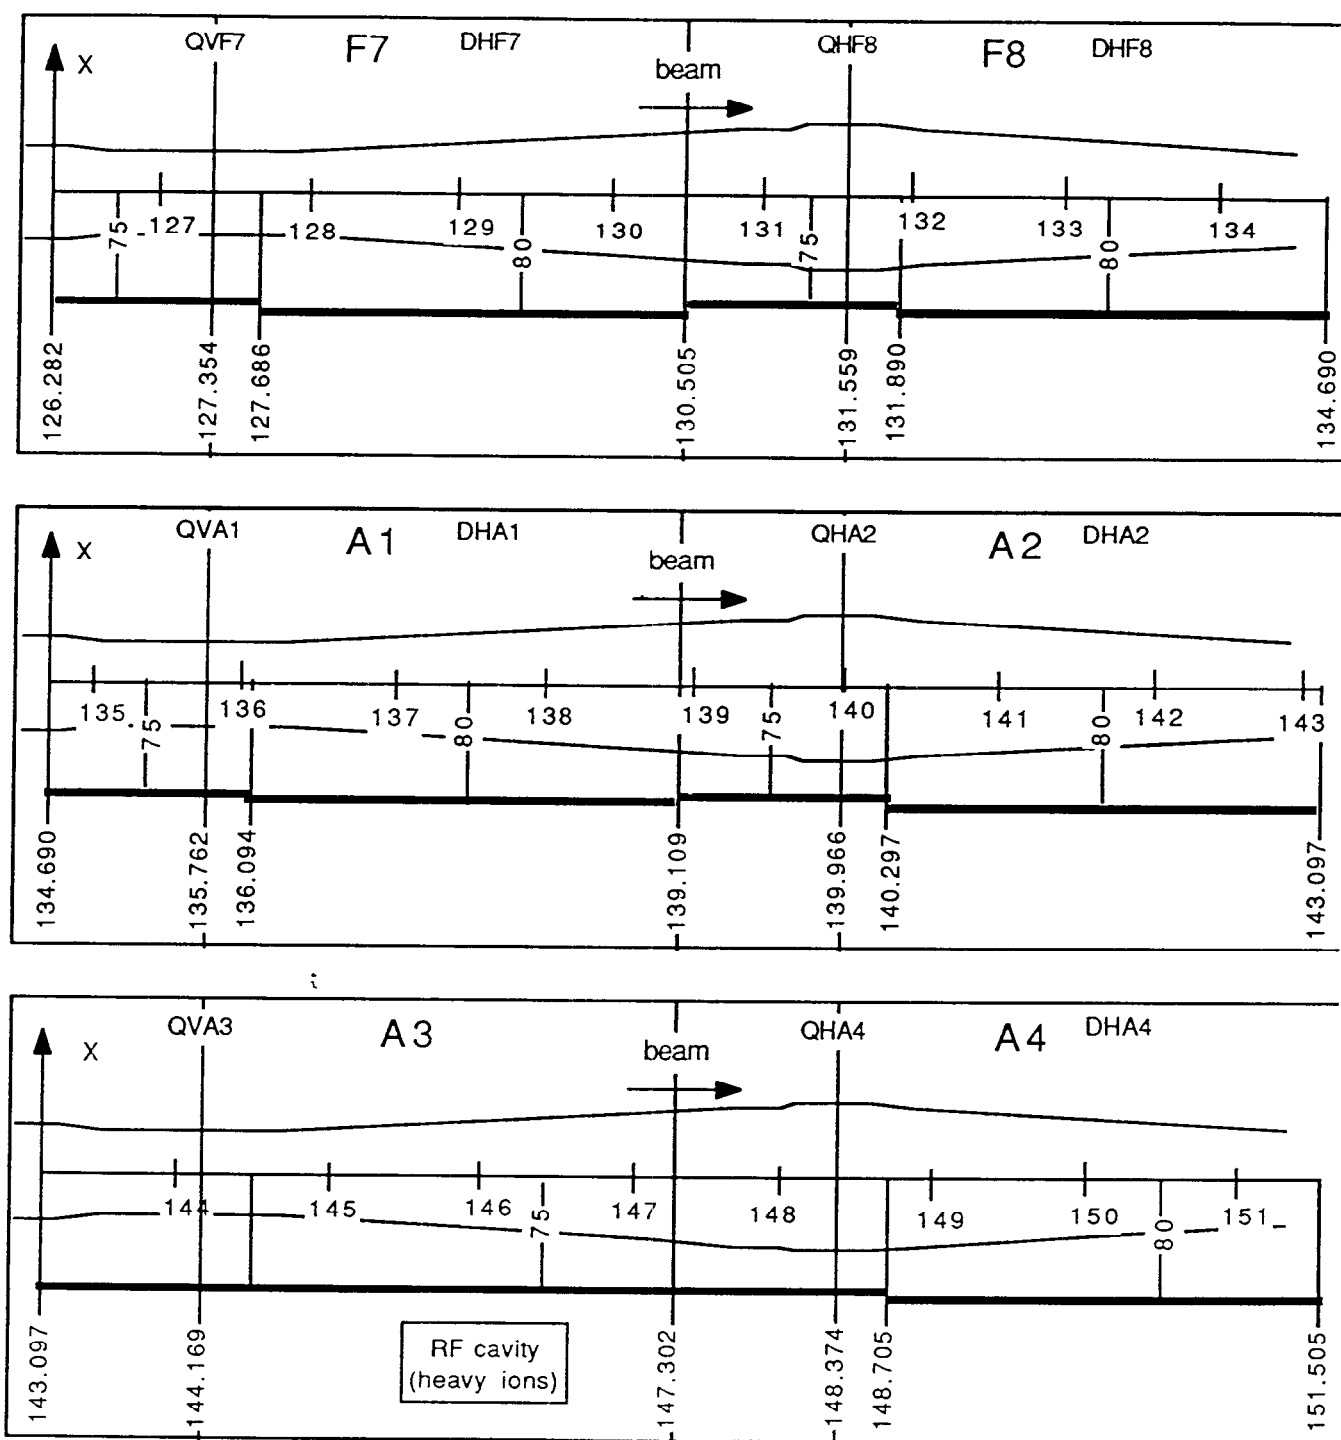


Fig.6. Horizontal aperture. F7 to A4.

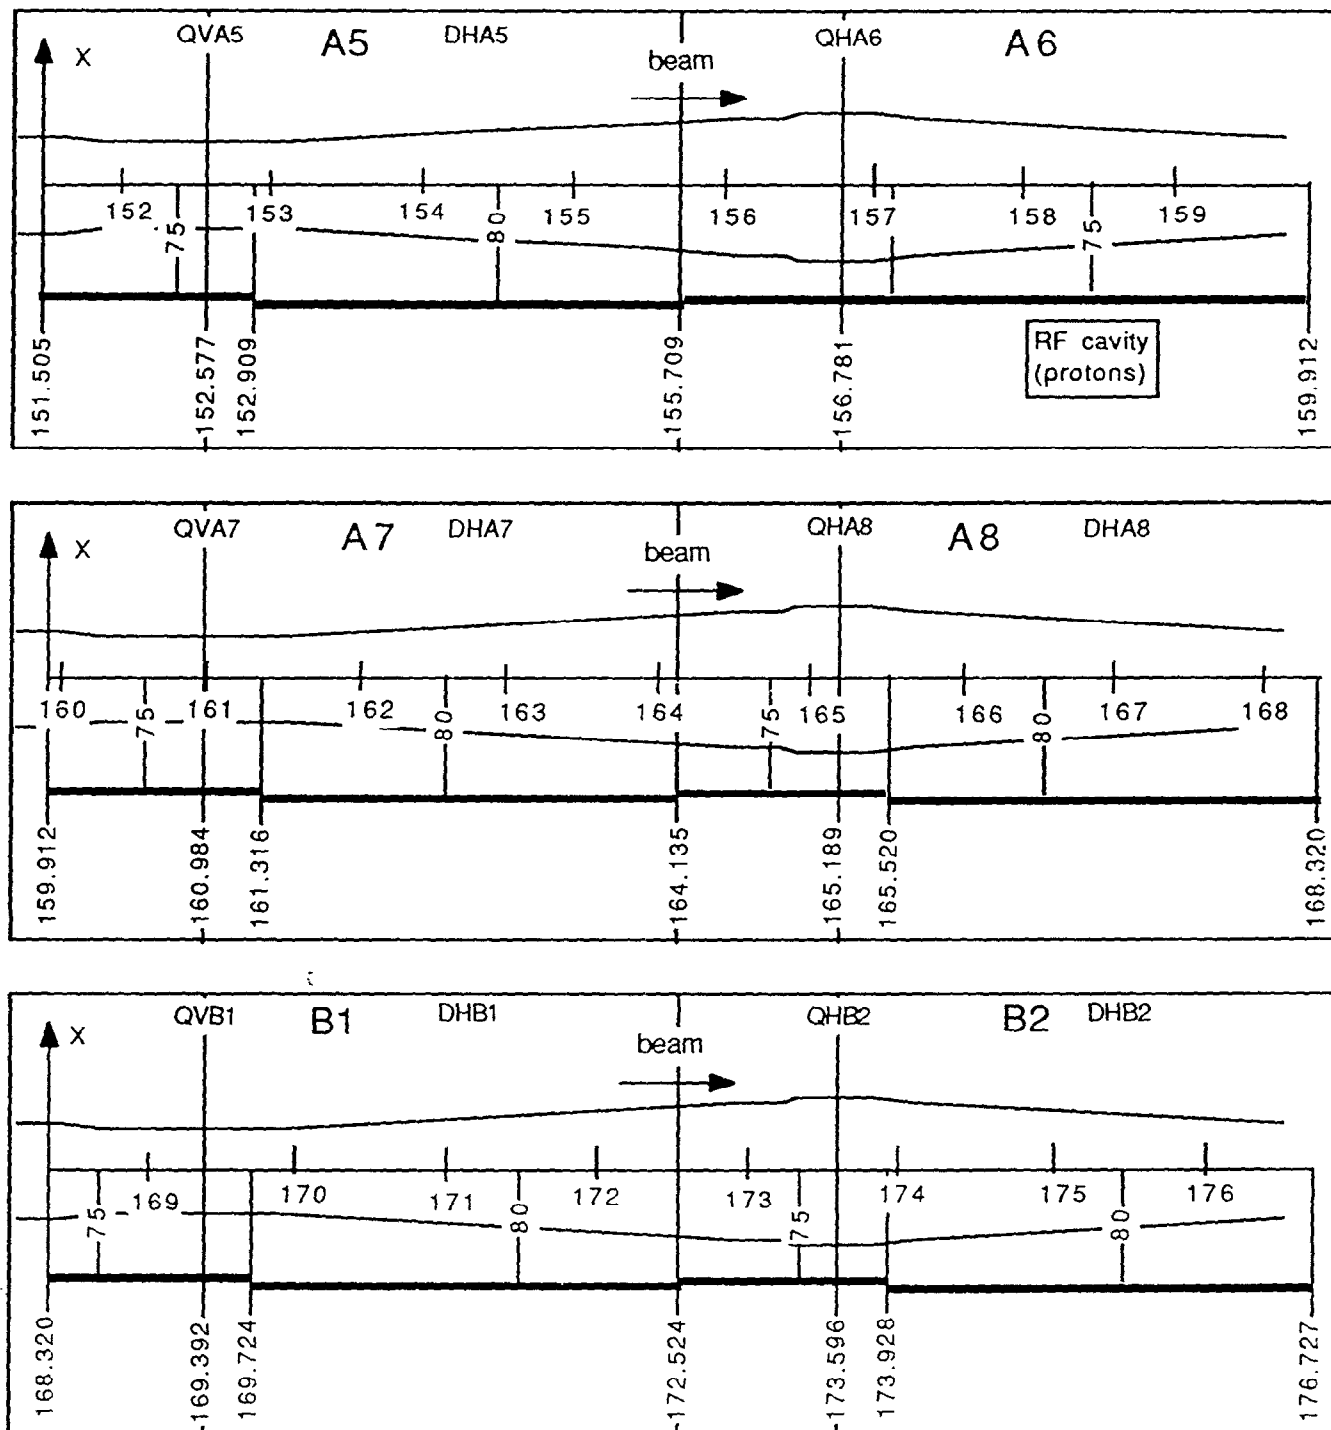


Fig.7. Horizontal aperture. A5 to B2.

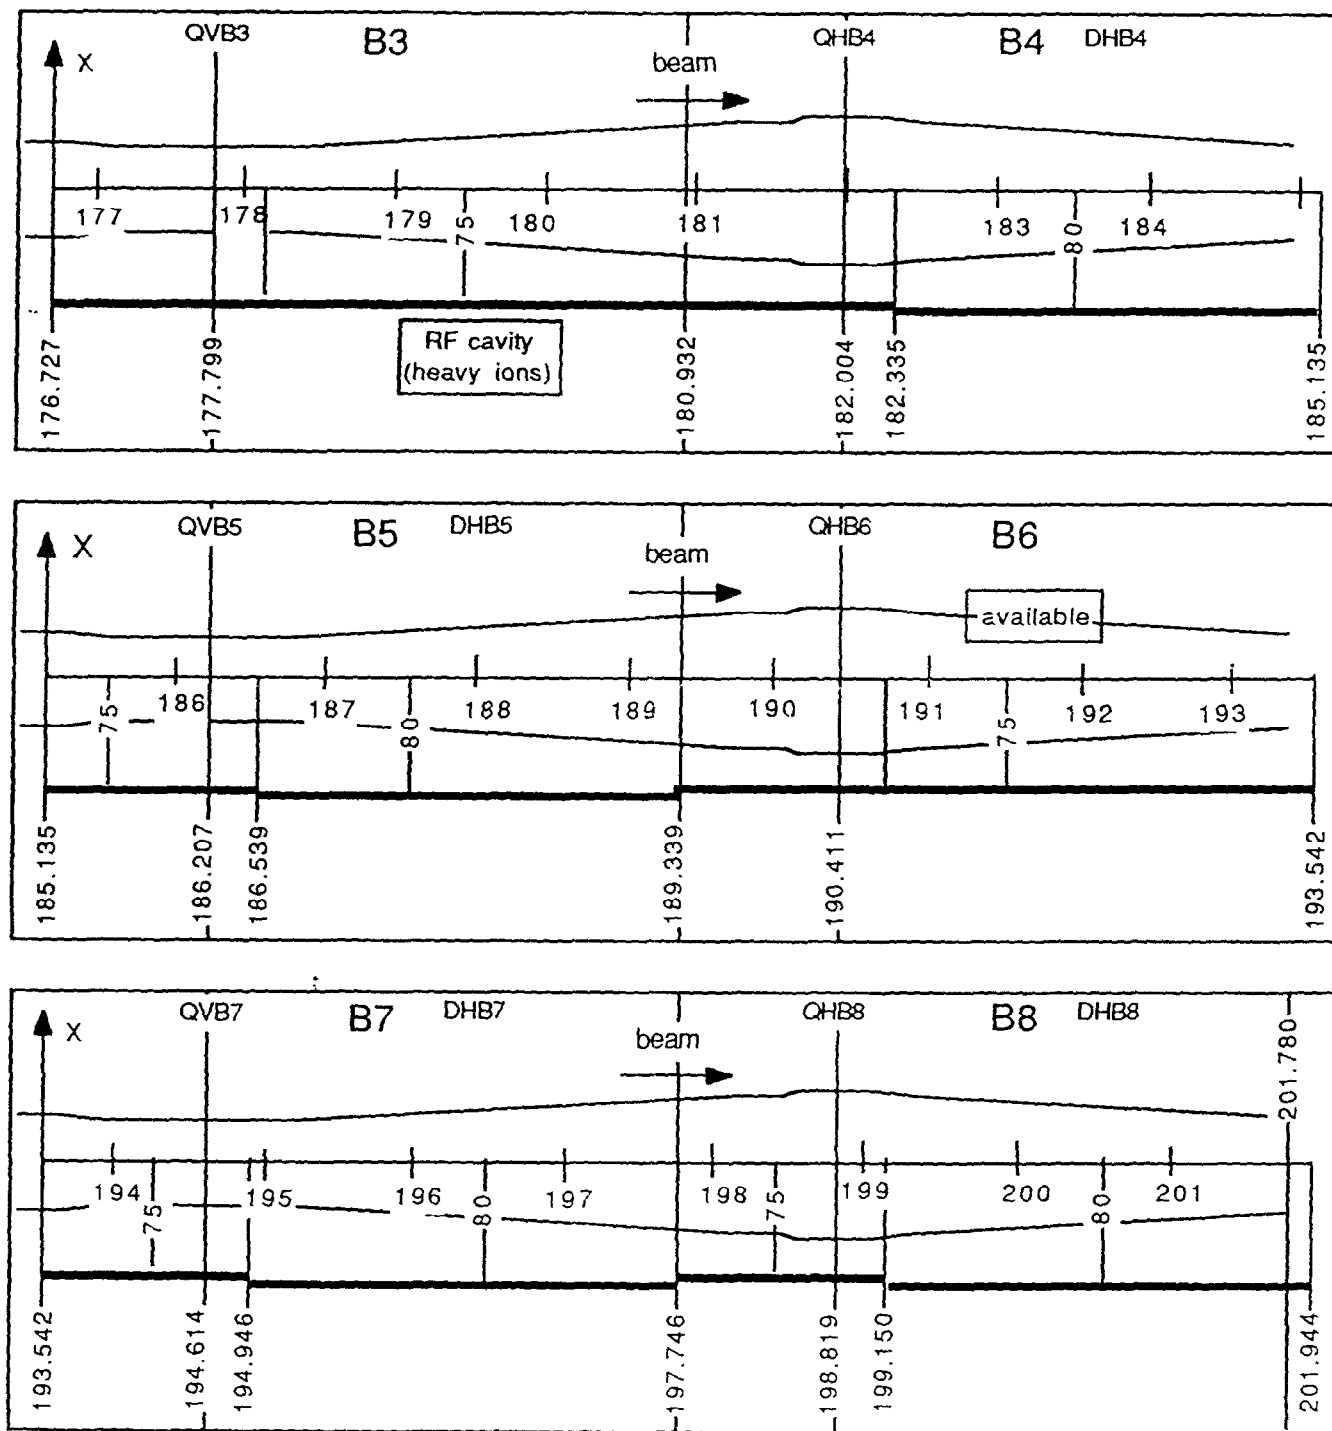


Fig.8. Horizontal aperture. B3 to B8.

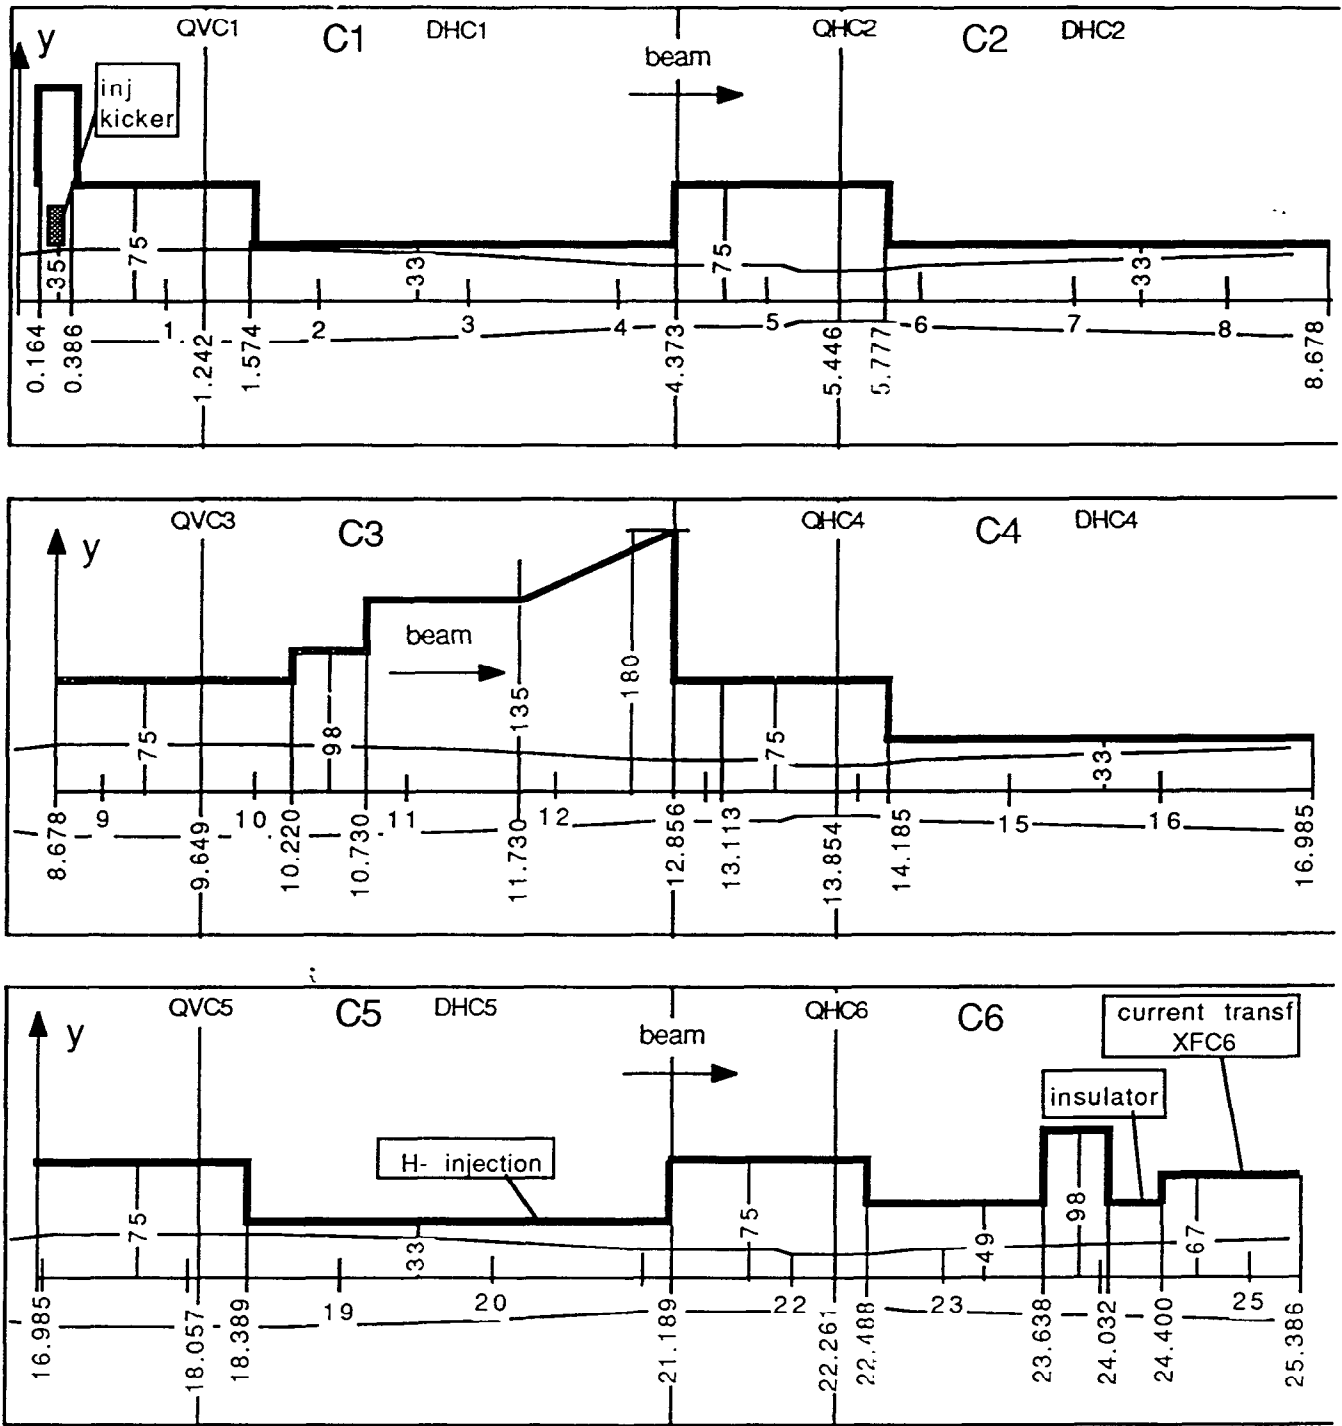


Fig.9. Vertical aperture. C1 to C6.

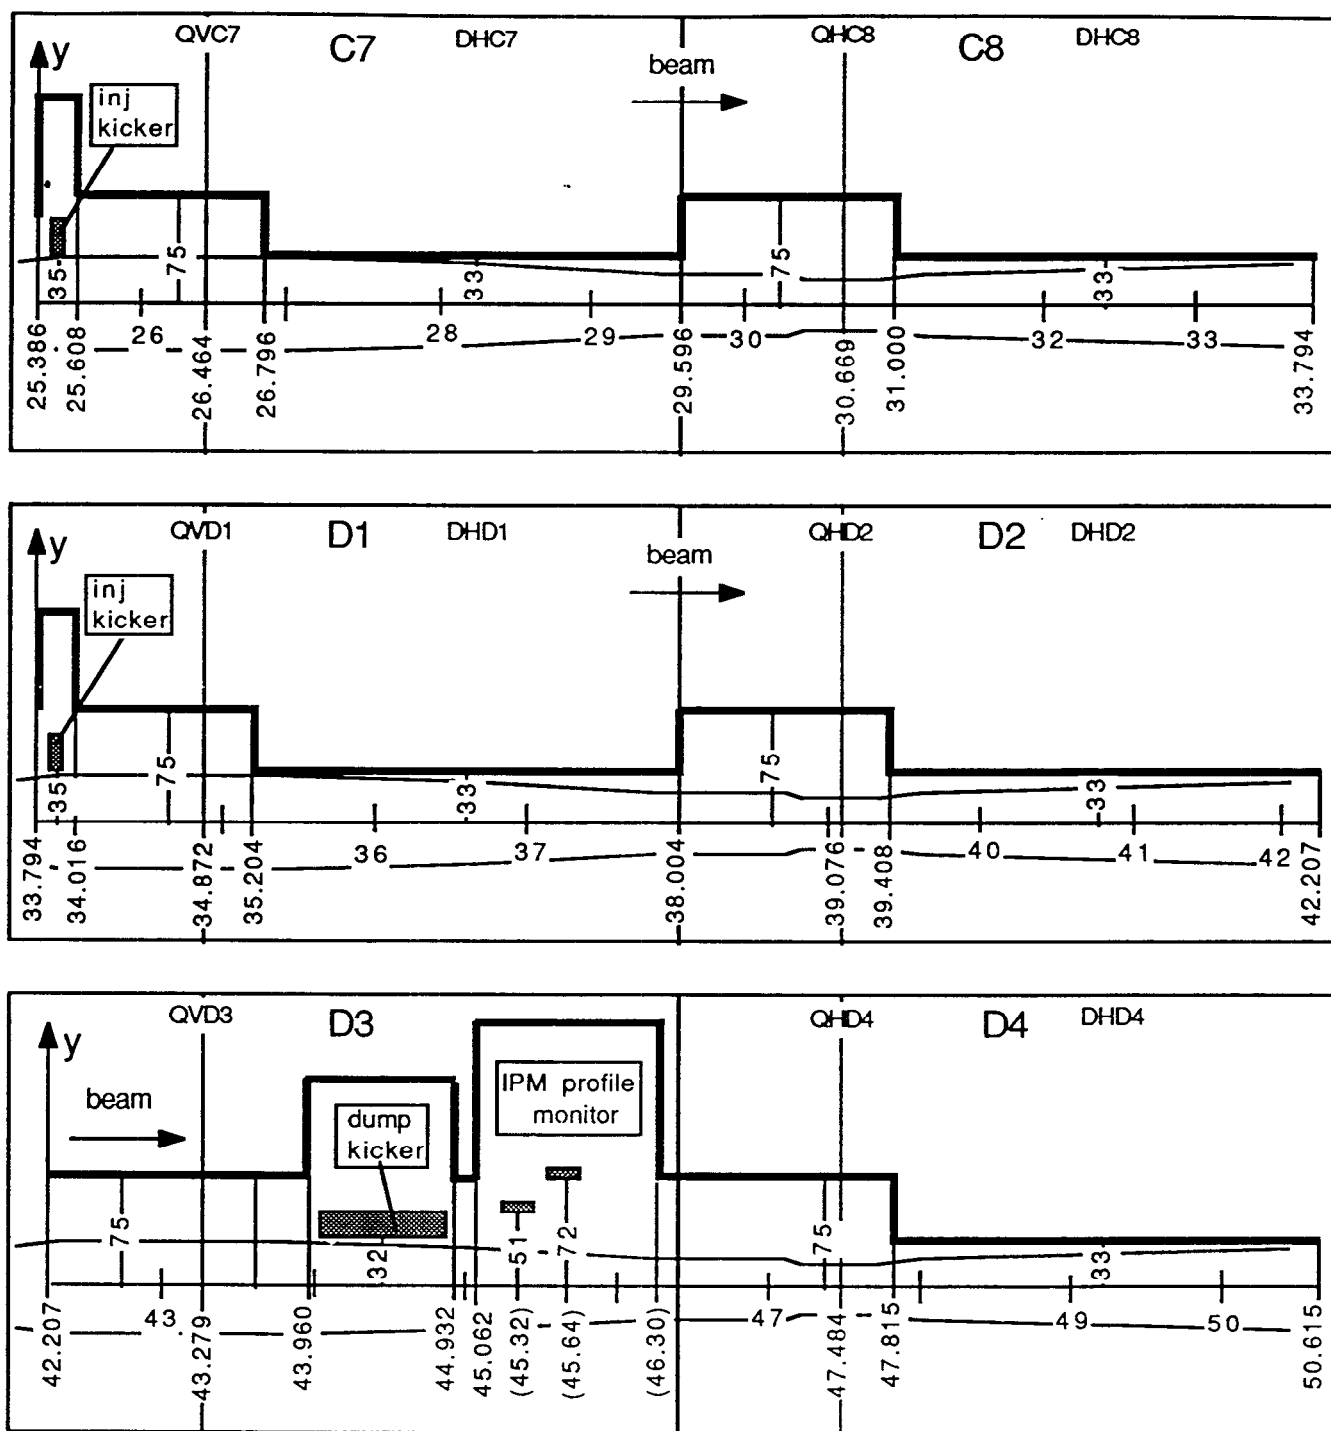


Fig.10. Vertical aperture. C7 to D4.

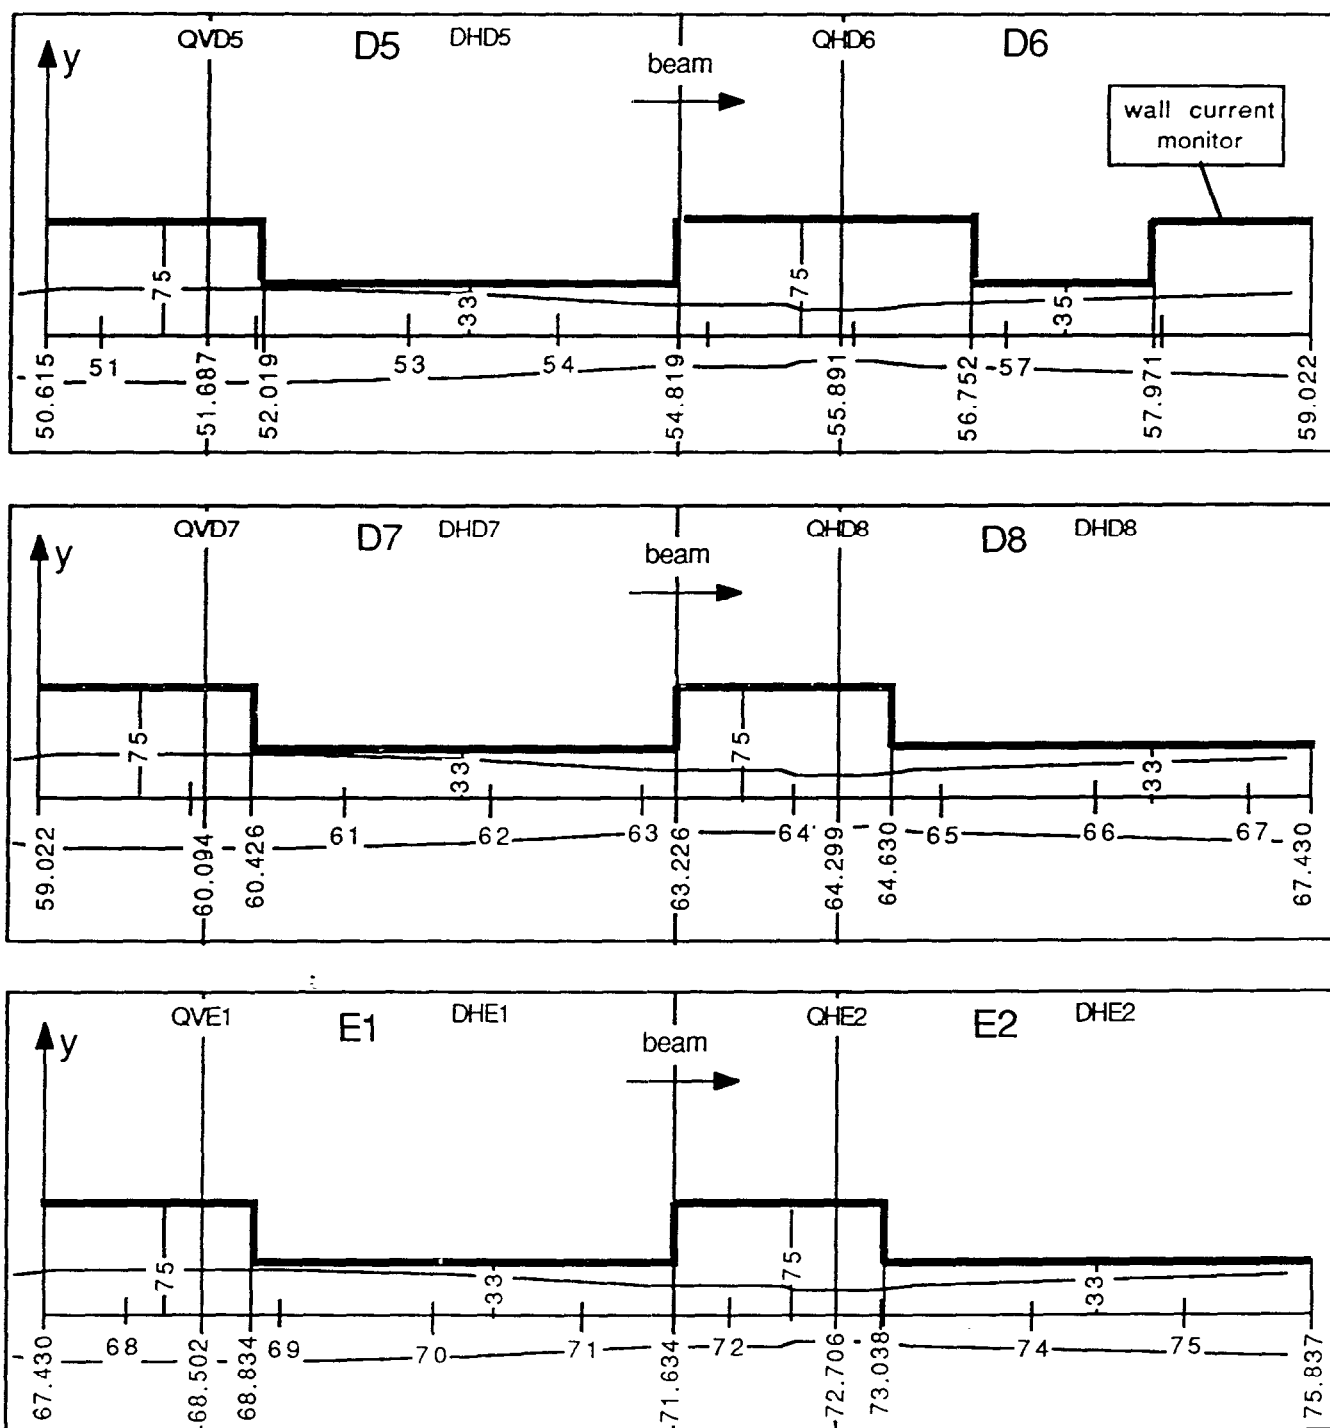


Fig.11. Vertical aperture. D5 to E2.

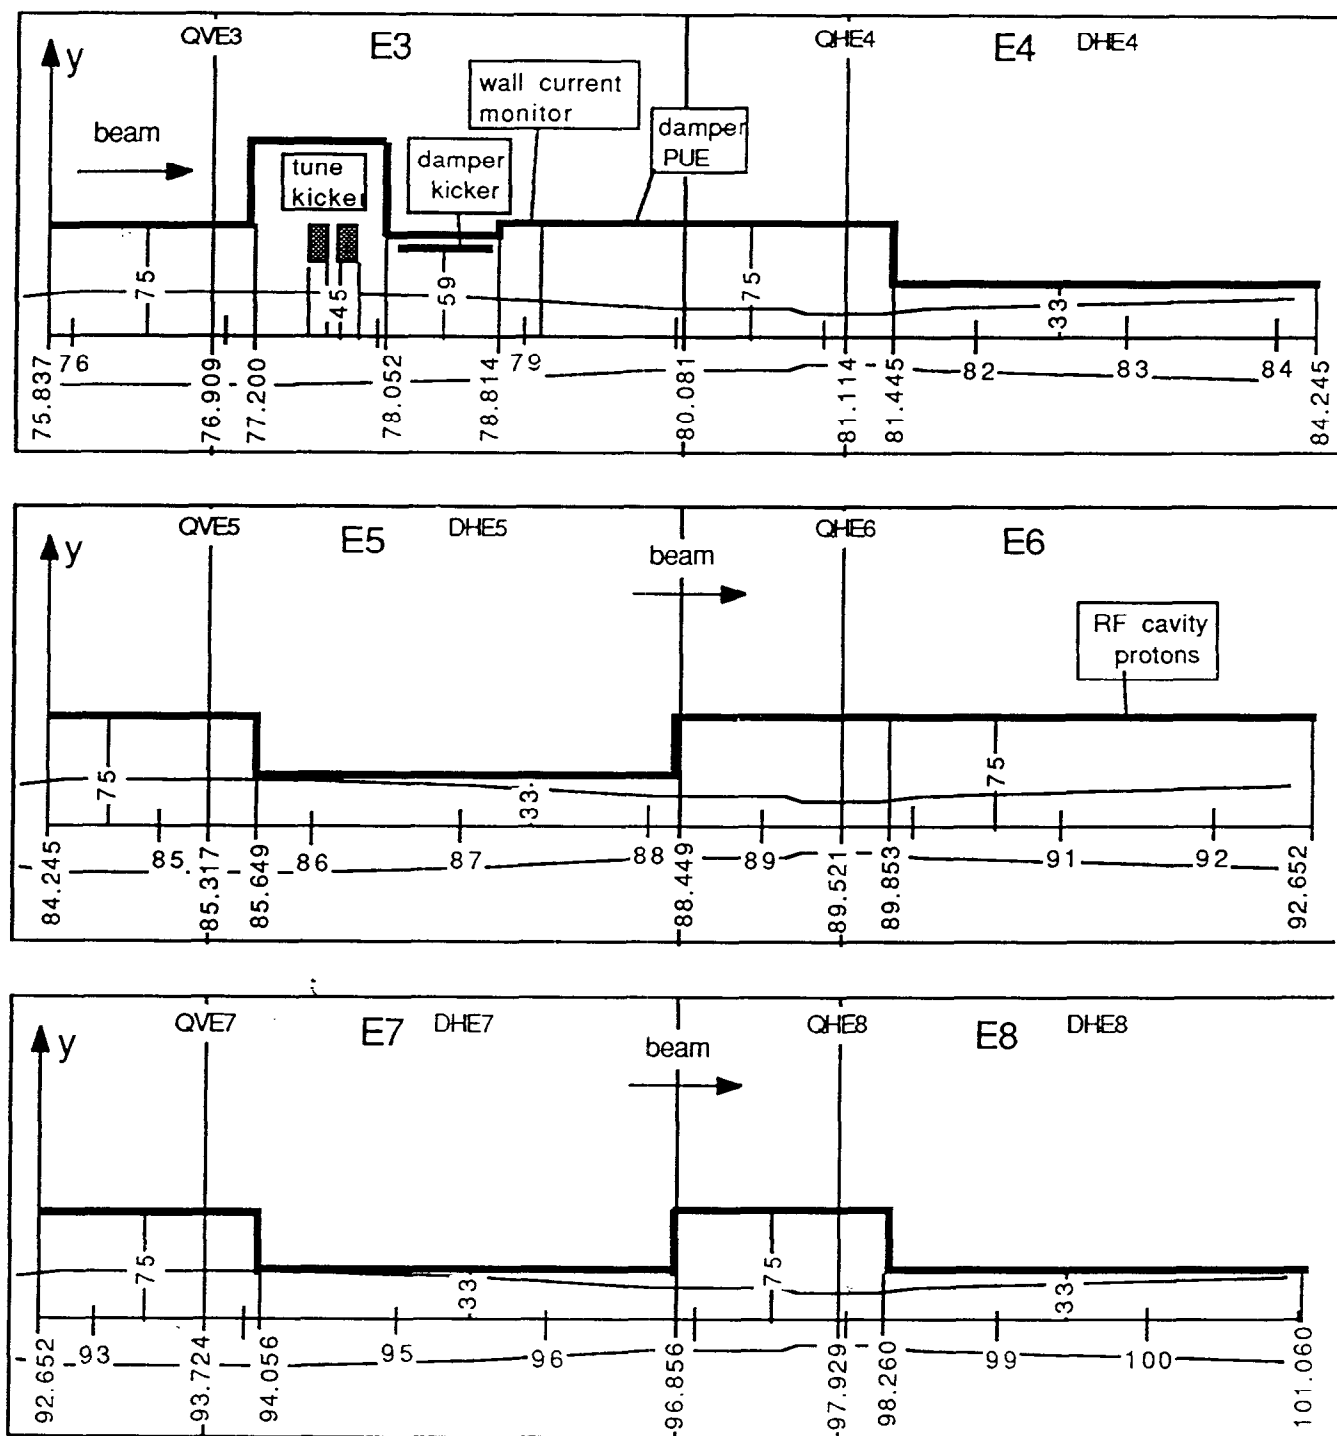


Fig.12. Vertical aperture. E3 to E8.

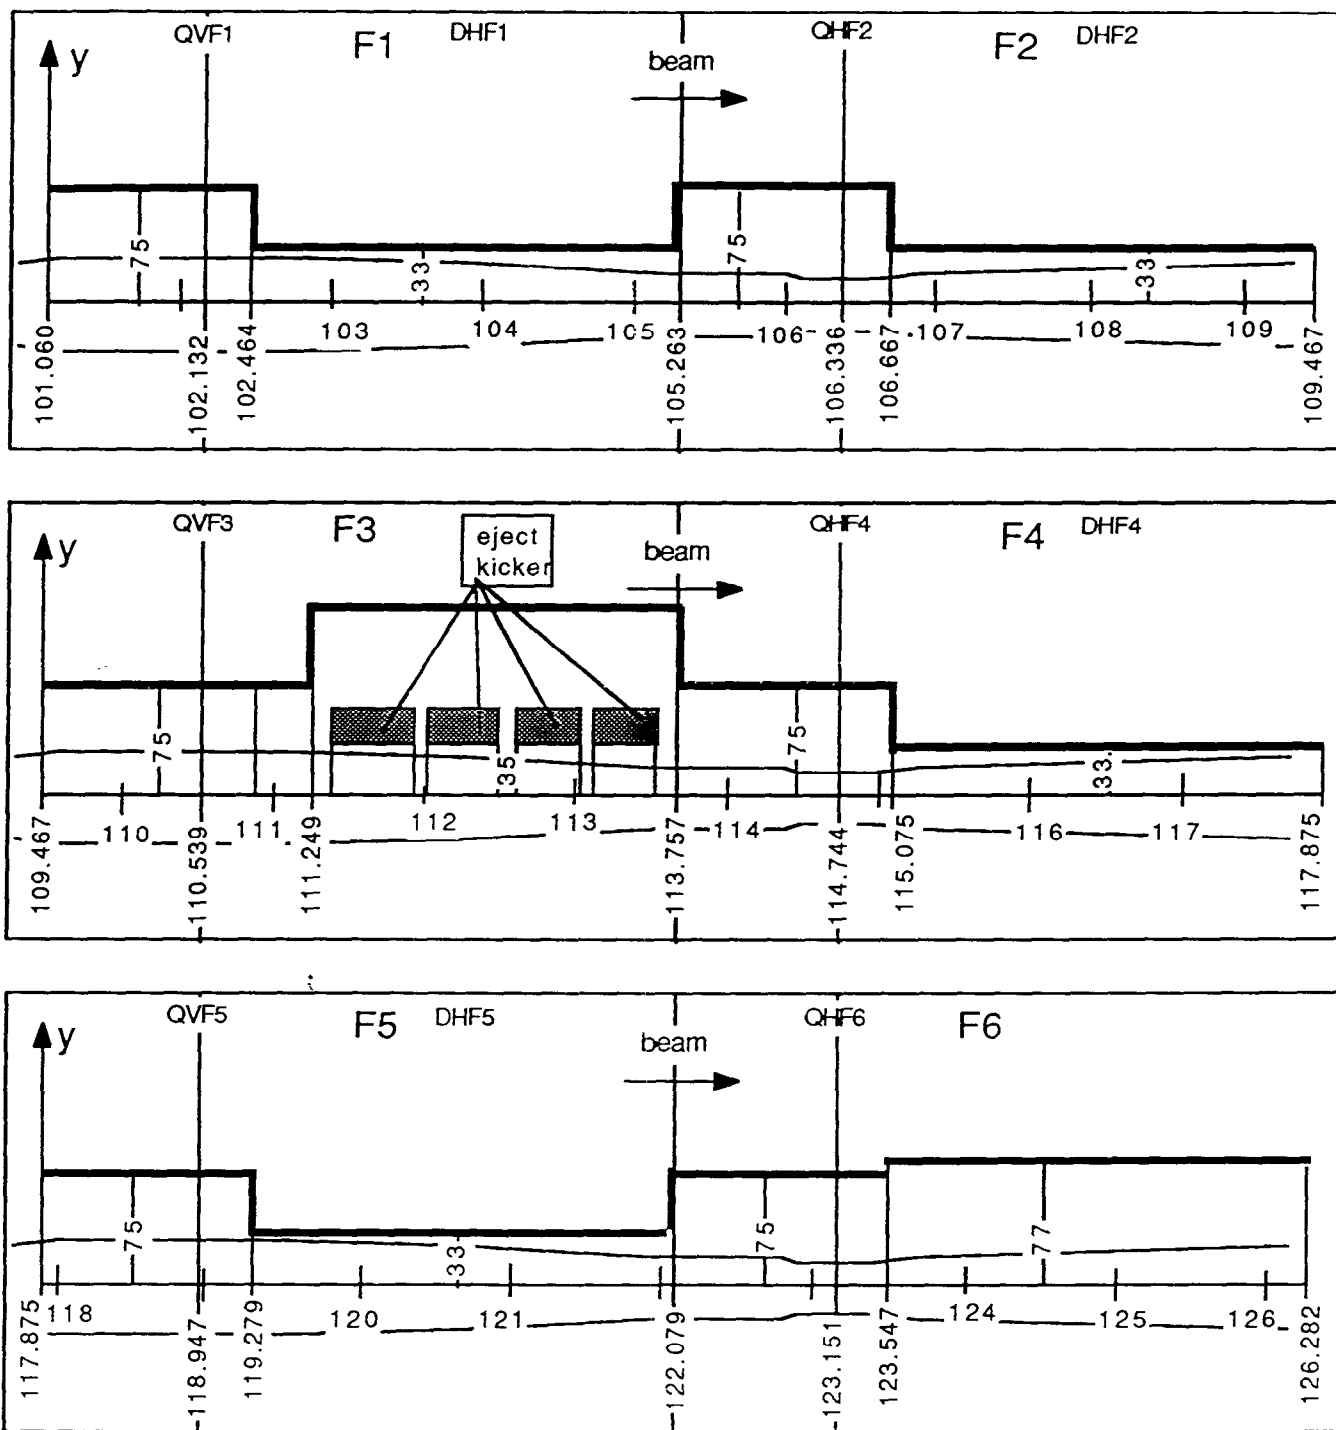


Fig.13. Vertical aperture. F1 to F6.

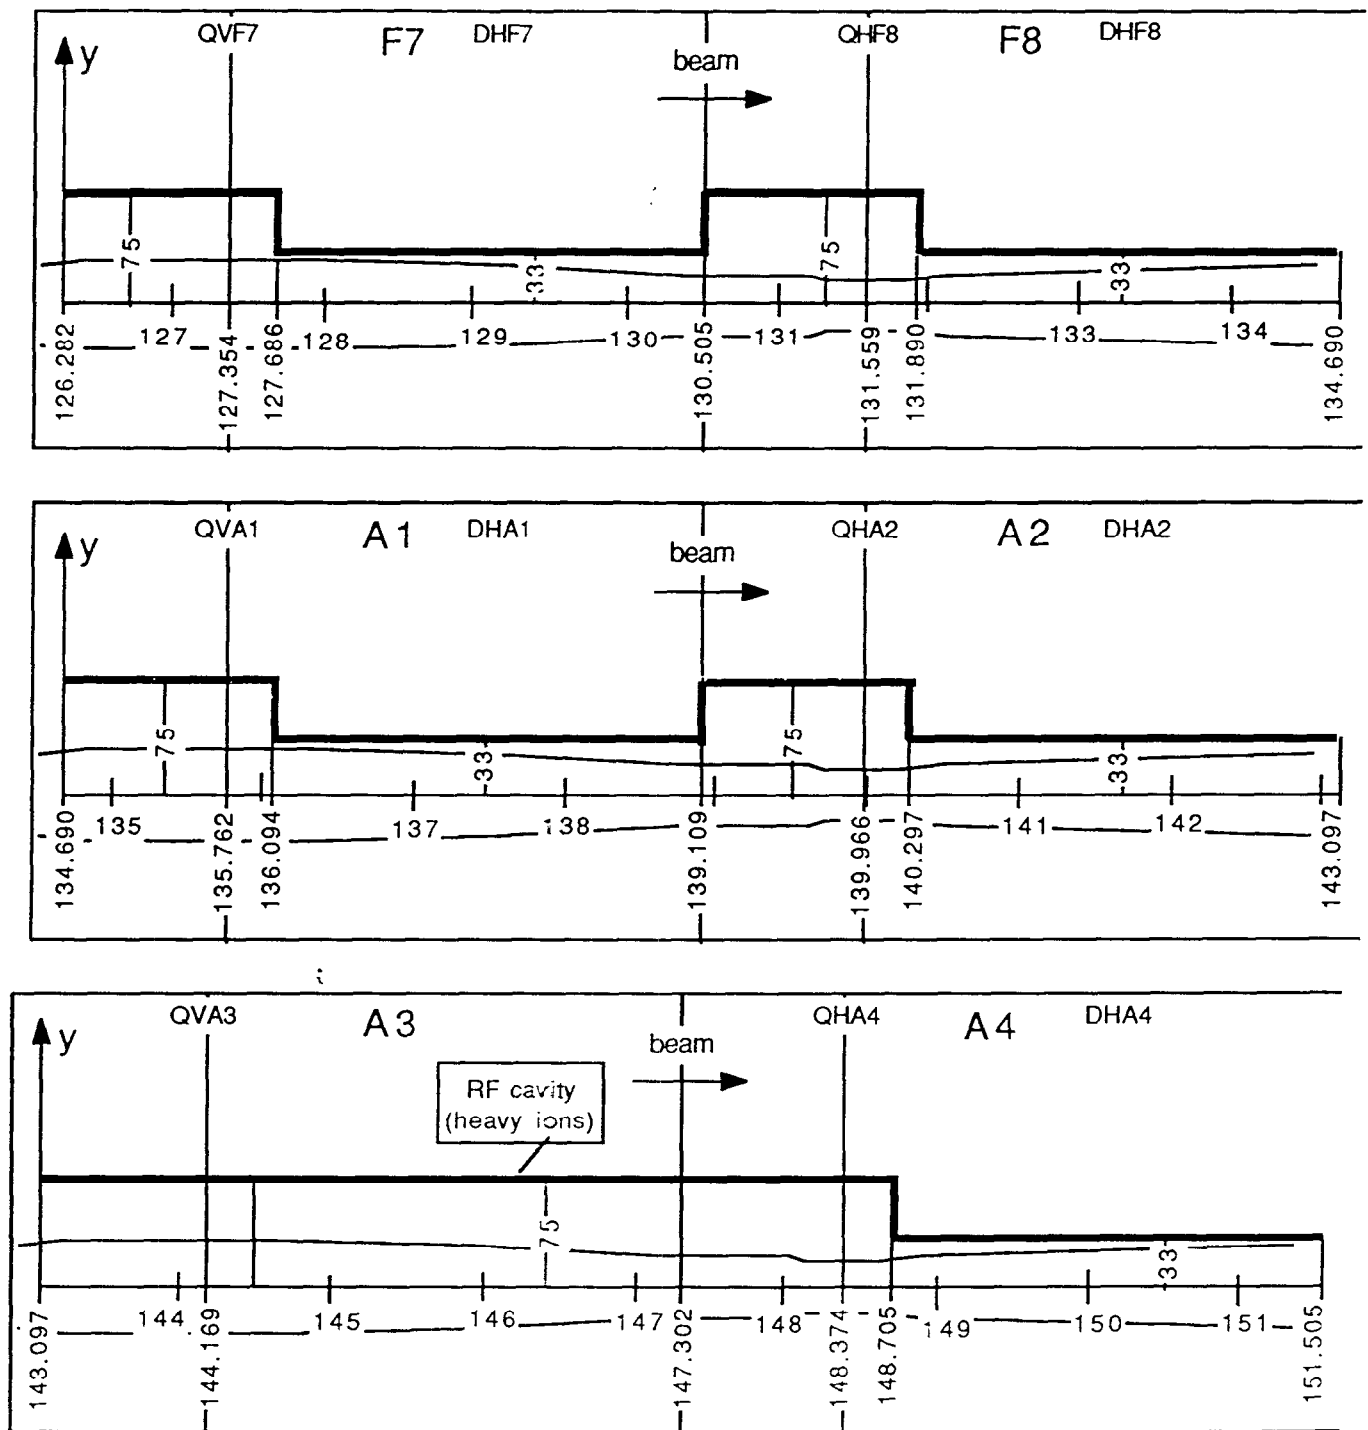


Fig.14. Vertical aperture. F7 to A4.

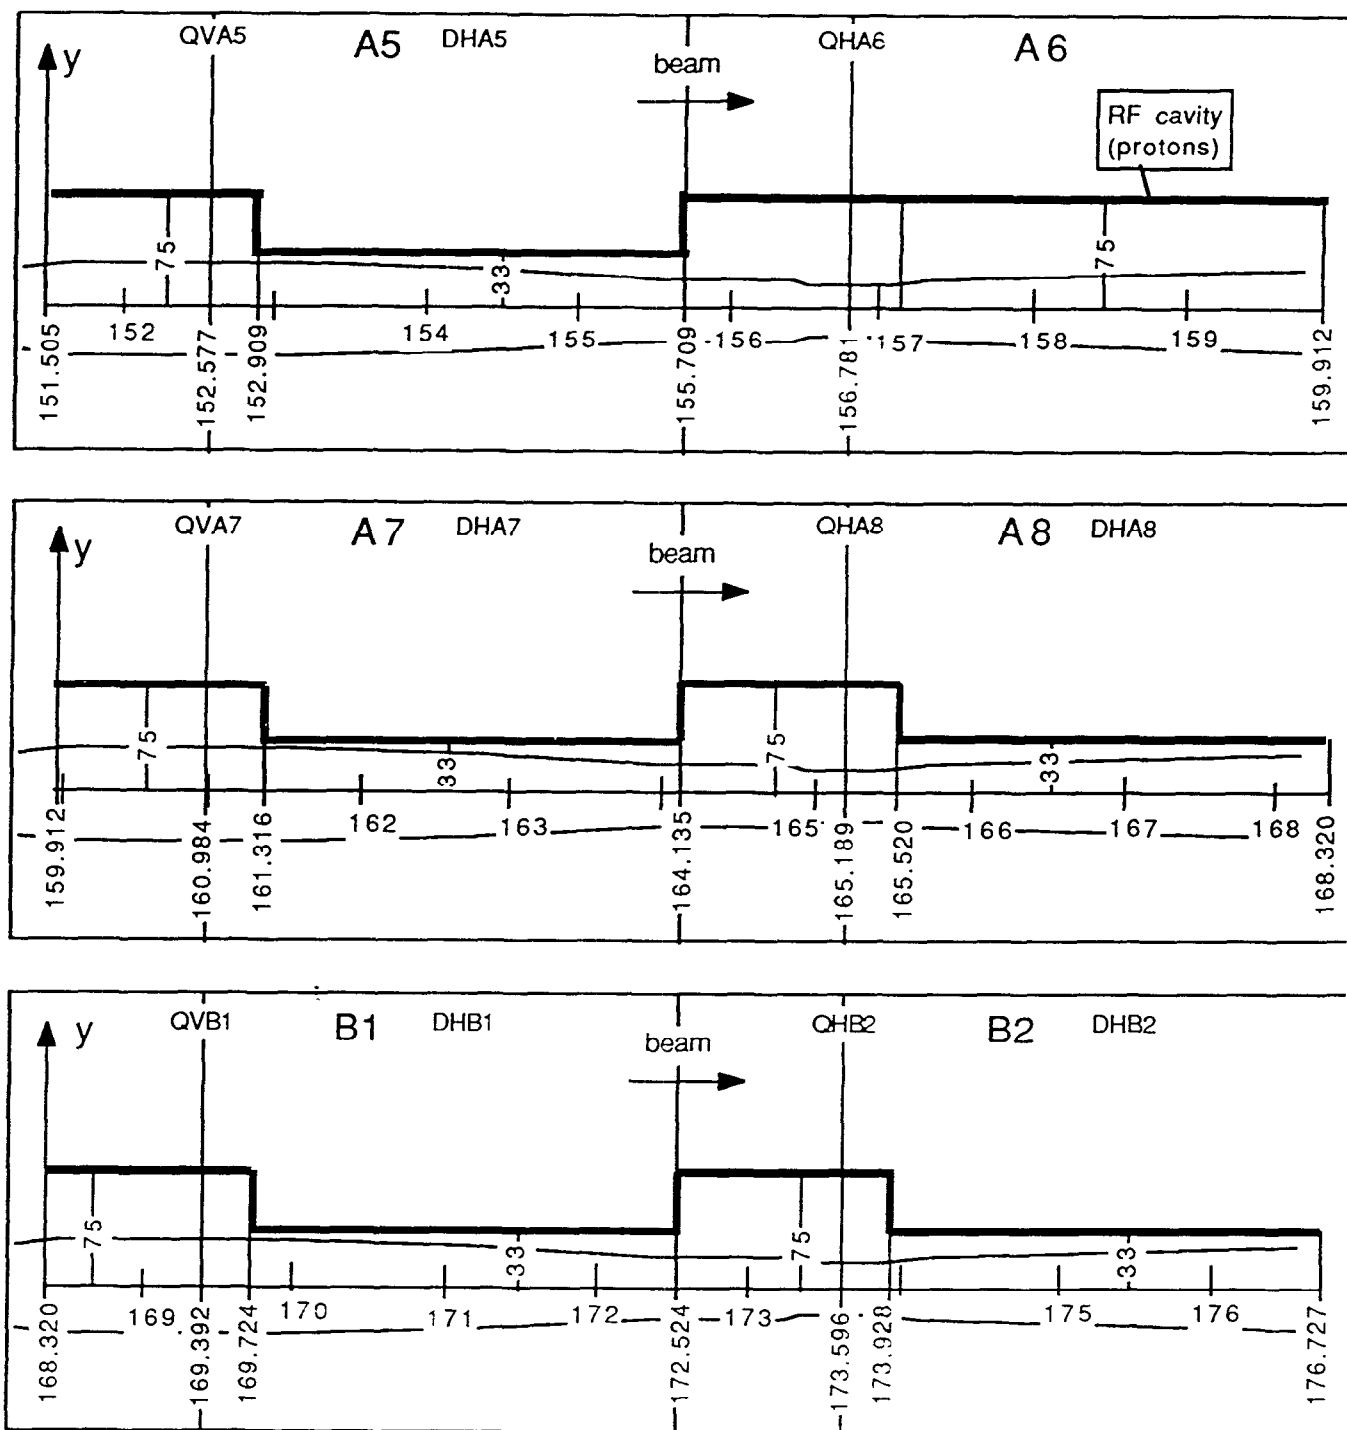


Fig.15. Vertical aperture. A5 to B2.

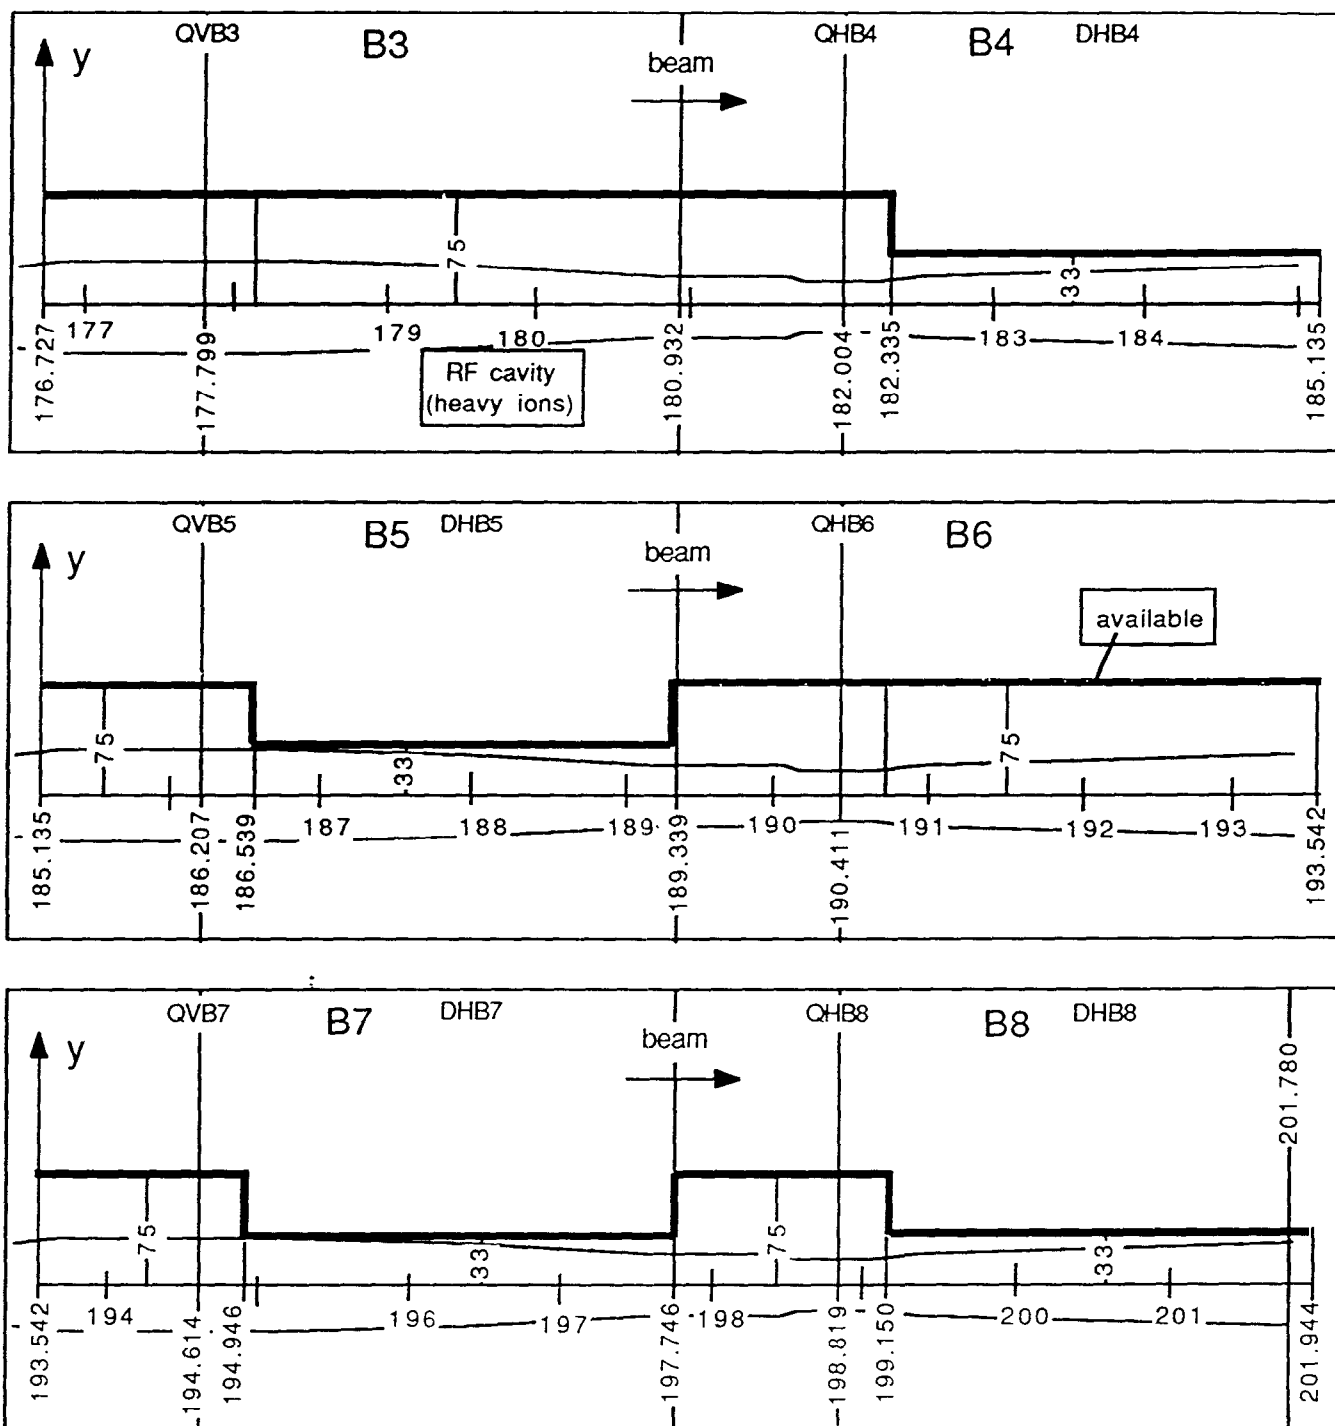


Fig.16. Vertical aperture. B3 to B8.

