

Calculation of the Booster proton cavity using the Superfish Program

J. Zhang

February 1988

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

CALCULATION OF THE BOOSTER PROTON CAVITY
USING THE "SUPERFISH" PROGRAM

AD

Booster Technical Note

No. 109

JIAN ZHANG

FEBRUARY 2, 1988

ACCELERATOR DEVELOPMENT DEPARTMENT
Brookhaven National Laboratory
Upton, N.Y. 11973

CALCULATION OF THE BOOSTER PROTON CAVITY USING THE "SUPERFISH" PROGRAM

Jian Zhang

INTRODUCTION

For the AGS Booster Project, two RF acceleration stations are needed for the proton. For each station, a four half-wave coaxial line with monogap filled with ferrites to allow for permeability tuning, has been adopted for the RF cavities. It has been chosen to operate at a peak voltage of 22.5KV, in each half-wave cavity, for accelerating proton, and a tunable frequency range of 2.4-4.1MHz is required. Presented here are some results and design features, for this cavity, calculated by using a "SUPERFISH"¹ program developed by Los Alamos National Laboratory (LANL).

FERRITE TYPE

The choice of ferrite for such purpose depends fundamentally upon the power losses and heat dissipation allowed. The losses increase very rapidly with the magnetic flux density and working frequency. A commercially available candidate for lower loss ferrite meeting the requirements of the Booster cavity is the Philips type 4M2. It has been used in the CERN PS Booster and Rutherford SNS accelerators. A test cavity based on a ferrite-loaded resonator, consisting of ferrite toroids with 50cm O.D., 25cm I.D. and 2.5cm thickness, has been built for the measurements on RF characteristics. The power losses are measured as a function of magnet flux over whole fre-

quency range. The curves of Q product is obtained for comparison with that provided by the Philips company (Figure 1). According to data measured, the number of ferrite rings in each half-wave cavity is evaluated to be at least 30 to satisfactorily run at highest frequency of 4.1MHz, the peak voltage of 22.5KV and within the limit of power losses of $0.30\text{W}/\text{cm}^3$. In this calculation, we assumed no cooling. In the actual design, there are cooling provided for the ferrite; therefore, fewer ferrite ring is possible. Main dimensions of this cavity are shown in Figure 2.

CALCULATION METHOD

In the past, simple formulas were utilized for the design of cavity with ferrites. Recently, a series of programs, named "SUPERFISH", have been developed for this purpose. It is a special program that can solve the MAXWELL's equation in two-dimension, by calculating properties of cavity resonator exhibiting an axial circular symmetry and the cut-off modes of uniform straight waveguides.

Because the oscillating frequency of cavity with ferrites is lower than the bare program produces, certain modification should be done when this program is used for the Booster cavity. Some special regions can be reset for program changes when used and a variety of new constants such as the permeabilities, permittivities and required accelerating voltage were put into the program for satisfying the needs of design.

The output file of the program contains a list of the parameters used for solution, a list of material properties for each region, and an iteration history. Many formulas were used in the program to calculate auxiliary properties such as average accelerating field, stored energy, power losses, etc.

Again, all these calculations do not contain the power losses on the ferrites and beam loading effect. Therefore, extra losses should be taken into account.

In order to eliminate the random error caused in the measurements, a sixth order polynomial obtained by fitting the measured data was used in the calculation.

For comparison, five parameter tables calculated with different numbers of ferrite rings in a half-wave cavity are listed in the end of this report.

SOME RESULTS

- (1) From the calculation, if the power losses of ferrite is limited to below $0.30\text{W}/\text{cm}^3$, at least 30 rings are needed in a half-wave cavity. Fewer rings are possible if cooling is provided.
- (2) When the dielectric constant of the ferrite is swept from 1 to 30 gradually, a small variation of the frequency develops, which is less than 2%.
- (3) The cooling plate existing around the ferrites do not affect the main parameters except the tolerable heat dissipation. (Figure 3.)
- (4) The electric field distribution is influenced by the shape of the accelerating electrodes, obviously within the region nearby the

electrode edge. To avoid the voltage breakdown the smooth arc shapes in these edges are preferred (Figure 4).

- (5) The capacitance of the gap capacitor can be selected between 400-1000 (pf) for different requirements. The amount of capacitance does not affect the shunt impedance but the quality factor of the cavity is certainly modified. Larger capacitance gives larger quality factor.
- (6) On the basis of data provided by the Philips Company, the maximum biasing current is about 2500A, if the biasing coil has one turn.
- (7) The possible uncertainties of the calculation are mainly from the data provided by the measurement and the Philips Co. The results obtained should be reliable for the prototype design.

ACKNOWLEDGMENT

I would like to thank M. Goldman, F. Khiari, A. Ratti, and A. McNerney for their helpful discussions.

REFERENCES

- 1. User's Guide for SUPERFISH, LA-UR-87-115.
- 2. U. Bigliani et al., IEEE Trans. Nul Sci, NS-18,233 (1971)
- 3. J. M. Baillod et al., IEEE Trans. Nul Sci, NS-30,3499 (1983)

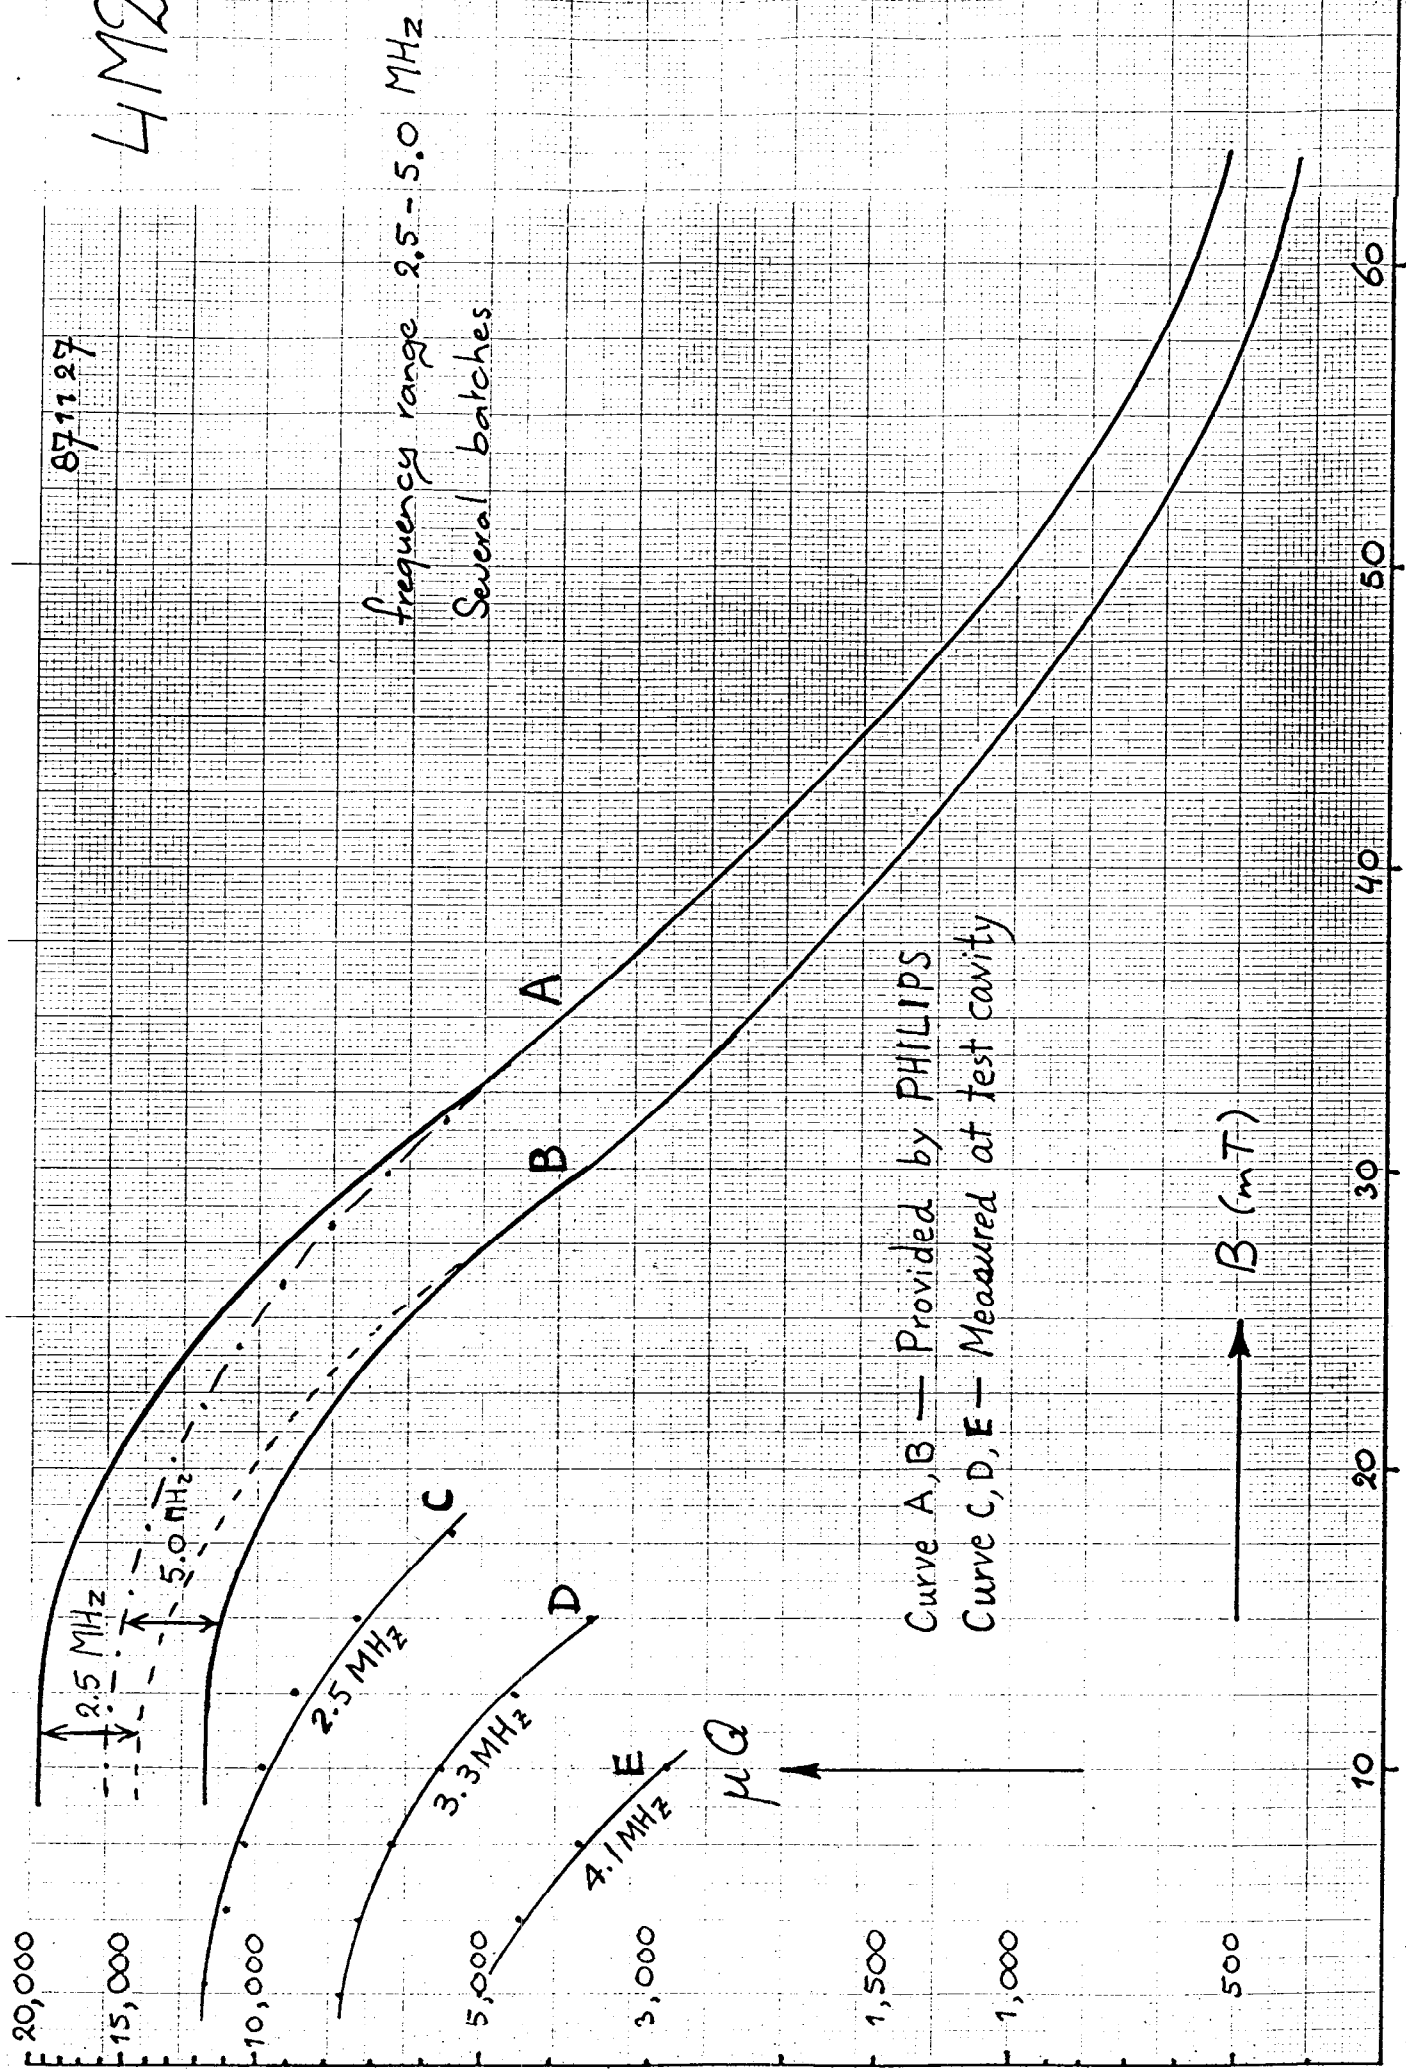


Fig.1 Some curves about μQ vs. B_m

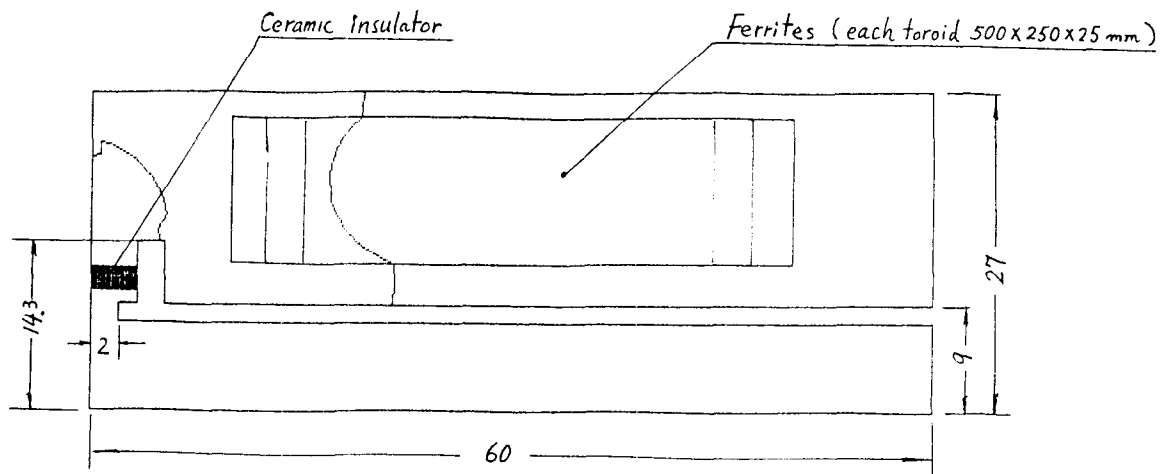


Fig.2 Main dimension of a quarter of cavity

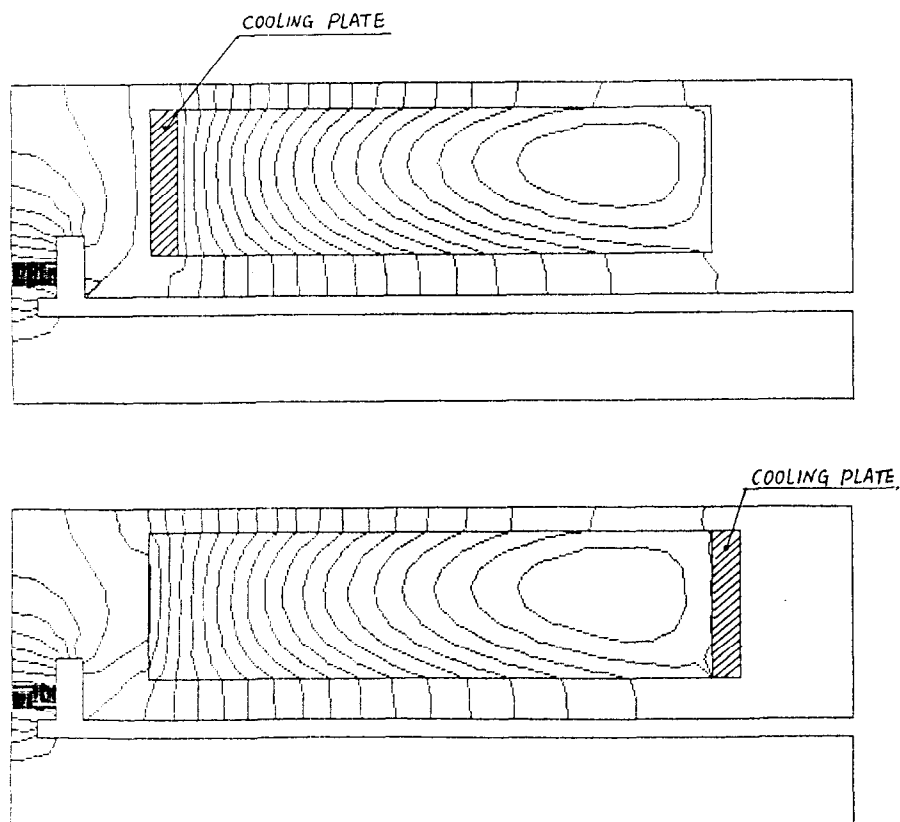


Fig.3 Position of the cooling plate in ferrites

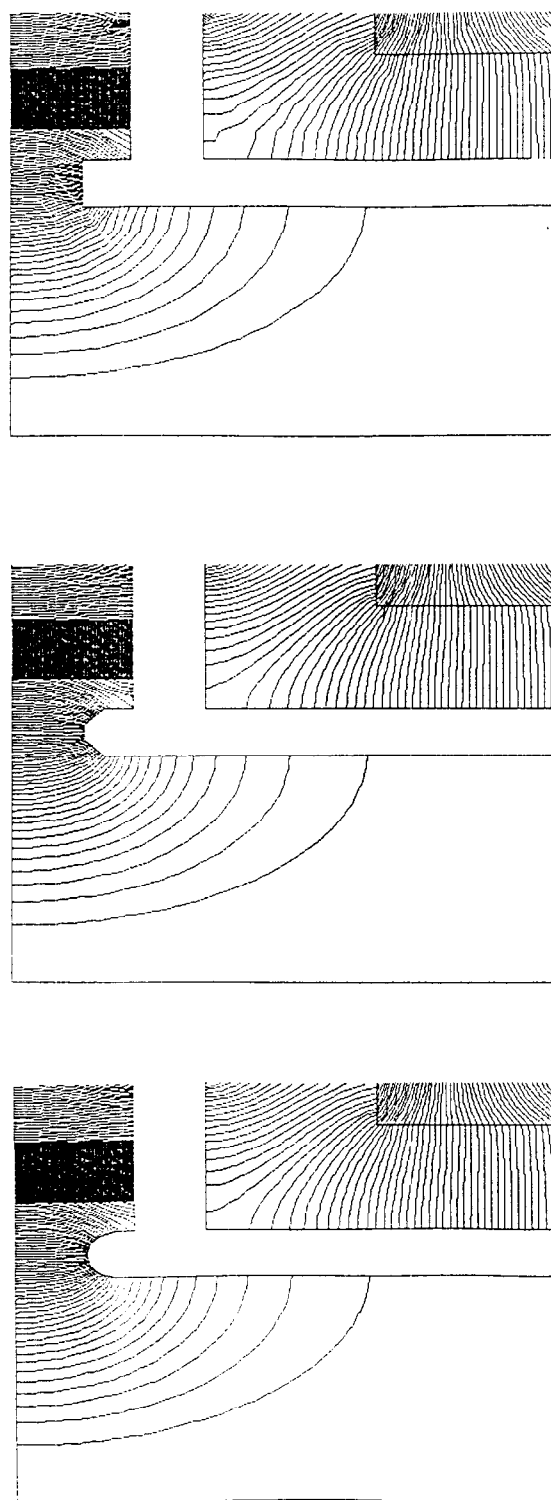


Fig.4 Electric field distribution with different shapes of accelerating electrode

NF	CG (PF)	UR	F0 (MHz)	H0 (A/M)	A1 (A)	BB (mT)	UQ (W/cm3)	PF (KW)	Q0 (KOHM/M)	Z0 (KOHM/M)	Q1	Z1 (KOHM/M)	Q2	Z2 (KOHM/M)
14.0	300.0	130.0	2.42	67.00	1.13	16.39	0.23	23.43	56.63	18.00	14.60	4.64	9.76	3.10
14.0	300.0	94.0	2.84	81.40	196.24	14.40	0.28	28.80	54.05	14.64	16.17	4.38	11.02	2.99
14.0	300.0	73.0	3.21	92.15	329.25	12.66	0.28	28.53	61.75	14.78	18.35	4.39	12.50	2.99
14.0	300.0	58.0	3.59	103.10	433.38	11.25	0.25	26.04	75.65	16.19	21.07	4.51	14.23	3.04
14.0	300.0	43.0	4.10	119.20	543.09	9.65	0.39	40.69	55.28	10.36	20.80	3.90	14.69	2.75
14.0	400.0	102.0	2.39	88.86	149.33	17.06	0.25	25.69	66.23	16.42	18.26	4.53	12.32	3.05
14.0	400.0	70.0	2.88	106.90	349.49	14.08	0.27	28.31	72.24	14.89	21.36	4.40	14.53	3.00
14.0	400.0	51.0	3.36	124.70	484.03	11.97	0.26	27.16	87.84	15.51	25.22	4.46	17.10	3.02
14.0	400.0	43.0	3.76	139.50	543.09	11.29	0.31	31.81	83.99	13.24	26.93	4.25	18.53	2.92
14.0	400.0	33.0	4.14	153.00	561.79	9.50	0.40	41.55	70.77	10.14	26.99	3.87	19.11	2.74
14.0	500.0	88.0	2.32	105.80	232.64	17.52	0.23	23.95	84.61	17.60	22.17	4.61	14.86	3.09
14.0	500.0	60.0	2.80	127.60	419.16	14.41	0.27	27.56	88.75	15.29	25.75	4.44	17.48	3.01
14.0	500.0	43.0	3.29	149.90	543.09	12.13	0.26	26.75	107.20	15.74	30.47	4.47	20.63	3.03
14.0	500.0	32.0	3.79	172.70	584.49	10.40	0.25	26.27	125.69	16.02	35.28	4.50	23.84	3.04
14.0	500.0	27.0	4.11	187.00	785.65	9.50	0.37	38.56	92.83	10.92	33.80	3.97	23.74	2.79
14.0	600.0	73.0	2.34	126.10	329.25	17.32	0.23	23.88	101.34	17.65	26.51	4.62	17.76	3.09
14.0	600.0	50.0	2.81	151.70	491.38	14.27	0.26	27.13	107.21	15.53	30.77	4.46	20.86	3.02
14.0	600.0	35.0	3.34	180.10	606.32	11.86	0.25	25.88	133.05	16.25	36.95	4.51	24.94	3.05
14.0	600.0	26.0	3.84	207.30	843.41	10.14	0.24	24.52	161.53	17.14	43.16	4.58	29.00	3.08
14.0	600.0	20.0	4.34	234.30	1312.67	8.82	0.39	40.53	110.49	10.37	41.54	3.90	29.34	2.75
14.0	700.0	63.0	2.34	145.70	398.04	17.27	0.23	23.61	118.35	17.84	30.71	4.63	20.56	3.10
14.0	700.0	42.0	2.84	177.30	550.82	14.01	0.26	26.68	127.42	15.78	36.15	4.48	24.47	3.03
14.0	700.0	30.0	3.34	208.30	647.43	11.76	0.24	25.22	158.04	16.67	43.10	4.55	29.03	3.06
14.0	700.0	22.0	3.86	241.00	1132.86	9.98	0.24	24.81	185.53	16.91	50.07	4.56	33.68	3.07
14.0	700.0	17.0	4.35	271.40	1626.22	8.68	0.36	37.04	139.89	11.33	49.72	4.03	34.78	2.82
14.0	800.0	54.0	2.36	167.30	462.15	17.00	0.23	23.95	133.94	17.58	35.13	4.61	23.55	3.09
14.0	800.0	37.0	2.83	200.70	590.21	13.97	0.25	26.18	146.85	16.06	41.13	4.50	27.79	3.04
14.0	800.0	26.0	3.35	237.40	843.41	11.62	0.24	24.54	184.93	17.11	49.48	4.58	33.25	3.08
14.0	800.0	19.0	3.88	274.70	1411.34	9.82	0.24	24.89	210.50	16.83	57.01	4.56	38.36	3.07
14.0	800.0	15.0	4.32	305.90	1670.97	8.63	0.33	34.47	169.39	12.16	57.51	4.13	39.93	2.87
14.0	900.0	48.0	2.36	187.30	505.16	16.92	0.23	23.70	151.51	17.75	39.45	4.62	26.42	3.10
14.0	900.0	32.0	2.87	227.60	584.49	13.71	0.25	25.79	168.86	16.29	46.82	4.52	31.60	3.05
14.0	900.0	23.0	3.36	265.90	1051.72	11.51	0.23	23.92	212.27	17.53	55.80	4.61	37.41	3.09
14.0	900.0	17.0	3.86	305.70	1626.22	9.78	0.23	23.62	246.42	17.70	64.31	4.62	43.09	3.09
14.0	900.0	13.0	4.35	344.90	2043.19	8.44	0.32	33.25	197.59	12.58	65.60	4.18	45.39	2.89
14.0	1000.0	43.0	2.37	207.70	543.09	16.81	0.23	23.49	169.57	17.90	43.89	4.63	29.37	3.10
14.0	1000.0	29.0	2.86	250.80	687.66	13.69	0.25	25.34	189.38	16.56	51.88	4.54	34.96	3.06
14.0	1000.0	20.0	3.40	298.40	1312.67	11.23	0.22	23.14	245.93	18.08	63.18	4.64	42.25	3.11
14.0	1000.0	15.0	3.88	340.30	1670.97	9.61	0.23	23.80	271.84	17.53	71.46	4.61	47.91	3.09
14.0	1000.0	13.0	4.14	362.00	2043.19	8.86	0.29	30.23	228.33	13.81	71.15	4.30	48.77	2.95

NF--Number of ferrites in a half-wave cavity
 CG--Capacitance of gap capacitor
 UR--Relative permeability of ferrite
 F0--Frequency of fundamental oscillation
 H0--Magnet field on the outer wall of cavity
 A1--Ferrite biasing current
 BB--Magnetic flux density
 UQ--Power losses in unit volume
 PF--Power losses in whole ferrites
 Q0--Quality of cavity without beam loading
 Z0--Shunt impedance without beam loading
 Q1,Z1--Quality and shunt impedance with beam loading of 3A average current
 Q2,Z2--Quality and shunt impedance with beam loading of 5A average current

NF	CG (PF)	UR	F0 (MHZ)	H0 (A/M)	A1 (A)	BB (mT)	UQ (W/cm3)	PF (KW)	Q0 (KOHM/M)	Z0 (KOHM/M)	Q1	Z1 (KOHM/M)	Q2	Z2 (KOHM/M)
15.0	300.0	128.0	2.35	67.00	11.68	16.14	0.19	21.23	60.94	19.86	14.59	4.75	9.68	3.15
15.0	300.0	88.0	2.83	81.44	232.64	13.49	0.23	25.02	62.23	16.86	16.83	4.56	11.33	3.07
15.0	300.0	64.0	3.31	95.20	391.06	11.47	0.22	24.39	74.61	17.29	19.81	4.59	13.30	3.08
15.0	300.0	49.0	3.77	108.40	497.73	10.00	0.22	24.67	83.96	17.08	22.49	4.58	15.12	3.07
15.0	300.0	40.0	4.16	119.00	566.43	8.96	0.32	35.35	64.66	11.92	22.24	4.10	15.47	2.85
15.0	400.0	95.0	2.39	89.00	190.26	15.91	0.20	21.80	78.19	19.34	19.10	4.72	12.70	3.14
15.0	400.0	66.0	2.86	106.50	377.19	13.23	0.22	24.51	83.15	17.20	22.17	4.58	14.89	3.08
15.0	400.0	48.0	3.34	124.40	505.16	11.24	0.21	23.63	100.71	17.83	26.14	4.63	17.50	3.10
15.0	400.0	36.0	3.84	143.00	598.24	9.69	0.22	24.19	112.99	17.41	29.85	4.60	20.03	3.09
15.0	400.0	30.0	4.19	156.00	647.43	8.81	0.31	34.48	86.50	12.21	29.28	4.13	20.32	2.87
15.0	500.0	83.0	2.31	105.40	264.00	16.46	0.19	20.91	96.49	20.16	22.84	4.77	15.14	3.16
15.0	500.0	56.0	2.80	127.70	447.71	13.46	0.22	23.95	102.13	17.59	26.77	4.61	17.94	3.09
15.0	500.0	40.0	3.30	150.50	566.43	11.33	0.21	23.30	123.56	18.07	31.76	4.64	21.24	3.11
15.0	500.0	30.0	3.78	172.60	647.43	9.74	0.21	23.58	139.93	17.84	36.31	4.63	24.31	3.10
15.0	500.0	25.0	4.13	188.00	906.98	8.84	0.29	31.64	113.76	13.30	36.37	4.25	25.02	2.93
15.0	600.0	68.0	2.34	126.40	363.42	16.17	0.19	20.93	115.73	20.13	27.42	4.77	18.18	3.16
15.0	600.0	46.0	2.83	152.90	520.19	13.24	0.21	23.58	124.14	17.86	32.19	4.63	21.55	3.10
15.0	600.0	33.0	3.32	179.50	561.79	11.15	0.20	22.58	151.97	18.63	38.18	4.68	25.47	3.12
15.0	600.0	25.0	3.79	204.80	906.98	9.63	0.21	23.07	169.56	18.21	43.33	4.65	28.95	3.11
15.0	600.0	19.0	4.30	232.50	1411.34	8.31	0.28	31.00	143.19	13.55	45.20	4.28	31.04	2.94
15.0	700.0	58.0	2.35	146.80	433.38	16.02	0.19	20.66	136.12	20.38	31.94	4.78	21.15	3.17
15.0	700.0	39.0	2.85	178.00	574.31	13.06	0.21	23.19	146.88	18.14	37.63	4.65	25.16	3.11
15.0	700.0	28.0	3.34	208.60	733.73	10.99	0.20	22.01	181.16	19.09	44.69	4.71	29.75	3.13
15.0	700.0	21.0	3.82	238.90	1219.84	9.44	0.20	22.26	204.70	18.84	51.00	4.69	33.98	3.13
15.0	700.0	16.0	4.34	271.00	1521.27	8.16	0.27	29.28	176.47	14.32	53.62	4.35	36.62	2.97
15.0	800.0	51.0	2.35	166.50	484.03	15.98	0.18	20.40	156.25	20.63	36.33	4.80	24.04	3.17
15.0	800.0	34.0	2.86	202.50	544.92	12.96	0.21	22.79	169.95	18.45	43.01	4.67	28.71	3.12
15.0	800.0	24.0	3.37	239.00	976.43	10.79	0.19	21.38	213.24	19.61	51.53	4.74	34.22	3.15
15.0	800.0	18.0	3.86	273.30	1515.86	9.26	0.20	22.58	230.62	18.54	58.14	4.67	38.80	3.12
15.0	800.0	14.0	4.32	306.70	1844.94	8.08	0.25	27.55	211.87	15.19	61.78	4.43	41.96	3.01
15.0	900.0	45.0	2.36	187.10	527.77	15.84	0.18	20.18	177.39	20.84	40.93	4.81	27.05	3.18
15.0	900.0	30.0	2.87	227.40	647.43	12.84	0.20	22.40	193.94	18.74	48.50	4.69	32.33	3.12
15.0	900.0	21.0	3.39	269.10	1219.84	10.63	0.19	20.85	245.94	20.08	58.37	4.77	38.70	3.16
15.0	900.0	16.0	3.85	305.20	1521.27	9.19	0.20	21.90	264.83	19.07	65.37	4.71	43.52	3.13
15.0	900.0	12.0	4.38	347.50	2265.72	7.85	0.22	24.75	266.32	16.84	72.09	4.56	48.51	3.07
15.0	1000.0	40.0	2.37	208.30	566.43	15.68	0.18	20.04	198.85	20.97	45.66	4.81	30.17	3.18
15.0	1000.0	27.0	2.87	251.40	785.65	12.77	0.20	22.03	217.92	19.04	53.85	4.71	35.85	3.13
15.0	1000.0	19.0	3.38	296.50	1411.34	10.60	0.18	20.41	276.28	20.48	64.61	4.79	42.77	3.17
15.0	1000.0	14.0	3.89	341.00	1844.94	8.98	0.20	22.28	290.37	18.70	72.73	4.68	48.50	3.12
15.0	1000.0	11.0	4.33	379.80	2512.52	7.86	0.22	24.17	297.41	17.20	79.27	4.58	53.24	3.08

NF--Number of ferrites in a half-wave cavity
 CG--Capacitance of gap capacitor
 UR--Relative permeability of ferrite
 F0--Frequency of fundamental oscillation
 H0--Magnet field on the outer wall of cavity
 A1--Ferrite biasing current
 BB--Magnetic flux density
 UQ--Power losses in unit volume
 PF--Power losses in whole ferrites
 Q0--Quality of cavity without beam loading
 Z0--Shunt impedance without beam loading
 Q1,Z1--Quality and shunt impedance with beam loading of 3A average current
 Q2,Z2--Quality and shunt impedance with beam loading of 5A average current

NF	CG (PF)	UR	F0 (MHz)	H0 (A/M)	A1 (A)	BB (mT)	UQ (W/cm ³)	PF (KW)	Q0 (KOHM/M)	Q1 (KOHM/M)	Z1 (KOHM/M)	Q2	Z2 (KOHM/M)
16.0	300.0	120.0	2.35	67.85	54.01	15.32	0.16	18.88	58.49	22.34	14.97	9.84	3.21
16.0	300.0	83.0	2.82	81.39	264.00	12.71	0.19	21.93	70.71	19.23	17.35	11.54	3.14
16.0	300.0	60.0	3.31	95.44	419.16	10.78	0.18	21.47	84.69	19.63	20.45	13.58	3.15
16.0	300.0	48.0	3.69	106.40	505.16	9.61	0.18	21.43	94.54	19.66	22.81	15.14	3.15
16.0	300.0	37.0	4.18	120.70	590.21	8.40	0.26	30.23	76.07	13.94	23.55	16.13	2.96
16.0	400.0	89.0	2.39	89.28	226.48	14.95	0.16	18.87	90.33	22.34	19.74	12.98	3.21
16.0	400.0	66.0	2.77	103.40	377.19	12.84	0.18	21.40	92.25	19.70	22.22	14.75	3.15
16.0	400.0	48.0	3.24	120.80	505.16	10.91	0.18	21.02	109.68	20.04	26.07	17.29	3.16
16.0	400.0	38.0	3.63	135.30	582.24	9.68	0.17	20.36	125.72	20.68	29.41	19.45	3.17
16.0	400.0	29.0	4.13	154.10	687.66	8.41	0.24	28.41	103.61	14.85	30.69	20.89	2.99
16.0	500.0	71.0	2.41	110.40	342.71	14.75	0.16	18.74	112.54	22.49	24.48	16.09	3.21
16.0	500.0	49.0	2.89	132.30	497.73	12.20	0.18	20.92	120.62	20.13	28.58	18.94	3.16
16.0	500.0	35.0	3.41	155.80	606.32	10.26	0.17	20.41	145.71	20.61	33.90	22.43	3.17
16.0	500.0	28.0	3.79	173.40	733.73	9.14	0.18	21.69	152.45	19.39	37.16	24.70	3.14
16.0	500.0	23.0	4.16	190.40	1051.72	8.24	0.23	27.31	132.94	15.40	38.38	26.03	3.02
16.0	600.0	59.0	2.43	131.50	426.25	14.60	0.16	18.57	135.23	22.67	29.22	19.19	3.22
16.0	600.0	43.0	2.83	153.40	543.09	12.41	0.18	20.68	141.66	20.36	33.28	22.04	3.17
16.0	600.0	31.0	3.32	179.60	613.04	10.48	0.17	19.96	171.59	21.06	39.27	25.94	3.18
16.0	600.0	24.0	3.75	203.00	976.43	9.17	0.17	20.58	187.92	20.40	44.07	29.18	3.17
16.0	600.0	19.0	4.18	226.60	1411.34	8.10	0.22	26.06	165.62	16.11	46.29	31.27	3.04
16.0	700.0	55.0	2.34	146.20	454.91	15.13	0.15	17.63	158.53	23.88	32.88	21.51	3.24
16.0	700.0	37.0	2.83	177.30	590.21	12.34	0.17	20.33	166.49	20.69	38.63	25.55	3.17
16.0	700.0	26.0	3.35	209.90	843.41	10.27	0.17	19.49	205.28	21.54	46.18	30.44	3.19
16.0	700.0	20.0	3.80	237.80	1312.67	8.95	0.18	20.83	217.25	20.12	51.48	34.12	3.16
16.0	700.0	16.0	4.21	263.70	1521.27	7.94	0.21	24.70	203.06	16.96	54.68	36.77	3.07
16.0	800.0	48.0	2.34	166.40	505.16	15.03	0.15	17.45	182.13	24.10	37.51	24.52	3.25
16.0	800.0	32.0	2.85	202.40	584.49	12.19	0.17	19.94	193.67	21.06	44.31	29.27	3.18
16.0	800.0	23.0	3.37	236.90	1051.72	10.25	0.17	19.59	232.36	21.41	52.51	34.64	3.19
16.0	800.0	18.0	3.74	265.90	1515.86	9.01	0.17	19.59	257.93	21.36	58.40	38.53	3.19
16.0	800.0	14.0	4.20	298.60	1844.94	7.87	0.20	23.64	239.76	17.68	62.62	41.96	3.09
16.0	900.0	42.0	2.36	187.70	550.82	14.84	0.15	17.34	206.50	24.24	42.33	27.67	3.25
16.0	900.0	28.0	2.87	228.20	733.73	12.02	0.17	19.60	221.80	21.41	50.12	33.06	3.19
16.0	900.0	21.0	3.29	261.50	1219.84	10.33	0.16	18.77	264.79	22.30	57.97	38.12	3.21
16.0	900.0	16.0	3.74	296.90	1521.27	8.94	0.16	19.05	295.34	21.91	65.55	43.16	3.20
16.0	900.0	13.0	4.11	326.50	2043.19	7.99	0.20	23.05	268.35	18.10	68.88	46.05	3.11
16.0	1000.0	35.0	2.45	215.60	606.32	14.20	0.15	17.90	229.63	23.45	48.31	31.65	3.23
16.0	1000.0	24.0	2.94	258.20	976.43	11.66	0.16	19.13	256.77	21.90	57.02	37.55	3.20
16.0	1000.0	18.0	3.36	295.60	1515.86	10.01	0.16	18.27	306.74	22.85	65.88	43.24	3.22
16.0	1000.0	14.0	3.78	331.90	1844.94	8.74	0.16	19.10	328.55	21.79	73.22	48.23	3.20
16.0	1000.0	11.0	4.20	370.10	2512.52	7.66	0.18	21.37	325.78	19.43	79.28	52.70	3.14

NF--Number of ferrites in a half-wave cavity
 CG--Capacitance of gap capacitor
 UR--Relative permeability of ferrite
 F0--Frequency of fundamental oscillation
 H0--Magnet field on the outer wall of cavity
 A1--Ferrite biasing current
 BB--Magnetic flux density
 UQ--Power losses in unit volume
 PF--Power losses in whole ferrites
 Q0--Quality of cavity without beam loading
 Z0--Shunt impedance without beam loading
 Q1,Z1--Quality and shunt impedance with beam loading of 3A average current
 Q2,Z2--Quality and shunt impedance with beam loading of 5A average current

NF	CG (PF)	UR	F0 (MHz)	H0 (A/M)	A1 (A)	BB (mT)	UQ (W/cm3)	PF (KW)	Q0 (KOHM/M)	Z0 (KOHM/M)	Q1	Z1 (KOHM/M)	Q2	Z2 (KOHM/M)
17.0	300.0	113.0	2.35	67.93	88.14	14.45	0.13	16.53	78.36	25.50	15.42	5.02	10.05	3.27
17.0	300.0	78.0	2.82	81.58	296.20	11.97	0.16	19.43	80.07	21.70	17.90	4.85	11.80	3.20
17.0	300.0	57.0	3.29	95.17	440.53	10.21	0.15	19.25	94.25	21.89	20.93	4.86	13.78	3.20
17.0	300.0	43.0	3.78	109.20	543.09	8.84	0.17	20.84	99.89	20.22	23.59	4.77	15.63	3.16
17.0	300.0	35.0	4.18	120.70	606.32	7.95	0.20	25.54	90.06	16.50	24.75	4.53	16.68	3.06
17.0	400.0	92.0	2.29	85.35	208.28	14.78	0.13	15.66	104.09	26.91	19.62	5.07	12.73	3.29
17.0	400.0	67.0	2.67	99.78	370.29	12.58	0.15	18.80	101.36	22.41	22.10	4.89	14.53	3.21
17.0	400.0	48.0	3.15	117.50	505.16	10.61	0.15	18.84	119.02	22.35	26.01	4.88	17.10	3.21
17.0	400.0	35.0	3.67	137.00	606.32	9.02	0.15	18.92	138.11	22.25	30.29	4.88	19.92	3.21
17.0	400.0	27.0	4.16	155.20	785.65	7.89	0.20	24.43	121.17	17.22	32.26	4.59	21.66	3.08
17.0	500.0	67.0	2.41	110.40	370.29	13.92	0.13	16.67	126.54	25.27	25.09	5.01	16.35	3.27
17.0	500.0	49.0	2.81	128.70	497.73	11.87	0.15	18.69	131.55	22.53	28.57	4.89	18.77	3.21
17.0	500.0	38.0	3.18	145.60	582.24	10.41	0.15	18.42	150.91	22.84	32.42	4.91	21.28	3.22
17.0	500.0	28.0	3.69	168.70	733.73	8.89	0.15	18.69	172.25	22.50	37.45	4.89	24.61	3.21
17.0	500.0	22.0	4.14	189.30	1132.86	7.84	0.19	23.52	153.52	17.87	39.78	4.63	26.63	3.10
17.0	600.0	56.0	2.42	131.10	447.71	13.82	0.13	16.52	151.68	25.49	29.87	5.02	19.46	3.27
17.0	600.0	41.0	2.82	152.60	558.60	11.77	0.15	18.35	158.98	22.94	34.04	4.91	22.34	3.22
17.0	600.0	29.0	3.33	180.40	687.66	9.84	0.14	17.97	191.64	23.39	40.41	4.93	26.48	3.23
17.0	600.0	22.0	3.80	205.90	1132.86	8.52	0.16	19.75	198.70	21.25	45.16	4.83	29.80	3.19
17.0	600.0	18.0	4.18	226.30	1515.86	7.67	0.18	22.44	192.21	18.70	48.15	4.68	32.11	3.12
17.0	700.0	52.0	2.33	146.00	476.71	14.29	0.12	15.46	180.13	27.23	33.63	5.08	21.81	3.30
17.0	700.0	35.0	2.83	177.10	606.32	11.66	0.14	18.06	186.70	23.28	39.52	4.93	25.90	3.23
17.0	700.0	26.0	3.26	204.30	843.41	10.00	0.14	17.65	220.07	23.78	45.80	4.95	29.97	3.24
17.0	700.0	20.0	3.70	231.40	1312.67	8.71	0.14	18.00	244.02	23.28	51.65	4.93	33.86	3.23
17.0	700.0	16.0	4.10	256.60	1521.27	7.73	0.17	21.78	224.59	19.32	54.90	4.72	36.51	3.14
17.0	800.0	45.0	2.35	166.90	527.77	14.13	0.12	15.46	206.10	27.19	38.52	5.08	24.98	3.30
17.0	800.0	30.0	2.86	203.10	647.43	11.47	0.14	17.73	218.53	23.69	45.62	4.95	29.87	3.24
17.0	800.0	22.0	3.32	235.50	1132.86	9.75	0.14	17.27	259.51	24.26	53.17	4.97	34.75	3.25
17.0	800.0	17.0	3.74	266.00	1626.22	8.51	0.15	18.21	277.43	22.96	59.35	4.91	38.94	3.22
17.0	800.0	13.0	4.24	301.00	2043.19	7.36	0.17	21.00	271.92	19.88	65.04	4.76	43.15	3.15
17.0	900.0	40.0	2.35	186.80	566.43	14.06	0.12	15.30	233.12	27.45	43.23	5.09	28.02	3.30
17.0	900.0	27.0	2.84	225.90	785.65	11.48	0.14	17.47	246.48	24.01	50.90	4.96	33.29	3.24
17.0	900.0	20.0	3.28	260.50	1312.67	9.80	0.14	16.96	291.91	24.65	59.04	4.99	38.54	3.25
17.0	900.0	16.0	3.64	289.30	1521.27	8.71	0.13	16.76	327.29	24.89	65.68	5.00	42.85	3.26
17.0	900.0	12.0	4.16	330.30	2265.72	7.46	0.17	20.77	301.07	20.06	71.53	4.77	47.42	3.16
17.0	1000.0	36.0	2.35	206.80	598.24	14.01	0.12	15.17	259.85	27.67	47.88	5.10	31.02	3.30
17.0	1000.0	24.0	2.86	251.20	976.43	11.35	0.14	17.16	278.54	24.41	56.79	4.98	37.10	3.25
17.0	1000.0	18.0	3.28	287.90	1515.86	9.75	0.13	16.66	327.59	25.05	65.41	5.00	42.66	3.26
17.0	1000.0	14.0	3.68	323.60	1844.94	8.53	0.13	16.80	363.82	24.75	73.35	4.99	47.87	3.26
17.0	1000.0	11.0	4.11	361.20	2512.52	7.48	0.16	20.23	336.95	20.53	78.63	4.79	52.04	3.17

NF---Number of ferrites in a half-wave cavity
 CG---Capacitance of gap capacitor
 UR---Relative permeability of ferrite
 F0---Frequency of fundamental oscillation
 H0---Magnet field on the outer wall of cavity
 A1---Ferrite biasing current
 BB---Magnetic flux density
 UQ---Power losses in unit volume
 PF---Power losses in whole ferrites
 Q0---Quality of cavity without beam loading
 Z0---Shunt impedance without beam loading
 Q1,Z1---Quality and shunt impedance with beam loading of 3A average current
 Q2,Z2---Quality and shunt impedance with beam loading of 5A average current

NF	CG (PF)	UR	F0 (MHz)	H0 (A/M)	A1 (A)	BB (mT)	UQ (W/cm ³)	PF (KW)	Q0 (KOHM/M)	Z0 (KOHM/M)	Q1	Z1 (KOHM/M)	Q2	Z2 (KOHM/M)
18.0	300.0	107.0	2.35	68.02	121.04	13.70	0.11	14.85	87.10	28.39	15.71	5.12	10.16	3.31
18.0	300.0	74.0	2.82	81.62	322.57	11.37	0.13	17.40	89.17	24.23	18.29	4.97	11.95	3.25
18.0	300.0	54.0	3.29	95.29	462.15	9.68	0.13	17.47	103.71	24.13	21.34	4.96	13.95	3.25
18.0	300.0	41.0	3.76	109.00	558.60	8.41	0.15	19.31	107.32	21.82	23.90	4.86	15.74	3.20
18.0	300.0	33.0	4.18	121.20	561.79	7.53	0.17	22.38	102.88	18.82	25.65	4.69	17.09	3.13
18.0	400.0	87.0	2.28	85.49	238.85	14.00	0.10	13.90	117.41	30.32	20.07	5.18	12.92	3.34
18.0	400.0	59.0	2.77	103.50	426.25	11.49	0.13	17.04	115.96	24.73	23.40	4.99	15.27	3.26
18.0	400.0	45.0	3.16	118.20	527.77	10.01	0.13	17.04	132.36	24.72	26.72	4.99	17.44	3.26
18.0	400.0	34.0	3.62	135.50	544.92	8.67	0.13	17.11	150.99	24.60	30.59	4.98	19.97	3.25
18.0	400.0	26.0	4.12	154.20	843.41	7.54	0.16	21.78	135.01	19.32	33.00	4.72	21.94	3.14
18.0	500.0	63.0	2.42	110.90	398.04	13.15	0.12	15.31	138.36	27.51	25.61	5.09	16.60	3.30
18.0	500.0	44.0	2.88	132.20	535.40	10.95	0.13	16.74	150.75	25.14	30.01	5.01	19.57	3.26
18.0	500.0	34.0	3.27	149.80	544.92	9.58	0.13	16.71	171.15	25.18	34.04	5.01	22.19	3.26
18.0	500.0	27.0	3.66	167.50	785.65	8.51	0.13	17.09	186.90	24.59	37.87	4.98	24.73	3.25
18.0	500.0	21.0	4.12	188.90	1219.84	7.46	0.16	21.49	167.60	19.56	40.59	4.74	26.97	3.15
18.0	600.0	53.0	2.42	131.20	469.41	13.09	0.11	15.11	165.97	27.86	30.41	5.10	19.69	3.31
18.0	600.0	36.0	2.92	158.50	598.24	10.74	0.12	16.45	183.99	25.57	36.14	5.02	23.53	3.27
18.0	600.0	28.0	3.30	179.00	733.73	9.43	0.12	16.46	207.36	25.52	40.80	5.02	26.57	3.27
18.0	600.0	22.0	3.70	200.90	1132.86	8.32	0.13	17.41	219.87	24.10	45.28	4.96	29.61	3.25
18.0	600.0	17.0	4.19	227.10	1626.22	7.27	0.16	20.67	209.19	20.29	49.27	4.78	32.64	3.16
18.0	700.0	49.0	2.34	146.50	497.73	13.51	0.11	14.06	199.12	29.92	34.41	5.17	22.18	3.33
18.0	700.0	33.0	2.83	177.70	561.79	11.04	0.12	16.27	208.49	25.83	40.61	5.03	26.43	3.27
18.0	700.0	23.0	3.37	211.30	1051.72	9.15	0.12	16.19	248.76	25.91	48.35	5.04	31.46	3.28
18.0	700.0	18.0	3.79	237.40	1515.86	8.04	0.14	18.04	250.37	23.21	53.12	4.92	34.82	3.23
18.0	700.0	15.0	4.13	258.70	1670.97	7.30	0.15	20.22	243.21	20.70	56.41	4.80	37.31	3.17
18.0	800.0	42.0	2.37	168.20	550.82	13.29	0.11	14.31	224.90	29.38	39.45	5.15	25.45	3.33
18.0	800.0	29.0	2.83	201.30	687.66	10.99	0.12	16.01	240.19	26.22	46.23	5.05	30.05	3.28
18.0	800.0	22.0	3.23	229.90	1132.86	9.52	0.12	15.85	276.37	26.43	52.86	5.05	34.34	3.28
18.0	800.0	17.0	3.76	267.30	1626.22	8.55	0.15	19.91	255.60	21.01	58.59	4.82	38.70	3.18
18.0	800.0	13.0	4.14	294.40	2043.19	7.20	0.15	19.59	285.31	21.30	64.72	4.83	42.70	3.19
18.0	900.0	38.0	2.35	186.70	582.24	13.35	0.11	13.97	255.44	30.06	43.97	5.17	28.33	3.33
18.0	900.0	27.0	2.77	220.30	785.65	11.19	0.12	15.82	265.79	26.51	50.70	5.06	32.94	3.29
18.0	900.0	19.0	3.28	260.60	1411.34	9.32	0.12	15.62	317.37	26.76	60.09	5.07	39.01	3.29
18.0	900.0	14.0	3.78	300.70	1844.94	7.92	0.13	17.28	330.20	24.12	67.94	4.96	44.42	3.25
18.0	900.0	12.0	4.06	322.90	2265.72	7.29	0.12	15.78	386.74	26.31	74.24	5.05	48.25	3.28
18.0	1000.0	34.0	2.36	207.20	544.92	13.26	0.11	13.93	283.95	30.11	48.82	5.18	31.45	3.33
18.0	1000.0	23.0	2.84	250.20	1051.72	10.83	0.12	15.56	306.19	26.89	57.75	5.07	37.48	3.29
18.0	1000.0	17.0	3.28	288.70	1626.22	9.24	0.12	15.34	357.34	27.19	66.79	5.08	43.31	3.30
18.0	1000.0	13.0	3.72	327.20	2043.19	8.00	0.12	16.32	379.46	25.47	74.77	5.02	48.70	3.27
18.0	1000.0	10.0	4.20	369.00	2783.59	6.94	0.14	18.17	383.01	22.80	82.40	4.91	54.10	3.22

NF--Number of ferrites in a half-wave cavity

CG--Capacitance of gap capacitor

UR--Relative permeability of ferrite

F0--Frequency of fundamental oscillation

H0--Magnet field on the outer wall of cavity

A1--Ferrite biasing current

BB--Magnetic flux density

UQ--Power losses in unit volume

PF--Power losses in whole ferrites

Q0--Quality of cavity without beam loading

Z0--Shunt impedance without beam loading

Q1,Z1--Quality and shunt impedance with beam loading of 3A average current

Q2,Z2--Quality and shunt impedance with beam loading of 5A average current

APPENDIX: FORMULAS FOR CALCULATION OF BOOSTER CAVITY IN CYLINDRICAL COORDINATES

1. AVERAGE ACCELERATING FIELD (From 'SUPERFISH' program)

$$E_o = \frac{1}{L} \int_{-L/2}^{L/2} E_z(z, r=0) dz$$

E_z --Electric field strength in z axis

L --Length of cavity in half-wave

2. STORED ENERGY (From 'SF' program)

$$U = \frac{\epsilon}{2} \frac{\int [H_\theta(z, r)]^2 r dr dz}{\int r dr dz}$$

ϵ --Dielectric constant

H_θ --Component of the magnetic field

3. POWER LOSSES

$$P = P_w + P_s + P_f + P_b$$

P_w, P_s --Power loss on walls and stems, which are given by 'SF' program

$P_f = Vol \cdot \mu Q(F, B_m)$ --Power losses on ferrites

Vol --Volume of whole ferrites

B_m --Maximum magnet flux density in ferrite

F --Oscillating frequency given by 'SF'

$P_b = I_b \cdot E_o$ --Power loss of average beam current

4. SHUNT IMPEDANCE

$$Z_s = E_o^2 L / P$$

5. QUALITY FACTOR

$$Q = 2\pi f U / P$$