



BNL-104553-2014-TECH

AGS/AD/Tech Note No. 123;BNL-104553-2014-IR

MEASUREMENTS OF LINAC STEERING DIPOLES

J. L. LeMaire

August 1976

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.E(30-1)-16 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Accelerator Department
BROOKHAVEN NATIONAL LABORATORY
Associated Universities, Inc.
Upton, New York

AGS DIVISION TECHNICAL NOTE

No. 123

MEASUREMENTS OF LINAC STEERING DIPOLES

JL. LeMaire*, J. Stephens†, A. Webster‡, R. Witkover
August 3, 1976

Two types of steering dipoles have been used at the linac in the past. Both are cosine wound and designed to be installed as a nested pair. A pair of each design type was tested to establish the strengths and magnetic lengths; the results are reported here.

The measurements were made using a Bell model 610 Hall probe mounted on a movable xy stage. The magnets were run at 2 amperes which was the power supply limit. The magnetic center of the dipole was found first and all measurements were referred to this point. The axial variation of the transverse field was measured in each case. The accuracy of the measurements was about 2%. The area under the curves of flux density versus location was measured with a planimeter and was estimated to be accurate to 5%.

Type I: BNL Design

The BNL design steering dipoles (D 25M-1612-4) consist of an inner (vertical steering) pair of coils attached to aluminum half cylinders, and an outer pair of coils which fit over these. No potting is used in the construction. A layer of Kapton insulation separates the two magnets. An iron shell with cooling fins fits over these coils. Inspection of the coils indicated that they had run hot in the past. The power supply limitation of 6 amps should not be extended or these dipoles may burn out. Caution is required in aligning these dipoles since they have not been carefully centered

*On leave from C.E.N., Saclay.

†Summer student, Cornell University.

‡Summer student, Mt. Holyoke College.

on the aluminum cylinders or within the finned outer shell.

Figures 1 and 2 show the magnetic field plots for the inner and outer dipoles, respectively. The field is seen to fall to the earth's field at the end of the measurement range. The results are summarized in Table I.

Type 2: FNAL Design

The FNAL design steering magnet (FNAL drawing numbers 0326-MD-2912 Rev. A and 0326-MD-2913 Rev. B) were purchased from Elma Engineering, Palo Alto, California. These units are of potted construction (material unknown) and have no additional cooling provision. Communication with E. Gray of FNAL indicated that these units "ran hot" at 10 amperes and melted at 12 amperes. These limitations must be carefully observed.

Figures 3 and 4 show the magnetic field plots for the inner and outer dipoles respectively. The field exhibited little or no flatness along the beam axis. The field changes sign after passing the physical end of the dipoles. This sign change was reproducible and clearly associated with the dipole being powered. It was not observed with the BNL design dipoles. Figure 5 shows this effect on a larger scan, where it is seen to eventually return to the earth's field value. The area under the negative portion is 11% of the area in the positive portion.

A summary of the results are shown in Table I. The values include the algebraic sign of the field.

Conclusions

Both types of steering magnets can be used in the linac HEBT line. They appear to give about 2 mrad bend at 200 MeV at the maximum current rating. Care in alignment is required (marking of the magnetic centers is needed).

lsk

Distr: Dept. Admin.
AGS Division Staff

TABLE I

| Magnet Type | Maximum Current (Amps) | Resistance (Ohms) | $\int_{-\infty}^{\infty} \frac{B \cdot dl}{I}$ (Gauss-cm/A) | L_{eff}^* (cm) | Max. Bend Angle at 200 MeV (mrad) |
|-------------|------------------------|-------------------|--|---------------------|-----------------------------------|
| BNL Inner | 6 | 5.0 | 1028 | 34.3 | 2.87 |
| BNL Outer | 6 | 5.0 | 972 | 26.1 | 2.72 |
| FNAL Inner | 10 | 2.25 | 447 | 15.2 | 2.08 |
| FNAL Outer | 10 | 1.23 | 464 | 14.5 | 2.16 |

$$* L_{eff} = \frac{\int_{-\infty}^{\infty} B \cdot dl}{B_{max}}$$

BNL STEERING DIPOLE (INNER)

SP 11037A

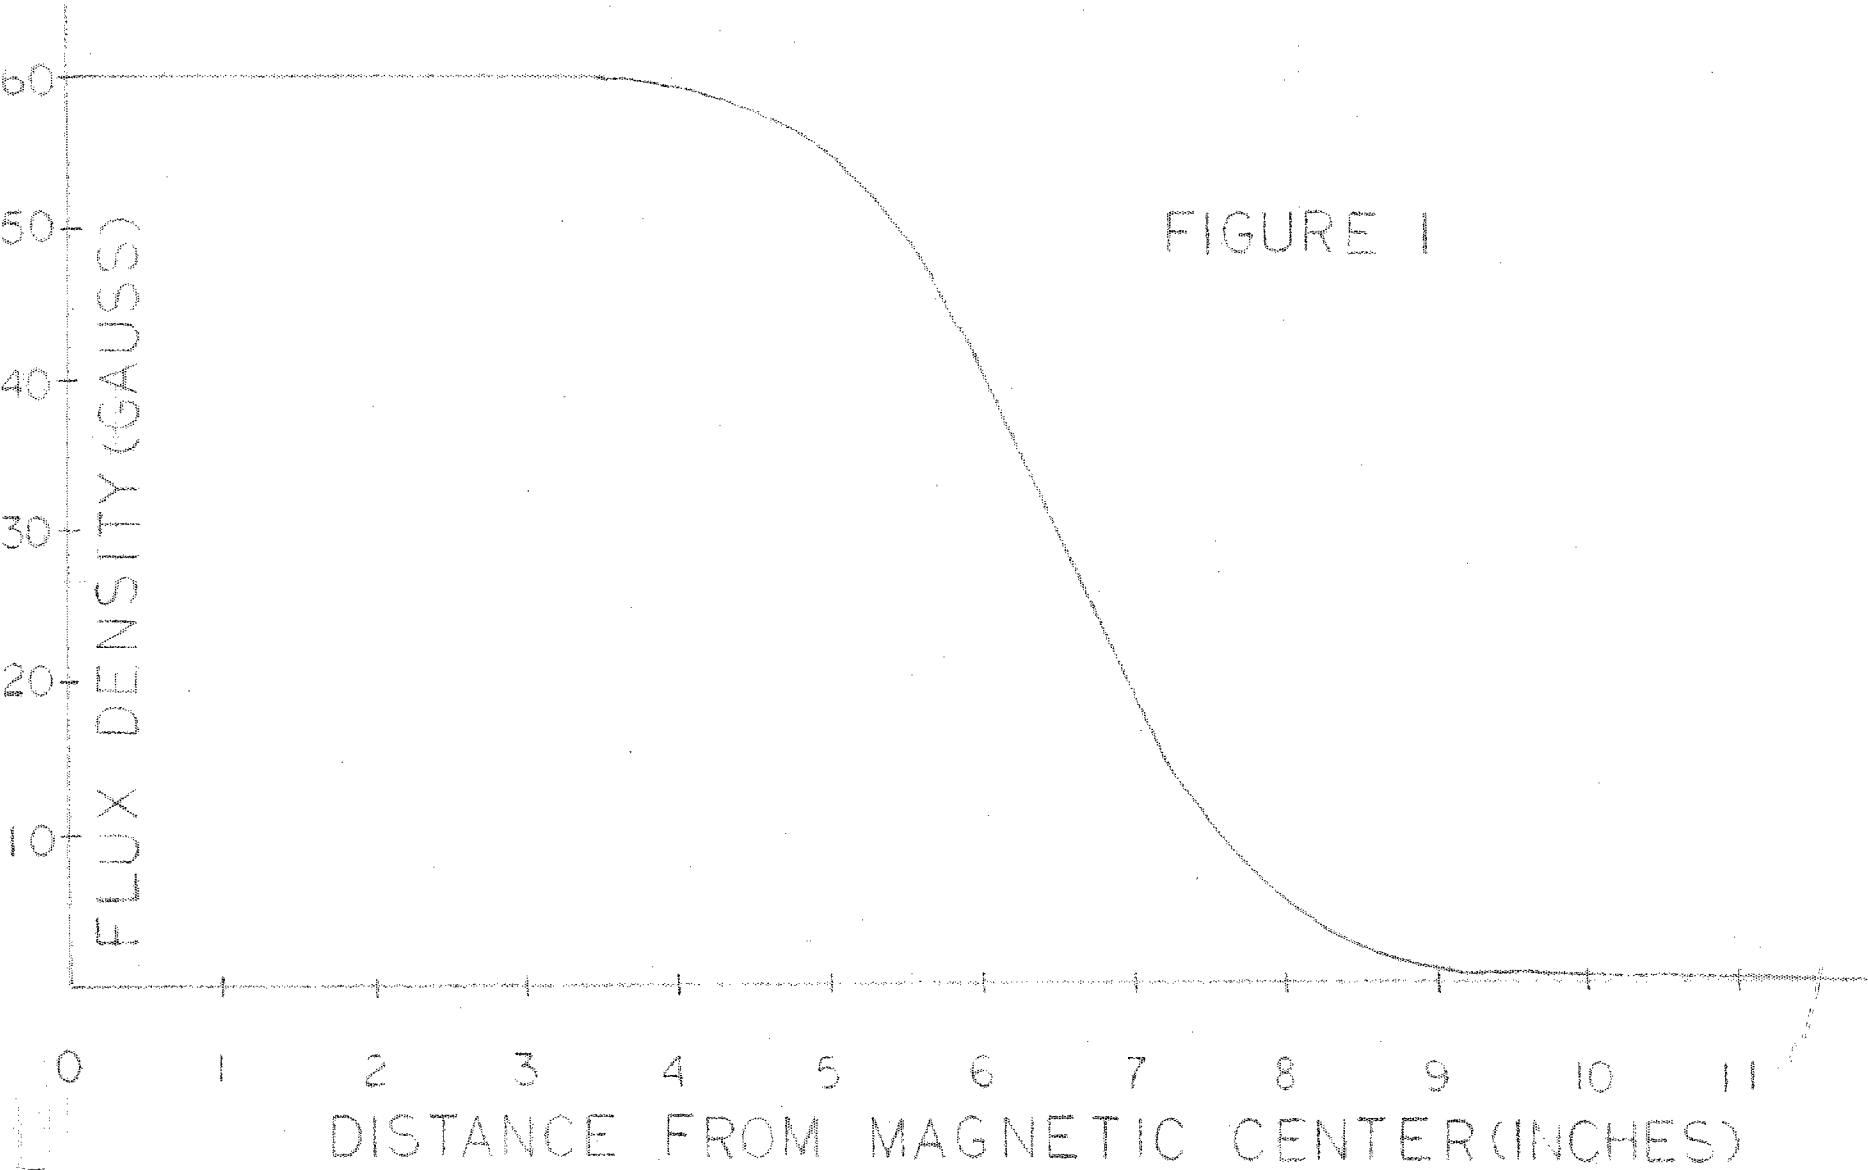


FIGURE 1

BROOKHAVEN NATIONAL LABORATORY

BY _____ DATE _____

CHKD. BY _____ DATE _____

SUBJECT _____

DEPT. OR PROJECT _____

SHEET NO. _____ OF _____


JOB NO. _____

DISTANCE FROM MAGNETIC CENTER (INCHES)

FLUX DENSITY (GAUSS)

BNL STEERING DIPOLE (OUTER)

FIGURE 2

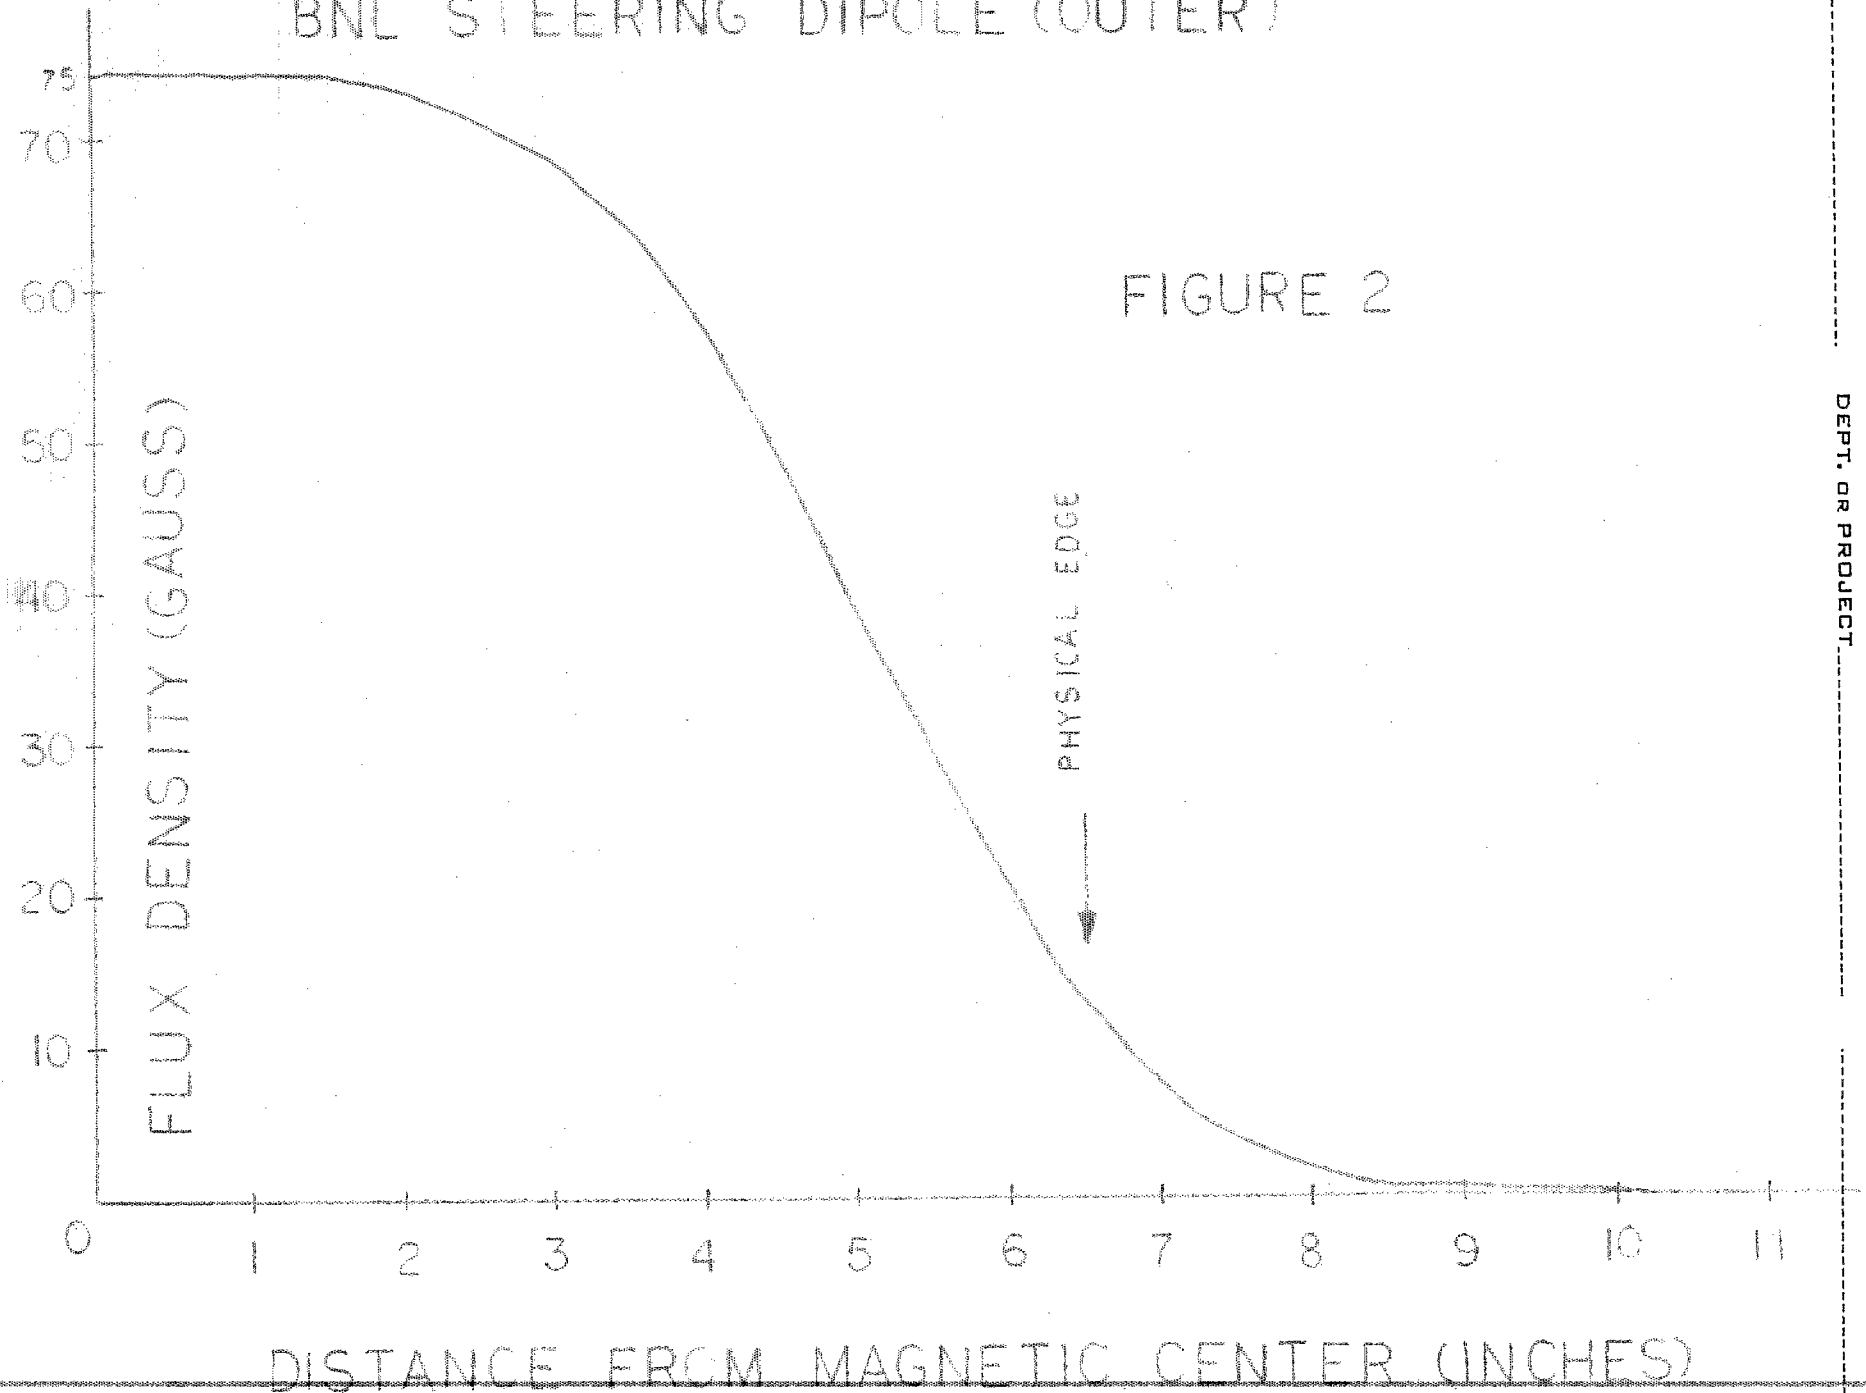

SP 11087A


BY _____ DATE _____ SUBJECT _____

CHKD. BY _____ DATE _____ DEPT. OR PROJECT _____

SHEET NO. _____ OF _____

FNAL DIPOLE (INNER)

FIGURE 3

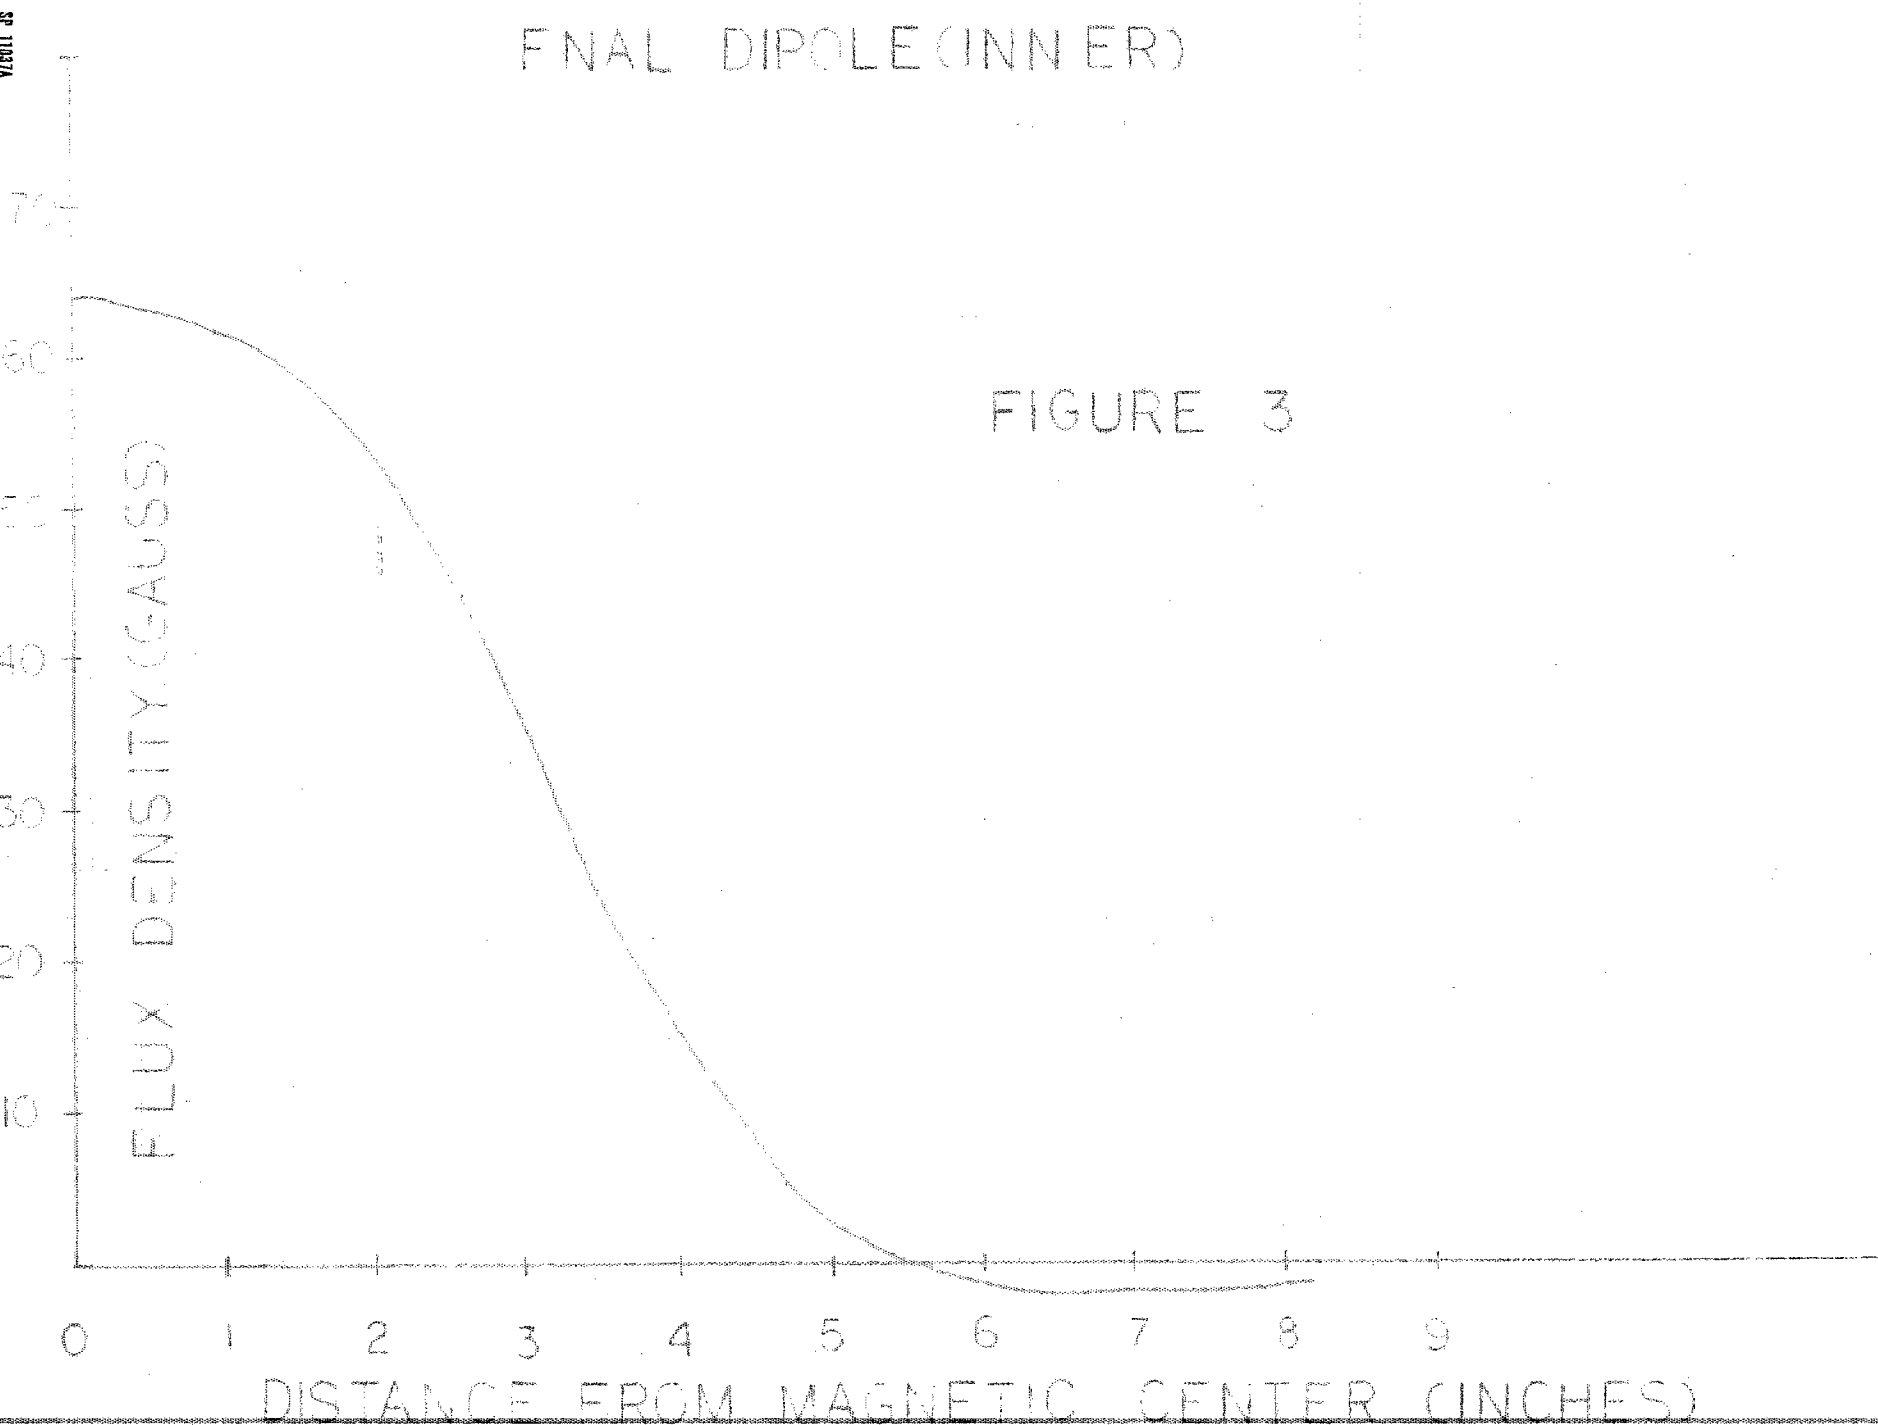

BY..... DATE.....

CHKD. BY..... DATE.....

SUBJECT.....


DEPT. OR PROJECT.....

SHEET NO. OF.....

JOB NO.

FNAL DIPOLE (OUTER)

FIGURE 4

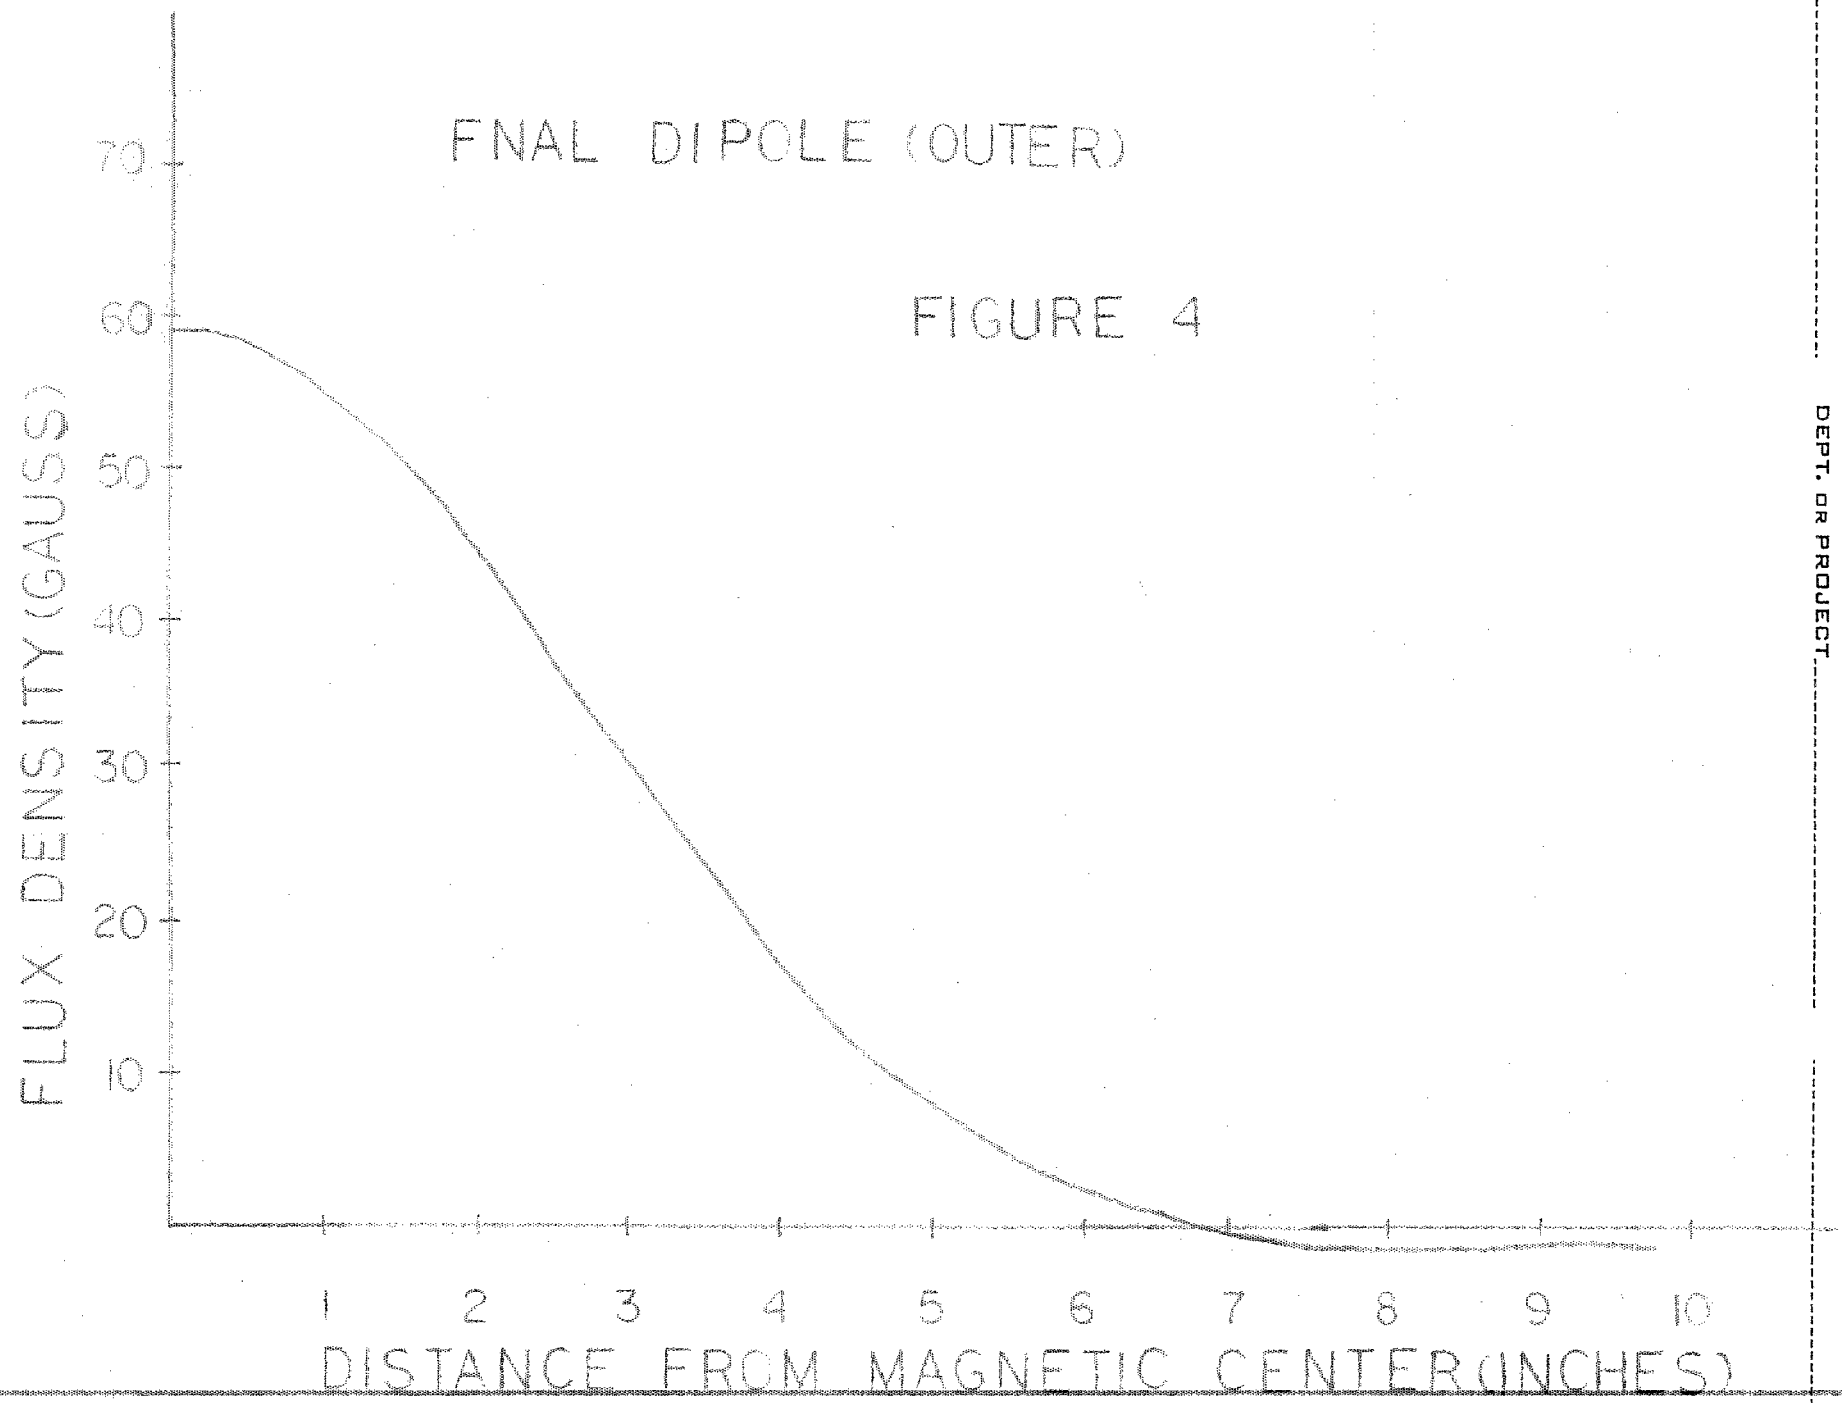

FNAL DIPOLE (OUTER)

FIGURE 5

