



BNL-105063-2014-TECH

Booster Technical Note No. 16;BNL-105063-2014-IR

## Transfer Line Between the Booster and the AGS

R. C. Gupta

March 1986

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

TRANSFER LINE BETWEEN THE BOOSTER AND THE AGS

*Booster Technical Note*  
No. 16

R. GUPTA  
S. Y. LEE  
Y. Y. LEE  
F. ZHAO

March 5, 1986

*HIGH ENERGY FACILITIES*  
*Brookhaven National Laboratory*  
*Upton, N.Y. 11973*

Transfer line between the Booster  
and the AGS

---

S. Y. Lee, X. F. Zhao, Y. Y. Lee and R. Gupta

Brookhaven National Laboratory

ABSTRACT

---

A beambump system in the booster and the transfer system has been worked out for the beam transfer between the booster and the AGS. The heavy ion beam is focused to the copper foil (70 mg/cm<sup>2</sup> thickness) with  $\beta_x = \beta_y = 3$  m. The beam is then transferred through some 14 quadrupoles with three dipoles to the AGS L20 straight section. The betafuncions in transfer line is maximum at 25m and 15m in most of the quadrupoles.

-----


The beam extraction from the booster is best facilitated by a set of slow beam bumps to excite the closed orbit locally and the kicker is then excited with rise time of 190 nsec to kick the beam 66 mm (for proton @  $B\rho = 5.677$ ) or 50 mm (for heavy ions with  $B\rho = 16.7$  Tm). The total kick angle is about 8.5 mrad. At the F6 location, septum of 10 mm thickness at 50.8 mm away from the central orbit is used to deflect the extracted beam at the exit of the septum is 110 mrad and away from the corresponding quadrupole at Q6D is 35 cm.

Fig.1 shows the closed orbit near the beam bump region, where the beam size at the injection and the beam size at the extraction for the proton and heavy ion is also shown for comparison. Figs. 2 shows the corresponding kickers needed for displacing the beam into the septum, which located at 50.8mm from the central orbit. With the beam size, the total beam displacement will be about 90 mm including the beam bump. Fig.3 shows the corresponding septum magnet consideration for the beam to clear the quadrupole Q6D 35 cm. These consideration will be discussed further by G. Cottingham.

Septans


$\phi(10000) = 174.53$

- $K1 = 2.15 \times 7$
- $K2 = 2.15 \times 7$
- $K3 = 1.55 \times 2$
- $K4 = 3.10 \times 1$
- $K5 = -1.55 \times 2$

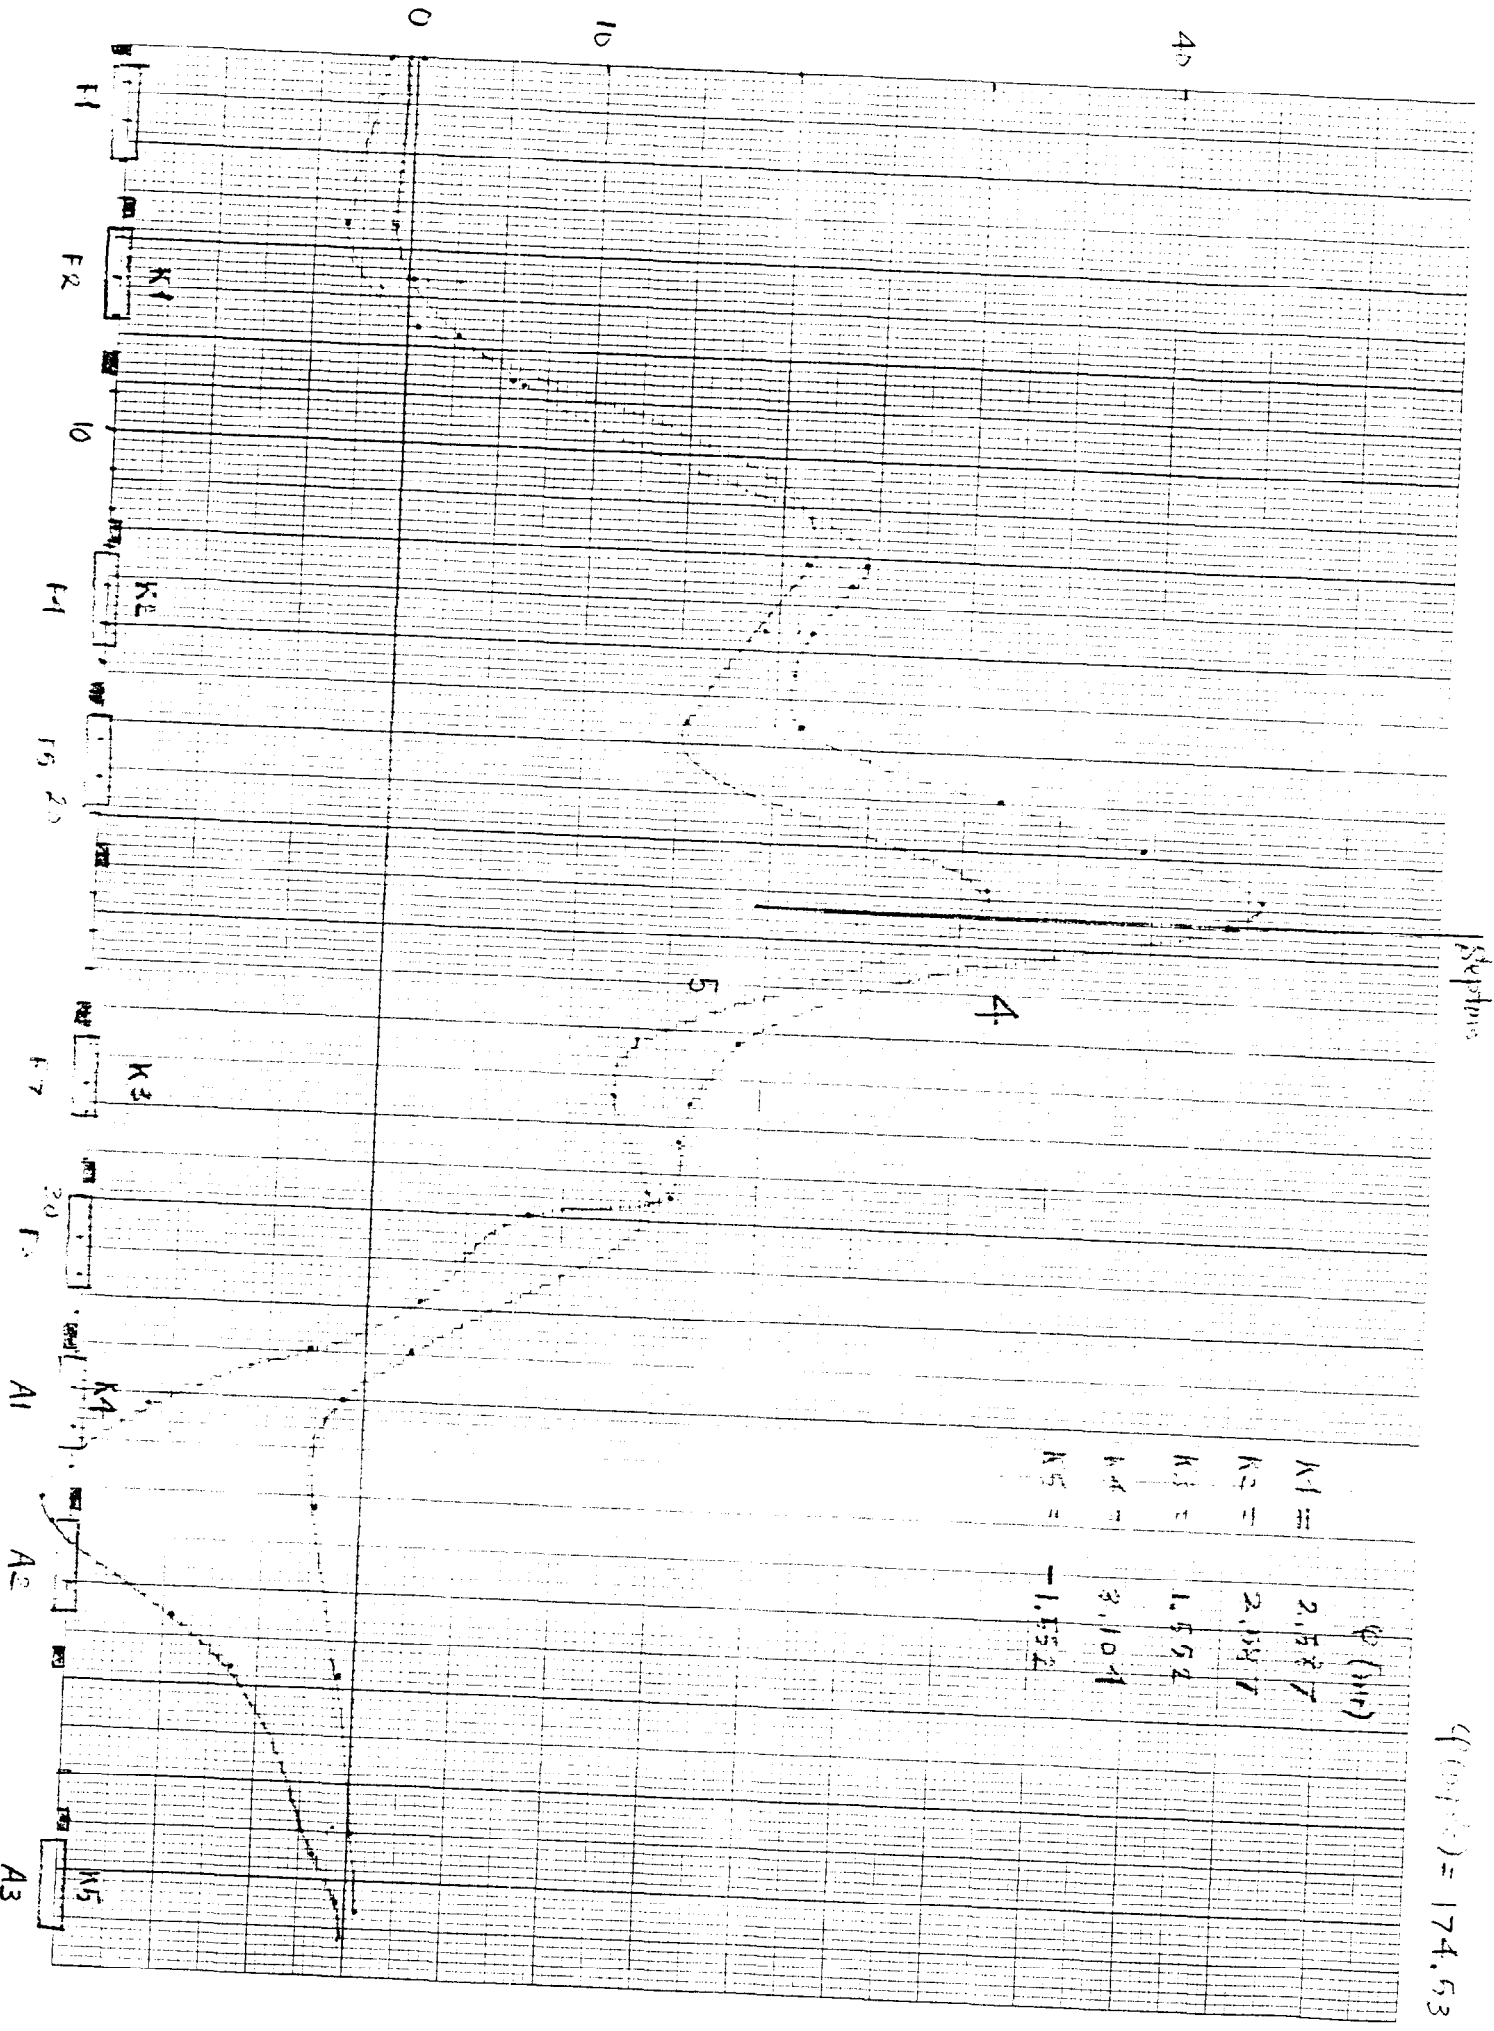

1323 96

REPRODUCTION OF THIS DOCUMENT IS PROHIBITED

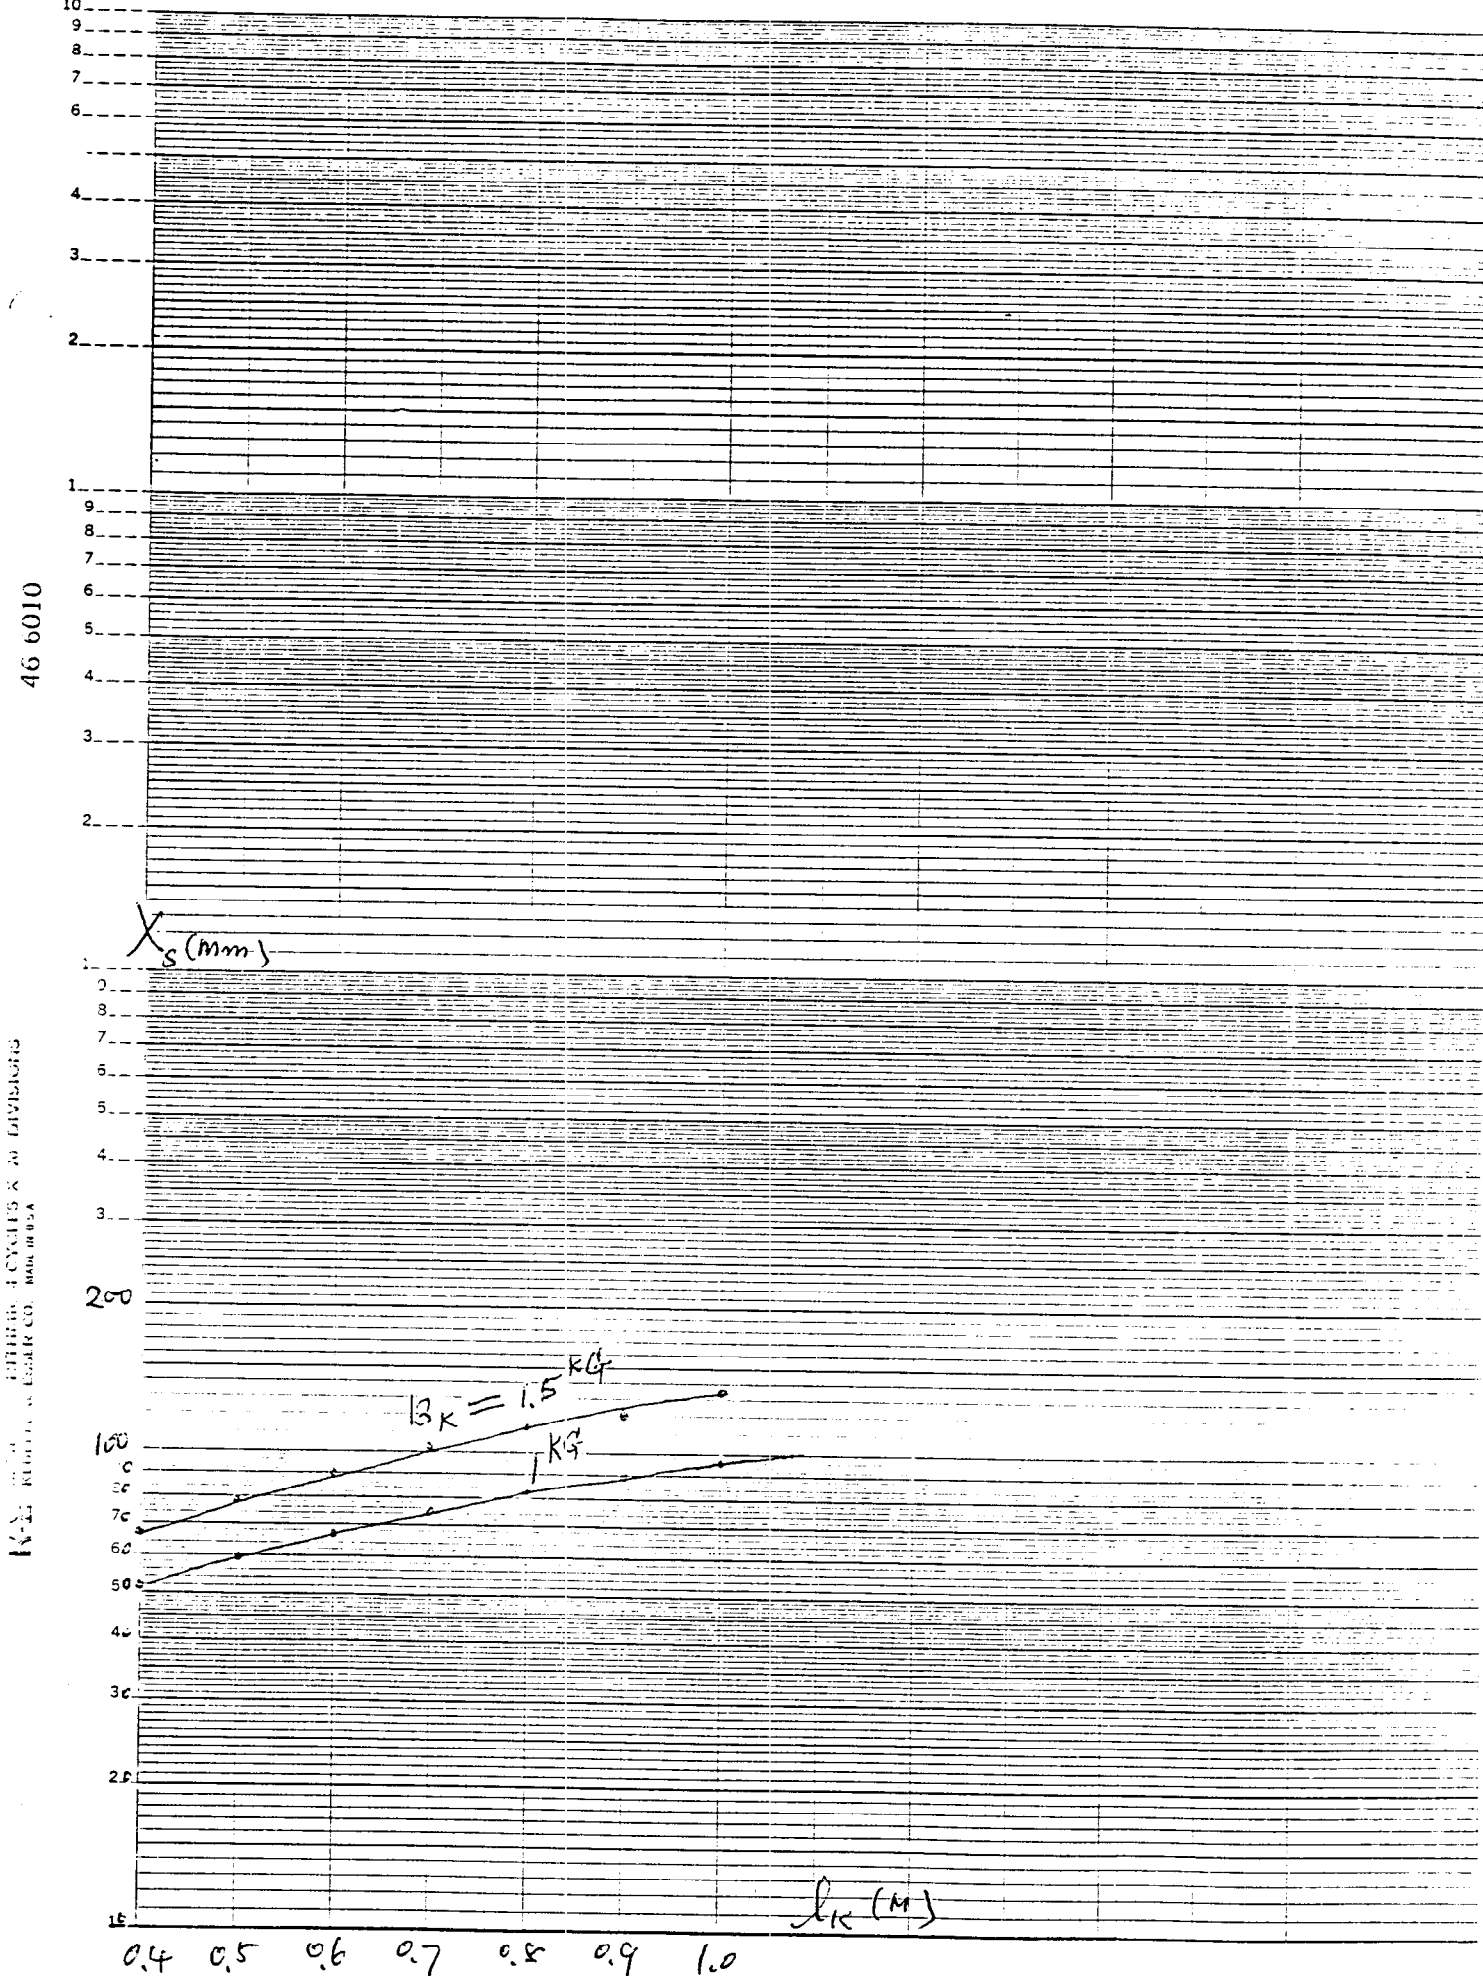


46 6010

K-22 RUBBER 4 CYCLES X 20 DIVISIONS  
 K-22 RUBBER 4 CYCLES X 20 DIVISIONS  
 MADE IN U.S.A.

461510


INSTRUMENTS TO THE CENTIMETER IN X-RAY  
LEWIS & CLARK CO. MADE IN U.S.A.

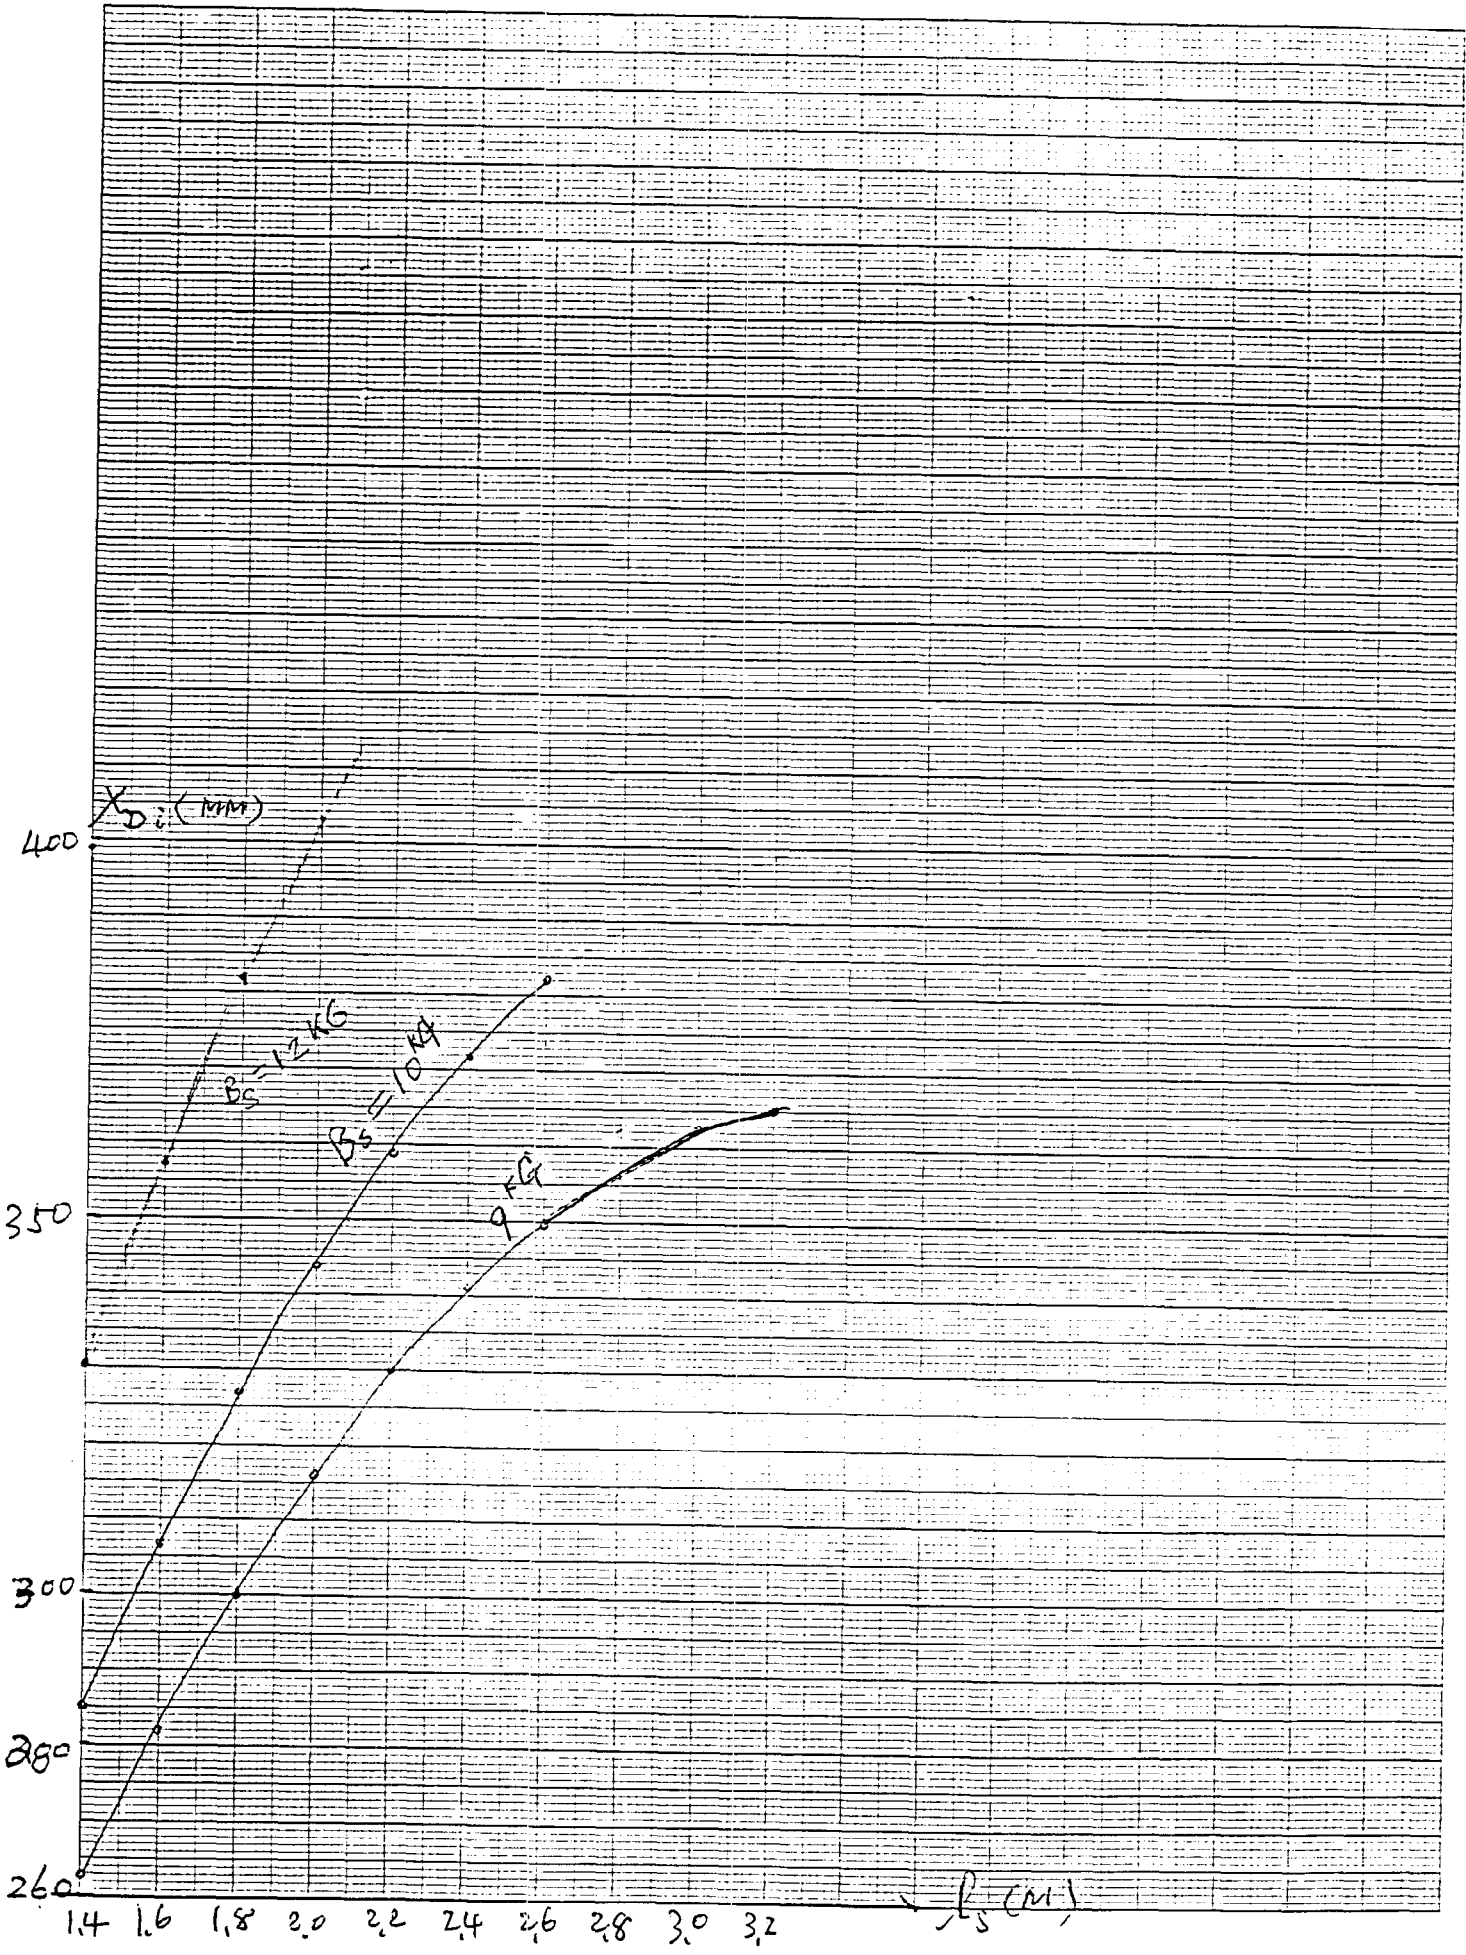



## 2. Focusing at the stripper

The beam of heavy ion is then transported to the stripper of copper with  $70 \text{ mg/cm}^2$ . Three quadrupoles are used to tune the betatron amplitudes of  $3 \times 3 \text{ m}$  and  $X_p = 0 \text{ m}$ . After the stripper the beam is expected to increase its emittance by an amount of  $1 \text{ pi-mm-mrad}$ . Fig. 4 show the betafunctions in this special focusing region.

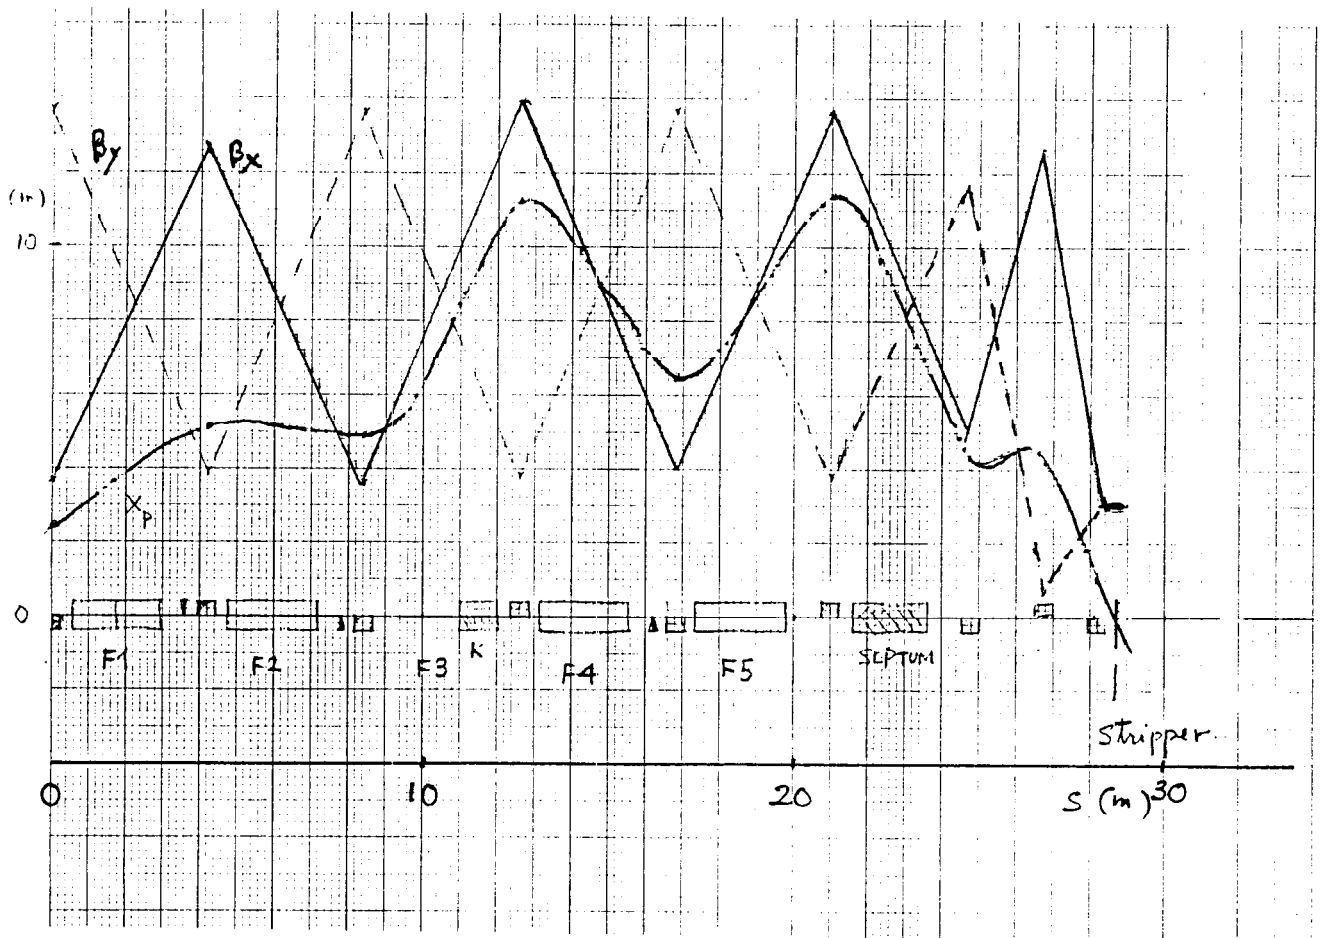

### 3. Beam transport

The beam is then transported with three dipoles onto the beam line of the old 50 MEV injection line. At the present design these dipoles are combined functions. Because of the heavy ion has higher charge after the stripper, the magnet field required is smaller by a factor of .724, .547, .418 for Cu, I, and Au respectively. Minimum of 6 quadrupoles is needed to match the betatron functions of the AGS ring. More realistically, simple FODO quadrupoles with roughly the same geometrical distribution can be used in the beam transfer after the dipoles. That is quadrupoles will be placed every 3.5 m of distance. We shall come up approximately 12 quadrupoles of .5 m. The betatron function can be controlled to within 15 m in average.

Table 1 list all the relevant elements of the booster transfer line. Note that the heavy ion and proton beams have different magnet rigidity at the extraction. The kicker is more seriously constrained by the proton consideration than the heavy ion beam. At the septum, the heavy ion central orbit and the proton central orbit is displaced by a distance of 12 mm. This displacement will continue until the straight section of the transfer line, where the a small orbit corrector will be used to adjust these two beams.

The final matching of the betatron functions to the AGS will be worked out with the AGS beam line. We have not done do in the present preliminary study.

Booster extraction and AGS injection system

---

Beam bumps:	
F2B	-0.01119 of the main dipoles
F4B	-0.01119
F7B	-0.01343
A1B	-0.01343
Kicker @F3	
L	
dx (proton)	66 mm @ $\rho=5.677$ or 11 for 2.56eV
(heavy ion)	50 mm @ $\rho=16.7$
theta kick	8.383233 mrad
x@sept. (prot)	88 mm from central orbit
(h.i.)	77 mm
Septum@F6	
L	
theta sept.	125.7485 mrad
thickness	10 mm including vacuum chamber
Transfer line	field @ $\rho=16.7$ all quads .5m
q1	-20 T/m
q2	23 T/m
q3	-24 T/m
strip foil	70 mg/cm <sup>2</sup>
beta@foil	3 m x & y
Xp	0
E loss	5 MeV/amu
sig. E	0.5 MeV/amu
	 brho=11 Tm is used in the following
B1T	1.58 m 1.32 T/m
q4	-8.17 T/m
B2T	2.12 m
q5	9.88 T/m
B3T	1.58 m -3.29 T/m
q6	7.90 T/m
q7	-9.22 T/m
q8	8.10 T/m
q9	-7.44 T/m
q10	6.59 T/m
q11	-7.25 T/m
q12	9.88 T/m
q13	-7.25 T/m
q14	7.25 T/m
q15	-6.59 T/m
q16	7.90 T/m
q17	-9.88 T/m
AGS injection	


#### 4. AGS injection components

The AGS lattice beam size is shown in Fig. 5, where the emittance is taken to be 50 mmrad and the  $\Delta p/p = .25\%$ . The beam is injected through the open magnets of L19 L20. The septum is located at S20 about 50 mm away from the horizontal central orbit. The kicker located at A5 straight section kicks the beam 50 mm. Table 2 summarizes the kicker strength needed for various kick distances. At  $B = 11$  Tm, we observe that

$l_k$	=	1.00	m
$\theta_k$	=	2.94	mrad
V	=	32.95	KVolts
I	=	1.97	KA
L	=	2.51	microH
B	=	0.32	KG

These parameters are the parameters needed for the consideration of power supplies. The corresponding septum is given by

$l_s$	=	2.50	m
$\theta_s$	=	40.	mrad

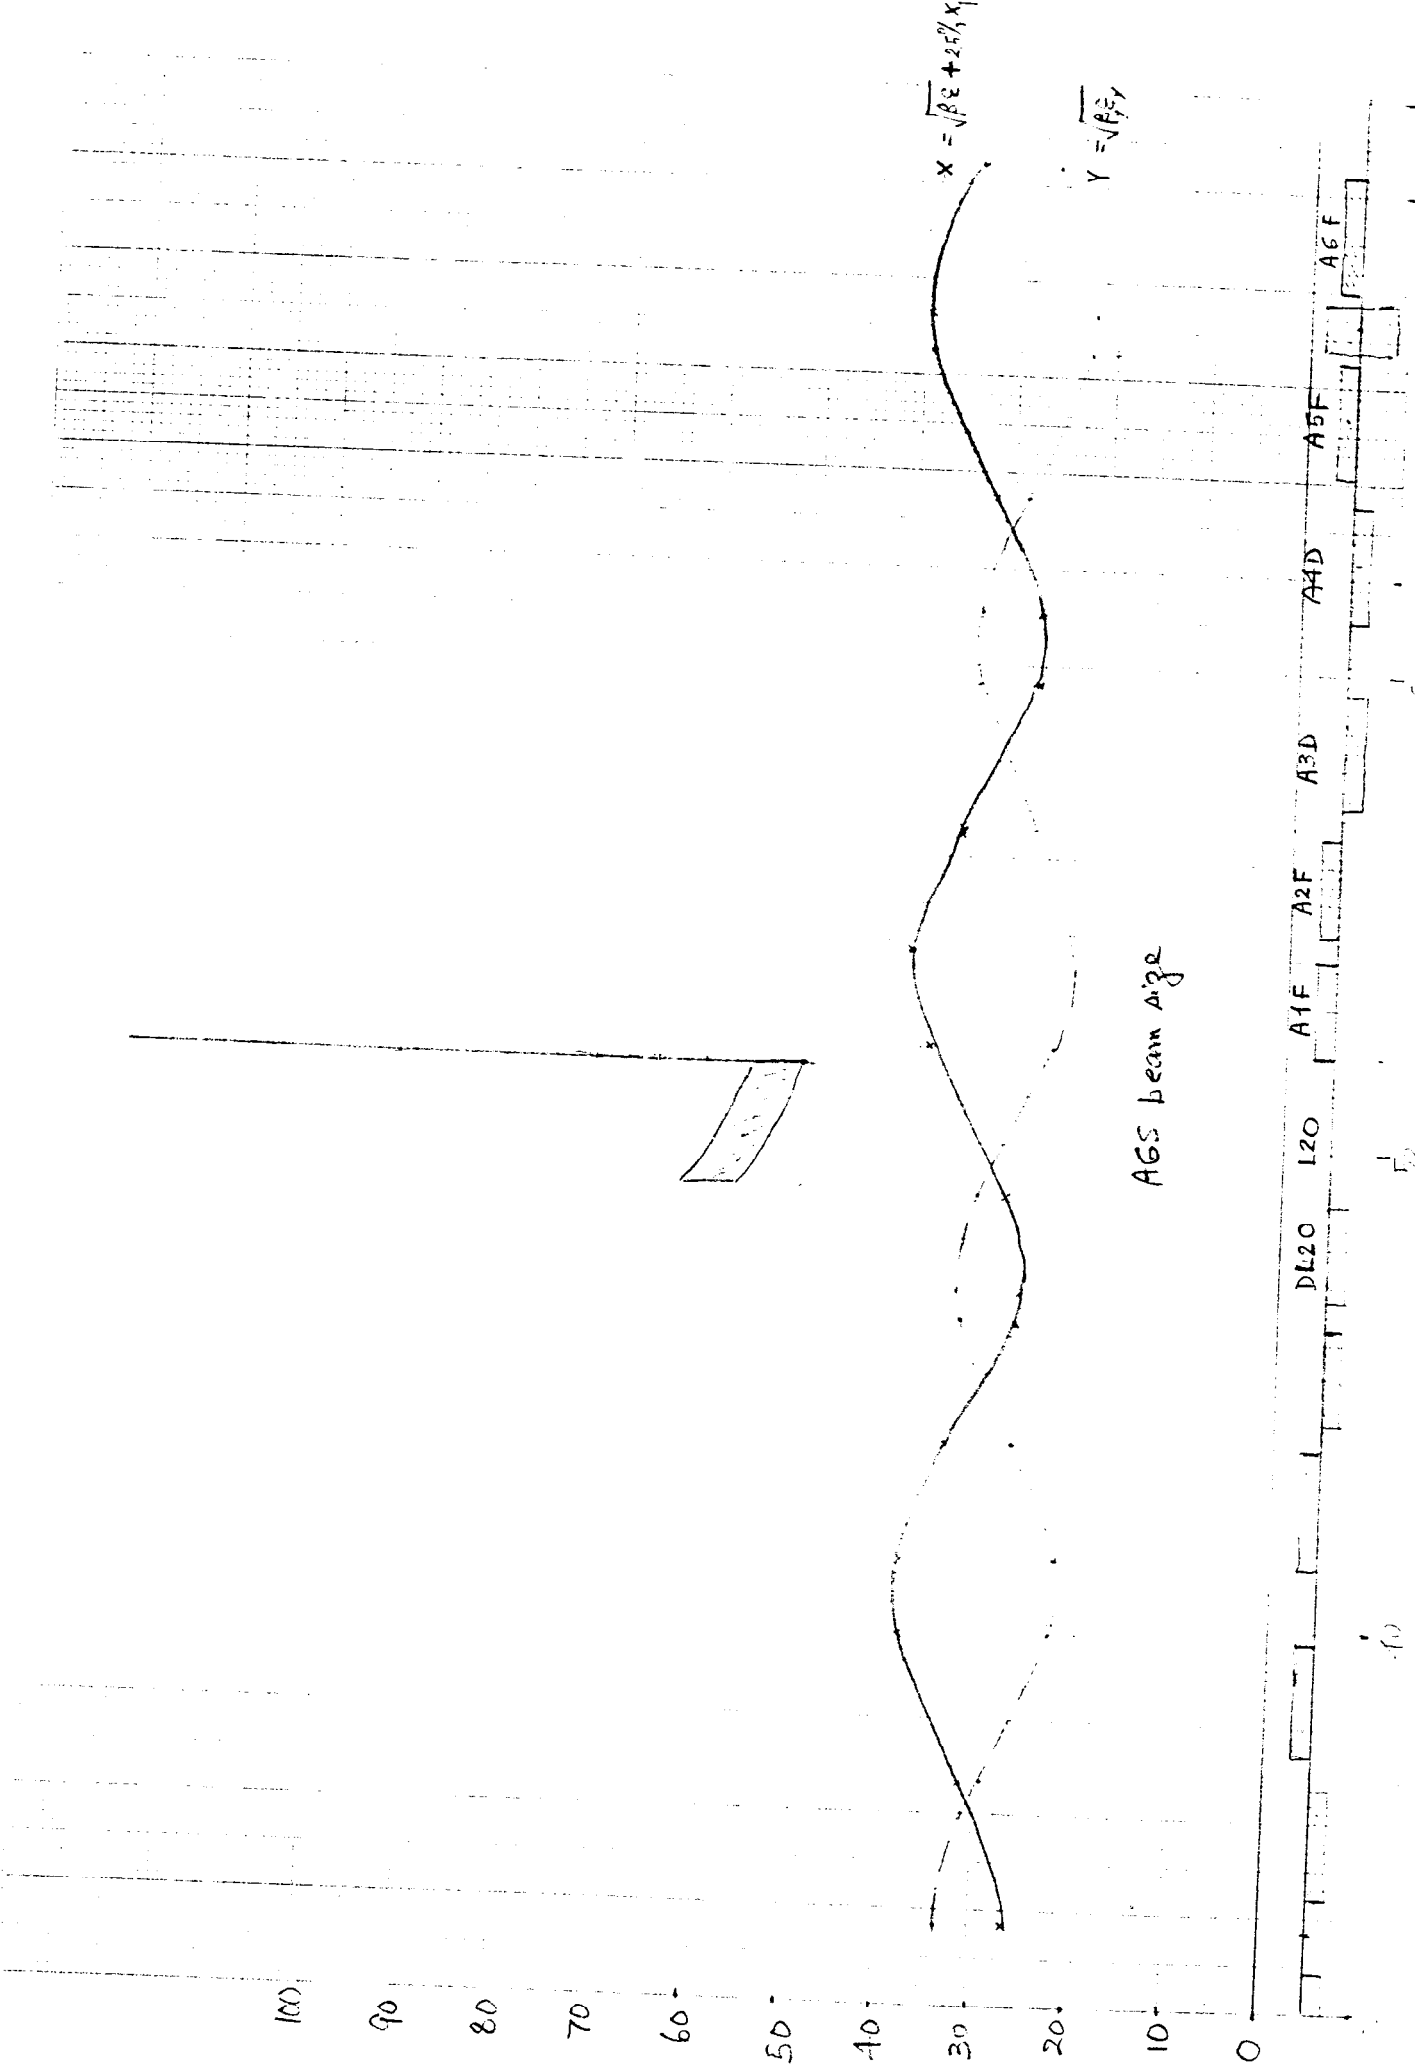

100  
90  
80  
70  
60  
50  
40  
30  
20  
10  
0

0  
10  
20  
30  
40  
50  
60  
70

Table . parameters for kicker and septum of AGS injection

1			1	1.033					
-0.09	1		0	1					
		1							1
1	2.616		1	1.033	0				
	1		-0.09	0.899	0				
		1	0	0	1				
1			0.746	3.387	0				
-0.09	1		-0.09	0.899	0				
		1	0	0	1				
1	2.806		0.746	3.387	0	The kicker parameters:			
	1		-0.16	0.571	0	lk=	1	m	
		1	0	0	1	dt=	150	ns	
						dimen=	0.152	0.076	(6'x3')
1			0.271	4.991	0	Brho=	11	Tm	
0.115	1		-0.16	0.571	0	thk	V(KV)	I(A)	B(KG)
		1	0	0	1		Lm(muH)		
1	3.911		0.271	4.991	0	-2.94	32.95	1967.	0.324
	1		-0.13	1.149	0	-3.53	39.54	2360.	0.389
		1	0	0	1	-3.83	42.84	2557.	0.421
						-4.12	46.14	2753.	0.454
1			-0.26	9.485	0	-4.42	49.43	2950.	0.486
0.115	1		-0.13	1.149	0	-4.71	52.73	3147.	0.519
		1	0	0	1				
1	2.997		-0.26	9.485	0				
	1		-0.16	2.246	0	xs(mm)xs'-mrthk(mrad)			
		1	0	0	1	50	2.744	-2.94	
1			-0.77	16.22	0	60	3.293	-3.53	
-0.11	1		-0.16	2.246	0	65	3.568	-3.83	
		1	0	0	1	70	3.842	-4.12	
						75	4.116	-4.42	
1	1.955		-0.77	16.22	0	80	4.391	-4.71	
	1		-0.07	0.375	0				
		1	0	0	1				
			-0.93	16.95	0				
			-0.07	0.375	0				
			0	0	1				


Septum consideration			xs	xs'	thk			
1			50	2.744	-2.94			
	1	23.50	60	3.293	-3.53			
		1	65	3.568	-3.83			
			70	3.842	-4.12			
			75	4.116	-4.42			
1	2.616		80	4.391	-4.71			
	1		xs	xs'	x	x'	ths	
		1	50	2.744	475	-90.0	45.83	
			xs=50mm, xs'=2.744mrad@exit of septum					
1			400	-78.9	34.73			
	1	23.50	425	-82.6	38.43			
		1	450	-86.3	42.13			
			475	-90.0	45.83			
			500	-93.7	49.53			
			xs=50mm, xs'=2.744mrad@exit of septum					
			1	6.756	180.2			
			0	1	47.00			
			0	0	1			

## Appendix.

1. Booster beam size at the injection energy and at the extraction energy.
2. Booster arrangement at the extraction region.
3. Relation between the AGS and the Booster ring.



# Beam size for the booster @ injection and extraction

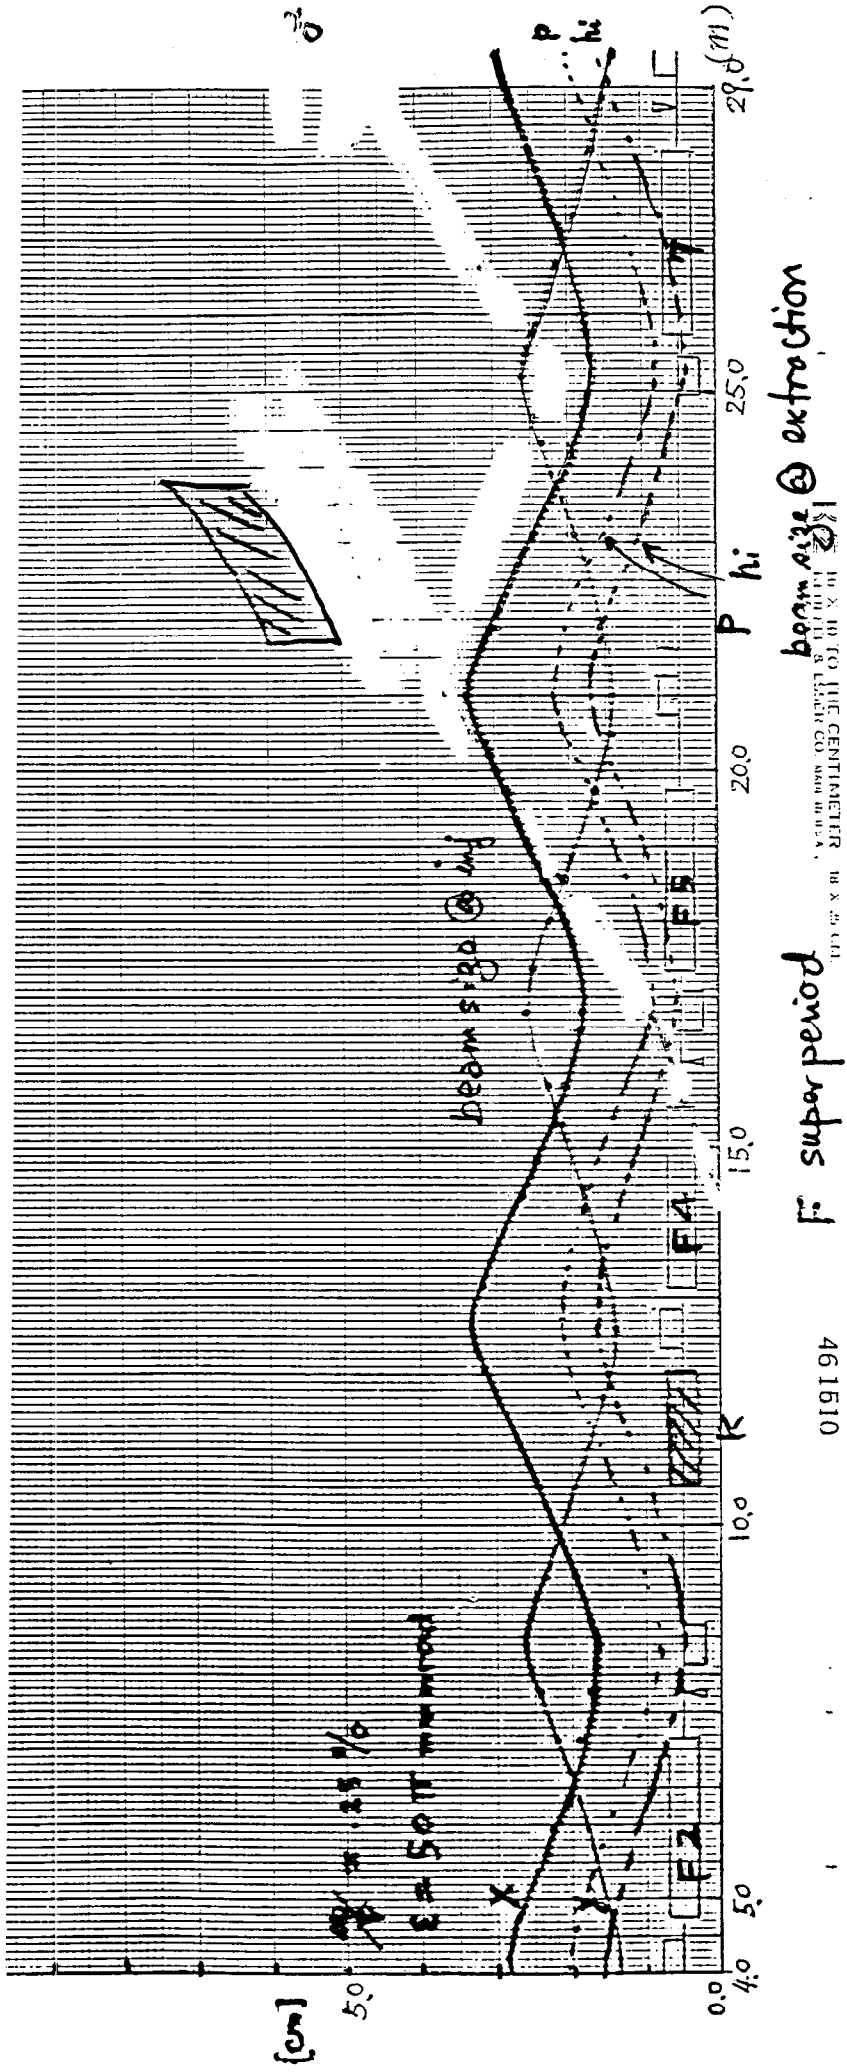

beam size @ extraction

F: super period

461510

IN X 10 TO THE CENTIMETER IN X 10 TO THE CENTIMETER

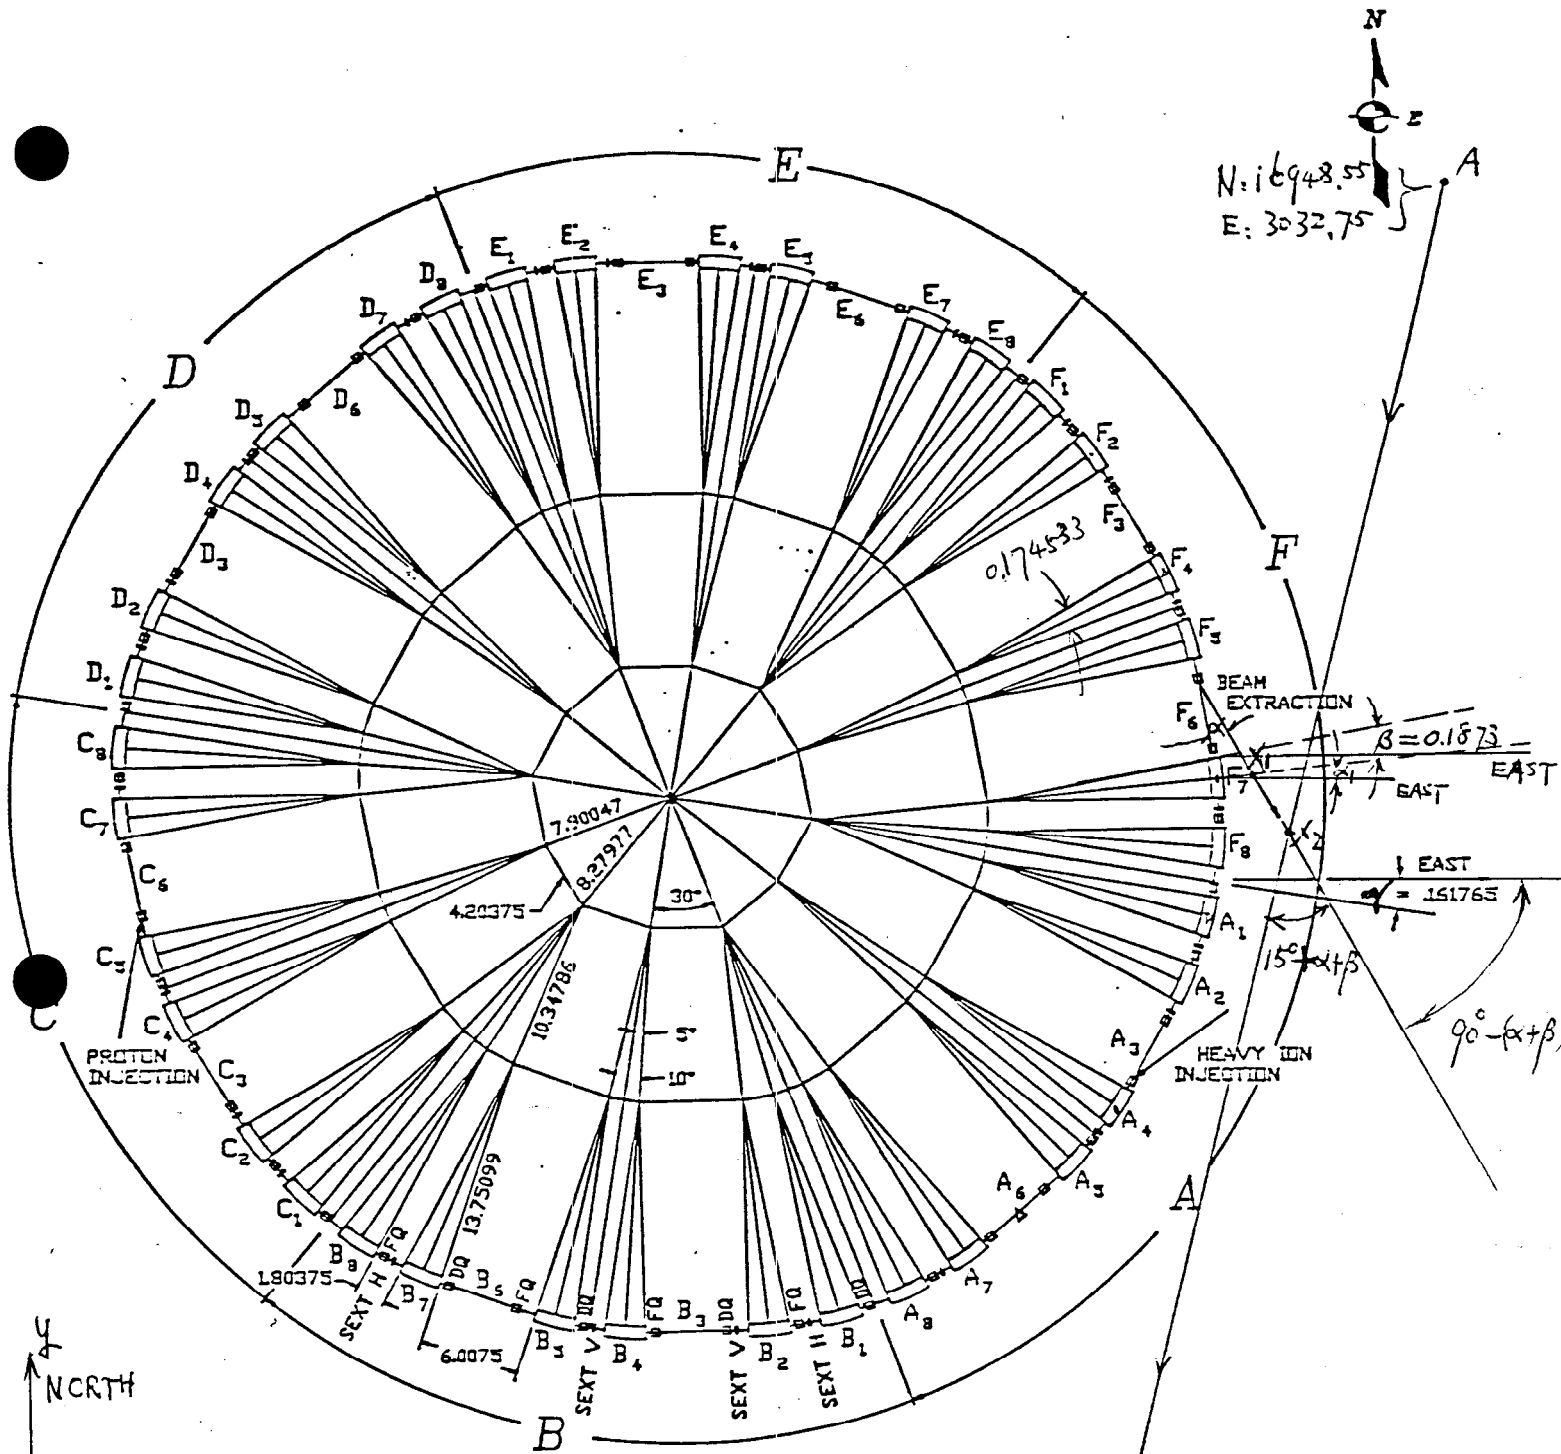



FIG. 1 Overall Layout of the AGS Booster

N: 13308.45  
E: 2057.52

75° EAST  
0 5  
METERS

NOTE: ALL DIMENSIONS ARE IN METERS

$$\text{total bending angle} = 150 + \alpha + \beta \approx 31.7^\circ$$

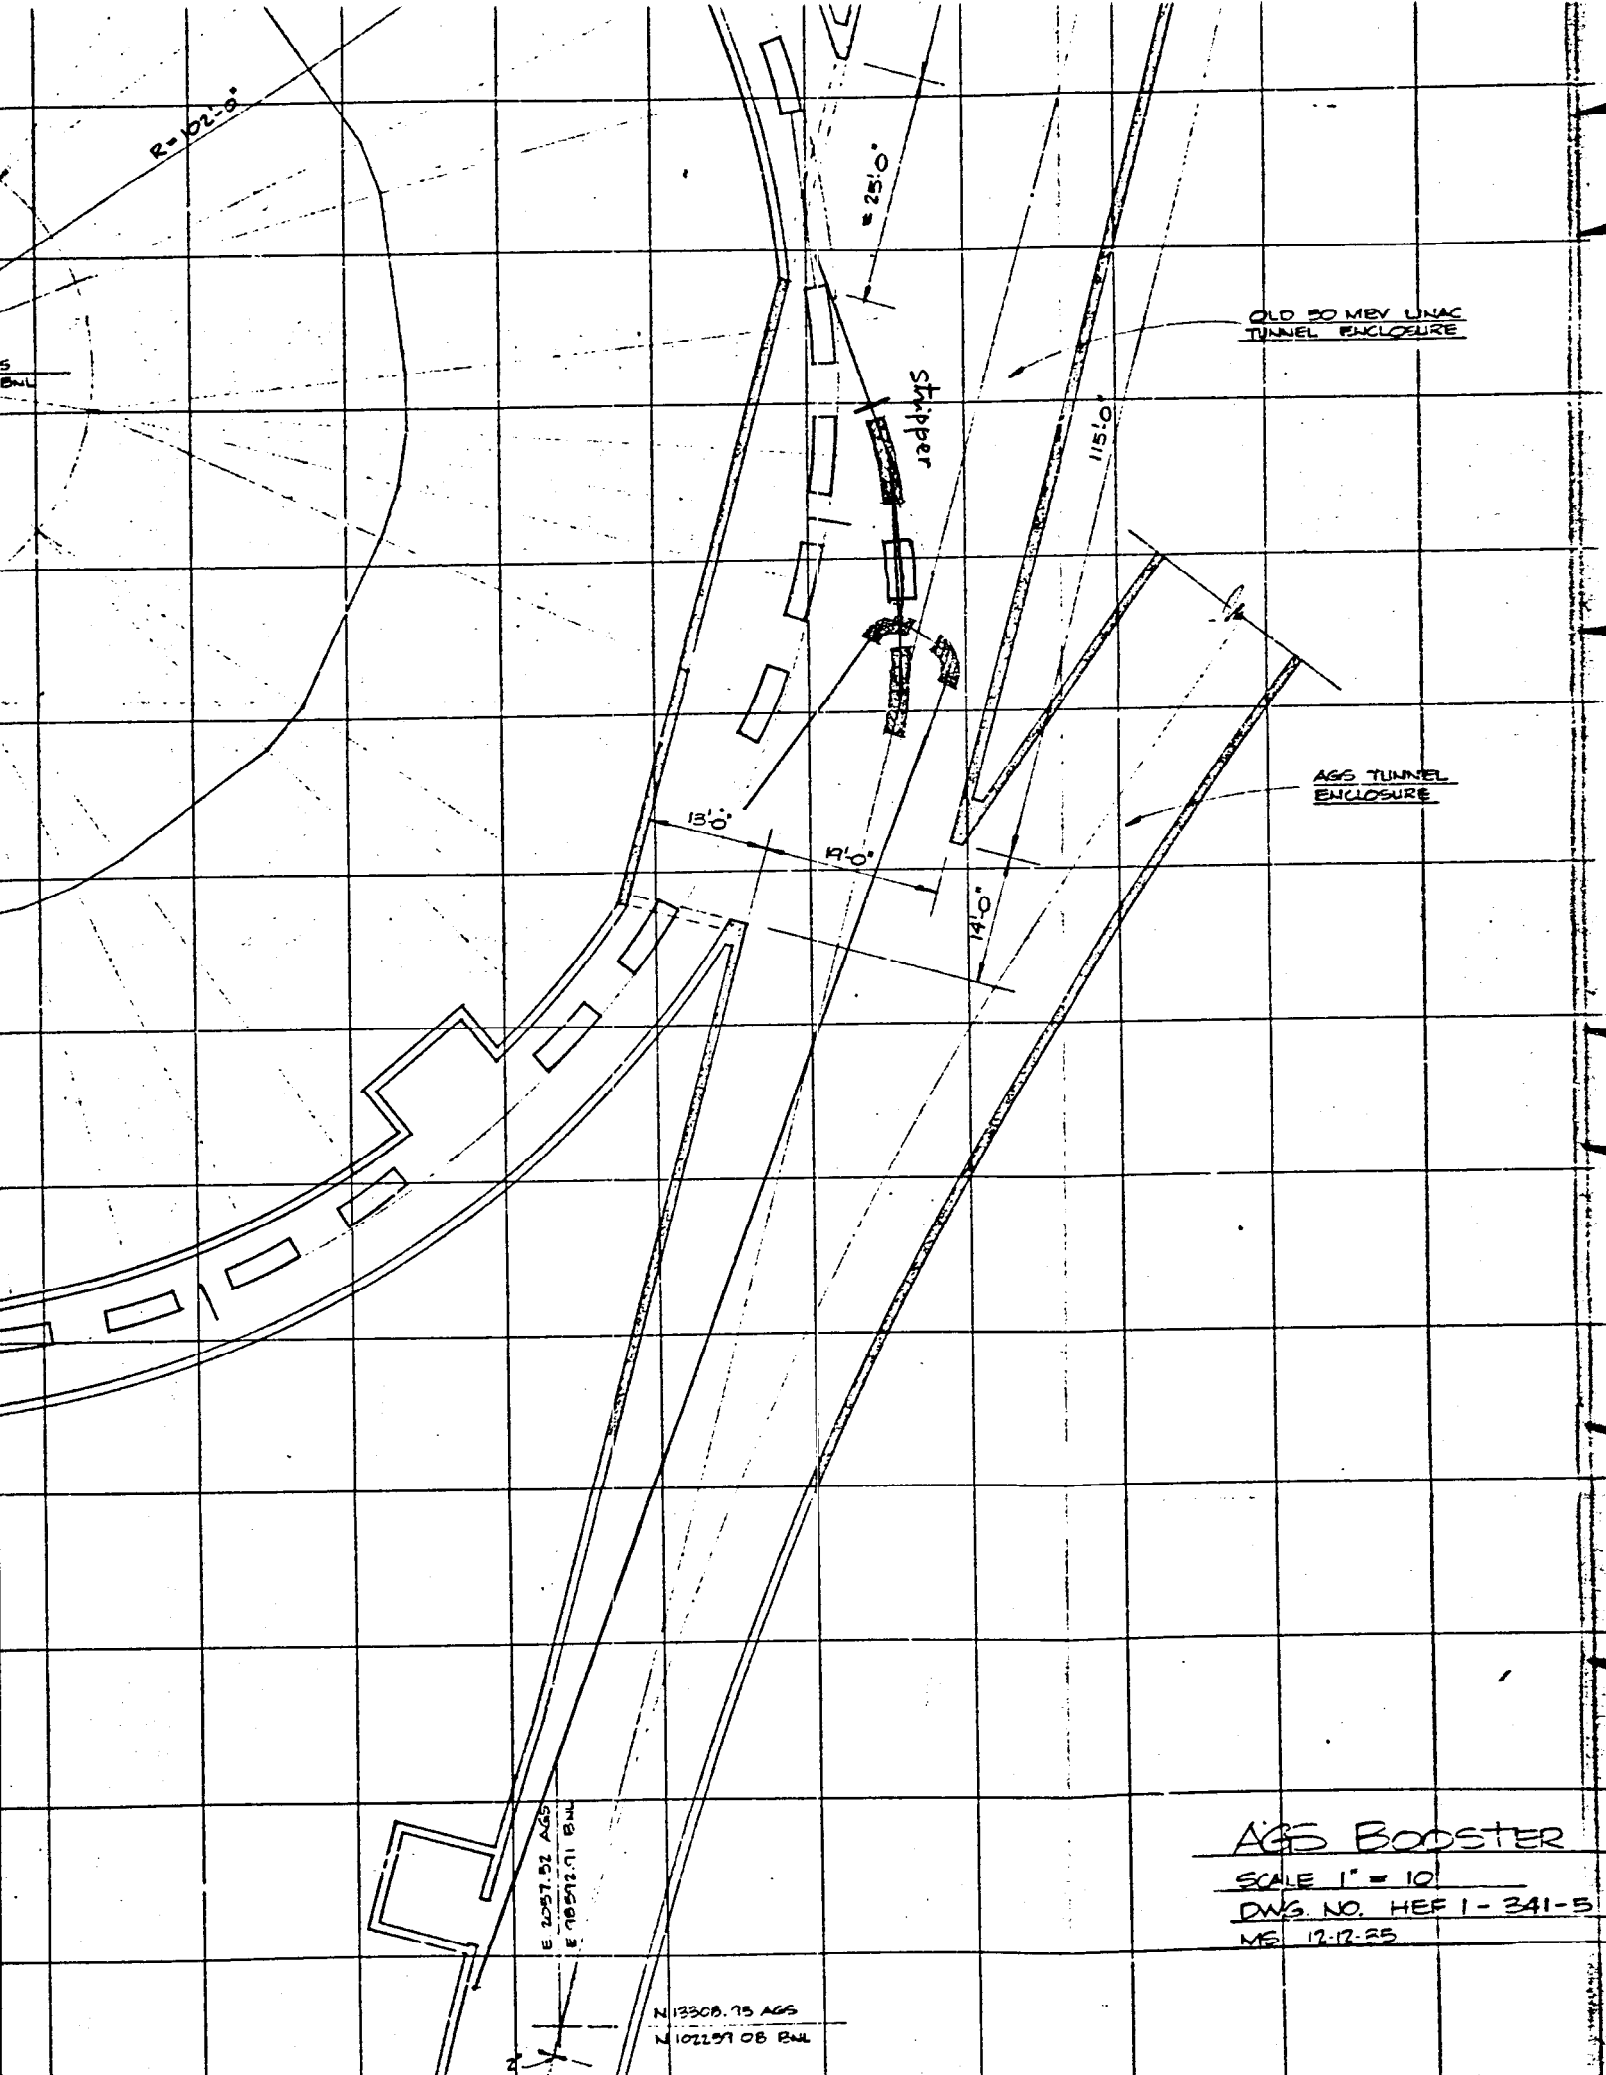

R = 102.0'

25.0°

OLD 50 MEV UNAC  
TUNNEL ENCLOSURE

Skipper

115.0'

AGS TUNNEL  
ENCLOSURE

13.0'

19.0'

14.0'

E 2057.92 AGS  
E 70572.91 BUL

N 13308.75 AGS  
N 102257.08 BUL

AGS BOOSTER  
SCALE 1" = 10'  
DWG. NO. HEF 1-341-5  
MEL 12-12-55