

# Aperture Study of the AGS Booster with and without Eddy Current Multipoles

G. F. Dell

March 1986

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

APERTURE STUDY OF THE AGS BOOSTER  
WITH AND WITHOUT EDDY CURRENT MULTIPOLES

*Booster Technical Note*  
No. 18

G.F. Dell  
March 10, 1986

HIGH ENERGY FACILITIES  
Brookhaven National Laboratory  
Upton, N.Y. 11973

APERTURE STUDY OF THE AGS BOOSTER  
WITH AND WITHOUT EDDY CURRENT MULTIPOLES

G.F. Dell

The aperture of the AGS Booster with the 1,2,4,7 sextupole configuration set for a chromaticity of zero and with or without eddy current multipoles has been studied by particle tracking (1) at four different tunes (Fig. 1) and five different momenta. The eddy current multipoles are those of Morgan (2) and are listed in Table I. In all cases the particles tracked had equal emittances in the horizontal and vertical directions.

n	Strength $m^{-n}$
2	$7.8 \times 10^{-1}$
4	$-2.4 \times 10^1$
6	$-1.6 \times 10^3$

Table I. Eddy current multipoles  $b_n$  (Morgan<sup>1</sup>).

A. TRACKING AT THE REQUIRED EMITTANCE

Particles were tracked for 400 turns with emittances of  $30/\pi$  to  $60/\pi$  mm mrad in steps of  $10/\pi$  mm mrad for the following cases: a). SF and SD sextupoles only, b). case "a" plus  $b_2$ , c). case "a" plus  $b_2$  and  $b_4$ , and d). case "a" plus  $b_2$ ,  $b_4$ , and  $b_6$ . The particles were stable at all tunes and all momenta. In addition, 2500 turn runs were made for case "d" at the design emittance of  $50/\pi$  mm mrad for three of the tunes (The fourth was inadvertently omitted). Again all particles were stable. These results as well as the particle tunes, derived from a Fourier analysis of the tracking data, are listed in Table II. The apertures listed are the radial dynamic aperture  $A(r) = ((\beta_x + \beta_y) \epsilon)^{1/2}$  with  $\epsilon$  being the emittance.

B. DYNAMIC APERTURE

The dynamic aperture of the booster was determined for case "d". A preliminary aperture was obtained from tracking runs of 600 turns. Then the initial amplitudes were decreased by approximately 5mm and 2500 turn runs were made to assure that the motion was stable at these amplitudes. The radial dynamic aperture and the associated particle tunes are listed in Table III.

### C. TRACKING OF THE EJECTION LATTICE

During ejection, the strengths of four dipoles in one region of the booster are reduced by approximately one percent to introduce a radial excursion to the particles. This configuration was tracked for case "a", and again stability was observed. Based on 400 turn runs, the radial dynamic aperture is greater than 80 mm for  $-0.5 \leq \Delta P/P \leq 0.5\%$ .

#### SUMMARY

1. Except for the operating point of  $U_x = 4.735$ ,  $U_y = 4.740$ , all radial dynamic apertures are at least 75 mm throughout the momentum range mentioned above. At (4.735, 4.740), the radial dynamic aperture is  $\sim 55$  mm.

2. The most significant feature in the shape of the phase plots is the indication of coupling between the horizontal and vertical motion. This appears in Fig. 2 as the radial width of the plot. Even with this coupling, the dynamic aperture is significantly greater than what is needed.

#### REFERENCES

1. H. Wiedemann, PEP-220, SLAC, 1976.
2. G. Morgan and S. Kahn, Booster Tech Note #4.

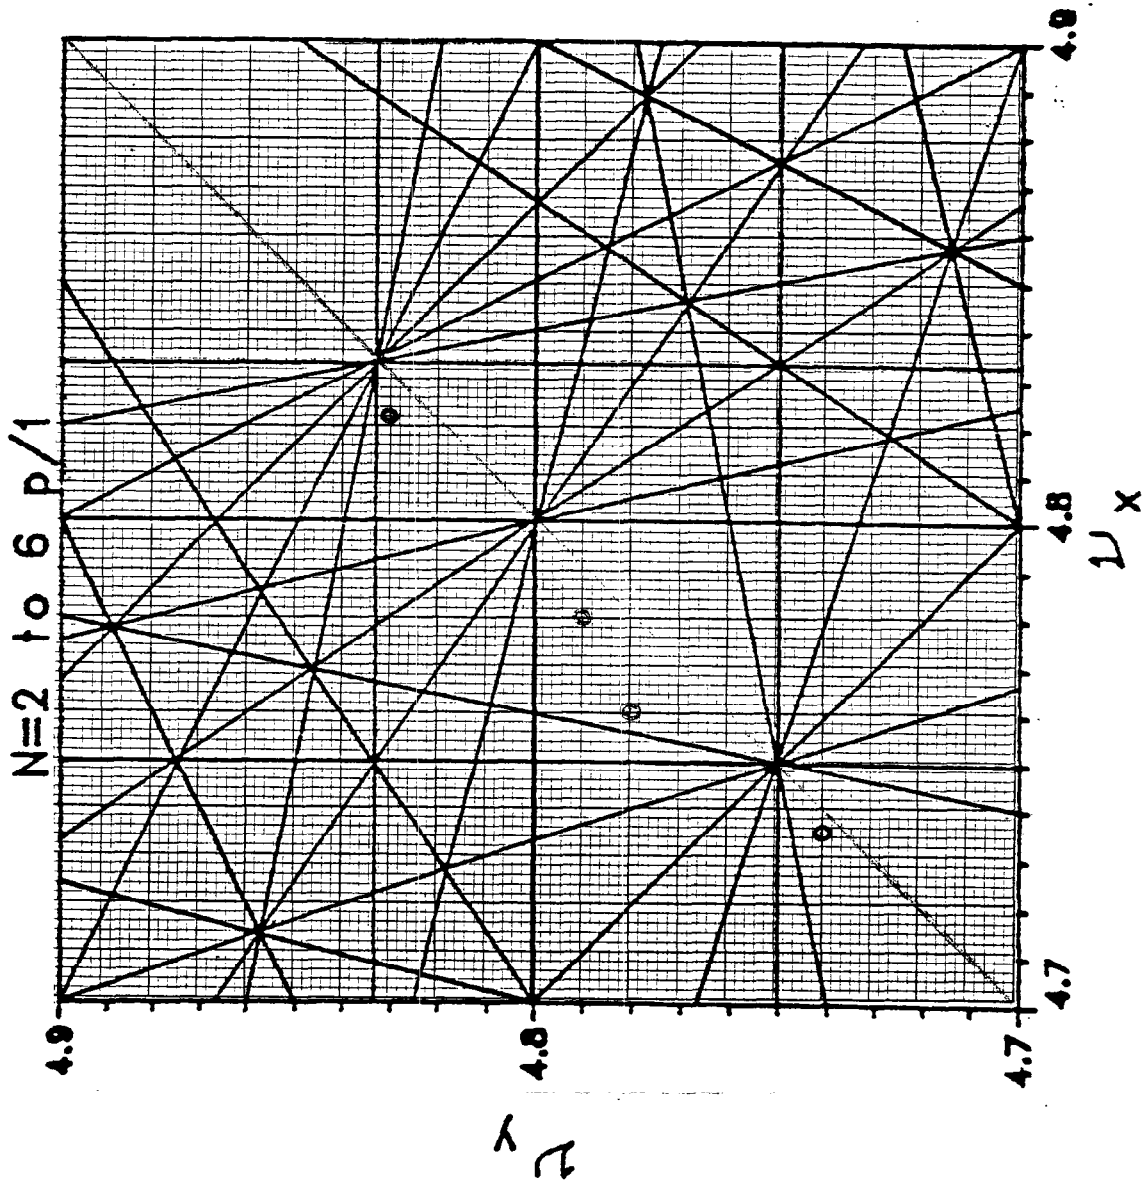


Fig. 1 Four operating points at which tracking was done for the AGS Booster. Tunes are: (4.735, 4.740), (4.760, 4.780), (4.780, 4.790) and (4.822, 4.830) with  $(\nu_x, \nu_y)$

	$\Delta P/P$ (%)				
TUNE	-0.5	-0.25	0.0	0.25	0.5
4.822/ 4.830	S 4.8216 4.8372	S 4.8220 4.8380	S 4.8228 4.8380	S 4.8220 4.8380	S 4.8216 4.8372
4.780/ 4.790	S 4.7836 4.7972	S 4.7796 4.7968	S 4.7804 4.7968	S 4.7796 4.7964	S 4.7792 4.7964
4.735/ 4.740	S 4.7348 4.7472	S 4.7372 4.7476	S 4.7360 4.7480	S 4.7352 4.7476	S 4.7348 4.7472

Table II. Tracking results for case "d" (all eddy current multipoles) for 2500 turns runs with  $\epsilon_x = \epsilon_y = 50 \mu\text{m}$  radians  $\rightarrow A(r) = 26.9 \text{ mm}$ . Entry "S" denotes stable particle.

TUNE	$\Delta P/P$ (%)				
	-0.5	-0.25	0.0	0.25	0.5
4.822/ 4.830	81.6mm 4.8304 4.9068	87.0mm 4.9188 4.9188	81.6mm 4.8228 4.8380	87.0mm 4.8340 4.9196	76.2mm 4.8492 4.8988
4.780/ 4.790	92.5mm 4.7836 4.8804	92.5mm 4.7888 4.8788	92.5mm	92.5mm 4.7996 4.8876	87.0mm 4.7840 4.8688
4.735/ 4.740	49.0mm 4.7400 4.7636	54.5mm 4.7404 4.7712	54.5mm 4.8000 4.8840	54.5mm 4.7444 4.7712	49.0mm 4.7452 4.7640

Table III. Radial dynamic aperture plus particle tunes. 2500 turn runs. Case "d" (all eddy current multipoles).



Fig. II X and Y phase plots at  $\Delta P/P = -0.5\%$  with  $\vec{U}_x(0) = 4.822, \vec{U}_y(0) = 4.830, 2500$  Turn runs.  
 $\epsilon_x(0) = 50/$  mm mradians  
 $\epsilon_x(\text{max}) = 51.9/$  mm mradians  
 $\epsilon_y(0) = 50/$  mm mradians  
 $\epsilon_y(\text{max}) = 94.3/$  mm mradians