

QUARTERLY STATUS REPORT (10) PREINJECTOR GROUP

T. Sluyters

January 1968

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.AT-30-2-GEN-16 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Accelerator Department
BROOKHAVEN NATIONAL LABORATORY
Associated Universities, Inc.
Upton, L.I., N.Y.

AGS DIVISION TECHNICAL NOTE

No. 42

Th. Sluyters

January 2, 1968

QUARTERLY STATUS REPORT (10)
PREINJECTOR GROUP

General

The objectives of the group to obtain 200-250 mA beam currents within a reasonable emittance have been obtained at 750 kV in the test column (see Internal Report AGS-Div. 67-6). In addition a three section tube has been successfully tested mechanically; on the basis of these results a final column is assembled; this unit will be fully tested in the first quarter of next year. The hitherto mechanical results will be published in technical notes by R. Amari and S. Senator. The modified low energy transport system for the 50 MeV linac is designed and in the workshop. A general layout of the tube and transport system is shown in the attached drawing.

A fast bouncer system, spark gaps and shunted hard tube modulator has been installed in the operational AGS machine during the Nov-Dec shutdown.

During continued beam tests with the short column in the test area, a drastic decrease in beam output occurred. It was found that the ceramic insulator between anode and intermediate electrode was partly

coated with a metal deposit (Mo?) disturbing the field distribution between the electrodes. After cleaning, the source characteristics were back to normal. We suspect metal vapors from the expansion cup has penetrated the anode aperture.

The design and construction of the 200 MeV preinjector (ion source and accelerator tube) has been started.

A Theoretical Explanation for the Obtained Absolute Emittance Values as Described in AGS-Div. 67-6

Gabovich ("Plasma Ion Sources" p.43, AD-623822, 1965) explains the existence of a negative potential drop close to the anode exit (see Fig. 1).

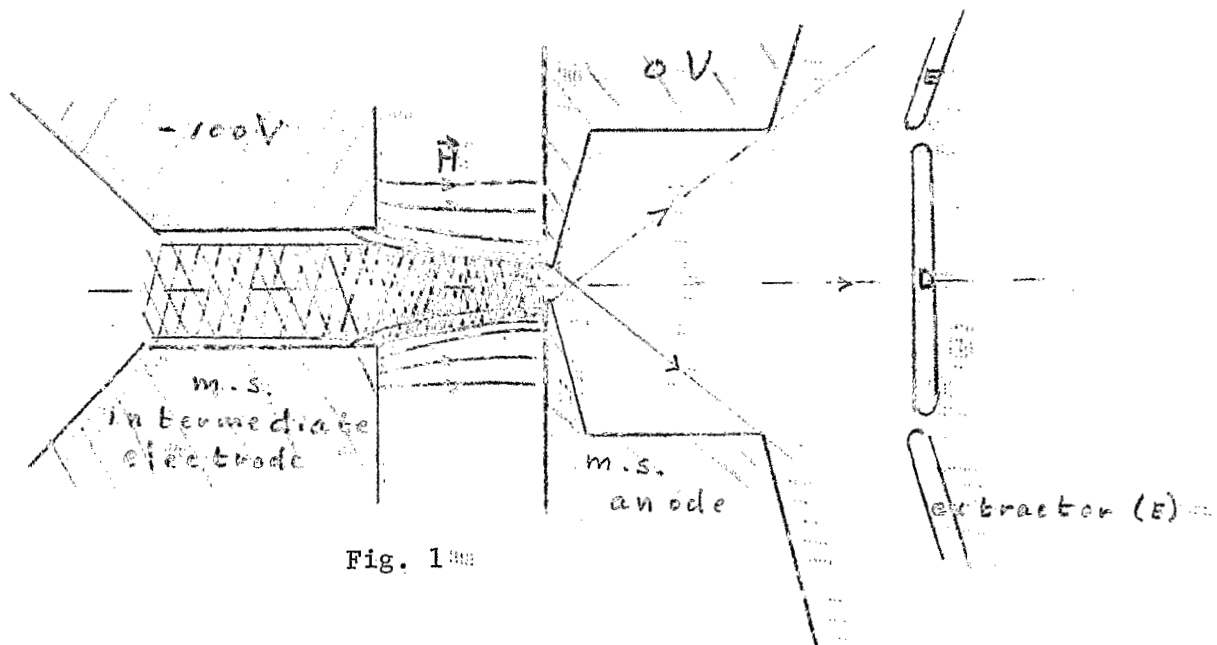


Fig. 1


It is caused by the amplification of ionization towards the anode (increased electron energy) and contraction of the plasma by the non-uniform magnetic field. This configuration forms a high concentration of charged particles just inside or in front of the anode aperture.

With the larger electron mobility and the outer imposed potential distribution a plasma sheath is formed close to the aperture and directed ion and electron beams move in opposite directions with an energy equal to the voltage drop across the sheath (several tens of volts).

P. Clarke brought some experimental evidence of the plasma jet idea in the detection of considerable positive beam currents on the zero potential extractor (E) and detector (D), which could be suppressed by about +10 V potential.

When the ions leave the source in laminar flow the optimum emittance value can be estimated from the geometry of the expansion cup

(see Fig. 2).

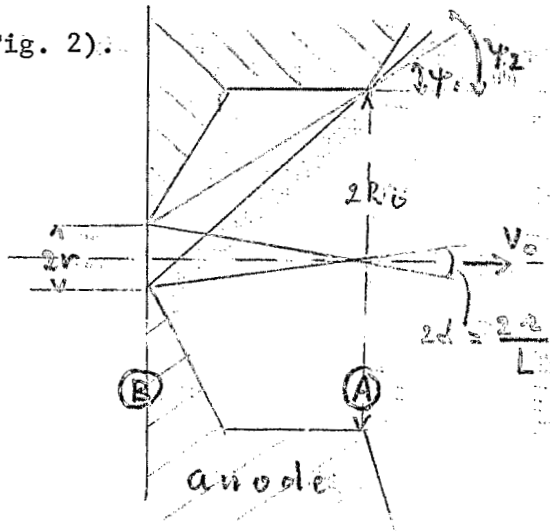

The normalized emittance without external fields at (A) is:

$$\epsilon_2 = \beta \gamma \frac{\text{area}}{\pi} = \frac{v_0}{c} \frac{\text{area}}{\pi} \quad (\gamma = 1)$$

For $L = 10 \text{ mm}$
 $2r = 1.5 \text{ mm}$
 $2R_0 = 12 \text{ mm}$

$$\left. \begin{array}{l} 2r = 1.5 \text{ mm} \\ 2R_0 = 12 \text{ mm} \end{array} \right\} \frac{\text{area}}{\pi} = 60 \text{ cm-mrad}$$


Suppose a maximum longitudinal plasma velocity v_0 :

$$(v_0)_{\text{max}} = 2\sqrt{\frac{2kT_i}{m}} \approx 10^5 \text{ m/sec}$$

(ion temperature $T_i = 10^5 \text{ }^\circ\text{K}$.)

Finally:

$$\epsilon_2 = \frac{10^5}{3 \cdot 10^8} \cdot 60 = .020 \text{ cm-mrad}$$

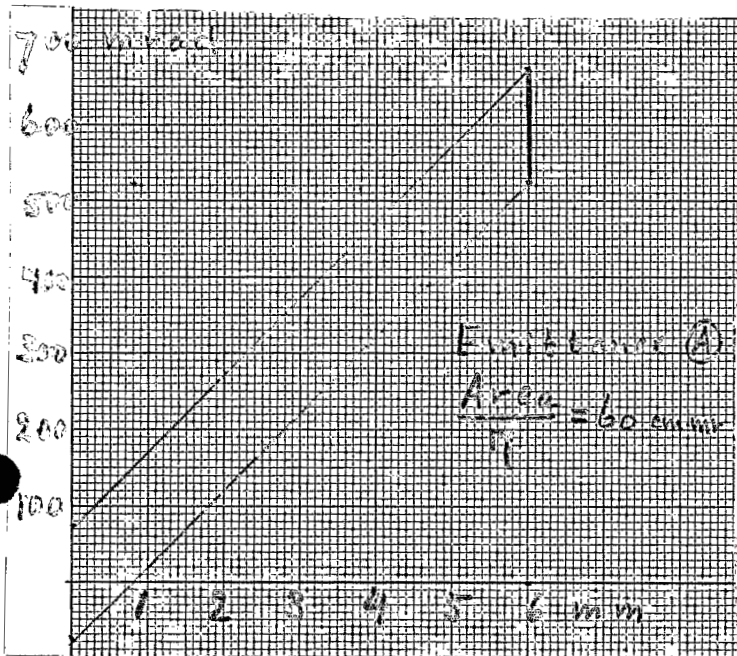

In Fig. 5 of our publication AGS-Div. 67-6 the measured $\epsilon_2 = .062$ cm-mrad is surprisingly close to the theoretical value.

In Fig. 4 of the same publication the emittance is $\epsilon_2 = .036$ cm-mrad, which corresponds again excellent in this jet theory; the cup is namely two times deeper, reducing the emittance by a factor of two! Under identical discharge conditions however the intensity is reduced by a factor of four because the solid angle at which the plasma emerges the cup is reduced by a factor of four:

$$\Omega = \pi \left(\frac{R_0}{L} \right)^2$$

This means that the brightness does not improve (brightness $\div \frac{\text{intensity}}{(\text{emittance})^2}$). In practice, however, one reduces the loss of particles in a longer cup by some additional magnetic field (in our case more stray-field from the source magnet).

Note

Comparison of emittances is only possible for apparent non-aberrant beams. For currents larger than 100 mA distortion in the core of the beam started to appear in the emittance pattern (double images).

cc: R. Abbott	S. Senator
R. Amari	J. Spiro
K. Batchelor	A. van Steenberghe
C. Bellezzi	G. Wheeler
P. Clarke	
R. Clipperton	
V. Kovarik	
R. Lane	
R. Locket	
I. Polk	
J. Richter	
S. Senator	
J. Spiro	
A. van Steenberghe	
G. Wheeler	

THS/lsl