

## Booster Parameter List with 1,2,4,7 Sextupole Configurations

Z. Parsa

February 1986

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Accelerator Division  
Alternating Gradient Synchrotron Department  
BROOKHAVEN NATIONAL LABORATORY  
Associated Universities, Inc.  
Upton, New York 11973

Accelerator Division  
Technical Note

No. 242

Booster Parameter List with 1,2,4,7 Sextupole Configurations

Z. Parsa

February 12, 1986

## ABSTRACT

THIS NOTE DESCRIBES THE PARAMETER LIST FOR THE AGS - BOOSTER, WITH SEXTUPOLE CONFIGURATIONS 1,2,4,7. A SCHEMATIC LAYOUT OF THE LATTICE AND ITS SUPERPERIODS ARE ALSO INCLUDED.

## INTRODUCTION

---

This note describes the parameter list of the AGS - Booster with 1,2,4,7 sextupole configurations and tunes of 4.82 and 4.83. In section II the present values of the Booster parameters are tabulated. The values listed are for theoretical calculations and are "precise but may not be accurate". This updates the Booster parameter list given in Reference 1. Schematic diagrams of the lattice [2,3] showing the layout of the AGS Booster, the labling convention of the lattice and its superperiods are also included.

---

### References:

1. AGS - Booster Parameter List, Booster Tech. Note No. 2, Z. Parsa, (January 16, 1986).
2. Booster Lattice, Booster Tech. Note No. 1, E. Courant and Z. Parsa, (January 15, 1986).
3. Booster Coordinates, Booster Tech. Note No. 6, Z. Parsa, (January 28, 1986). See also, BST/TN NO. 3, Z. Parsa, G. F. Dell, (January 17, 1986).

AGS BOOSTER PARAMETER LIST  
-----

ENERGY [MeV]  
-----

INJECTION:  
-----

PROTONS (INCLUDING POL PROTONS) 200 MeV

HEAVY IONS > 1 MeV/AMU

[POL == POLARIZED]

EJECTION (MAXIMUM)  
-----

PROTONS (INCLUDING POL PROTONS) 1 GeV

HEAVY IONS P = 5 Q/A GeV/AMU-C

[Q is the charge of the Heavy Ions (whether fully stripped or not) delivered from the Tandem.]

LATTICE  
-----

CIRCUMFERENCE	201.78 M (1/4 AGS)
PERIODICITY	6
NUMBER OF CELLS	24 FODO [SEPARATE FUNCTION, MISSING DIPOLS]
LENGTH	8.4075 M
PHASE ADVANCE/CELL	72.3°, 72.45°
TUNES	QX= 4.82, QY= 4.83
BETAX MAX/MIN	13.865/3.5754
BETAY MAX/MIN	13.644/3.7033
XP MAX	2.9515 M
TRANSITION GAMMA	4.8812

## RF SYSTEM

-----

NUMBER OF STATIONS (3 IN TOTAL)

1 FOR PROTONS (INCLUDING POL PROTONS)  
 2 FOR HEAVY IONS  
 [where POL== POLARIZED]

HARMONIC NUMBER

3 FOR PROTONS (INCLUDING POL PROTONS)  
 3 FOR HEAVY IONS (1 FOR RHIC)

FREQUENCY RANGE (MHz)

FOR PROTONS (INCLUDING POL PROTONS) 2.5 - 3.9  
 FOR HEAVY IONS 0.178 - 2.5 (.06 - .84 FOR RHIC)

PEAK RF VOLTAGE [KV]

FOR PROTONS (INCLUDING POL PROTONS) 35  
 FOR HEAVY IONS 17

ACCELERATION TIME [M-SEC]

FOR PROTONS (INCLUDING POL PROTONS) 50  
 FOR HEAVY IONS 500

REPETITION RATE

FOR PROTONS 10 Hz (4 PULSES/AGS PULSE)  
 FOR POL PROTONS 1 Hz (1 PULSE/AGS PULSE)  
 FOR HEAVY IONS 1 Hz (1 PULSE/AGS PULSE)

## DIPOLES

-----

[DIPOLES ARE CURVED AND WEDGED FOR 0 ENTRANCE ANGLE]

NUMBER	36
LENGTH (MAGNETIC)	2.4 M
GAP	82.55 MM
GAP VACUUM CHAMBER	66 MM
	-4
GOOD FIELD REGION (<10 )	16 X 6.6 CM

INJECTION FIELD [KG]

-----

FOR PROTONS (INCLUDING POL PROTONS) 1.5633  
 FOR HEAVY IONS 0.1047 A/Q

EJECTION FIELD [KG]  
 -----

FOR PROTONS (INCLUDING POL PROTONS) 4.1049  
 FOR HEAVY IONS 12.129

LAMINATION THICKNESS 1.5 MM  
 [0.6 MM AROUND ENDS]

QUADRUPOLES  
 -----

NUMBER 48  
 LENGTH (MAGNETIC) 0.50375 M  
 APERTURE 16.52 CM  
 VACUUM CHAMBER AP. 15.5 CM  
 [AP.== APERTURE]

WITH GF = 11.999 [KG/M] , GD = 12.369 [KG/M]

INJECTION POLE TIP FIELD [KG]  
 -----

FOR PROTONS (INCLUDING POL PROTONS)

BF = 0.98992 , BD = 1.0204

FOR HEAVY IONS

BF = 0.06635 A/Q , BD = 0.0683 A/Q

EJECTION POLE TIP FIELD [KG]  
 -----

FOR PROTONS (INCLUDING POL PROTONS)

BF = 2.5994 , BD = 2.6795

FOR HEAVY IONS

BF = 7.6805 , BD = 7.917

LAMINATION THICKNESS 0.6 MM

FIELD QUALITY

SEXTUPOLE HARMONIC 0.0

(6 THETA/2 THETA) (SHAPE POLE TIP TO ELIMINATE)



ALL OTHER HARMONICS < 10<sup>-4</sup>

MAX. VACUUM PRESSURE (N2 EQU.) 10<sup>-10</sup> TORR

---

MAX. INTENSITY (PARTICLES PER PULSE)

---

FOR PROTONS	1 - 1.5 x 10 <sup>13</sup>
FOR POL PROTONS	10 <sup>12</sup>
FOR HEAVY IONS	2 x 10 <sup>11</sup> / Z

SEXTUPOLES

---

LOCATION	1,7 (SF), 2,4 (SD)
NUMBER	24 (12 SF + 12 SD)
LENGTH	10 CM
APERTURE	16.52 CM

AT 1 GEV WITH INTEGRATED STRENGTH [T/M]: 1.7 , 1.761

INJECTION POLE TIP FIELD [KG]

---

FOR PROTONS (INCLUDING POL PROTONS)	0.44139	0.45761
FOR HEAVY IONS	0.02956 A/Q	0.03065 A/Q

EJECTION POLE TIP FIELD [KG]

---

FOR PROTONS (INCLUDING POL PROTONS)	1.159	1.2015
FOR HEAVY IONS	3.4246	3.5504

ACKNOWLEDGEMENT:  
-----

We acknowledge the efforts of G. F. Dell, E. Courant and other members of the Booster Design study group.

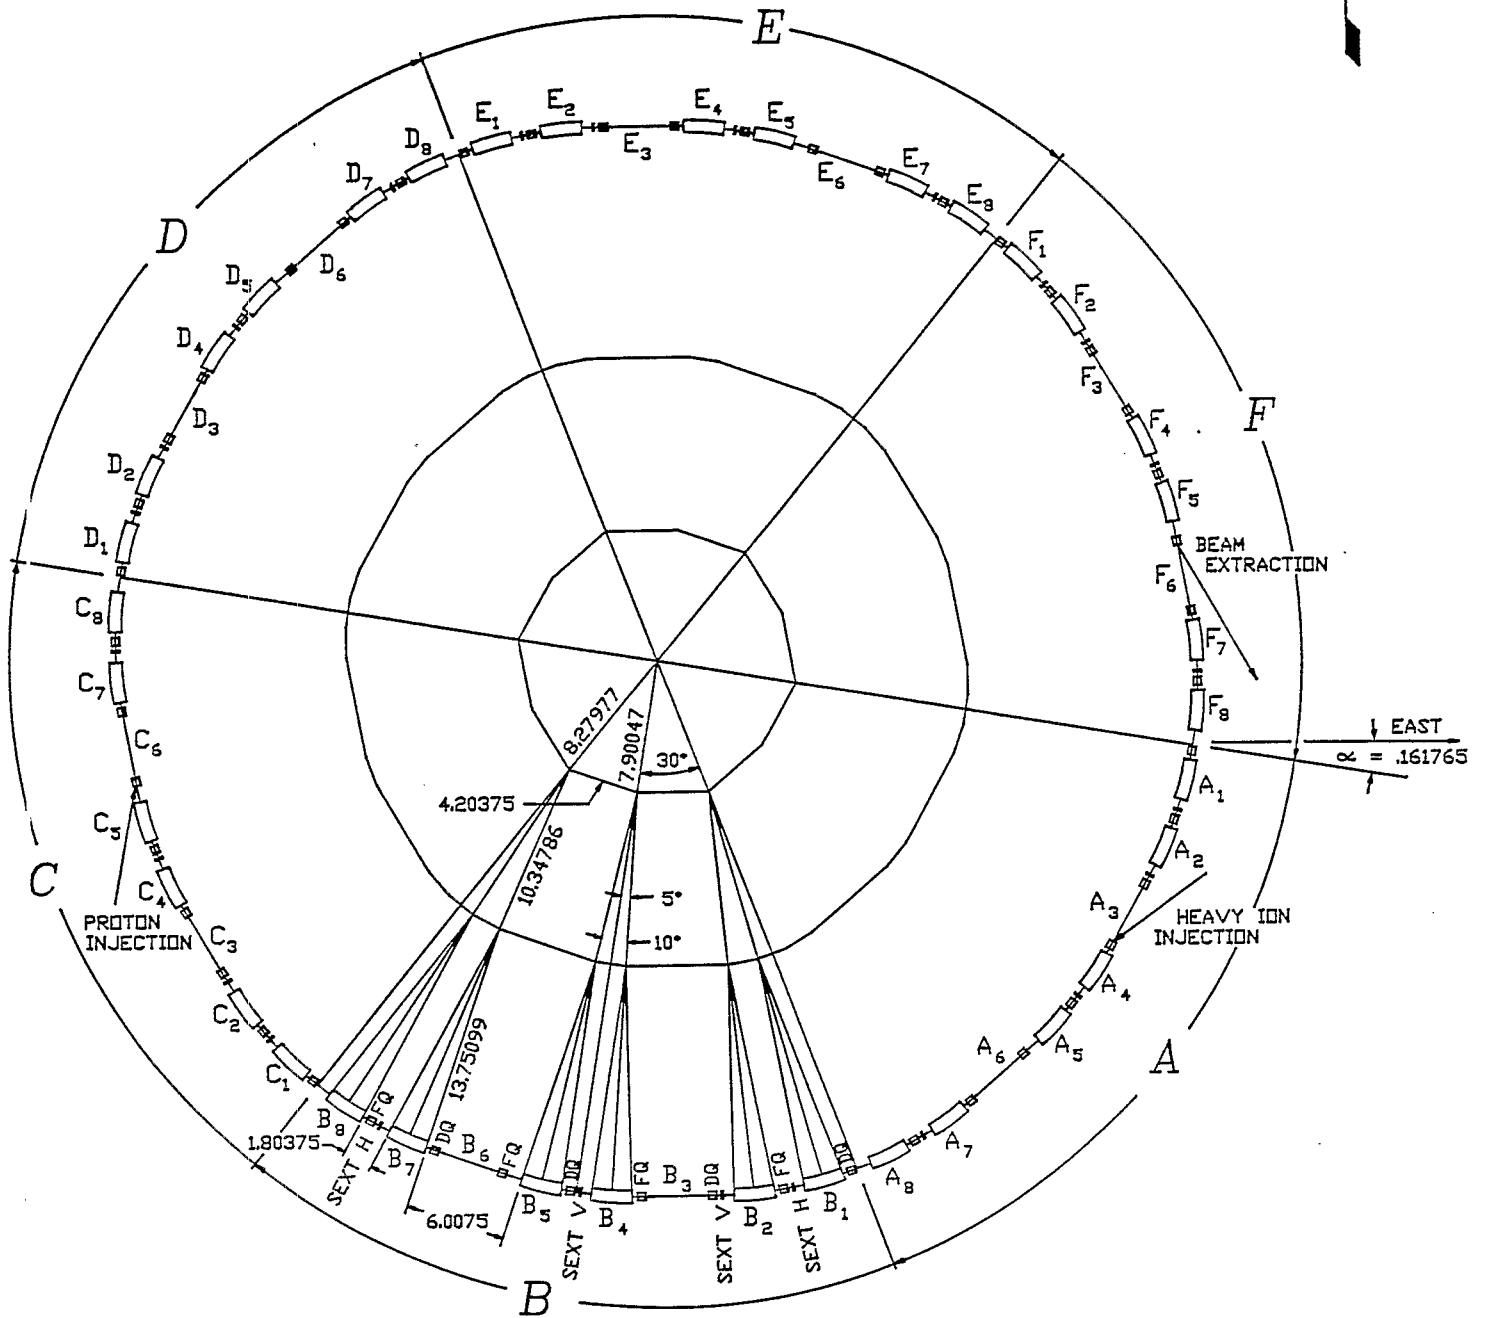


Fig. 1 The Booster Lattice

0 5  
METERS  
NOTE: ALL DIMENSIONS ARE IN METERS