

## Booster Parameter List with 40 kV rf Voltage

Z. Parsa

March 1986

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Accelerator Division  
Alternating Gradient Synchrotron Department  
BROOKHAVEN NATIONAL LABORATORY  
Associated Universities, Inc.  
Upton, New York 11973

Accelerator Division  
Technical Note

No. 244

Booster Parameter List with 40 kV rf Voltage

Z. Parsa

March 10, 1986

## ABSTRACT

THIS NOTE DESCRIBES THE PARAMETER LIST FOR THE AGS-BOOSTER, WITH 40 KV RF VOLTAGE FOR PROTONS; AND THE CHROMATICITY CORRECTION 1,2,4,7 SEXTUPOLE CONFIGURATION. A SCHEMATIC LAYOUT OF THE LATTICE AND ITS SUPERPERIODS ARE ALSO INCLUDED.

## INTRODUCTION

---

This note describes the parameter list of the AGS-Booster with the 40 KV RF Voltage for protons; and tunes of 4.82 and 4.83. The chromaticity correction sextupole configuration is 1,2,4,7 and the eddy current sextupole strengths are taken to be 0.12 Tesla per meter square [1]. A schematic layout of the Booster lattice and its superperiods are also included [2-4]. In section II the present values of the Booster parameters are tabulated, [note that, the values listed are for theoretical calculations]. This updates the Booster parameter list given in Reference 5.

---

### References:

1. Calculation of Eddy Currents, BST/TN 4, G. Morgan and S. Kahn, (January 1986).
2. Booster Lattice, Booster Tech. Note No. 1, E. Courant and Z. Parsa, (January 15, 1986).
3. Chromaticity Correction for the AGS - Booster with 1,2,4,7 Sextupole Configuration, BST/ TN 17, E. Courant and Z. Parsa, (March 5, 1986).
4. Booster Coordinates, Booster Tech. Note No. 6, Z. Parsa, (January 28, 1986).
5. AGS - Booster Parameter List, Booster Tech. Note No. 2, Z. Parsa, (January 16, 1986).

AGS BOOSTER PARAMETER LIST  
-----

ENERGY [MeV]  
-----

INJECTION:  
-----

PROTONS (INCLUDING POL PROTONS) 200 MeV

HEAVY IONS > 1 MeV/AMU

[POL == POLARIZED]

EJECTION (MAXIMUM)  
-----

PROTONS (INCLUDING POL PROTONS) 1 GeV

HEAVY IONS P = 5 Q/A GeV/AMU-C

[Q is the charge of the Heavy Ions (whether fully stripped or not) delivered from the Tandem.]

LATTICE  
-----

CIRCUMFERENCE 201.78 M (1/4 AGS)

PERIODICITY 6

NUMBER OF CELLS 24 FODO  
[SEPARATE FUNCTION,  
MISSING DIPOLS]

LENGTH 8.4075 M

PHASE ADVANCE/CELL 72.3 , 72.45

TUNES QX= 4.82, QY= 4.83

BETAX MAX/MIN 13.865/3.5754

BETAY MAX/MIN 13.644/3.7033

XP MAX 2.9515 M

TRANSITION GAMMA 4.8812

RF SYSTEM

NUMBER OF STATIONS (3 IN TOTAL)

1 FOR PROTONS (INCLUDING POL PROTONS)  
 2 FOR HEAVY IONS  
 [where POL== POLARIZED]

HARMONIC NUMBER

3 FOR PROTONS (INCLUDING POL PROTONS)  
 3 FOR HEAVY IONS (1 FOR RHIC)

FREQUENCY RANGE (MHz)

FOR PROTONS (INCLUDING POL PROTONS) 2.5 - 3.9  
 FOR HEAVY IONS 0.178 - 2.5 (.06 - .84 FOR RHIC)

PEAK RF VOLTAGE [KV]

FOR PROTONS (INCLUDING POL PROTONS) 40  
 FOR HEAVY IONS 17

ACCELERATION TIME [M-SEC]

FOR PROTONS (INCLUDING POL PROTONS) 50  
 FOR HEAVY IONS 500

REPETITION RATE

FOR PROTONS 10 Hz (4 PULSES/AGS PULSE)  
 FOR POL PROTONS 1 Hz (1 PULSE/AGS PULSE)  
 FOR HEAVY IONS 1 Hz (1 PULSE/AGS PULSE)

DIPOLES

[DIPOLES ARE CURVED AND WEDGED FOR 0 ENTRANCE ANGLE]

NUMBER 36  
 LENGTH (MAGNETIC) 2.4 M  
 GAP 82.55 MM  
 GAP VACUUM CHAMBER 66 MM  
 -4  
 GOOD FIELD REGION (<10 ) 16 X 6.6 CM

INJECTION FIELD [KG]

FOR PROTONS (INCLUDING POL PROTONS) 1.5633  
 FOR HEAVY IONS 0.1047 A/Q

EJECTION FIELD [KG]  
 -----

FOR PROTONS (INCLUDING POL PROTONS) 4.1049  
 FOR HEAVY IONS 12.129

LAMINATION THICKNESS 1.5 MM  
 [0.6 MM AROUND ENDS]

QUADRUPOLES  
 -----

NUMBER 48  
 LENGTH (MAGNETIC) 0.50375 M  
 APERTURE 16.52 CM  
 VACUUM CHAMBER AP. 15.5 CM  
 [AP.== APERTURE]

WITH GF = 11.999 [KG/M] , GD = 12.369 [KG/M]

INJECTION POLE TIP FIELD [KG]  
 -----

FOR PROTONS (INCLUDING POL PROTONS)

BF = 0.98992 , BD = 1.0204

FOR HEAVY IONS

BF = 0.06635 A/Q , BD = 0.0683 A/Q

EJECTION POLE TIP FIELD [KG]  
 -----

FOR PROTONS (INCLUDING POL PROTONS)

BF = 2.5994 , BD = 2.6795

FOR HEAVY IONS

BF = 7.6805 , BD = 7.917

LAMINATION THICKNESS 0.6 MM

FIELD QUALITY

SEXTUPOLE HARMONIC 0.0

(6 THETA/2 THETA) (SHAPE POLE TIP TO ELIMINATE)



ALL OTHER HARMONICS  $< 10^{-4}$

MAX. VACUUM PRESSURE (N<sub>2</sub> EQU.)  $3 \times 10^{-11}$  TORR

---

MAX. INTENSITY (PARTICLES PER PULSE)

---

FOR PROTONS	1 - 3 x 10 <sup>13</sup>
FOR POL PROTONS	10 <sup>12</sup>
FOR HEAVY IONS	10 <sup>11</sup> A/Q <sup>2</sup>

SEXTUPOLES

---

LOCATION	1,7 (SF), 2,4 (SD)
NUMBER	24 (12 SF + 12 SD)
LENGTH	10 CM
APERTURE	16.52 CM

AT 1 GEV WITH INTEGRATED STRENGTH [T/M]: 1.761

---

INJECTION POLE TIP FIELD [KG]

---

FOR PROTONS (INCLUDING POL PROTONS)	0.45761
FOR HEAVY IONS	0.03065 A/Q

EJECTION POLE TIP FIELD [KG]

---

FOR PROTONS (INCLUDING POL PROTONS)	1.2015
FOR HEAVY IONS	3.5504

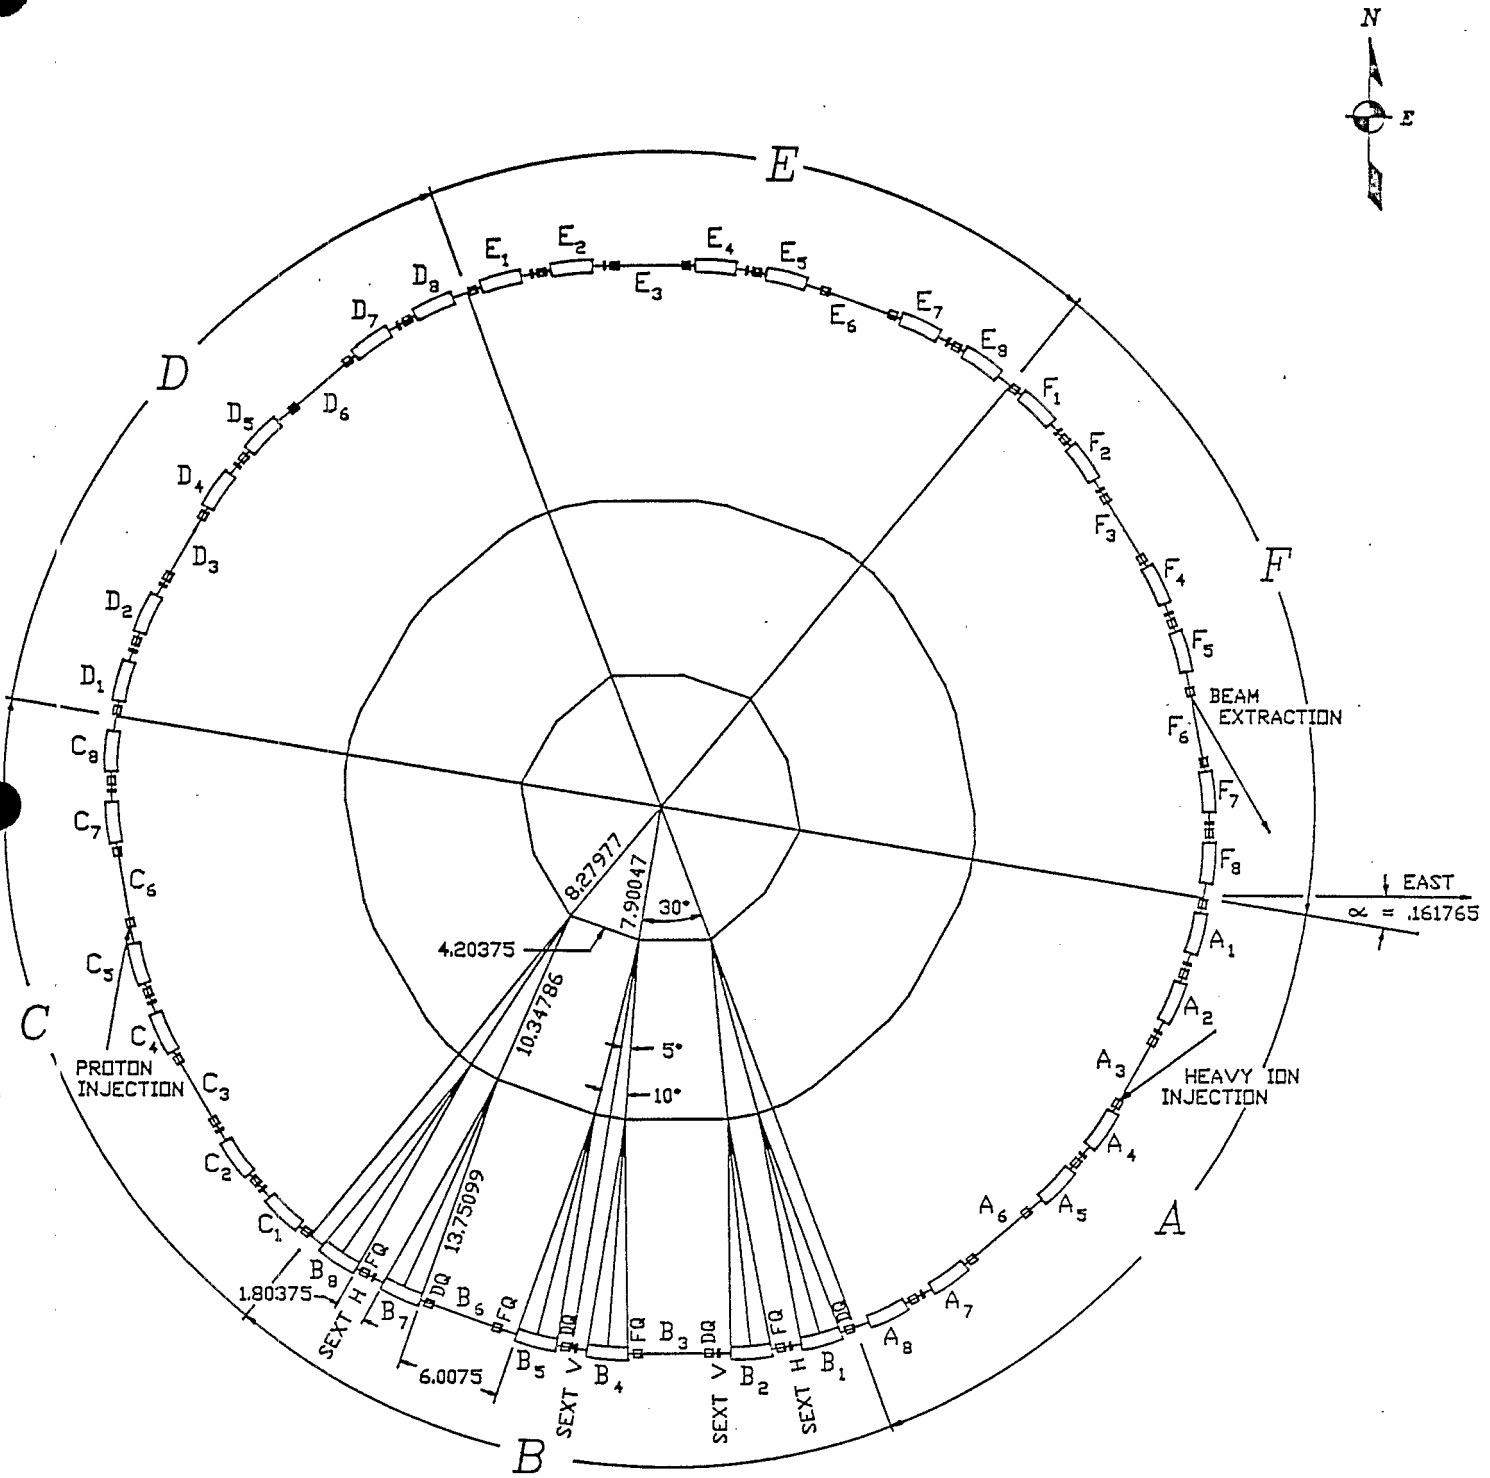


Fig. 1 The Booster Lattice

0 5  
METERS

NOTE: ALL DIMENSIONS ARE IN METERS

ACKNOWLEDGEMENT:

We acknowledge the efforts of E. Courant, members of the Booster Design study group, and R. Alvino's assistance.