

EDDY CURRENTS IN THE TRANSITION JUMP QUADRUPOLE VACUUM CHAMBERS

A. Feltman

November 1989

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Accelerator Division
Alternating Gradient Synchrotron Department
BROOKHAVEN NATIONAL LABORATORY
Upton, New York 11973

Accelerator Division
Technical Note

AGS/AD/Tech. Note No. 332

**EDDY CURRENTS IN THE TRANSITION JUMP
QUADRUPOLE VACUUM CHAMBERS**

A. Feltman, J. Funaro, L. Ratner, W. van Asselt, P. Yamin

November 15, 1989

Introduction

A fast transition jump is being installed in the AGS. Quadrupoles located in the "17" straight sections of the A, C, E, G, I, and K superperiods will be excited with a 60 msec risetime. This will raise the AGS transition energy by about 3 GeV. The transition energy will then be abruptly lowered during a 500 μ sec de-excitation as the AGS itself passes through transition. The effect of these manipulations will be to speed up passage through transition by a factor of 30 to 100 if the magnetic fields in the quadrupoles follow the excitation currents. This will drastically lower beam losses at this inherently unstable point. However, eddy currents induced in the vacuum chamber by the rapid de-excitation will reduce the amount of speed up. The purpose of these studies was to investigate the effects of eddy currents in the vacuum chamber on the pulsed magnetic field in a transition jump quadrupole.

Procedure

A simplified electrical schematic is shown in Figure 1a, and the mechanical arrangement is illustrated in Figure 1b. However, a prototype of the GTO switch which will be used in final installation was used for these tests. The quadrupole was energized to 3000 A by closing the switch (since $R \gg r$, little current flows in resistor). Upon opening the switch, the current was diverted to the bypass resistor and the quadrupole field decayed. An air core pick-up coil was placed in the magnet, about 1" from a pole tip, and the voltage induced in this coil during the decay was displayed

on an oscilloscope. The mechanical configuration was such that the coil did not have to be disturbed in order to change the 2'-3' sections of vacuum pipe which were used in these tests.

Results

Figure 2a is a photograph of the oscilloscope showing current in R and the coil voltage with no vacuum pipe. The pick-up coil (which is sensitive to dB/dt), gives a maximum output of 6.210 V at no delay, Δ , after $(di/dt)_{\max}$. Figure 2b shows similar data, but for a 0.125" aluminum pipe. The maximum coil output is 0.550 V, which occurs 1,000 μsecs after the maximum di/dt . Table I summarizes all the data which we have taken.

TABLE I
Eddy Current Data


Pipe Material	$V_{\max}$ (V)	$V_{\max}/V_{\max \text{ air}}$	Δ (μsecs)
Air	6.210	1.0	0
0.020" Inconel	5.57	0.90	0
0.025" Stainless	4.70	0.76	50
0.062" Stainless	4.24	0.68	100
0.125" Aluminum	0.55	0.09	1000

Conclusions


We conclude that the use of the present AGS vacuum chambers, which are 0.062" stainless steel, will degrade the speed of the transition jump by approximately 32%. This is acceptable for the short term. However, in order to achieve the maximum benefits from the system, it would be desirable to go to a thin Inconel chamber.

Acknowledgments


We would like to thank E. Rodger and K. Welch for supplying some of the vacuum chambers. The design of the GTO pulser is due to K. Hughes.

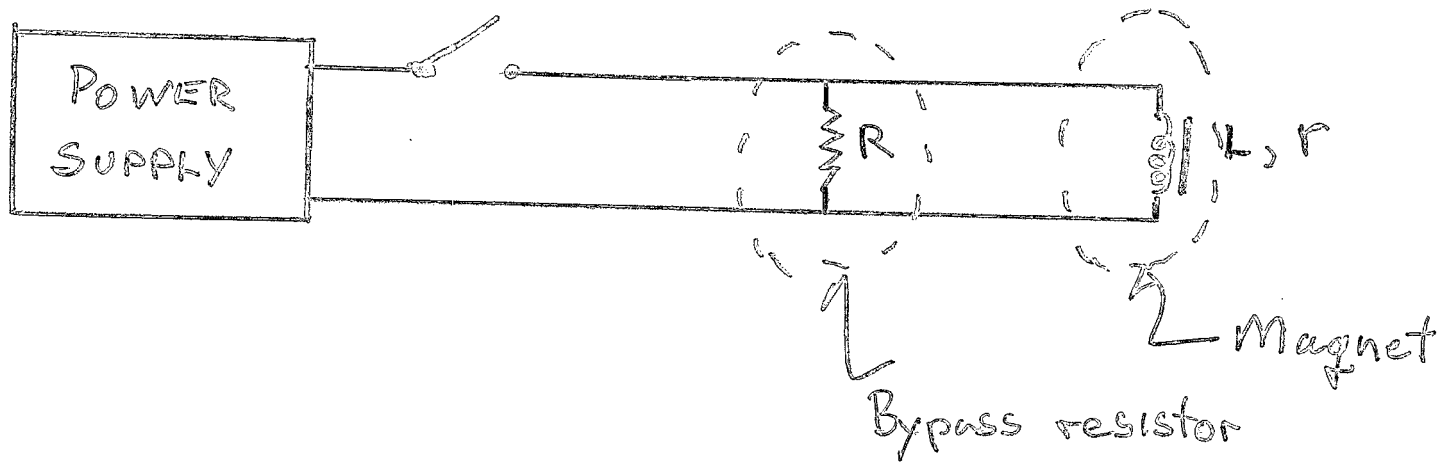

(a)

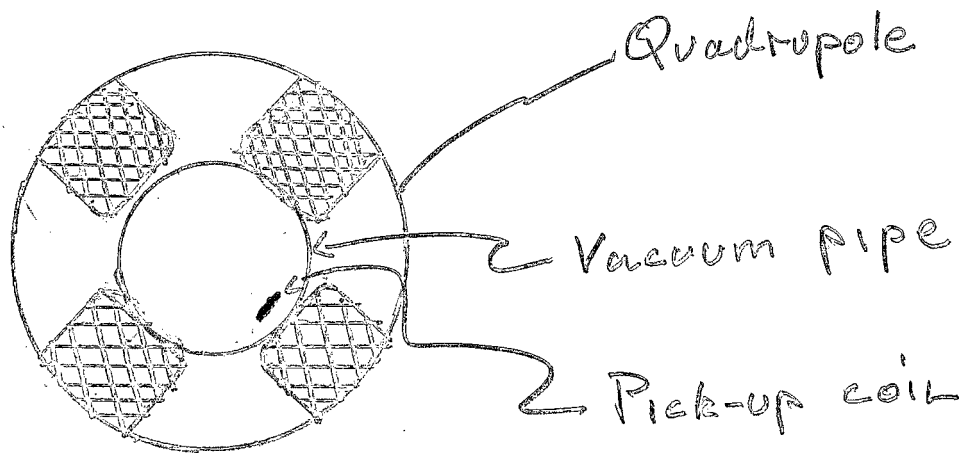


(b)

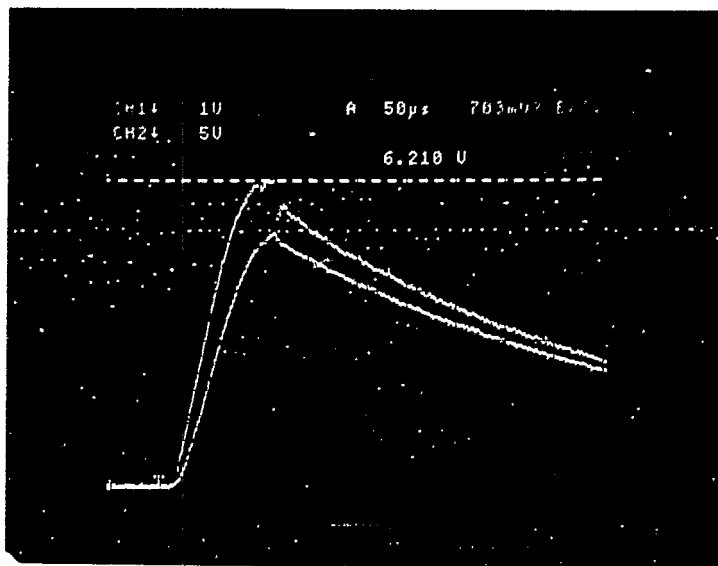

AIR 3000A B 6.21V

(a)

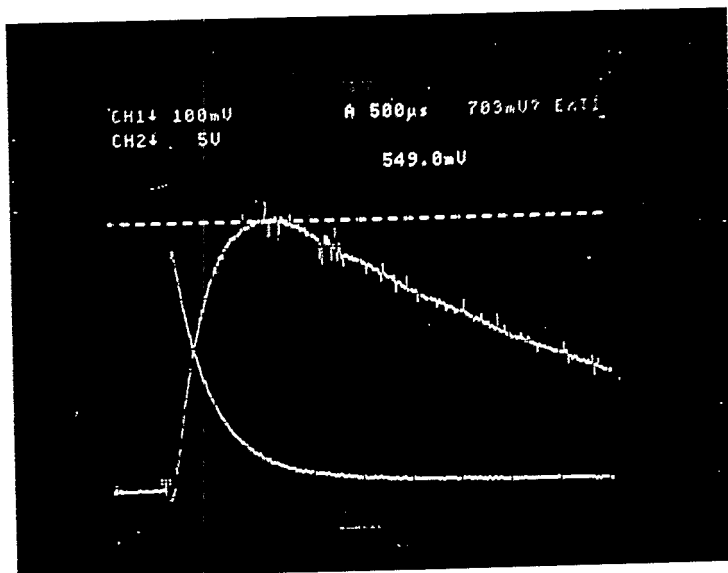

1/2" A2

(b)

Fig. 2