



BNL-104714-2014-TECH

AGS/AD/Tech Note No. 297; BNL-104714-2014-IR

# COMPUTER MODELS OF THE AGS, I : The D. C. Bare Machine at High Fields

E. Auerbach

March 1988

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Accelerator Division  
Alternating Gradient Synchrotron Department  
BROOKHAVEN NATIONAL LABORATORY  
Associated Universities, Inc.  
Upton, New York 11973

Accelerator Division  
Technical Note

AGS/AD/Tech. Note No. 297

COMPUTER MODELS OF THE AGS, I:  
The D. C. "Bare" Machine at High Fields

E. Auerbach

March 7, 1988

This is the first of a series of computer model calculations of the transverse parameters of the AGS. We begin at high fields (beam momenta 15 GeV/c and greater) and the machine consisting of the main magnets only and without regard to the effects of time variation in the magnetic fields (no B-dot effects). Subsequent papers will add those effects, and then the high field correction system (quadrupoles and sextupoles) to obtain the "full" machine.

Calculation of the Courant-Snyder and associated parameters are presented both in tabular and graphical form; the input to the computer model program (MAD) which generated these results is also described.

## INTRODUCTION

We present here, in both tabular and graphical form, values of the Courant-Snyder[1] and related parameters calculated using the accelerator modelling program MAD[2].

In this first set of calculations, descriptions of the Bare AGS (i.e., with main magnets only) at high fields (15-32 GeV/c) in an unramped state have been developed. The main magnets have both quadrupole and sextupole terms, but the effects of  $dB/dt$  are ignored. Later calculations will include effects of ramping and, beyond that, the inclusion of the high field correctors: dipoles, quadrupoles and sextupoles. Subsequently, we expect to do the same at low (injection) fields.

We are concerned here with transverse parameters: hence subscripts  $-x$  (horizontal) and  $-y$  (vertical) can be applied to most symbols. These are functions of the distance,  $s$ , along the machine. The zeros of  $x$  and  $y$  are on the design central orbit -- the path along which  $s$  is measured.

The important Courant-Snyder parameter is  $\beta$ , which describes the beam amplitude. Beam sizes and oscillations in them are proportional to  $\beta^{1/2}$ .  $\beta$  must be calculated for the particular machine lattice.

Associated parameters are  $\alpha$  and  $\gamma$ . They are related by:

$$\alpha = -\frac{1}{2}\beta' = -\frac{1}{2} \frac{d\beta}{ds}$$

$$\gamma = \beta'(1 + \alpha^2)$$

The phase parameter  $\mu$  is obtained from the relation:

$$2\pi\mu = \int_{s_0}^{s_1} ds/\beta$$

where the choice of  $s_0$  is arbitrary. The tune is the integral of  $1/\beta$  around the accelerator:

$$2\pi Q = 2\pi\nu = \oint ds/\beta$$

Dispersion,  $dx$ , is defined as the transverse displacement of the beam per unit change in momentum from the nominal (central orbit) momentum:

$$dx = \Delta x / \frac{\Delta p}{p}$$

Thus, a dispersion of 1 meter produces a change in the transverse coordinate of 1 mm for a 0.1% momentum change (1/1000).

These quantities are calculated in the "TWISS" procedure of MAD.

I. MAD INPUT for D.C. "Bare Machine" -- High Fields: 15-32 GeV/c

A. Full Input for "TWISS" Run at 15 GeV/c with Print requested for 1st Superperiod only. (See MAD Input Manual [2] for full description of input lines.)

```
TITLE!
P150D      (15 GeV/c)
!
CONSTANT, K1AF = 0.04874640          !
CONSTANT, K1AD = -0.0486922         ! replace
CONSTANT, K1BF = K1AF               !
CONSTANT, K1BD = K1AD               ! by
CONSTANT, K1CF = 0.04855743          !
CONSTANT, K1CD = -0.0484907          ! appropriate
CONSTANT, K2AF = -0.00729            !
CONSTANT, K2AD = -0.00715            ! block
CONSTANT, K2BF = -0.0087              !
CONSTANT, K2BD = -0.00857             ! for other
CONSTANT, K2CF = -0.00961             !
CONSTANT, K2CD = -0.00939             ! energies.
!
CONSTANT, CONV= 0.0254                ! inches to meters
CONSTANT, LENA = 94*CONV
CONSTANT, LENB = 79*CONV
CONSTANT, LENC = 94*CONV
CONSTANT, ANGA = 0.0279650307
CONSTANT, ANGB = 0.0235023009
CONSTANT, ANGC = 0.0279650307
!
DRIFT, D2S, L=23.99664 *CONV
DRIFT, D2T, L=23.99548 *CONV
DRIFT, D2L, L=23.99428 *CONV
DRIFT, D2H, L=29.99714 *CONV
DRIFT, D5L, L=59.99428 *CONV
DRIFT, D10, L=59.99367 *CONV
!
!
RBEND, AF, L=LENA, ANGLE=ANGA, K1=K1AF, K2=K2AF
RBEND, AD, L=LENA, ANGLE=ANGA, K1=K1AD, K2=K2AD
RBEND, BF, L=LENB, ANGLE=ANGB, K1=K1BF, K2=K2BF
RBEND, BD, L=LENB, ANGLE=ANGB, K1=K1BD, K2=K2BD
RBEND, CF, L=LENC, ANGLE=ANGC, K1=K1CF, K2=K2CF
RBEND, CD, L=LENC, ANGLE=ANGC, K1=K1CD, K2=K2CD
!
!      sublines
!
L1A: LINE = (D10,BF,D2S,BF,D2T,CD,D5L,CD,D2L,AF,D2H)
L2A: LINE = (D10,BD,D2S,BD,D2T,CF,D5L,CF,D2L,AD,D2H)
!
!      superperiods and machine
!
LINE, SUPER = (L1A,-L1A, L2A,-L2A)
LINE, AGS = (12 * SUPER)
!
!
USE, (AGS)
!
PRINT, SUPER[1]
!
TWISS, DELTAP=0.
stop!
```

B. Changes in Constants defining quadrupole and sextupole strengths for main magnets at other energies (replaces area noted in 15 GeV/c input, preceding page):

P200D (20 GeV/c)

!  
CONSTANT, K1AF = 0.04869689  
CONSTANT, K1AD = -0.0486381  
CONSTANT, K1BF = K1AF  
CONSTANT, K1BD = K1AD  
CONSTANT, K1CF = 0.04852880  
CONSTANT, K1CD = -0.0484573  
CONSTANT, K2AF = -0.00841  
CONSTANT, K2AD = -0.00839  
CONSTANT, K2BF = -0.00996  
CONSTANT, K2BD = -0.00994  
CONSTANT, K2CF = -0.01045  
CONSTANT, K2CD = -0.01031

P250D (25 GeV/c)

!  
CONSTANT, K1AF = 0.04855992  
CONSTANT, K1AD = -0.0484901  
CONSTANT, K1BF = K1AF  
CONSTANT, K1BD = K1AD  
CONSTANT, K1CF = 0.04841473  
CONSTANT, K1CD = -0.0483322  
CONSTANT, K2AF = -0.01136  
CONSTANT, K2AD = -0.01148  
CONSTANT, K2BF = -0.01333  
CONSTANT, K2BD = -0.01341  
CONSTANT, K2CF = -0.01320  
CONSTANT, K2CD = -0.01318

P270D (27 GeV/c)

!  
CONSTANT, K1AF = 0.04844988  
CONSTANT, K1AD = -0.0483751  
CONSTANT, K1BF = K1AF  
CONSTANT, K1BD = K1AD  
CONSTANT, K1CF = 0.04829478  
CONSTANT, K1CD = -0.0482072  
CONSTANT, K2AF = -0.01435  
CONSTANT, K2AD = -0.01451  
CONSTANT, K2BF = -0.01655  
CONSTANT, K2BD = -0.01667  
CONSTANT, K2CF = -0.01631  
CONSTANT, K2CD = -0.01632

P290D (29 GeV/c)

!  
CONSTANT, K1AF = 0.04824669  
CONSTANT, K1AD = -0.0481701  
CONSTANT, K1BF = K1AF  
CONSTANT, K1BD = K1AD  
CONSTANT, K1CF = 0.04808474  
CONSTANT, K1CD = -0.0479969  
CONSTANT, K2AF = -0.01984  
CONSTANT, K2AD = -0.01991  
CONSTANT, K2BF = -0.02221  
CONSTANT, K2BD = -0.02226  
CONSTANT, K2CF = -0.022  
CONSTANT, K2CD = -0.02189

P320D (32 GeV/c)

```
CONSTANT, K1AF = 0.04755687
CONSTANT, K1AD = -0.0474825
CONSTANT, K1BF = K1AF
CONSTANT, K1BD = K1AD
CONSTANT, K1CF = 0.04734094
CONSTANT, K1CD = -0.0472565
CONSTANT, K2AF = -0.03396
CONSTANT, K2AD = -0.03404
CONSTANT, K2BF = -0.0365
CONSTANT, K2BD = -0.03656
CONSTANT, K2CF = -0.03691
CONSTANT, K2CD = -0.03676
```

COMMENTS:

Strengths:

The constants K1xx and K2xx give the quadrupole and sextupole strengths of the respective magnets for the D. C. machine. Eddy currents induced by changing magnetic fields will alter the sextupole strengths. MAD does provide for inclusion of higher multipoles, but we do not consider them at this time.

Magnets:

Magnets are named with the following conventions: the 2nd letter (F or D) indicates focussing or defocussing in the horizontal plane; the first letter is:

- A for long open magnets (at "05", "06", "15" and "16"),
- B for short open magnets (at "01", "02", "09", "10", "11", "12", "19" and "20"),
- C for long closed magnets (at "03", "04", "07", "08", "13", "14", "17" and "18").

Straight Sections:

D2S refers to the 2 ft. straight sections at "01", "09", "11" and "19".

D2L refers to the 2 ft. straight sections at "02", "08", "12" and "18".

D2T refers to the 2 ft. straight sections at "04", "06", "14" and "16".

D5L refers to the 5 ft. straight sections at "03", "07", "13" and "17".

D2H is half of the "05" and "15" straight sections.

D10 is half of the "10" and "20" straight sections.

To insert additional elements in the straight sections, it is necessary to replace these by an insert containing the appropriate element and the remaining drift lengths. E. g., an 8" quadrupole placed in an "08" 2 ft. straight section might be described by:

INS08 = (D1X, QF8, D1Y),

where QF8 describes that "quad" and D1X, D1Y are drift spaces.

Superperiods:

The superperiod of the "Bare" machine consists of the magnets and straight sections enumerated in order; in a fuller machine it may be necessary to define several different superperiods as the list of additional elements (in the straight sections) will be different. In that case, the AGS will be defined by listing the various superperiods rather than by the simple statement:

AGS = (12 \* SUPER) .

II. SAMPLE MAD OUTPUT (from file "mad.out")  
RUN: P320D (32 GeV/c)

Note that only Superperiod "A" is given in detail, but that the last line (END USE...01) is for the end of the whole (12 superperiod) machine and that the tunes, etc. are also for the whole machine --- i. e., Q-x is 12 times the value of MUX at the end of the 1st sector, etc. Note further that since this is an "on-momentum" calculation with no magnet displacements (or misalignments) specified in the input, X(CO), X'(CO), Y(CO), Y'(CO) are 0. at all locations.

... SEARCHING FOR CLOSED ORBIT FOR BEAM LINE "USE...01", DELTA(P)/P = 0.000000, SYMM = F  
... ITER. X PX Y PY ERROR  
... 1 0.000000 0.000000 0.000000 0.000000 0.000000E+00  
1 P320D 32 GeV/c "MAD" VERSION: 6.01/01 RUN: 01/29/88 09:07:23  
LINEAR LATTICE PARAMETERS FOR BEAM LINE: "USE...01", RANGE = "#S / #E"  
DELTA(P)/P = 0.000000 SYMM = F PAGE 1

POS. NO.	ELEMENT NAME	SEQUENCE NO.	I	H O R I Z O N T A L						I	V E R T I C A L							
			DIST [M]	I [M]	BETAY	ALFAX	MUX [2PI]	X(CO) [MM]	X'(CO) [MRAD]	DX [M]	DX' [M]	I [M]	BETAY	ALFAX	MUY [2PI]	Y(CO) [MM]	Y'(CO) [MRAD]	DY [M]
BEGIN USE...01	1	0.000	15.773	-1.298	0.000	0.000	0.000	1.916	0.153	15.697	1.293	0.000	0.000	0.000	0.000	0.000	0.000	0.000
BEGIN SUPER	1	0.000	15.773	-1.298	0.000	0.000	0.000	1.916	0.153	15.697	1.293	0.000	0.000	0.000	0.000	0.000	0.000	0.000
BEGIN L1A	1	0.000	15.773	-1.298	0.000	0.000	0.000	1.916	0.153	15.697	1.293	0.000	0.000	0.000	0.000	0.000	0.000	0.000
1 D10	1	1.524	20.125	-1.558	0.014	0.000	0.000	2.150	0.153	12.152	1.034	0.018	0.000	0.000	0.000	0.000	0.000	0.000
2 BF	1	3.530	22.637	0.387	0.028	0.000	0.000	2.268	-0.037	10.657	-0.242	0.047	0.000	0.000	0.000	0.000	0.000	0.000
3 D2S	1	4.140	22.184	0.356	0.032	0.000	0.000	2.246	-0.037	10.989	-0.302	0.056	0.000	0.000	0.000	0.000	0.000	0.000
4 BF	2	6.147	17.139	1.996	0.048	0.000	0.000	1.986	-0.218	15.024	-1.835	0.081	0.000	0.000	0.000	0.000	0.000	0.000
5 D2T	1	6.756	14.814	1.819	0.054	0.000	0.000	1.853	-0.218	17.369	-2.012	0.087	0.000	0.000	0.000	0.000	0.000	0.000
6 CD	1	9.144	10.660	0.075	0.086	0.000	0.000	1.597	0.000	22.566	0.035	0.106	0.000	0.000	0.000	0.000	0.000	0.000
7 D5L	1	10.667	10.649	-0.068	0.109	0.000	0.000	1.597	0.000	22.562	-0.033	0.117	0.000	0.000	0.000	0.000	0.000	0.000
8 CD	2	13.055	14.761	-1.806	0.141	0.000	0.000	1.850	0.217	17.356	2.013	0.135	0.000	0.000	0.000	0.000	0.000	0.000
9 D2L	1	13.665	17.069	-1.982	0.147	0.000	0.000	1.982	0.217	15.011	1.835	0.141	0.000	0.000	0.000	0.000	0.000	0.000
10 AF	1	16.052	22.190	0.034	0.166	0.000	0.000	2.247	0.000	10.830	0.071	0.172	0.000	0.000	0.000	0.000	0.000	0.000
11 D2H	1	16.814	22.164	0.000	0.171	0.000	0.000	2.247	0.000	10.776	0.000	0.184	0.000	0.000	0.000	0.000	0.000	0.000
END L1A	1	16.814	22.164	0.000	0.171	0.000	0.000	2.247	0.000	10.776	0.000	0.184	0.000	0.000	0.000	0.000	0.000	0.000
BEGIN L1A	2	16.814	22.164	0.000	0.171	0.000	0.000	2.247	0.000	10.776	0.000	0.184	0.000	0.000	0.000	0.000	0.000	0.000
12 D2H	2	17.576	22.190	-0.034	0.177	0.000	0.000	2.247	0.000	10.830	-0.071	0.195	0.000	0.000	0.000	0.000	0.000	0.000
13 AF	2	19.964	17.069	1.982	0.195	0.000	0.000	1.982	-0.217	15.011	-1.835	0.226	0.000	0.000	0.000	0.000	0.000	0.000
14 D2L	2	20.573	14.761	1.806	0.202	0.000	0.000	1.850	-0.217	17.356	-2.013	0.232	0.000	0.000	0.000	0.000	0.000	0.000
15 CD	3	22.961	10.649	0.068	0.233	0.000	0.000	1.597	0.000	22.562	0.033	0.251	0.000	0.000	0.000	0.000	0.000	0.000
16 D5L	2	24.485	10.660	-0.075	0.256	0.000	0.000	1.597	0.000	22.566	-0.035	0.261	0.000	0.000	0.000	0.000	0.000	0.000
17 CD	4	26.872	14.814	-1.819	0.288	0.000	0.000	1.853	0.218	17.369	2.012	0.280	0.000	0.000	0.000	0.000	0.000	0.000
18 D2T	2	27.482	17.139	-1.996	0.294	0.000	0.000	1.986	0.218	15.024	1.835	0.286	0.000	0.000	0.000	0.000	0.000	0.000
19 BF	3	29.488	22.184	-0.356	0.310	0.000	0.000	2.246	0.037	10.989	0.302	0.312	0.000	0.000	0.000	0.000	0.000	0.000
20 D2S	2	30.098	22.637	-0.387	0.314	0.000	0.000	2.268	0.037	10.657	0.242	0.321	0.000	0.000	0.000	0.000	0.000	0.000
21 BF	4	32.104	20.125	1.558	0.329	0.000	0.000	2.150	-0.153	12.152	-1.034	0.350	0.000	0.000	0.000	0.000	0.000	0.000
22 D10	2	33.628	15.773	1.298	0.343	0.000	0.000	1.916	-0.153	15.697	-1.293	0.367	0.000	0.000	0.000	0.000	0.000	0.000
END L1A	2	33.628	15.773	1.298	0.343	0.000	0.000	1.916	-0.153	15.697	-1.293	0.367	0.000	0.000	0.000	0.000	0.000	0.000
BEGIN L2A	1	33.628	15.773	1.298	0.343	0.000	0.000	1.916	-0.153	15.697	-1.293	0.367	0.000	0.000	0.000	0.000	0.000	0.000
23 D10	3	35.152	12.212	1.039	0.360	0.000	0.000	1.682	-0.153	20.033	-1.552	0.381	0.000	0.000	0.000	0.000	0.000	0.000
24 BD	1	37.159	10.709	-0.243	0.389	0.000	0.000	1.551	0.021	22.537	0.385	0.396	0.000	0.000	0.000	0.000	0.000	0.000
25 D2S	3	37.768	11.042	-0.303	0.398	0.000	0.000	1.564	0.021	22.087	0.354	0.400	0.000	0.000	0.000	0.000	0.000	0.000
26 BD	2	39.775	15.092	-1.842	0.424	0.000	0.000	1.784	0.202	17.063	1.988	0.416	0.000	0.000	0.000	0.000	0.000	0.000
27 D2T	3	40.384	17.446	-2.020	0.430	0.000	0.000	1.907	0.202	14.747	1.811	0.422	0.000	0.000	0.000	0.000	0.000	0.000
28 CF	1	42.772	22.662	0.035	0.448	0.000	0.000	2.148	-0.004	10.608	0.076	0.454	0.000	0.000	0.000	0.000	0.000	0.000
29 D5L	3	44.296	22.658	-0.032	0.459	0.000	0.000	2.141	-0.004	10.598	-0.069	0.477	0.000	0.000	0.000	0.000	0.000	0.000
30 CP	2	46.683	17.431	2.021	0.477	0.000	0.000	1.881	-0.208	14.697	-1.799	0.509	0.000	0.000	0.000	0.000	0.000	0.000
31 D2L	3	47.293	15.076	1.843	0.483	0.000	0.000	1.754	-0.208	16.997	-1.975	0.515	0.000	0.000	0.000	0.000	0.000	0.000
32 AD	1	49.680	10.880	0.070	0.514	0.000	0.000	1.511	0.000	22.101	0.035	0.534	0.000	0.000	0.000	0.000	0.000	0.000
33 D2H	3	50.442	10.826	0.000	0.525	0.000	0.000	1.511	0.000	22.075	0.000	0.539	0.000	0.000	0.000	0.000	0.000	0.000
END L2A	1	50.442	10.826	0.000	0.525	0.000	0.000	1.511	0.000	22.075	0.000	0.539	0.000	0.000	0.000	0.000	0.000	0.000
BEGIN L2A	2	50.442	10.826	0.000	0.525	0.000	0.000	1.511	0.000	22.101	-0.035	0.545	0.000	0.000	0.000	0.000	0.000	0.000
34 D2H	4	51.204	10.880	-0.070	0.536	0.000	0.000	1.511	0.000	22.101	-0.035	0.545	0.000	0.000	0.000	0.000	0.000	0.000
35 AD	2	53.592	15.076	-1.843	0.568	0.000	0.000	1.754	0.208	16.997	1.975	0.564	0.000	0.000	0.000	0.000	0.000	0.000
36 D2L	4	54.201	17.431	-2.021	0.574	0.000	0.000	1.881	0.208	14.697	1.799	0.570	0.000	0.000	0.000	0.000	0.000	0.000
37 CF	3	56.589	22.658	0.032	0.592	0.000	0.000	2.141	0.004	10.598	0.069	0.602	0.000	0.000	0.000	0.000	0.000	0.000
38 D5L	4	58.113	22.662	-0.035	0.603	0.000	0.000	2.148	0.004	10.608	-0.076	0.625	0.000	0.000	0.000	0.000	0.000	0.000
39 CF	4	60.500	17.446	2.020	0.621	0.000	0.000	1.907	-0.202	14.747	-1.811	0.657	0.000	0.000	0.000	0.000	0.000	0.000

TOTAL LENGTH =	807.075641	QX =	8.496780	QY =	8.536931
		QX' =	-58.274315	QY' =	36.700898
ALFA	=	0.146667E-01	BETAX(MAX) =	=	22.661810
GAMMA(TR)	=	8.257205	DX(MAX) =	=	2.268471
					DY(MAX) = 0.000000
... END OF "TWISS" COMMAND, ELAPSED CPU TIME =	3.195 SECONDS	SPACE = 10700 TO 12803	01/29/88 09:08:22		
stop!					
.... . . . . . END PROGRAM.					

### III. Courant-Snyder Parameters for D. C. "Bare Machine" at High Fields:

For the "Bare Machine", all 12 superperiods are alike; thus the parameters are given for one superperiod only.

In the following tables, the parameters are given for full superperiods from the middle of straight-section of L20 through the middle of straight-section A20. (These boundaries have been chosen for the superperiods because they then have symmetries which would be less obvious had we used the conventional nomenclature and gone from the beginning of magnet A01 through the end of the A20 straight section.)

Each beam momentum is given on a separate page.

The top two lines identify the run from the title card of the MAD input (and also include a "MAD" version number and date and time of the run).

$\text{DELTA(P)/P} = 0.000$  indicates an "on-momentum" calculation.

Contents of the columns of the main table are:

MACHINE LOCATION ID: Description in the standard AGS nomenclature:

A01 through A20 denote the points of exit from these magnets  
A01-SS, etc. denote the downstream ends of the respective straight sections; for the 05, 10, 15 and 20 straight-sections (which have been split in halves for calculation), notations are A05(Mid), A05-End, etc. to denote the middle and downstream ends.

ELEMENT SEQUENCE:

POS. NO.      "MAD" sequence number for the element -- each magnet, straight section (if not split) and half of a long straight section counts as an element.

ELEMENT NAME    "MAD" element name, as given in the input:

Our conventions are:

Main magnets are named: AD, AF, BD, BF, CD, CF

Straight sections (or parts) have element names beginning with D (for drift)

"SUPER" refers to the super-period -- middle of a "20" straight section to the middle of the next "20".

SEQUENCE OCC. NO. sequential occurrence (ordinal) number for that element in this run

HORIZONTAL (respectively, VERTICAL):

BETAX      The Courant-Snyder parameter Beta (for the horizontal plane), in meters

ALFX      The Courant-Snyder parameter Alpha (for the horizontal plane) -- dimensionless

MUX      The Phase Advance (horizontal) in units of  $2\pi$   
Due to symmetry, the tunes are exactly 12 times the phase advances in one sector.

DX      The Dispersion (in the horizontal plane), in meters

DX'      The derivative of Dispersion (horizontal plane)  
-- dimensionless

Note that vertical dispersions zero everywhere and thus omitted.

In the table at the bottom (values refer to full machine):

TOTAL LENGTH is the total over all elements in the full machine (survey length, not central-orbit length).

GAMMA-TR is the calculated transition-gamma for the full machine

QX (rep., QY) is the horizontal (resp., vertical) tune.

QX' (resp., QY') is the derivative of the horizontal (resp., vertical) tune with respect to momentum change. Chromaticity is obtained by taking  $QX'/QX$  (horizontal; resp.,  $QY'/QY$  for vertical).

BETAX(MAX), BETAY(MAX), DX(MAX) and DY(MAX) are the maximum values of these respective quantities appearing in the tables above (not the separately calculated maxima covering intermediate points).

P150D DELTA(P)/P = 0.000000				(15 GeV/c) "BARE MACHINE"						"MAD" VERSION: 6.01/01 RUN: 01/29/88 08:51			
MACHINE LOCATION ID	ELEMENT SEQUENCE POS. ELEMENT OCC. NO.	DIST [M]		H O R I Z O N T A L BETAX ALFAX MUX [2PI] [M]		A L DX DX'		V E R T I C A L BETAY ALFAY MUY [M] [2PI]					
L20(Mid)	BEGIN SUPER	1	0.000	15.411	-1.308	0.000	1.826	0.150	15.315	1.301	0.000		
L20-End	1 D10	1	1.524	19.807	-1.576	0.014	2.055	0.150	11.757	1.033	0.018		
A01	2 BF	1	3.530	22.360	0.388	0.029	2.170	-0.036	10.258	-0.238	0.048		
A01-SS	3 D2S	1	4.140	21.906	0.357	0.033	2.148	-0.036	10.586	-0.301	0.058		
A02	4 BF	2	6.147	16.823	2.009	0.049	1.893	-0.213	14.611	-1.834	0.084		
A02-SS	5 D2T	1	6.756	14.485	1.826	0.055	1.763	-0.213	16.958	-2.016	0.090		
A03	6 CD	1	9.144	10.323	0.075	0.088	1.513	-0.001	22.171	0.038	0.109		
A03-SS	7 D5L	1	10.667	10.321	-0.073	0.112	1.512	-0.001	22.160	-0.031	0.120		
A04	8 CD	2	13.055	14.474	-1.824	0.144	1.758	0.212	16.919	2.019	0.139		
A04-SS	9 D2L	1	13.665	16.808	-2.006	0.151	1.887	0.212	14.570	1.836	0.145		
A05	10 AF	1	16.052	22.004	0.035	0.170	2.146	0.000	10.390	0.074	0.178		
A05(Mid)	11 D2H	1	16.814	21.977	0.000	0.175	2.146	0.000	10.333	0.000	0.189		
A05-End	12 D2H	2	17.576	22.004	-0.035	0.181	2.146	0.000	10.390	-0.074	0.201		
A06	13 AF	2	19.964	16.808	2.006	0.199	1.887	-0.212	14.570	-1.836	0.234		
A06-SS	14 D2L	2	20.573	14.474	1.824	0.206	1.758	-0.212	16.919	-2.019	0.240		
A07	15 CD	3	22.961	10.321	0.073	0.238	1.512	0.001	22.160	0.031	0.259		
A07-SS	16 D5L	2	24.485	10.323	-0.075	0.262	1.513	0.001	22.171	-0.038	0.270		
A08	17 CD	4	26.872	14.485	-1.826	0.295	1.763	0.213	16.958	2.016	0.288		
A08-SS	18 D2T	2	27.482	16.823	-2.009	0.301	1.893	0.213	14.611	1.834	0.294		
A09	19 BF	3	29.488	21.906	-0.357	0.317	2.148	0.036	10.586	0.301	0.321		
A09-SS	20 D2S	2	30.098	22.360	-0.388	0.322	2.170	0.036	10.258	0.238	0.330		
A10	21 BF	4	32.104	19.807	1.576	0.336	2.055	-0.150	11.757	-1.033	0.361		
A10(Mid)	22 D10	2	33.628	15.411	1.308	0.350	1.826	-0.150	15.315	-1.301	0.379		
A10-End	23 D10	3	35.152	11.832	1.040	0.368	1.598	-0.150	19.690	-1.569	0.393		
A11	24 BD	1	37.159	10.322	-0.239	0.398	1.471	0.021	22.234	0.386	0.408		
A11-SS	25 D2S	3	37.768	10.652	-0.301	0.407	1.484	0.021	21.783	0.354	0.412		
A12	26 BD	2	39.775	14.694	-1.843	0.434	1.699	0.197	16.726	1.998	0.428		
A12-SS	27 D2T	3	40.384	17.052	-2.026	0.440	1.819	0.197	14.401	1.816	0.434		
A13	28 CF	1	42.772	22.289	0.038	0.459	2.055	-0.004	10.258	0.075	0.467		
A13-SS	29 D5L	3	44.296	22.277	-0.030	0.470	2.048	-0.004	10.257	-0.074	0.491		
A14	30 CF	2	46.683	17.011	2.029	0.488	1.794	-0.204	14.395	-1.815	0.524		
A14-SS	31 D2L	3	47.293	14.650	1.845	0.494	1.670	-0.204	16.718	-1.997	0.530		
A15	32 AD	1	49.680	10.451	0.073	0.527	1.432	0.000	21.892	0.035	0.549		
A15(Mid)	33 D2H	3	50.442	10.395	0.000	0.538	1.432	0.000	21.866	0.000	0.555		
A15-End	34 D2H	4	51.204	10.451	-0.073	0.550	1.432	0.000	21.892	-0.035	0.560		
A16	35 AD	2	53.592	14.650	-1.845	0.582	1.670	0.204	16.718	1.997	0.579		
A16-SS	36 D2L	4	54.201	17.011	-2.029	0.589	1.794	0.204	14.395	1.815	0.586		
A17	37 CF	3	56.589	22.277	0.030	0.607	2.048	0.004	10.257	0.074	0.619		
A17-SS	38 D5L	4	58.113	22.289	-0.038	0.618	2.055	0.004	10.258	-0.075	0.642		
A18	39 CF	4	60.500	17.052	2.026	0.637	1.819	-0.197	14.401	-1.816	0.675		
A18-SS	40 D2T	4	61.110	14.694	1.843	0.643	1.699	-0.197	16.726	-1.998	0.682		
A19	41 BD	3	63.116	10.652	0.301	0.669	1.484	-0.021	21.783	-0.354	0.698		
A19-SS	42 D2S	4	63.726	10.322	0.239	0.679	1.471	-0.021	22.234	-0.386	0.702		
A20	43 BD	4	65.732	11.832	-1.040	0.709	1.598	0.150	19.690	1.569	0.717		
A20(Mid)	44 D10	4	67.256	15.411	-1.308	0.727	1.826	0.150	15.315	1.301	0.731		
A20(Mid)	END SUPER	1	67.256	15.411	-1.308	0.727	1.826	0.150	15.315	1.301	0.731		
TOTAL LENGTH =	807.075641			QX	= 8.720065			QY	= 8.772418				
ALFA	= 0.139714E-01			QX'	= -20.156010			QY'	= 0.925753				
GAMMA (TR)	= 8.460189			BETAX (MAX)	= 22.360054			BETAY (MAX)	= 22.234183				
				DX (MAX)	= 2.170248			DY (MAX)	= 0.000000				

P200D DELTA(P)/P = 0.000000				(20 GeV/c) "BARE MACHINE"						"MAD" VERSION: 6.01/01 RUN: 01/29/88 08:57		
LOCATION ID	ELEMENT SEQUENCE		DIST [M]	H O R I Z O N T A L				V E R T I C A L			[M]	[2PI]
	POS. NO.	ELEMENT OCC. NAME NO.		BETAX [M]	ALFAX [2PI]	MUX [M]	DX [M]	DX' [2PI]	BETAY [M]	ALFYAY [2PI]	MUY	
L20(Mid)	BEGIN	SUPER	1	0.000	15.420	-1.309	0.000	1.829	0.149	15.330	1.302	0.000
L20-End	1	D10	1	1.524	19.817	-1.577	0.014	2.056	0.149	11.769	1.034	0.018
A01	2	BF	1	3.530	22.375	0.387	0.029	2.171	-0.037	10.265	-0.237	0.048
A01-SS	3	D2S	1	4.140	21.922	0.355	0.033	2.149	-0.037	10.593	-0.300	0.058
A02	4	BF	2	6.147	16.845	2.008	0.049	1.893	-0.214	14.610	-1.831	0.084
A02-SS	5	D2T	1	6.756	14.508	1.826	0.055	1.763	-0.214	16.953	-2.013	0.090
A03	6	CD	1	9.144	10.350	0.074	0.088	1.513	-0.001	22.155	0.039	0.109
A03-SS	7	D5L	1	10.667	10.351	-0.074	0.111	1.511	-0.001	22.141	-0.030	0.120
A04	8	CD	2	13.055	14.515	-1.827	0.144	1.757	0.211	16.905	2.016	0.139
A04-SS	9	D2L	1	13.665	16.854	-2.010	0.150	1.885	0.211	14.560	1.833	0.145
A05	10	AF	1	16.052	22.059	0.035	0.169	2.143	0.000	10.384	0.074	0.178
A05(Mid)	11	D2H	1	16.814	22.033	0.000	0.175	2.143	0.000	10.328	0.000	0.189
A05-End	12	D2H	2	17.576	22.059	-0.035	0.180	2.143	0.000	10.384	-0.074	0.201
A06	13	AF	2	19.964	16.854	2.010	0.199	1.885	-0.211	14.560	-1.833	0.234
A06-SS	14	D2L	2	20.573	14.515	1.827	0.205	1.757	-0.211	16.905	-2.016	0.240
A07	15	CD	3	22.961	10.351	0.074	0.238	1.511	0.001	22.141	0.030	0.259
A07-SS	16	D5L	2	24.485	10.350	-0.074	0.261	1.513	0.001	22.155	-0.039	0.270
A08	17	CD	4	26.872	14.508	-1.826	0.294	1.763	0.214	16.953	2.013	0.288
A08-SS	18	D2T	2	27.482	16.845	-2.008	0.300	1.893	0.214	14.610	1.831	0.295
A09	19	BF	3	29.488	21.922	-0.355	0.316	2.149	0.037	10.593	0.300	0.321
A09-SS	20	D2S	2	30.098	22.375	-0.387	0.321	2.171	0.037	10.265	0.237	0.331
A10	21	BF	4	32.104	19.817	1.577	0.336	2.056	-0.149	11.769	-1.034	0.361
A10(Mid)	22	D10	2	33.628	15.420	1.309	0.349	1.829	-0.149	15.330	-1.302	0.379
A10-End	23	D10	3	35.152	11.839	1.041	0.367	1.601	-0.149	19.707	-1.570	0.393
A11	24	BD	1	37.159	10.326	-0.238	0.397	1.475	0.021	22.256	0.384	0.408
A11-SS	25	D2S	3	37.768	10.654	-0.300	0.407	1.488	0.021	21.807	0.353	0.412
A12	26	BD	2	39.775	14.688	-1.840	0.433	1.704	0.198	16.753	1.998	0.428
A12-SS	27	D2T	3	40.384	17.041	-2.022	0.439	1.825	0.198	14.428	1.817	0.434
A13	28	CF	1	42.772	22.265	0.039	0.458	2.062	-0.004	10.288	0.074	0.467
A13-SS	29	D5L	3	44.296	22.250	-0.029	0.469	2.055	-0.004	10.291	-0.075	0.491
A14	30	CF	2	46.683	16.991	2.025	0.488	1.801	-0.204	14.439	-1.819	0.524
A14-SS	31	D2L	3	47.293	14.633	1.842	0.494	1.677	-0.204	16.768	-2.001	0.530
A15	32	AD	1	49.680	10.441	0.073	0.526	1.438	0.000	21.953	0.035	0.549
A15(Mid)	33	D2H	3	50.442	10.385	0.000	0.538	1.438	0.000	21.926	0.000	0.555
A15-End	34	D2H	4	51.204	10.441	-0.073	0.549	1.438	0.000	21.953	-0.035	0.560
A16	35	AD	2	53.592	14.633	-1.842	0.582	1.677	0.204	16.768	2.001	0.579
A16-SS	36	D2L	4	54.201	16.991	-2.025	0.588	1.801	0.204	14.439	1.819	0.585
A17	37	CF	3	56.589	22.250	0.029	0.607	2.055	0.004	10.291	0.075	0.618
A17-SS	38	D5L	4	58.113	22.265	-0.039	0.618	2.062	0.004	10.288	-0.074	0.642
A18	39	CF	4	60.500	17.041	2.022	0.636	1.825	-0.198	14.428	-1.817	0.675
A18-SS	40	D2T	4	61.110	14.688	1.840	0.642	1.704	-0.198	16.753	-1.998	0.681
A19	41	BD	3	63.116	10.654	0.300	0.669	1.488	-0.021	21.807	-0.353	0.697
A19-SS	42	D2S	4	63.726	10.326	0.238	0.678	1.475	-0.021	22.256	-0.384	0.701
A20	43	BD	4	65.732	11.839	-1.041	0.708	1.601	0.149	19.707	1.570	0.716
A20(Mid)	44	D10	4	67.256	15.420	-1.309	0.726	1.829	0.149	15.330	1.302	0.730
A20(Mid)	END	SUPER	1	67.256	15.420	-1.309	0.726	1.829	0.149	15.330	1.302	0.730
TOTAL LENGTH =	807.075641	QX	=	8.713461	QY	=	8.762655					
ALFA	=	0.139920E-01	QX'	=	-21.561643	QY'	=	2.267100				
GAMMA(TR)	=	8.453955	BETAX(MAX)	=	22.374626	BETAY(MAX)	=	22.256231				
		DX(MAX)	=	2.171203	DY(MAX)	=	0.000000					

P250D DELTA(P)/P = 0.000000				(25 GeV/c) "BARE MACHINE"						"MAD" VERSION: 6.01/01 RUN: 01/29/88 09:00			
MACHINE LOCATION ID	ELEMENT SEQUENCE			DIST [M]	H O R I Z O N T A L				V E R T I C A L				
	POS. NO.	ELEMENT NAME	OCC. NO.		BETAX [M]	ALFAX [2PI]	MUX [M]	DX [M]	DX' [M]	BETAY [M]	ALFAY [2PI]	MUY	
L20(Mid)	BEGIN	SUPER	1	0.000	15.451	-1.309	0.000	1.837	0.149	15.375	1.303	0.000	
L20-End	1 D10		1	1.524	19.847	-1.576	0.014	2.064	0.149	11.811	1.036	0.018	
A01	2 BF		1	3.530	22.407	0.385	0.029	2.178	-0.037	10.303	-0.236	0.048	
A01-SS	3 D2S		1	4.140	21.957	0.353	0.033	2.155	-0.037	10.628	-0.298	0.057	
A02	4 BF		2	6.147	16.890	2.006	0.049	1.899	-0.214	14.638	-1.828	0.084	
A02-SS	5 D2T		1	6.756	14.555	1.824	0.055	1.769	-0.214	16.976	-2.009	0.090	
A03	6 CD		1	9.144	10.403	0.072	0.088	1.518	-0.001	22.164	0.040	0.109	
A03-SS	7 D5L		1	10.667	10.408	-0.075	0.111	1.516	-0.001	22.147	-0.029	0.120	
A04	8 CD		2	13.055	14.582	-1.831	0.144	1.760	0.211	16.920	2.013	0.139	
A04-SS	9 D2L		1	13.665	16.924	-2.013	0.150	1.889	0.211	14.577	1.831	0.145	
A05	10 AF		1	16.052	22.136	0.034	0.169	2.146	0.000	10.407	0.074	0.177	
A05(Mid)	11 D2H		1	16.814	22.110	0.000	0.174	2.146	0.000	10.351	0.000	0.189	
A05-End	12 D2H		2	17.576	22.136	-0.034	0.180	2.146	0.000	10.407	-0.074	0.201	
A06	13 AF		2	19.964	16.924	2.013	0.198	1.889	-0.211	14.577	-1.831	0.233	
A06-SS	14 D2L		2	20.573	14.582	1.831	0.204	1.760	-0.211	16.920	-2.013	0.239	
A07	15 CD		3	22.961	10.408	0.075	0.237	1.516	0.001	22.147	0.029	0.258	
A07-SS	16 D5L		2	24.485	10.403	-0.072	0.260	1.518	0.001	22.164	-0.040	0.269	
A08	17 CD		4	26.872	14.555	-1.824	0.293	1.769	0.214	16.976	2.009	0.288	
A08-SS	18 D2T		2	27.482	16.890	-2.006	0.299	1.899	0.214	14.638	1.828	0.294	
A09	19 BF		3	29.488	21.957	-0.353	0.315	2.155	0.037	10.628	0.298	0.321	
A09-SS	20 D2S		2	30.098	22.407	-0.385	0.320	2.178	0.037	10.303	0.236	0.330	
A10	21 BF		4	32.104	19.847	1.576	0.334	2.064	-0.149	11.811	-1.036	0.360	
A10(Mid)	22 D10		2	33.628	15.451	1.309	0.348	1.837	-0.149	15.375	-1.303	0.378	
A10-End	23 D10		3	35.152	11.870	1.041	0.366	1.609	-0.149	19.755	-1.571	0.392	
A11	24 BD		1	37.159	10.353	-0.237	0.396	1.484	0.022	22.307	0.383	0.407	
A11-SS	25 D2S		3	37.768	10.680	-0.299	0.405	1.497	0.022	21.859	0.352	0.411	
A12	26 BD		2	39.775	14.703	-1.835	0.432	1.716	0.199	16.812	1.997	0.427	
A12-SS	27 D2T		3	40.384	17.050	-2.016	0.438	1.837	0.199	14.487	1.817	0.433	
A13	28 CF		1	42.772	22.256	0.040	0.456	2.075	-0.004	10.350	0.072	0.466	
A13-SS	29 D5L		3	44.296	22.238	-0.028	0.467	2.069	-0.004	10.355	-0.076	0.490	
A14	30 CF		2	46.683	16.991	2.020	0.486	1.814	-0.205	14.516	-1.823	0.522	
A14-SS	31 D2L		3	47.293	14.639	1.838	0.492	1.689	-0.205	16.849	-2.005	0.529	
A15	32 AD		1	49.680	10.454	0.073	0.525	1.450	0.000	22.042	0.035	0.547	
A15(Mid)	33 D2H		3	50.442	10.399	0.000	0.536	1.450	0.000	22.016	0.000	0.553	
A15-End	34 D2H		4	51.204	10.454	-0.073	0.548	1.450	0.000	22.042	-0.035	0.558	
A16	35 AD		2	53.592	14.639	-1.838	0.580	1.689	0.205	16.849	2.005	0.577	
A16-SS	36 D2L		4	54.201	16.991	-2.020	0.586	1.814	0.205	14.516	1.823	0.583	
A17	37 CF		3	56.589	22.238	0.028	0.605	2.069	0.004	10.355	0.076	0.616	
A17-SS	38 D5L		4	58.113	22.256	-0.040	0.616	2.075	0.004	10.350	-0.072	0.640	
A18	39 CF		4	60.500	17.050	2.016	0.635	1.837	-0.199	14.487	-1.817	0.672	
A18-SS	40 D2T		4	61.110	14.703	1.835	0.641	1.716	-0.199	16.812	-1.997	0.679	
A19	41 BD		3	63.116	10.680	0.299	0.667	1.497	-0.022	21.859	-0.352	0.695	
A19-SS	42 D2S		4	63.726	10.353	0.237	0.676	1.484	-0.022	22.307	-0.383	0.699	
A20	43 BD		4	65.732	11.870	-1.041	0.706	1.609	0.149	19.755	1.571	0.714	
A20(Mid)	44 D10		4	67.256	15.451	-1.309	0.724	1.837	0.149	15.375	1.303	0.728	
A20(Mid)	END	SUPER	1	67.256	15.451	-1.309	0.724	1.837	0.149	15.375	1.303	0.728	
TOTAL LENGTH =	807.075641	OX	=	8.691952	QY	=	8.733685						
		OX'	=	-25.566044	QY'	=	6.050744						
ALFA	= 0.140574E-01	BETAX (MAX)	=	22.407113	BETAY (MAX)	=	22.306816						
GAMMA (TR)	= 8.434267	DX (MAX)	=	2.178077	DY (MAX)	=	0.000000						

P270D DELTA(P)/P = 0.000000				(27 GeV/c) "BARE MACHINE"						"MAD" VERSION: 6.01/01 RUN: 01/29/88 09:02			
MACHINE LOCATION ID	ELEMENT POS. NO.	SEQUENCE ELEMENT OCC. NAME	DIST [M]	BETAX [M]	HORI [2PI]	ZONT [2PI]	AL [M]	DX [M]	DX' [M]	VERT [M]	CAL [M]	ALFAY [2PI]	MUY
L20(Mid)	BEGIN	SUPER	1	0.000	15.484	-1.307	0.000	1.845	0.150	15.414	1.302	0.000	
L20-End	1	D10	1	1.524	19.874	-1.574	0.014	2.073	0.150	11.852	1.036	0.018	
A01	2	BF	1	3.530	22.428	0.385	0.029	2.187	-0.037	10.345	-0.237	0.048	
A01-SS	3	D2S	1	4.140	21.978	0.354	0.033	2.165	-0.037	10.671	-0.299	0.057	
A02	4	BF	2	6.147	16.913	2.004	0.049	1.908	-0.214	14.684	-1.829	0.084	
A02-SS	5	D2T	1	6.756	14.580	1.823	0.055	1.778	-0.214	17.024	-2.010	0.090	
A03	6	CD	1	9.144	10.428	0.072	0.088	1.526	-0.001	22.214	0.039	0.108	
A03-SS	7	D5L	1	10.667	10.432	-0.075	0.111	1.524	-0.001	22.199	-0.029	0.119	
A04	8	CD	2	13.055	14.597	-1.827	0.143	1.770	0.212	16.973	2.013	0.138	
A04-SS	9	D2L	1	13.665	16.935	-2.008	0.150	1.899	0.212	14.630	1.832	0.144	
A05	10	AF	1	16.052	22.135	0.034	0.168	2.157	0.000	10.457	0.073	0.177	
A05(Mid)	11	D2H	1	16.814	22.109	0.000	0.174	2.157	0.000	10.401	0.000	0.188	
A05-End	12	D2H	2	17.576	22.135	-0.034	0.179	2.157	0.000	10.457	-0.073	0.200	
A06	13	AF	2	19.964	16.935	2.008	0.198	1.899	-0.212	14.630	-1.832	0.232	
A06-SS	14	D2L	2	20.573	14.597	1.827	0.204	1.770	-0.212	16.973	-2.013	0.239	
A07	15	CD	3	22.961	10.432	0.075	0.237	1.524	0.001	22.199	0.029	0.257	
A07-SS	16	D5L	2	24.485	10.428	-0.072	0.260	1.526	0.001	22.214	-0.039	0.268	
A08	17	CD	4	26.872	14.580	-1.823	0.292	1.778	0.214	17.024	2.010	0.287	
A08-SS	18	D2T	2	27.482	16.913	-2.004	0.299	1.908	0.214	14.684	1.829	0.293	
A09	19	BF	3	29.488	21.978	-0.354	0.315	2.165	0.037	10.671	0.299	0.319	
A09-SS	20	D2S	2	30.098	22.428	-0.385	0.319	2.187	0.037	10.345	0.237	0.329	
A10	21	BF	4	32.104	19.874	1.574	0.334	2.073	-0.150	11.852	-1.036	0.359	
A10(Mid)	22	D10	2	33.628	15.484	1.307	0.348	1.845	-0.150	15.414	-1.302	0.377	
A10-End	23	D10	3	35.152	11.906	1.041	0.365	1.617	-0.150	19.789	-1.569	0.391	
A11	24	BD	1	37.159	10.391	-0.237	0.395	1.491	0.022	22.336	0.383	0.405	
A11-SS	25	D2S	3	37.768	10.718	-0.299	0.404	1.504	0.022	21.888	0.352	0.410	
A12	26	BD	2	39.775	14.744	-1.836	0.431	1.722	0.199	16.841	1.997	0.426	
A12-SS	27	D2T	3	40.384	17.092	-2.017	0.437	1.844	0.199	14.517	1.816	0.432	
A13	28	CF	1	42.772	22.299	0.040	0.456	2.082	-0.004	10.379	0.073	0.465	
A13-SS	29	D5L	3	44.296	22.283	-0.029	0.466	2.076	-0.004	10.383	-0.075	0.488	
A14	30	CF	2	46.683	17.038	2.020	0.485	1.820	-0.205	14.535	-1.820	0.521	
A14-SS	31	D2L	3	47.293	14.687	1.839	0.491	1.695	-0.205	16.865	-2.001	0.527	
A15	32	AD	1	49.680	10.501	0.073	0.524	1.456	0.000	22.048	0.035	0.546	
A15(Mid)	33	D2H	3	50.442	10.445	0.000	0.535	1.456	0.000	22.021	0.000	0.551	
A15-End	34	D2H	4	51.204	10.501	-0.073	0.547	1.456	0.000	22.048	-0.035	0.557	
A16	35	AD	2	53.592	14.687	-1.839	0.579	1.695	0.205	16.865	2.001	0.576	
A16-SS	36	D2L	4	54.201	17.038	-2.020	0.585	1.820	0.205	14.535	1.820	0.582	
A17	37	CF	3	56.589	22.283	0.029	0.604	2.076	0.004	10.383	0.075	0.614	
A17-SS	38	D5L	4	58.113	22.299	-0.040	0.615	2.082	0.004	10.379	-0.073	0.638	
A18	39	CF	4	60.500	17.092	2.017	0.633	1.844	-0.199	14.517	-1.816	0.670	
A18-SS	40	D2T	4	61.110	14.744	1.836	0.639	1.722	-0.199	16.841	-1.997	0.677	
A19	41	BD	3	63.116	10.718	0.299	0.666	1.504	-0.022	21.888	-0.352	0.693	
A19-SS	42	D2S	4	63.726	10.391	0.237	0.675	1.491	-0.022	22.336	-0.383	0.697	
A20	43	BD	4	65.732	11.906	-1.041	0.705	1.617	0.150	19.789	1.569	0.712	
A20(Mid)	44	D10	4	67.256	15.484	-1.307	0.723	1.845	0.150	15.414	1.302	0.726	
A20(Mid)	END	SUPER	1	67.256	15.484	-1.307	0.723	1.845	0.150	15.414	1.302	0.726	
TOTAL LENGTH =	807.075641	QX	=	8.671489	QY	=	8.709868						
		QX'	=	-29.723339	QY'	=	9.946212						
ALFA	=	0.141190E-01	BETAX (MAX)	=	22.427681	BETAY (MAX)	=	22.335744					
GAMMA (TR)	=	8.415839	DX (MAX)	=	2.187402	DY (MAX)	=	0.000000					

P290D DELTA(P)/P = 0.000000				(29 GeV/c) "BARE MACHINE"						"MAD" VERSION: 6.01/01 RUN: 01/29/88 09:05			
MACHINE LOCATION ID	POS. NO.	ELEMENT NAME	SEQUENCE ELEMENT OCC. NO.	DIST [M]	BETAX [M]	H O R I Z O N T A L ALFAX [2PI]	MUX [M]	DX [M]	DX' [2PI]	V E R T I C A L BETAY [M]	ALFAY [2PI]	MUY	
L20(Mid)	BEGIN	SUPER	1	0.000	15.547	-1.306	0.000	1.860	0.150	15.478	1.301	0.000	
L20-End	1	D10	1	1.524	19.930	-1.571	0.014	2.089	0.150	11.918	1.036	0.018	
A01	2	BF	1	3.530	22.476	0.385	0.028	2.204	-0.037	10.411	-0.237	0.048	
A01-SS	3	D2S	1	4.140	22.026	0.354	0.033	2.182	-0.037	10.738	-0.299	0.057	
A02	4	BF	2	6.147	16.968	2.002	0.049	1.925	-0.215	14.753	-1.829	0.083	
A02-SS	5	D2T	1	6.756	14.637	1.822	0.055	1.793	-0.215	17.093	-2.009	0.089	
A03	6	CD	1	9.144	10.486	0.073	0.087	1.541	-0.001	22.280	0.039	0.108	
A03-SS	7	D5L	1	10.667	10.487	-0.074	0.110	1.539	-0.001	22.266	-0.030	0.119	
A04	8	CD	2	13.055	14.645	-1.824	0.143	1.786	0.213	17.046	2.012	0.137	
A04-SS	9	D2L	1	13.665	16.978	-2.004	0.149	1.916	0.213	14.704	1.832	0.144	
A05	10	AF	1	16.052	22.165	0.034	0.168	2.175	0.000	10.531	0.073	0.176	
A05(Mid)	11	D2H	1	16.814	22.139	0.000	0.173	2.175	0.000	10.476	0.000	0.187	
A05-End	12	D2H	2	17.576	22.165	-0.034	0.179	2.175	0.000	10.531	-0.073	0.199	
A06	13	AF	2	19.964	16.978	2.004	0.197	1.916	-0.213	14.704	-1.832	0.231	
A06-SS	14	D2L	2	20.573	14.645	1.824	0.204	1.786	-0.213	17.046	-2.012	0.237	
A07	15	CD	3	22.961	10.487	0.074	0.236	1.539	0.001	22.266	0.030	0.256	
A07-SS	16	D5L	2	24.485	10.486	-0.073	0.259	1.541	0.001	22.280	-0.039	0.267	
A08	17	CD	4	26.872	14.637	-1.822	0.291	1.793	0.215	17.093	2.009	0.285	
A08-SS	18	D2T	2	27.482	16.968	-2.002	0.297	1.925	0.215	14.753	1.829	0.292	
A09	19	BF	3	29.488	22.026	-0.354	0.314	2.182	0.037	10.738	0.299	0.318	
A09-SS	20	D2S	2	30.098	22.476	-0.385	0.318	2.204	0.037	10.411	0.237	0.327	
A10	21	BF	4	32.104	19.930	1.571	0.332	2.089	-0.150	11.918	-1.036	0.357	
A10(Mid)	22	D10	2	33.628	15.547	1.306	0.346	1.860	-0.150	15.478	-1.301	0.375	
A10-End	23	D10	3	35.152	11.972	1.040	0.364	1.631	-0.150	19.845	-1.566	0.389	
A11	24	BD	1	37.159	10.458	-0.238	0.394	1.504	0.022	22.385	0.383	0.403	
A11-SS	25	D2S	3	37.768	10.785	-0.299	0.403	1.518	0.022	21.937	0.352	0.408	
A12	26	BD	2	39.775	14.813	-1.836	0.429	1.737	0.200	16.897	1.995	0.424	
A12-SS	27	D2T	3	40.384	17.161	-2.016	0.435	1.858	0.200	14.575	1.815	0.430	
A13	28	CF	1	42.772	22.365	0.039	0.454	2.098	-0.004	10.437	0.073	0.462	
A13-SS	29	D5L	3	44.296	22.350	-0.029	0.465	2.092	-0.004	10.439	-0.074	0.486	
A14	30	CF	2	46.683	17.112	2.019	0.483	1.835	-0.206	14.585	-1.817	0.518	
A14-SS	31	D2L	3	47.293	14.761	1.838	0.489	1.709	-0.206	16.910	-1.997	0.524	
A15	32	AD	1	49.680	10.575	0.072	0.521	1.469	0.000	22.080	0.035	0.543	
A15(Mid)	33	D2H	3	50.442	10.520	0.000	0.533	1.469	0.000	22.054	0.000	0.549	
A15-End	34	D2H	4	51.204	10.575	-0.072	0.544	1.469	0.000	22.080	-0.035	0.554	
A16	35	AD	2	53.592	14.761	-1.838	0.576	1.709	0.206	16.910	1.997	0.573	
A16-SS	36	D2L	4	54.201	17.112	-2.019	0.582	1.835	0.206	14.585	1.817	0.579	
A17	37	CF	3	56.589	22.350	0.029	0.601	2.092	0.004	10.439	0.074	0.612	
A17-SS	38	D5L	4	58.113	22.365	-0.039	0.612	2.098	0.004	10.437	-0.073	0.635	
A18	39	CF	4	60.500	17.161	2.016	0.630	1.858	-0.200	14.575	-1.815	0.667	
A18-SS	40	D2T	4	61.110	14.813	1.836	0.637	1.737	-0.200	16.897	-1.995	0.674	
A19	41	BD	3	63.116	10.785	0.299	0.663	1.518	-0.022	21.937	-0.352	0.690	
A19-SS	42	D2S	4	63.726	10.458	0.238	0.672	1.504	-0.022	22.385	-0.383	0.694	
A20	43	BD	4	65.732	11.972	-1.040	0.702	1.631	0.150	19.845	1.566	0.709	
A20(Mid)	44	D10	4	67.256	15.547	-1.306	0.719	1.860	0.150	15.478	1.301	0.723	
A20(Mid)	END	SUPER	1	67.256	15.547	-1.306	0.719	1.860	0.150	15.478	1.301	0.723	
TOTAL LENGTH =	807.075641	QX	=	8.632619	QY	=	8.670353						
ALFA	=	0.142383E-01	QX'	=	-37.307979	QY'	=	16.998239					
GAMMA(TR)	=	8.380511	BETAX(MAX)	=	22.476140	BETAY(MAX)	=	22.384957					
		DX(MAX)	=	2.204457	DY(MAX)	=	0.000000						

P320D DELTA(P)/P = 0.000000				(32 GeV/c) "BARE MACHINE"						"MAD" VERSION: 6.01/01 RUN: 01/29/88 09:07			
MACHINE LOCATION ID	ELEMENT POS. NO.	SEQUENCE ELEMENT OCC. NAME NO.	DIST [M]	BETAX [M]	ALFAX [2PI]	H O R I Z O N T A L MUX [M]	DX [M]	DX' [2PI]	V E R T I C A L BETAY [M]	ALFAY [2PI]	MUY [M]		
L20(Mid)	BEGIN	SUPER	1	0.000	15.773	-1.298	0.000	1.916	0.153	15.697	1.293	0.000	
L20-End	1	D10	1	1.524	20.125	-1.558	0.014	2.150	0.153	12.152	1.034	0.018	
A01	2	BF	1	3.530	22.637	0.387	0.028	2.268	-0.037	10.657	-0.242	0.047	
A01-SS	3	D2S	1	4.140	22.184	0.356	0.032	2.246	-0.037	10.989	-0.302	0.056	
A02	4	BF	2	6.147	17.139	1.996	0.048	1.986	-0.218	15.024	-1.835	0.081	
A02-SS	5	D2T	1	6.756	14.814	1.819	0.054	1.853	-0.218	17.369	-2.012	0.087	
A03	6	CD	1	9.144	10.660	0.075	0.086	1.597	0.000	22.566	0.035	0.106	
A03-SS	7	D5L	1	10.667	10.649	-0.068	0.109	1.597	0.000	22.562	-0.033	0.117	
A04	8	CD	2	13.055	14.761	-1.806	0.141	1.850	0.217	17.356	2.013	0.135	
A04-SS	9	D2L	1	13.665	17.069	-1.982	0.147	1.982	0.217	15.011	1.835	0.141	
A05	10	AF	1	16.052	22.190	0.034	0.166	2.247	0.000	10.830	0.071	0.172	
A05(Mid)	11	D2H	1	16.814	22.164	0.000	0.171	2.247	0.000	10.776	0.000	0.184	
A05-End	12	D2H	2	17.576	22.190	-0.034	0.177	2.247	0.000	10.830	-0.071	0.195	
A06	13	AF	2	19.964	17.069	1.982	0.195	1.982	-0.217	15.011	-1.835	0.226	
A06-SS	14	D2L	2	20.573	14.761	1.806	0.202	1.850	-0.217	17.356	-2.013	0.232	
A07	15	CD	3	22.961	10.649	0.068	0.233	1.597	0.000	22.562	0.033	0.251	
A07-SS	16	D5L	2	24.485	10.660	-0.075	0.256	1.597	0.000	22.566	-0.035	0.261	
A08	17	CD	4	26.872	14.814	-1.819	0.288	1.853	0.218	17.369	2.012	0.280	
A08-SS	18	D2T	2	27.482	17.139	-1.996	0.294	1.986	0.218	15.024	1.835	0.286	
A09	19	BF	3	29.488	22.184	-0.356	0.310	2.246	0.037	10.989	0.302	0.312	
A09-SS	20	D2S	2	30.098	22.637	-0.387	0.314	2.268	0.037	10.657	0.242	0.321	
A10	21	BF	4	32.104	20.125	1.558	0.329	2.150	-0.153	12.152	-1.034	0.350	
A10(Mid)	22	D10	2	33.628	15.773	1.298	0.343	1.916	-0.153	15.697	-1.293	0.367	
A10-End	23	D10	3	35.152	12.212	1.039	0.360	1.682	-0.153	20.033	-1.552	0.381	
A11	24	BD	1	37.159	10.709	-0.243	0.389	1.551	0.021	22.537	0.385	0.396	
A11-SS	25	D2S	3	37.768	11.042	-0.303	0.398	1.564	0.021	22.087	0.354	0.400	
A12	26	BD	2	39.775	15.092	-1.842	0.424	1.784	0.202	17.063	1.988	0.416	
A12-SS	27	D2T	3	40.384	17.446	-2.020	0.430	1.907	0.202	14.747	1.811	0.422	
A13	28	CF	1	42.772	22.662	0.035	0.448	2.148	-0.004	10.608	0.076	0.454	
A13-SS	29	D5L	3	44.296	22.658	-0.032	0.459	2.141	-0.004	10.598	-0.069	0.477	
A14	30	CF	2	46.683	17.431	2.021	0.477	1.881	-0.208	14.697	-1.799	0.509	
A14-SS	31	D2L	3	47.293	15.076	1.843	0.483	1.754	-0.208	16.997	-1.975	0.515	
A15	32	AD	1	49.680	10.880	0.070	0.514	1.511	0.000	22.101	0.035	0.534	
A15(Mid)	33	D2H	3	50.442	10.826	0.000	0.525	1.511	0.000	22.075	0.000	0.539	
A15-End	34	D2H	4	51.204	10.880	-0.070	0.536	1.511	0.000	22.101	-0.035	0.545	
A16	35	AD	2	53.592	15.076	-1.843	0.568	1.754	0.208	16.997	1.975	0.564	
A16-SS	36	D2L	4	54.201	17.431	-2.021	0.574	1.881	0.208	14.697	1.799	0.570	
A17	37	CF	3	56.589	22.658	0.032	0.592	2.141	0.004	10.598	0.069	0.602	
A17-SS	38	D5L	4	58.113	22.662	-0.035	0.603	2.148	0.004	10.608	-0.076	0.625	
A18	39	CF	4	60.500	17.446	2.020	0.621	1.907	-0.202	14.747	-1.811	0.657	
A18-SS	40	D2T	4	61.110	15.092	1.842	0.627	1.784	-0.202	17.063	-1.988	0.663	
A19	41	BD	3	63.116	11.042	0.303	0.653	1.564	-0.021	22.087	-0.354	0.679	
A19-SS	42	D2S	4	63.726	10.709	-0.243	0.662	1.551	-0.021	22.537	-0.385	0.683	
A20	43	BD	4	65.732	12.212	-1.039	0.691	1.682	0.153	20.033	1.552	0.698	
A20(Mid)	44	D10	4	67.256	15.773	-1.298	0.708	1.916	0.153	15.697	1.293	0.711	
A20(Mid)	END	SUPER	1	67.256	15.773	-1.298	0.708	1.916	0.153	15.697	1.293	0.711	
TOTAL LENGTH =	807.075641	QX	=	8.496780	QY	=	8.536931						
ALFA	=	0.146667E-01	QX'	=	-58.274315	QY'	=	36.700898					
GAMMA (TR)	=	8.257205	BETAX (MAX)	=	22.661810	BETAY (MAX)	=	22.566020					
		DX (MAX)	=	2.268471	DY (MAX)	=	0.000000						

#### IV. GRAPHICAL PRESENTATIONS

The figures that follow present the data of the tables in the preceding section in graphical form. In all figures, calculated points have been joined by straight lines without interpolation.

Data were computed for beam momenta of 15, 20, 25, 27, 29 and 32 GeV/c. The 15 GeV/c results apply for momenta down to about 1-2 GeV/c.

All data in this high-field regime are for a D. C. (not ramped) Bare Machine. "Bare" means with main magnets only -- that is: not including any corrections effected by the high-field quadrupoles and sextupoles. "D. C." or "unramped" means excluding any effects due to changing magnetic fields (i.e., no dB/dt effects).

##### Summary of Figures:

Figures 1-8 present data for the parameters Beta-x, Beta-y, Alpha-x, Alpha-y, Mu-x, Mu-y, dx and dx'. Each parameter is given for all six energies (beam momenta) on the same panel.

Figures 9-13 and 14-18 present data for the respective beam momenta 15 GeV/c and 29 GeV/c. (Alpha-x, Alpha-y and dx' are not given separately, since their energy variations are mini and these parameters can be read just as easily from Figures 3, 4, and 8.)

Figures 19-24 present the energy (beam momentum) variations in the minima and maxima of Beta-x, Beta-y and dx (dispersion).

Figures 25-26 present the energy (beam momentum) variations in tunes and chromaticities, both horizontal and vertical.

Figures 27-32 present the Courant-Snyder parameters, Beta and Alpha, and the phase function, Mu, showing both the horizontal and vertical parameters on the same panel at each of the two beam momenta: 15 and 29 GeV/c.

Figures 33-34 repeat the data of Figures 1 and 2 (Beta-s) but with a square root scale and zero not suppressed. This shows the relative beam sizes along the supereperiod (as beam size is proportional to the square root of Beta).

Figure 35 presents beam size for the 15 GeV/c case, given in actual size units (mm). These were calculated using emittances measured at 1 GeV and scaled, appropriately, to this momentum.

#### Notations of Axes:

In Figures 1-18 and 27-35, the horizontal axis represents distance along the machine, starting from the middle of the "20"-straight section of one superperiod and running through the middle of the "20"-straight section of the next superperiod.

The bottom horizontal axis is noted with rectangles showing the positions of the main magnets: with horizontal focussing magnets above the axis and horizontal defocussing ones below.

Above the frame are the section numbers -- 01 to 20; the heavier vertical grid lines mark section boundaries. Note that the second half of straight section 20 (of the preceding superperiod) is to the left of magnet 01.

In Figures 19-26, the horizontal axis represents machine beam momentum and runs from 15 to 32 GeV/c.

The vertical axes are marked with the respective parameters and have a scale chosen to fill most of the panel. Note that this axis does not necessarily contain the zero-point.

#### Units:

Beta's and dispersions ( $dx$ ) are given in meters.

Phase advance is given in units of  $2\pi$  -- a phase advance of 8.7 corresponds to 8.7 cycles (or approximately 54.66 rad).

Alpha,  $dx'$ , tune and chromaticity are dimensionless.

#### Comments:

Since we have chosen to connect the calculated points with straight lines, the plots of the beta-functions show sharp corners. In reality, the beta-functions are smooth (their derivatives exist everywhere). In contrast, the alpha-functions do not have a derivative everywhere and, therefore, the sharp corners shown in the plots are real. It should be noted that the derivatives of the alpha-s in drift spaces (straight sections) are always negative; consequently, the second derivative of the beta-function is always positive in these spaces. Thus, the beta-s, though they may appear to be flat there, are in fact going through a local minimum. Where the beta-functions are at a maximum in a straight section (05, 13 and 17 in x; 03, 07 and 15 in y), the true maxima occur on the boundaries of these straight sections (at the ends of the magnets); there is a local minimum inside the straight section. To a good approximation, the curves there may be considered to be flat-topped.

#### REFERENCES

- [1] E. D. Courant and H. S. Snyder, "Theory of the Alternating Gradient Synchrotron", Ann. of Phys. 3,1 (1958). See also chapters covering this material in the various Summer Study volumes: Fermilab, 1981 (AIP Conf. Proceedings No. 87, pp. 1-34); BNL-SUNY, 1983 (AIP Conf. Proceedings No.127, pp. 3-27).
- [2] F. C. Iselin and J. Niederer, "The MAD Program -- User's Reference Manual", CERN/LEP-TH/87-33, April, 1987.

#### ACKNOWLEDGEMENTS

I would like to thank E. Bleser for collaboration in formulating the input which specifies the magnets of the bare machine; this was based, in part, on earlier field measurements by R. Thern.

Thanks are also due to M. Tanaka and R. Thern for comments and suggestions on the material to be displayed and for the manner of presentation in this note.

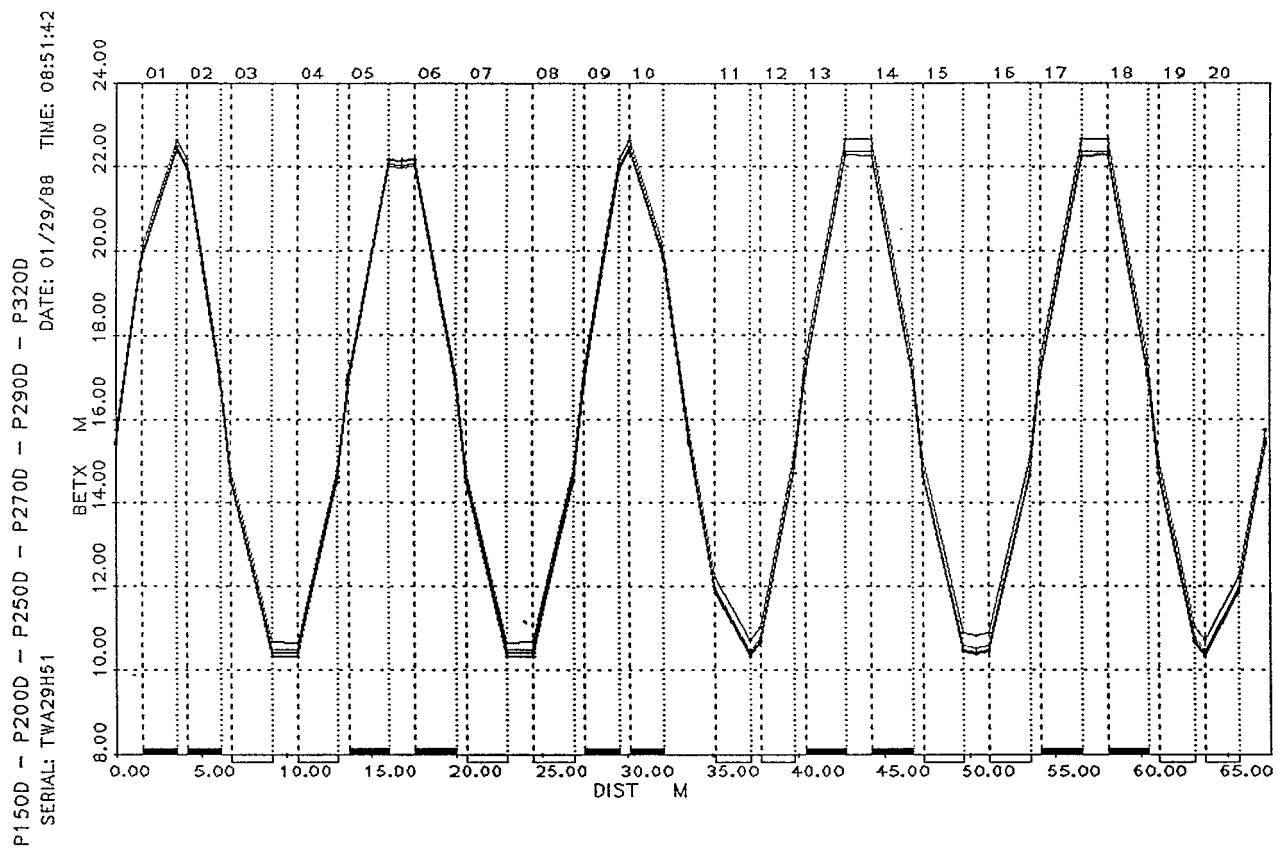


Figure 1. Courant-Snyder Parameter Beta-x (in meters) for the D.C. "Bare" Machine (main magnets only) at high fields: 15-32 GeV/c, given for one superperiod.

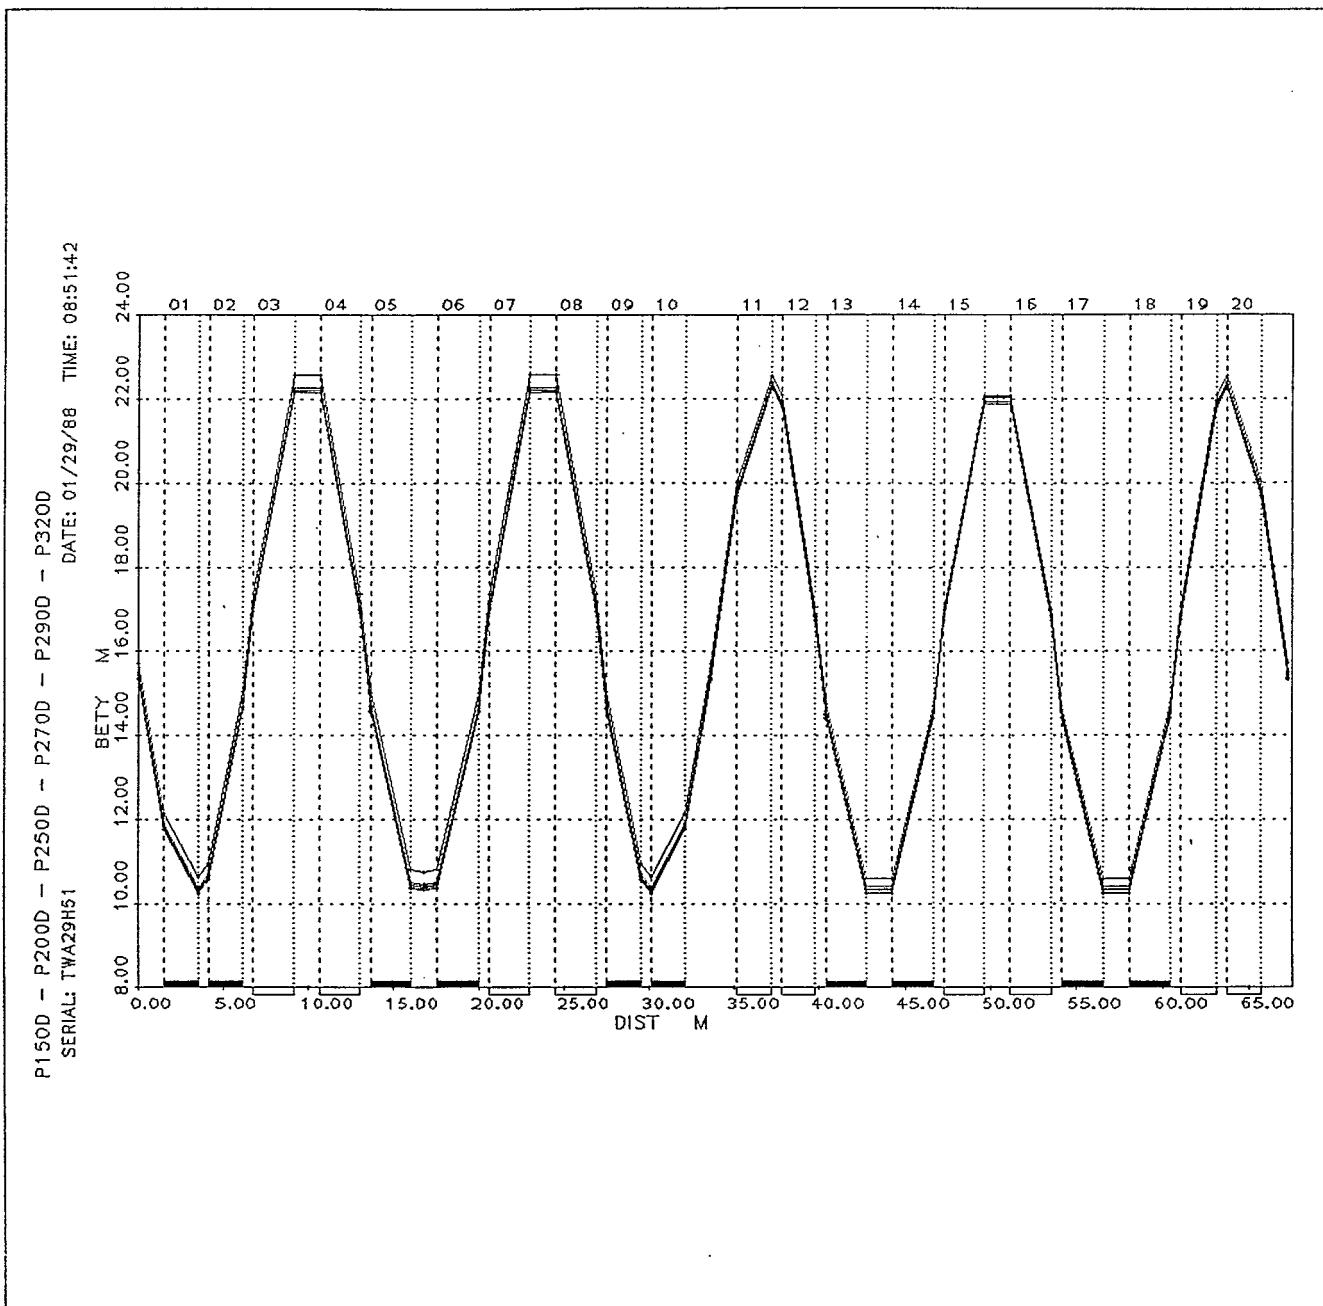


Figure 2. Courant-Snyder Parameter Beta-y (in meters) for the D.C. "Bare" Machine (main magnets only) at high fields: 15-32 GeV/c, given for one superperiod.

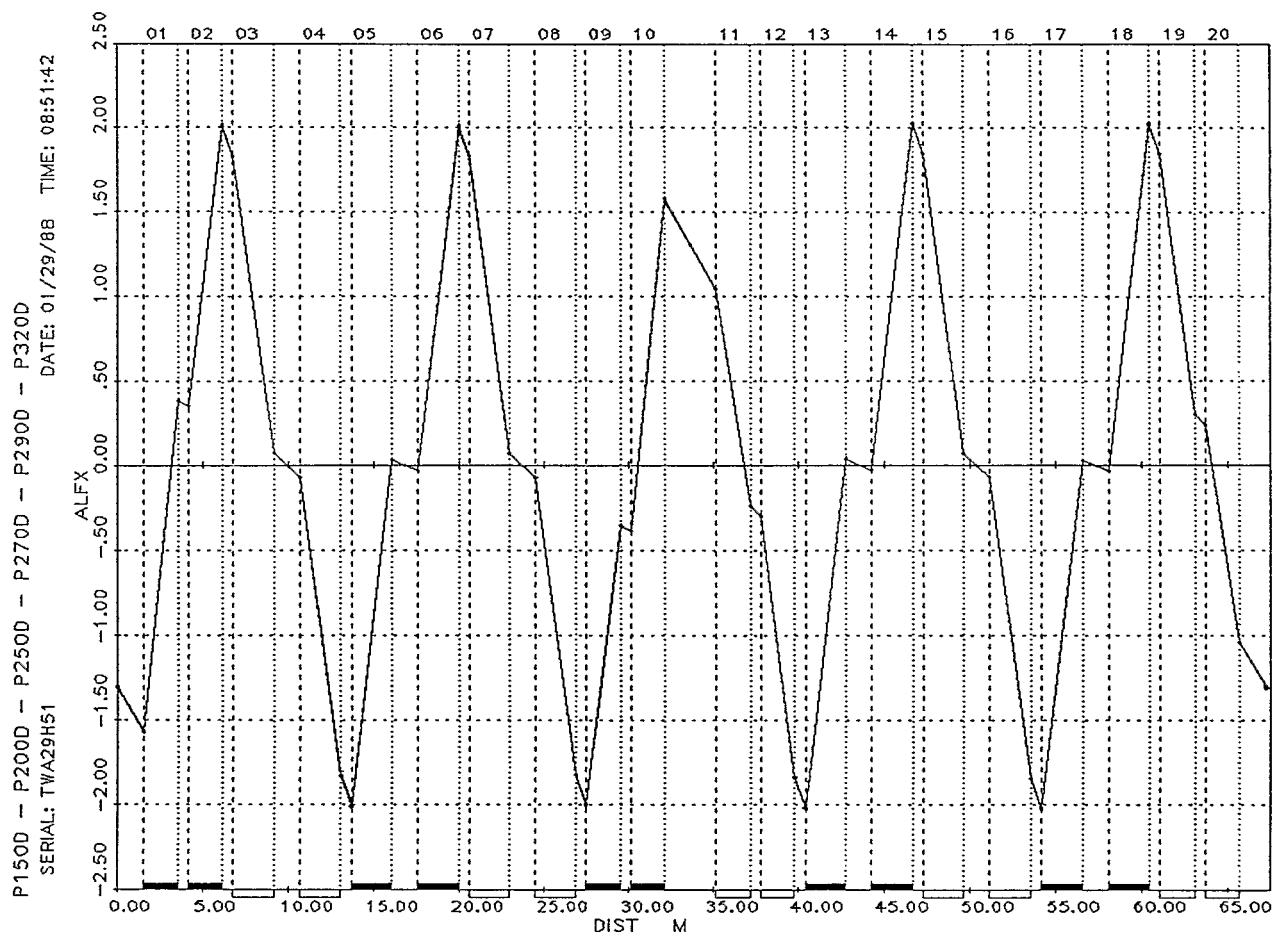


Figure 3. Courant-Snyder Parameter Alpha-x (dimensionless) for the D. C. "Bare" Machine (main magnets only) at high fields: 15-32 GeV/c, given for one superperiod.

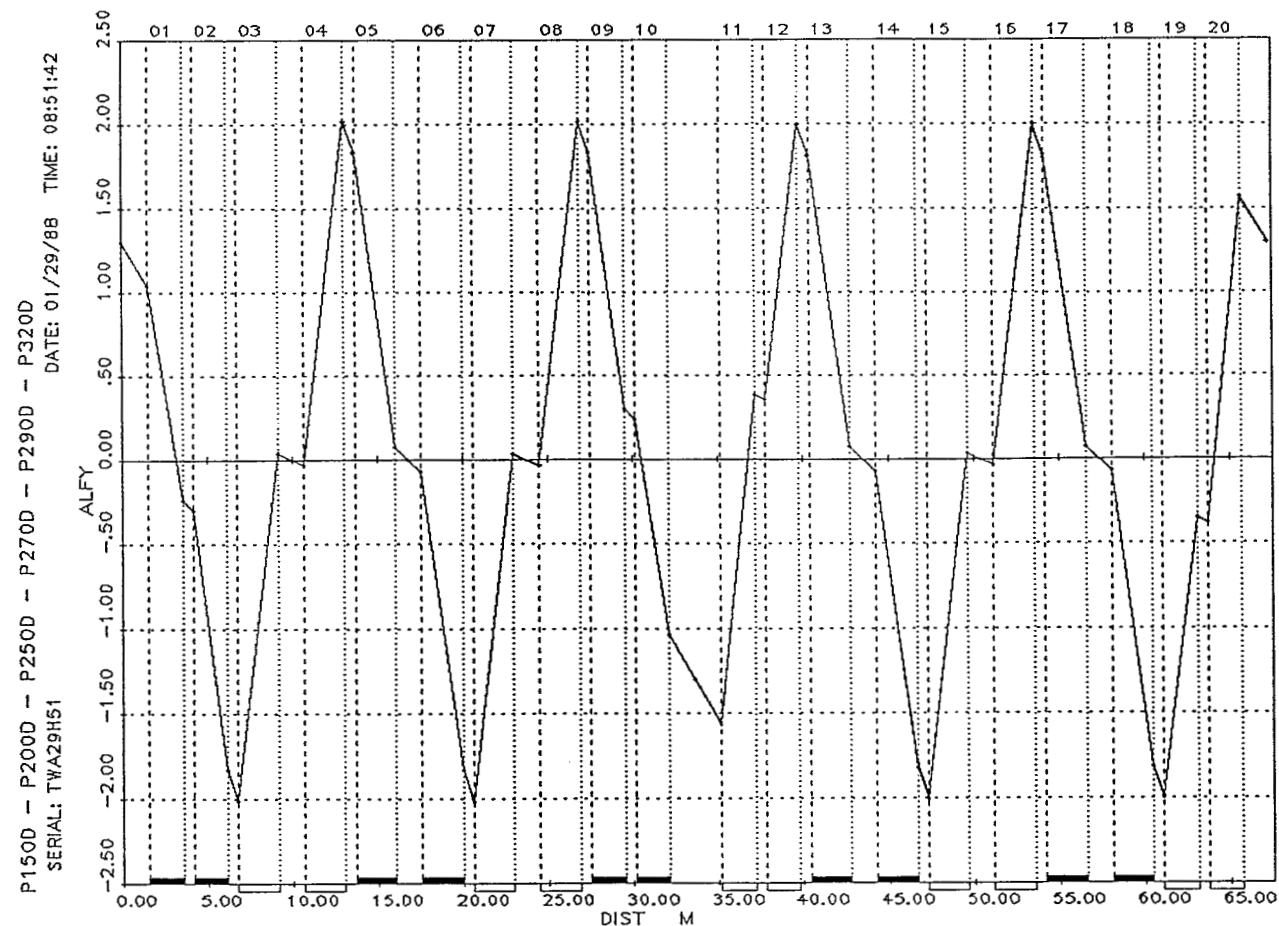


Figure 4. Courant-Snyder Parameter Alpha-y (dimensionless) for the D. C. "Bare" Machine (main magnets only) at high fields: 15-32 GeV/c, given for one superperiod.

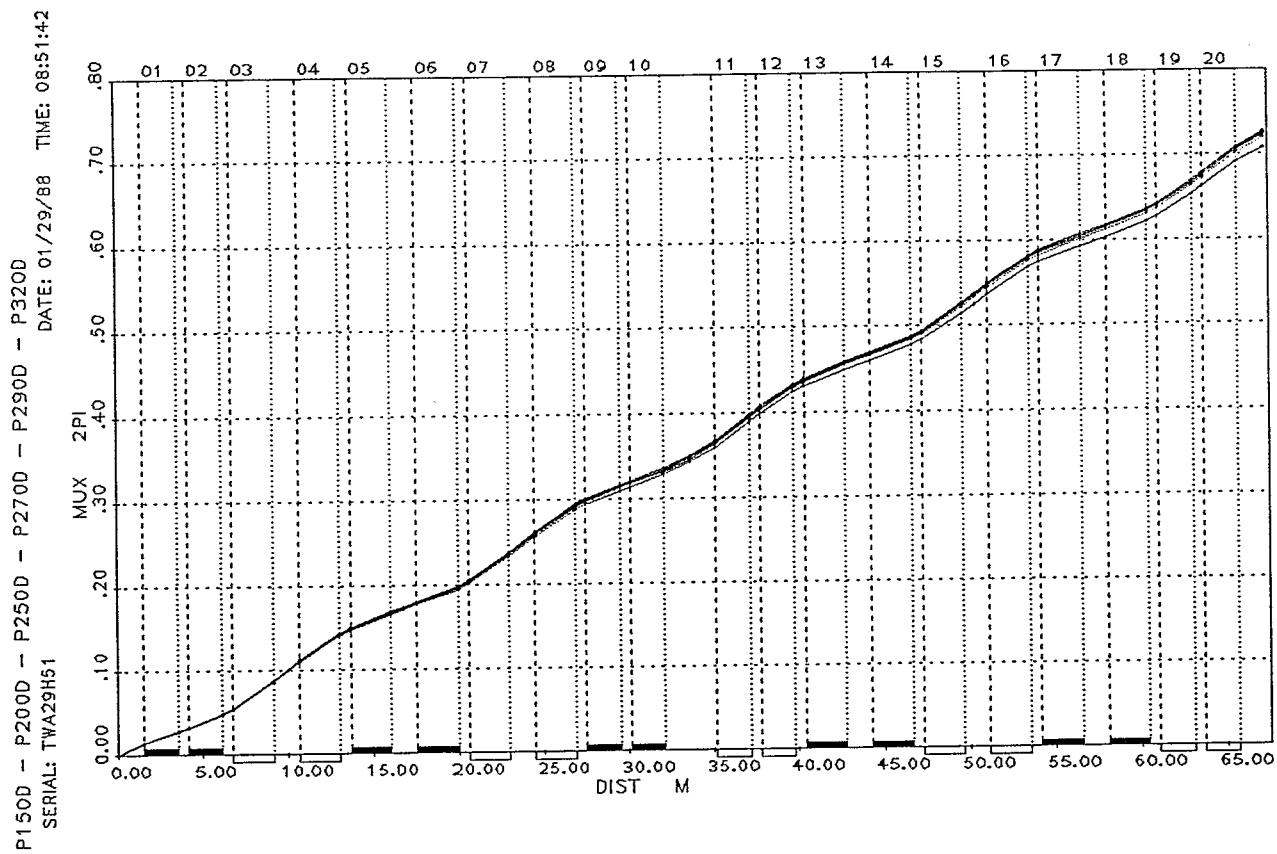


Figure 5. Phase Function Mu-x (in units of  $2\pi$  radians) for the D.C. "Bare" Machine (main magnets only) at high fields: 15-32 GeV/c, given for one superperiod.

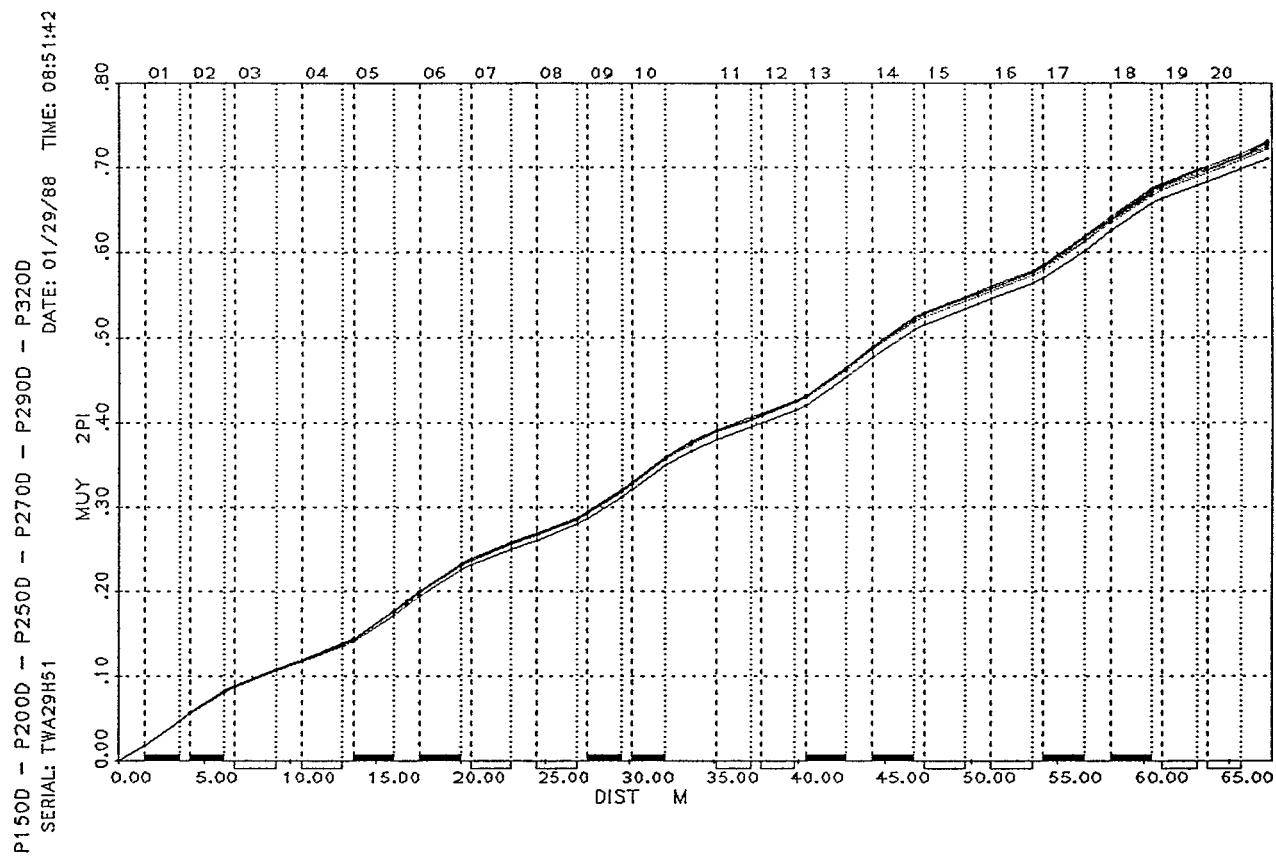


Figure 6. Phase Function  $\mu_y$  (in units of  $2\pi$  radians) for the D.C. "Bare" Machine (main magnets only) at high fields: 15-32 GeV/c, given for one superperiod.

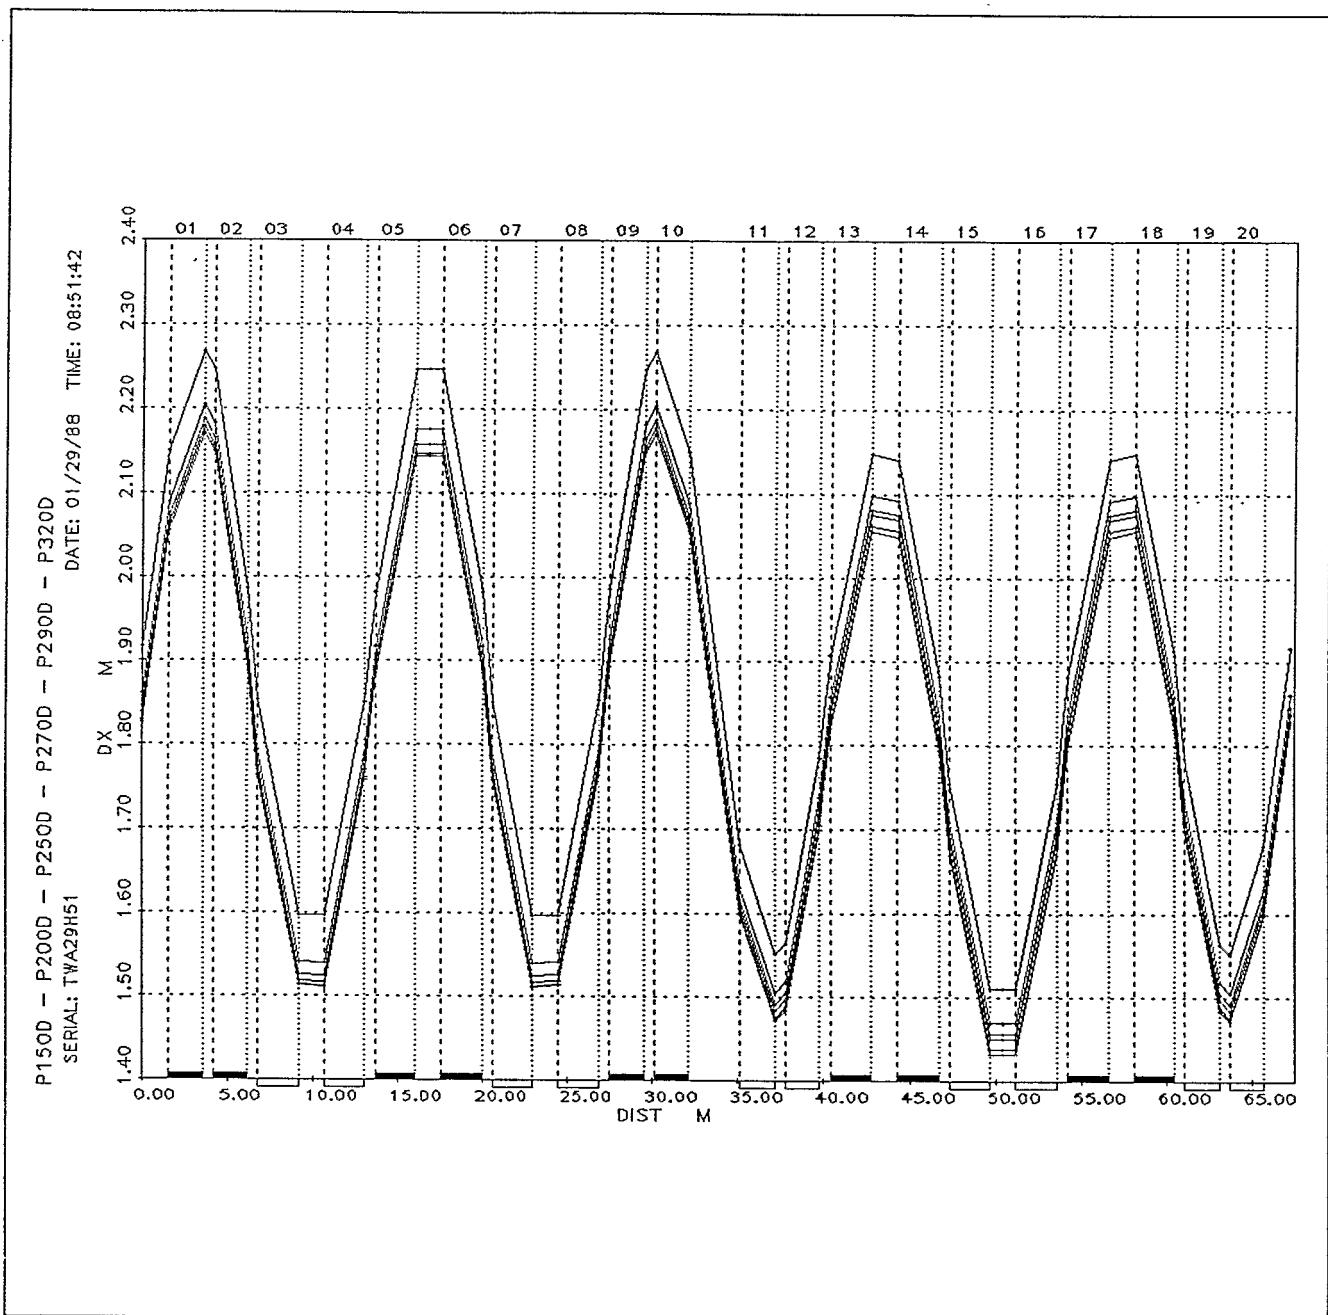


Figure 7. Dispersion Function  $dx$  (in meters) for the D.C.  
"Bare" Machine (main magnets only) at high fields: 15-32  
GeV/c, given for one superperiod.

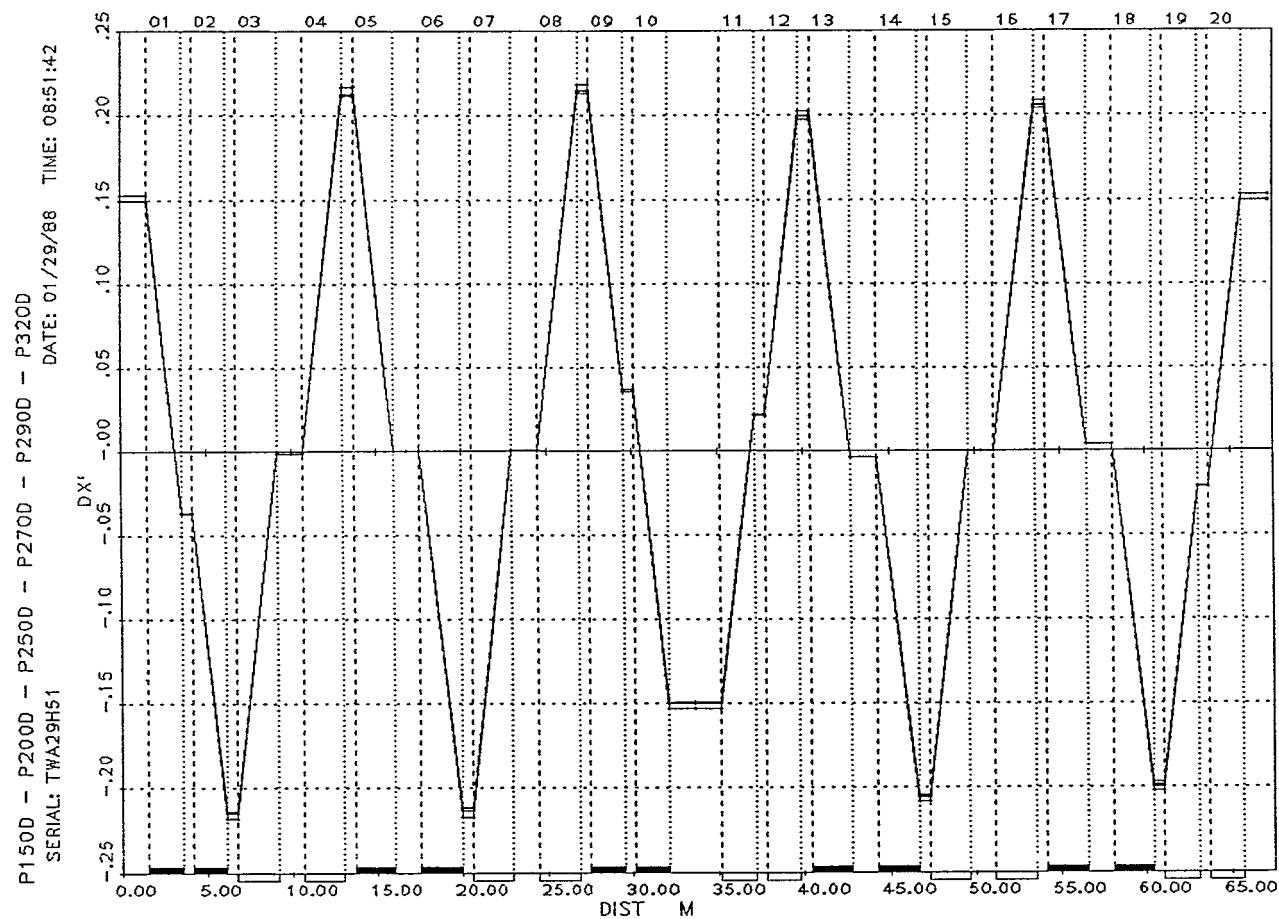


Figure 8. Derivative of Dispersion  $dx'$  (dimensionless) for the D.C. "Bare" Machine (main magnets only) at high fields: 15-32 GeV/c, given for one superperiod.

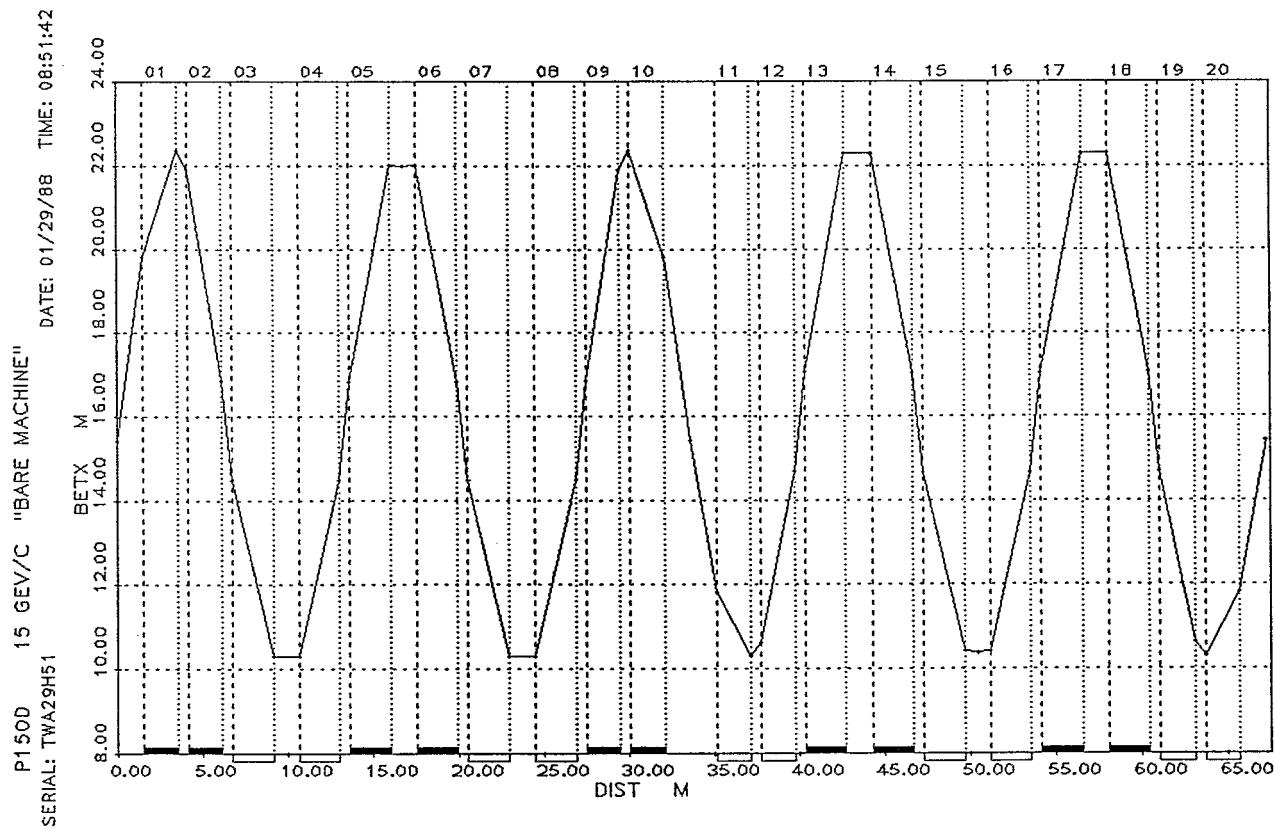


Figure 9. Courant-Snyder Parameter Beta-x (in meters) for the D. C. "Bare" Machine (main magnets only) at 15 GeV/c, given for one superperiod.

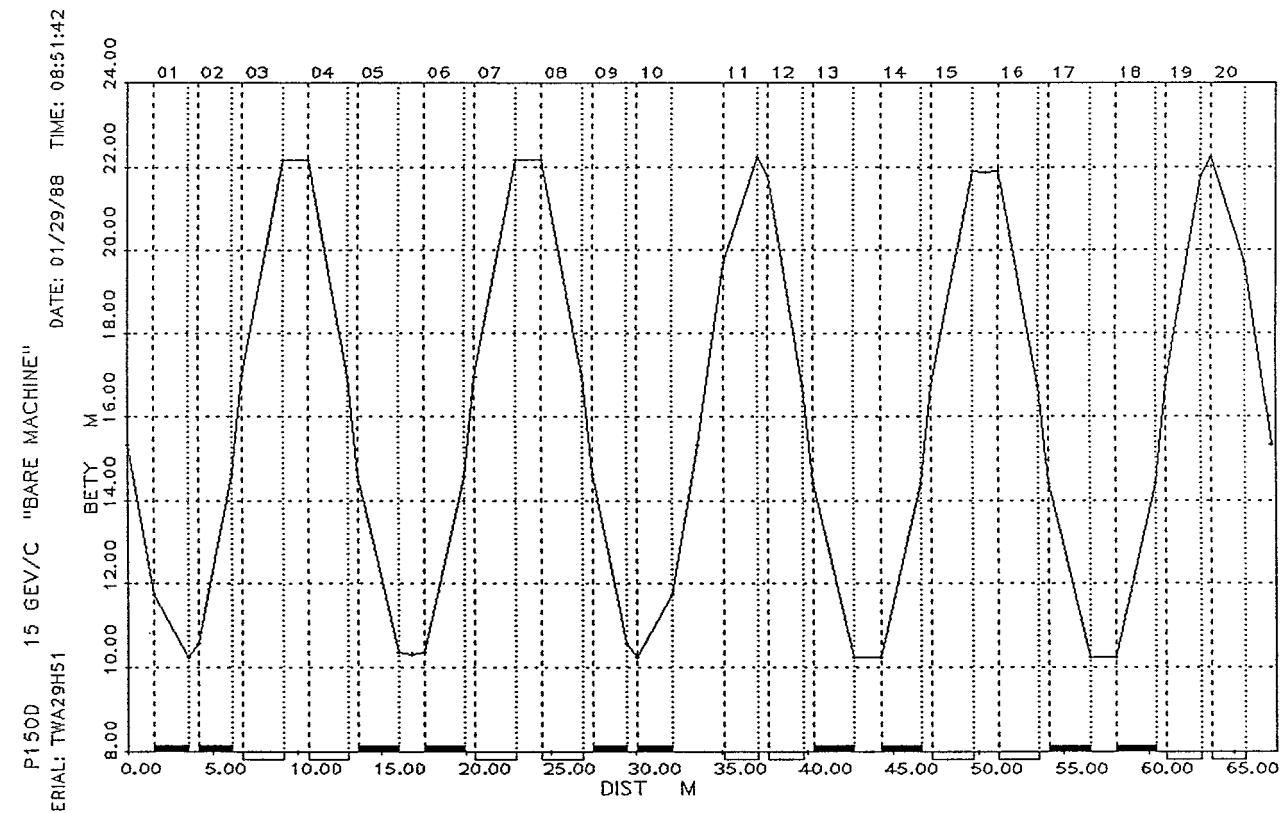


Figure 10. Courant-Snyder Parameter Beta-y (in meters) for the D. C. "Bare" Machine (main magnets only) at 15 GeV/c, given for one superperiod.

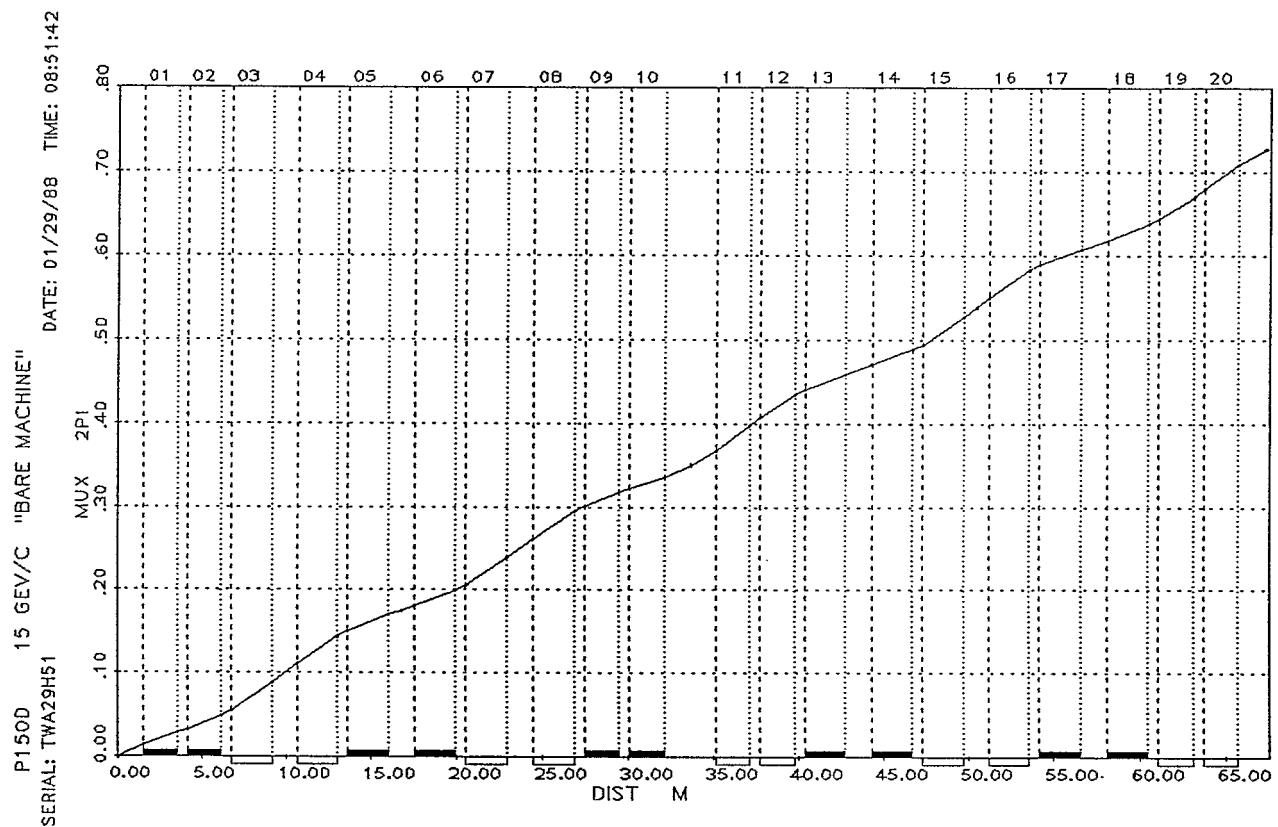


Figure 11. Phase Function  $\mu_x$  (in units of  $2\pi$  radians) for the D. C. "Bare" Machine (main magnets only) at 15 GeV/c, given for one superperiod.

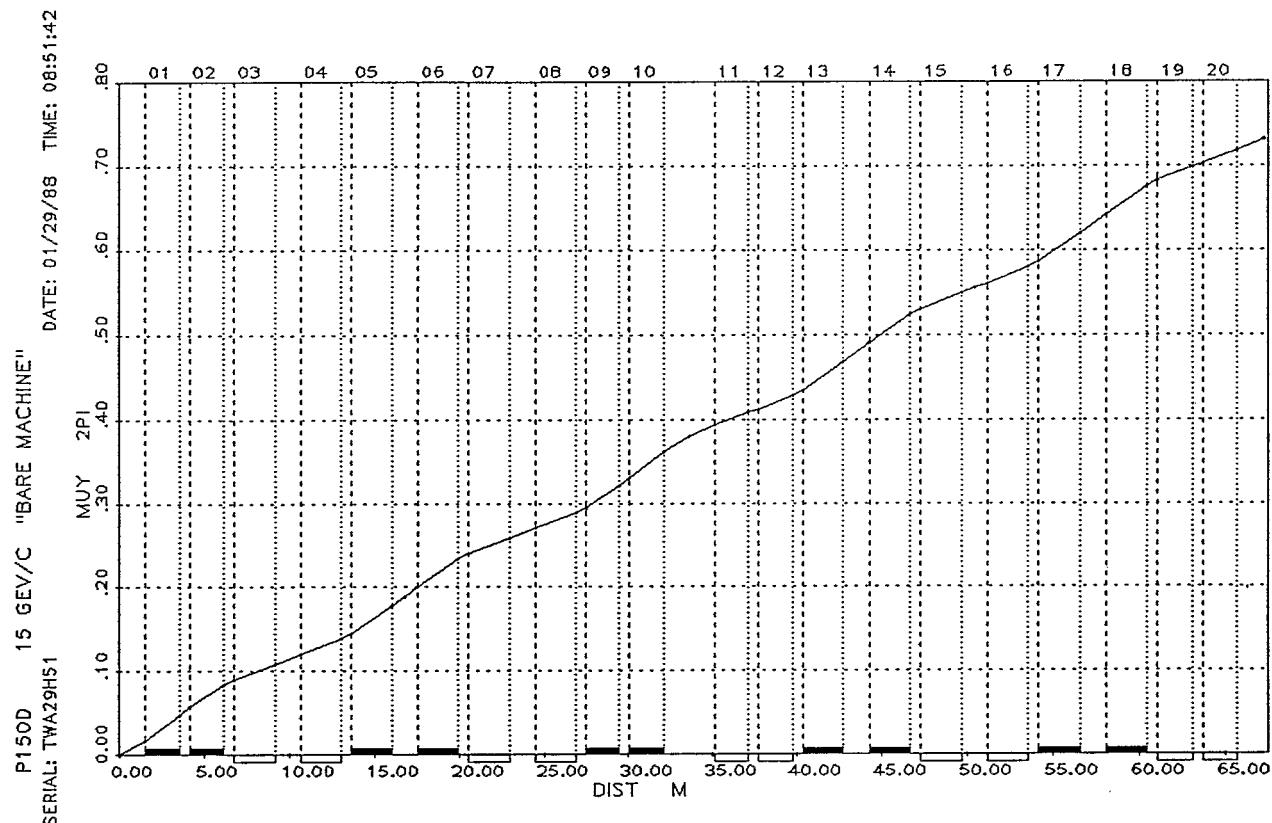


Figure 12. Phase Function  $\mu_y$  (in units of  $2\pi$  radians) for the D. C. "Bare" Machine (main magnets only) at 15 GeV/c, given for one superperiod.

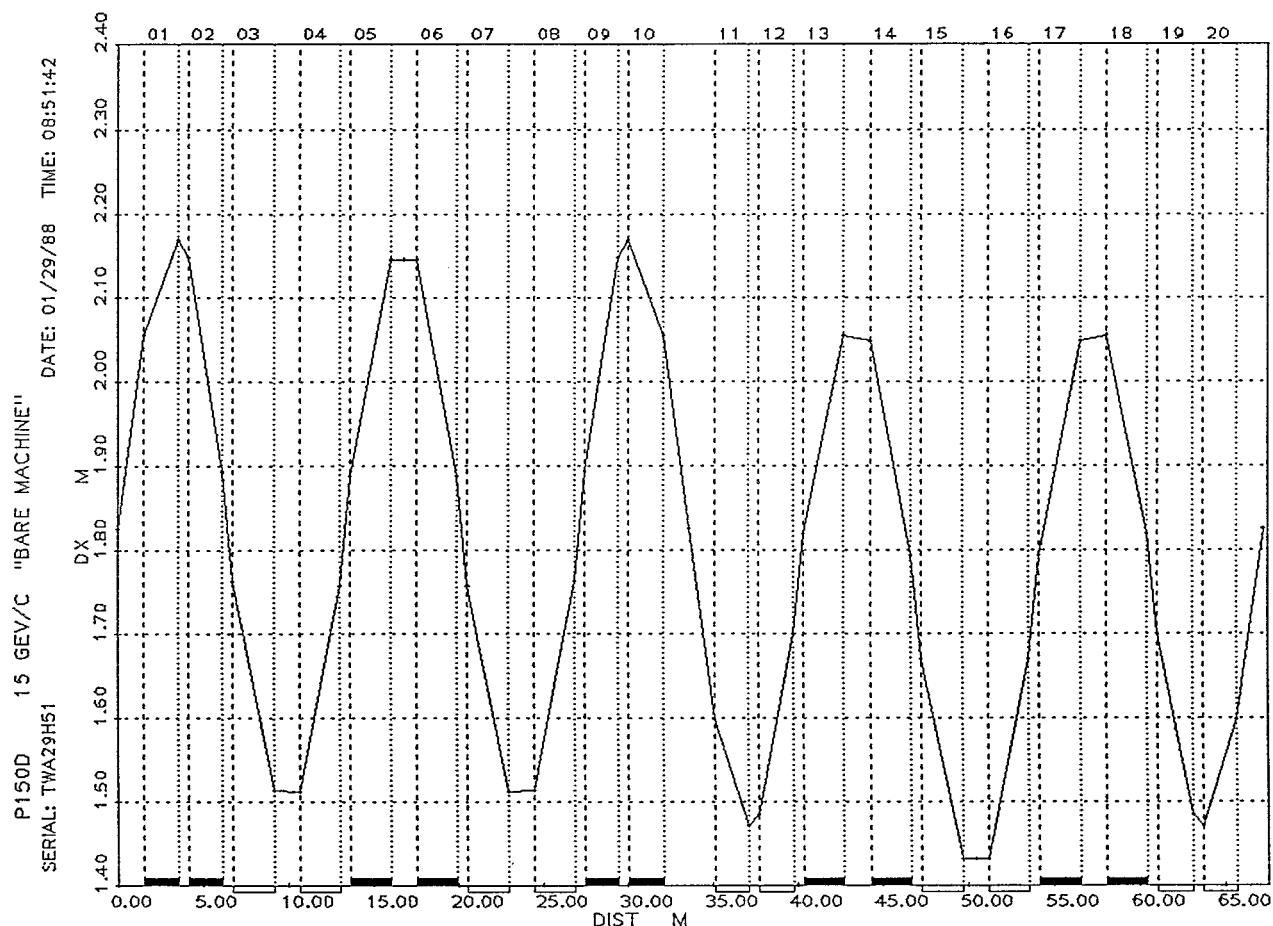


Figure 13. Dispersion Function  $dx$  (in meters) for the D. C. "Bare" Machine (main magnets only) at 15 GeV/c, given for one superperiod.

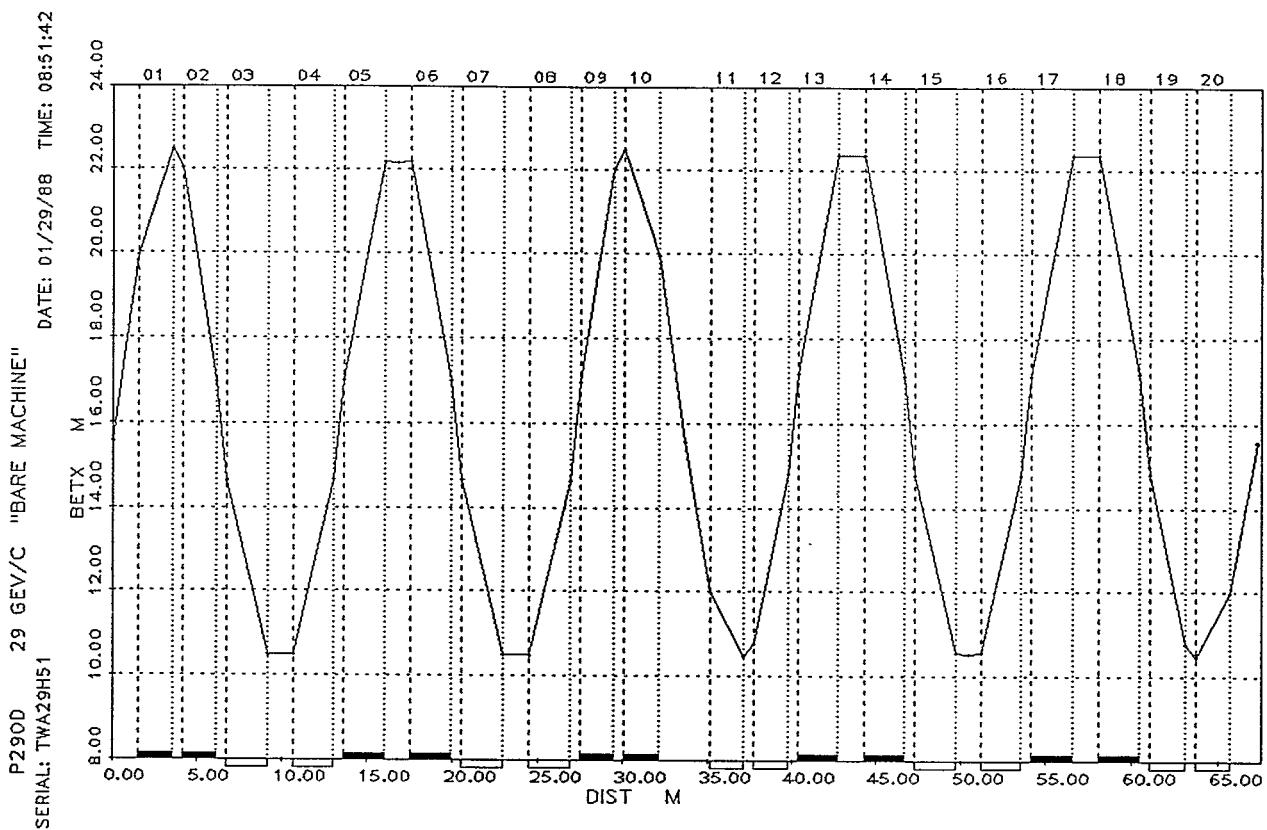


Figure 14. Courant-Snyder Parameter Beta-x (in meters) for the D. C. "Bare" Machine (main magnets only) at 29 Gev/c, given for one superperiod.

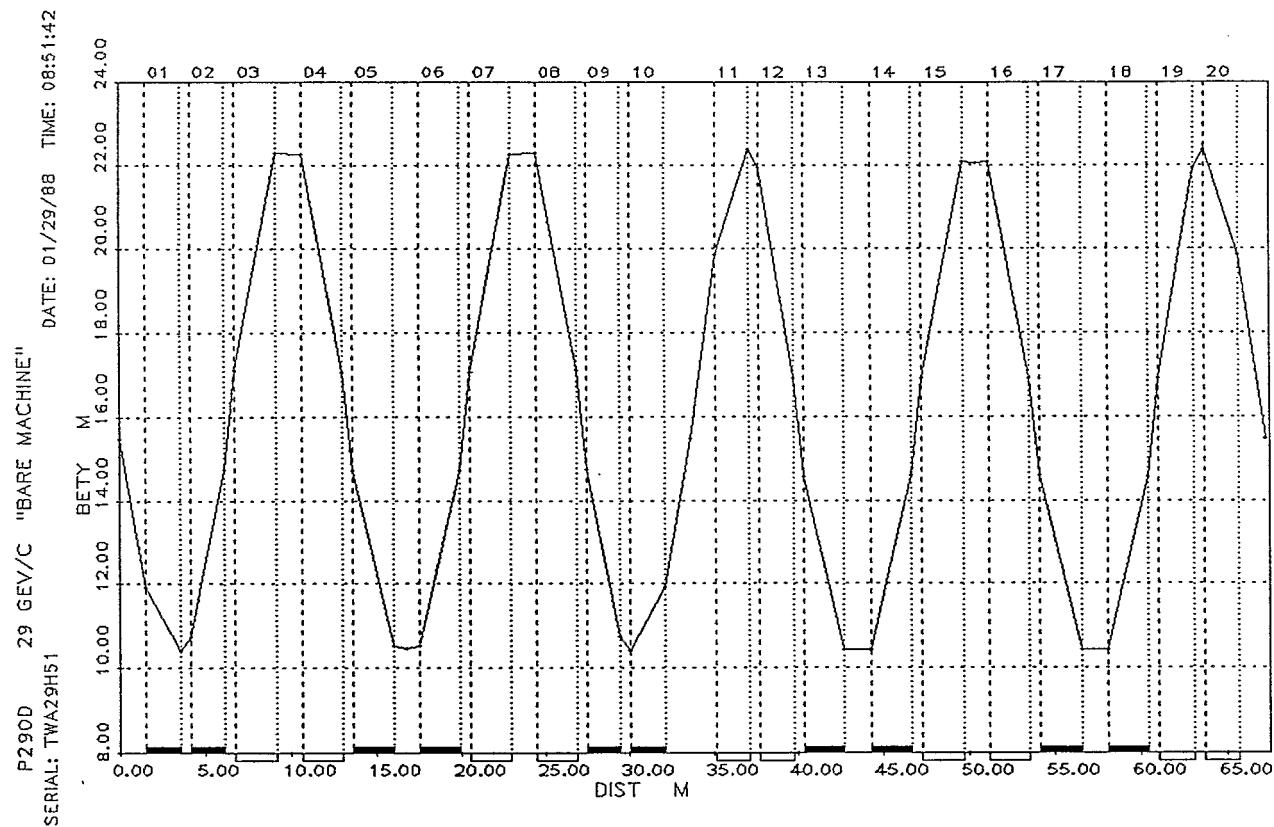


Figure 15. Courant-Snyder Parameter Beta-y (in meters) for the D. C. "Bare" Machine (main magnets only) at 29 GeV/c, given for one superperiod.

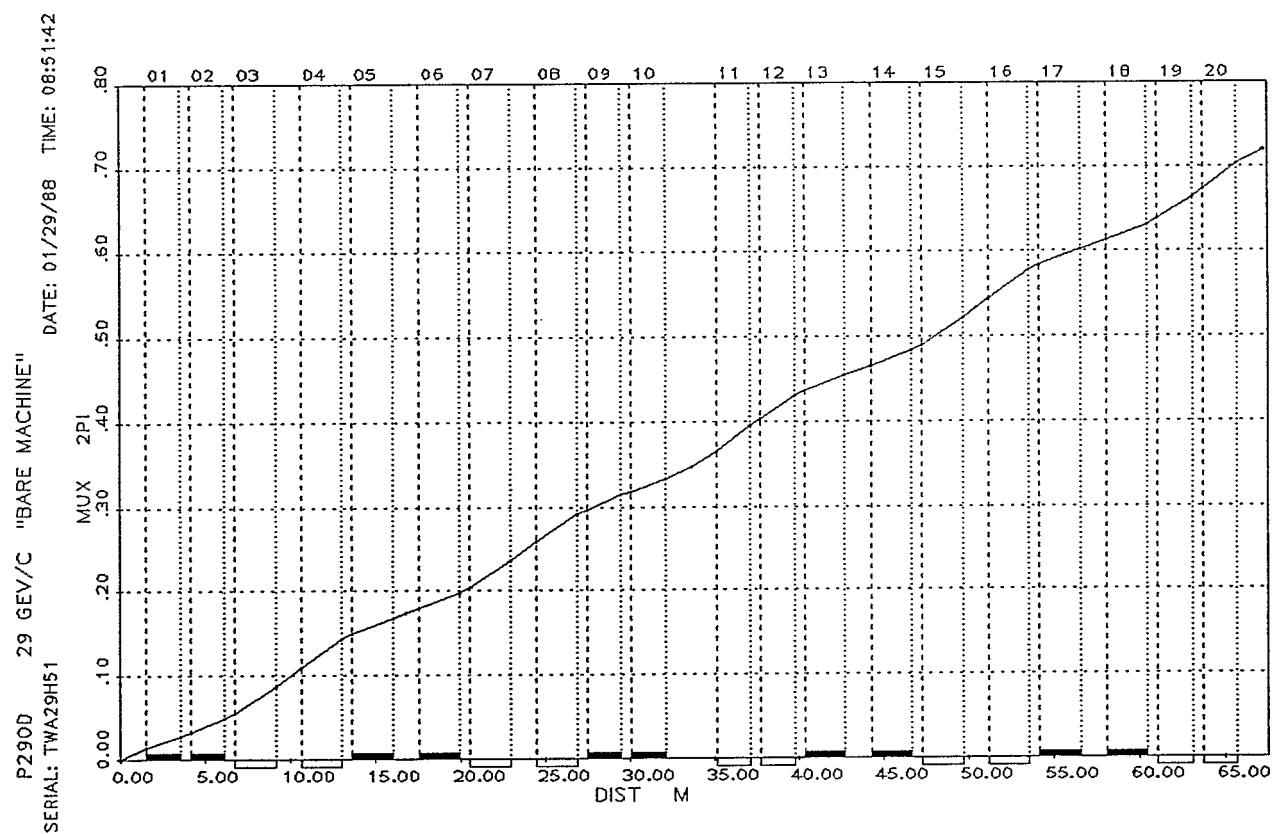


Figure 16. Phase Function Mu-x (in units of  $2\pi$  radians) for the D. C. "Bare" Machine (main magnets only) at 29 GeV/c, given for one superperiod.

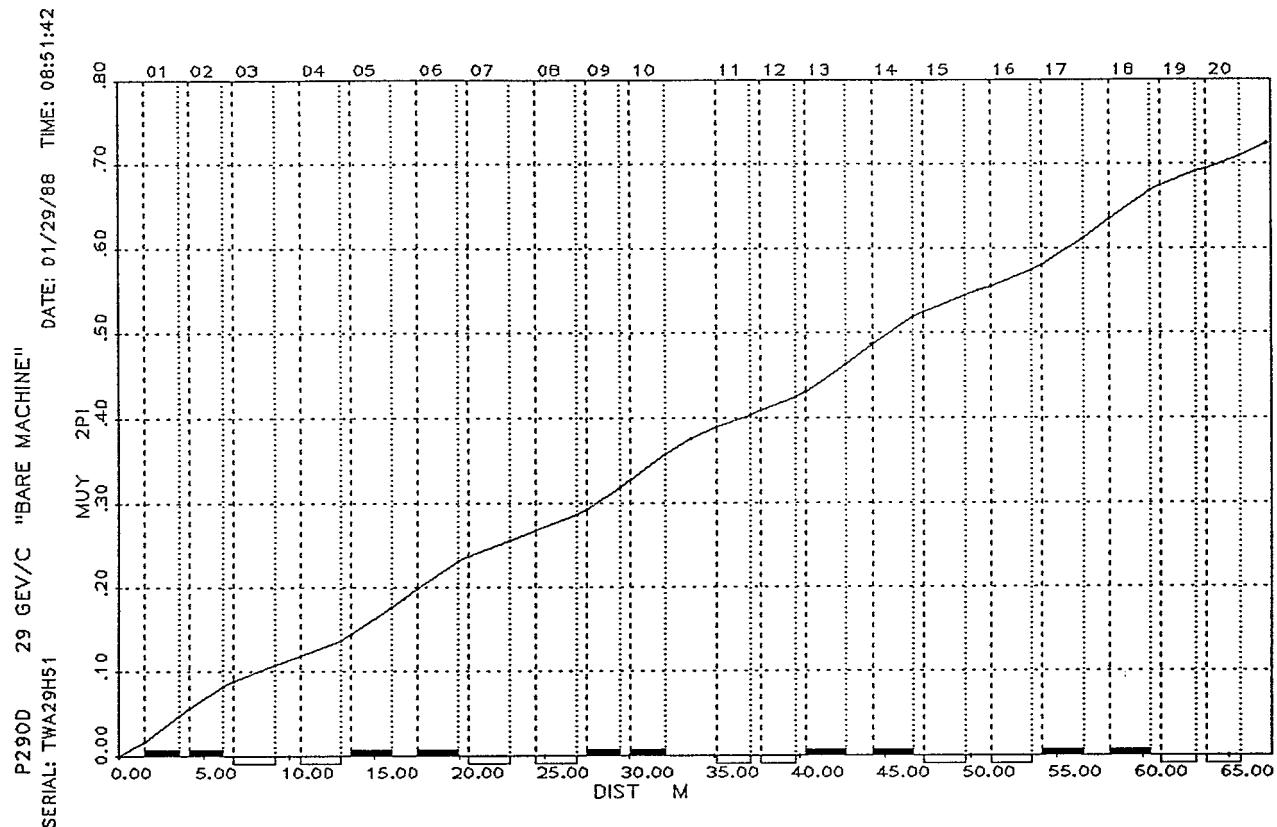


Figure 17. Phase Function  $\text{Mu-y}$  (in units of  $2\pi$  radians) for the D. C. "Bare" Machine (main magnets only) at 29 GeV/c, given for one superperiod.

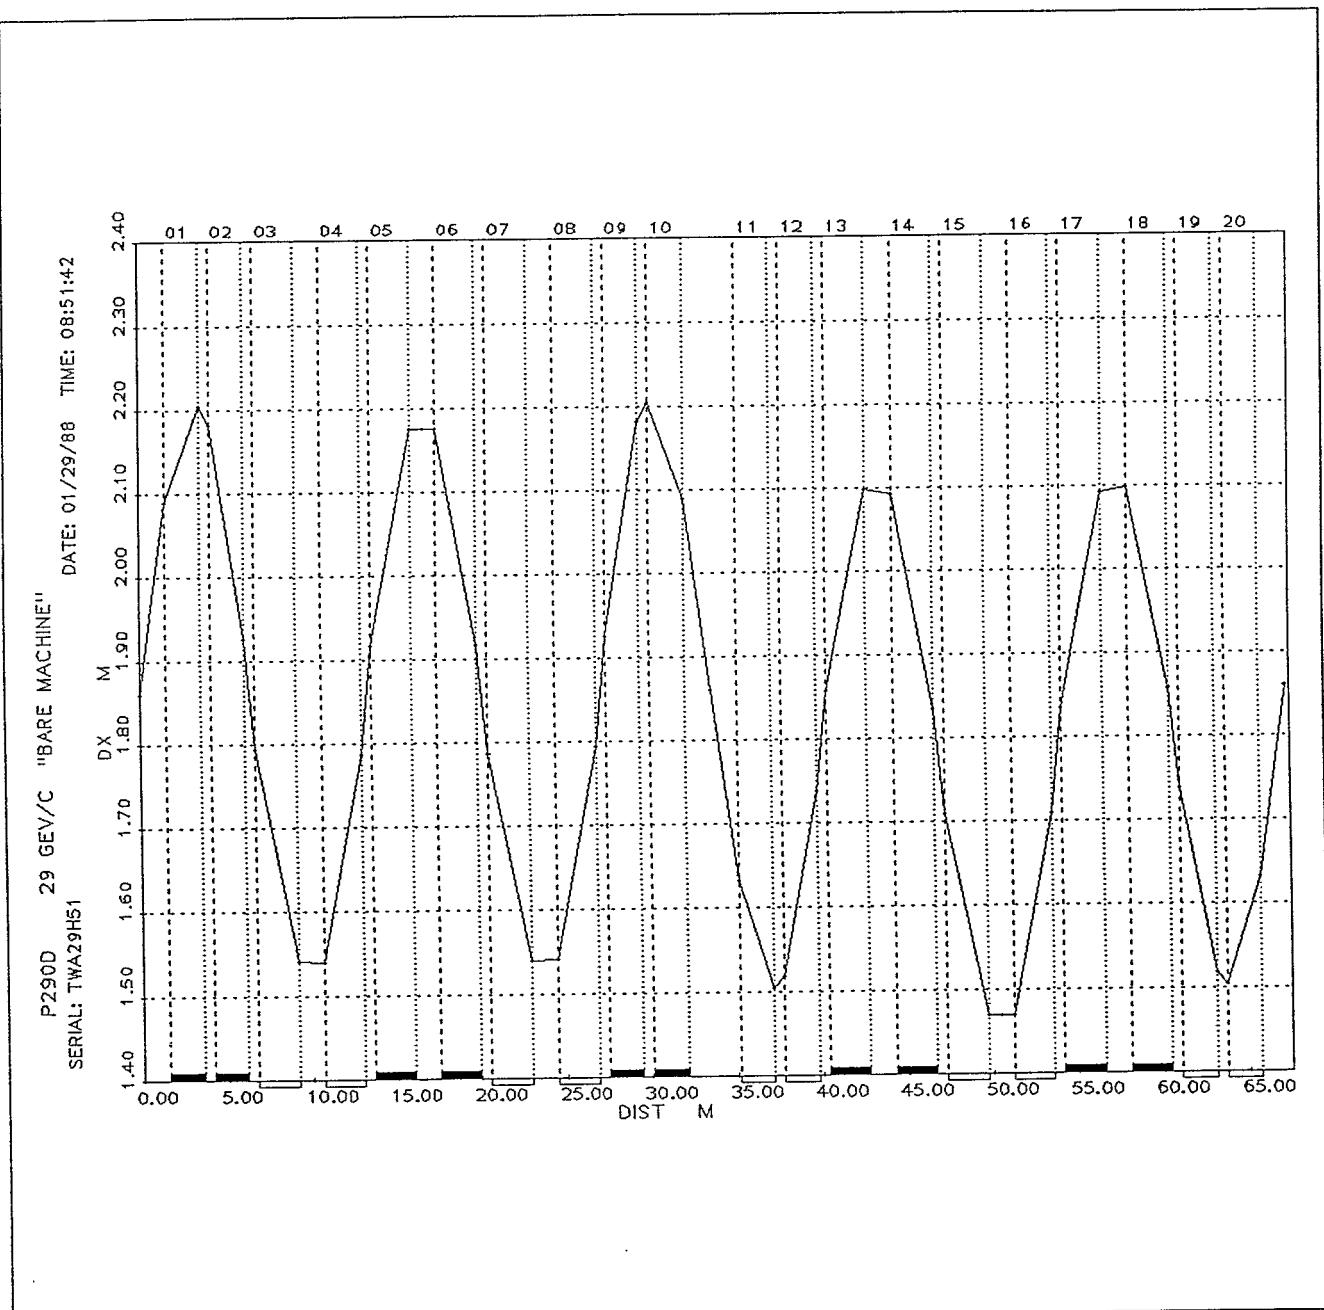


Figure 18. Dispersion Function  $dx$  (in meters) for the D. C. "Bare" Machine (main magnets only) at 29 GeV/c, given for one superperiod.

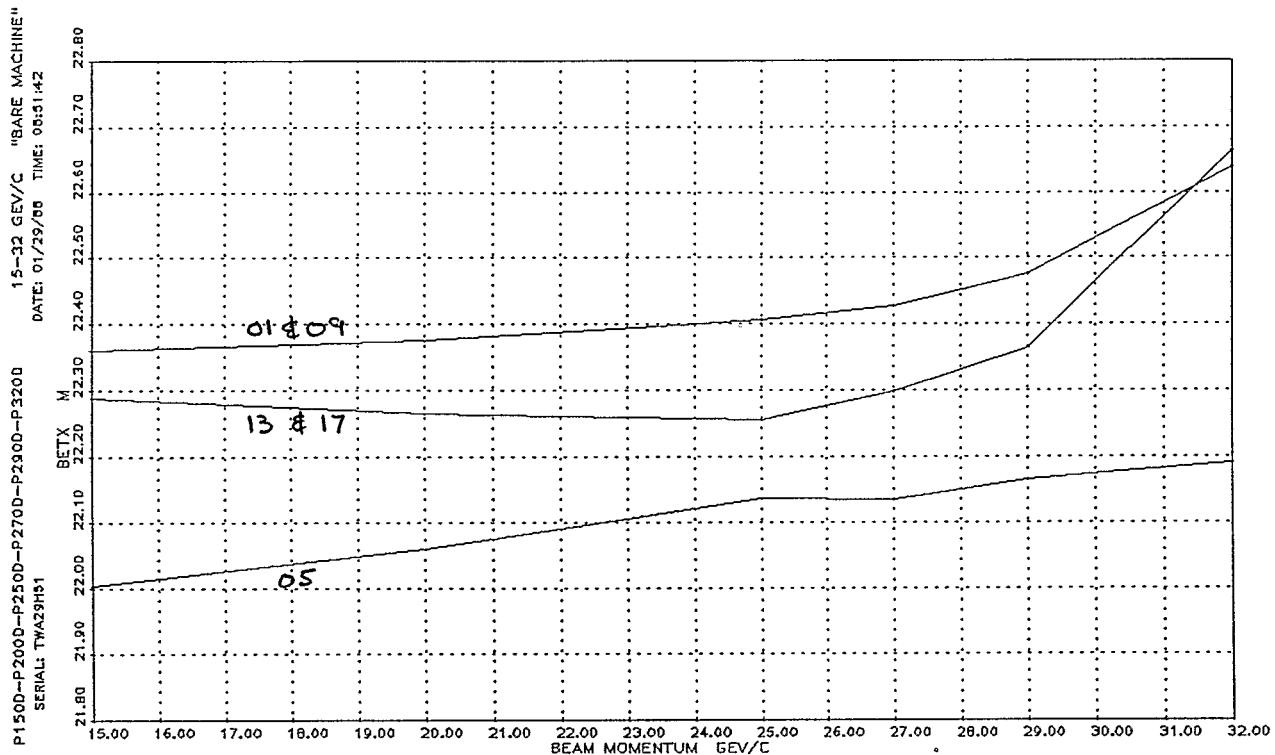


Figure 19. Energy Dependence of the Maxima in Beta-x (in meters) for the D. C. "Bare" Machine (main magnets only) at high fields: 15-32 GeV/c. (Corresponds to Figure 1.) The several maxima are labelled by the machine section in which they occur.

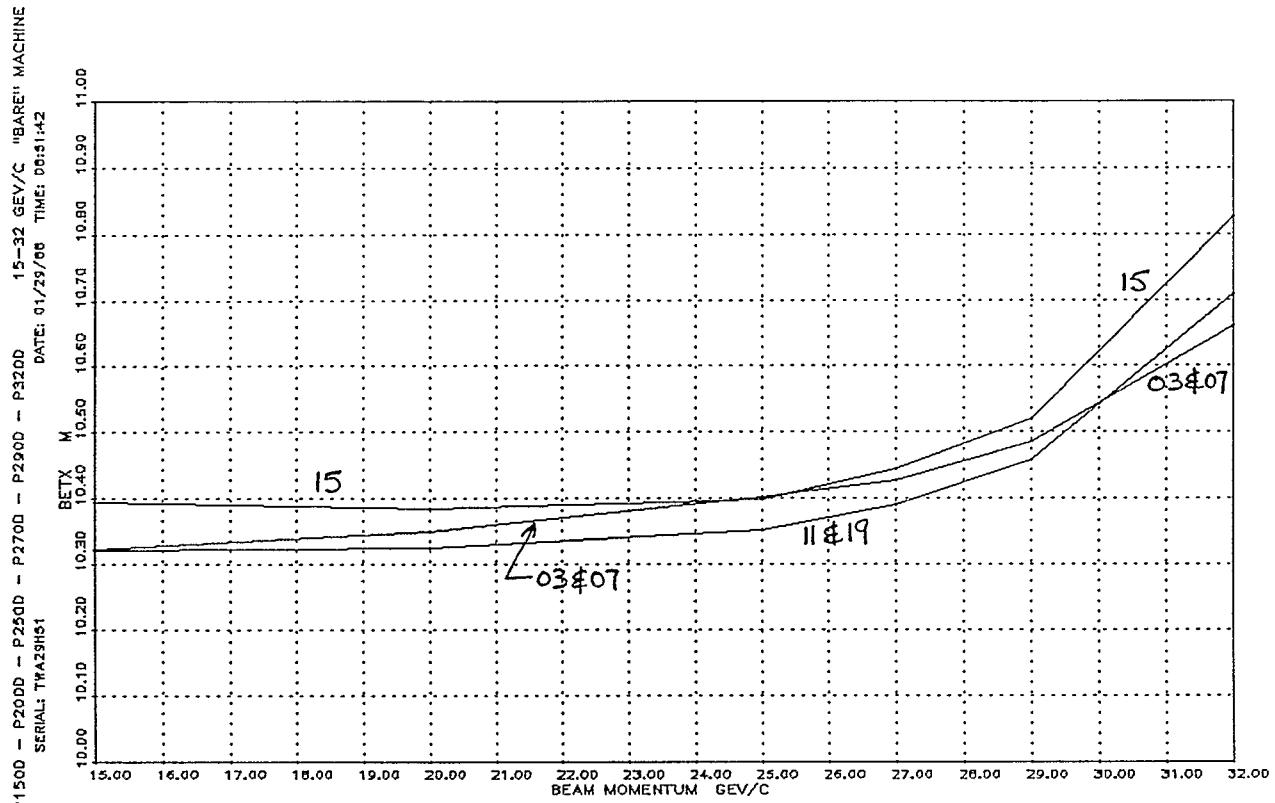


Figure 20. Energy Dependence of the Minima in Beta-x (in meters) for the D. C. "Bare" Machine (main magnets only) at high fields: 15-32 GeV/c. (Corresponds to Figure 1.) The several minima are labelled by the machine section in which they occur.

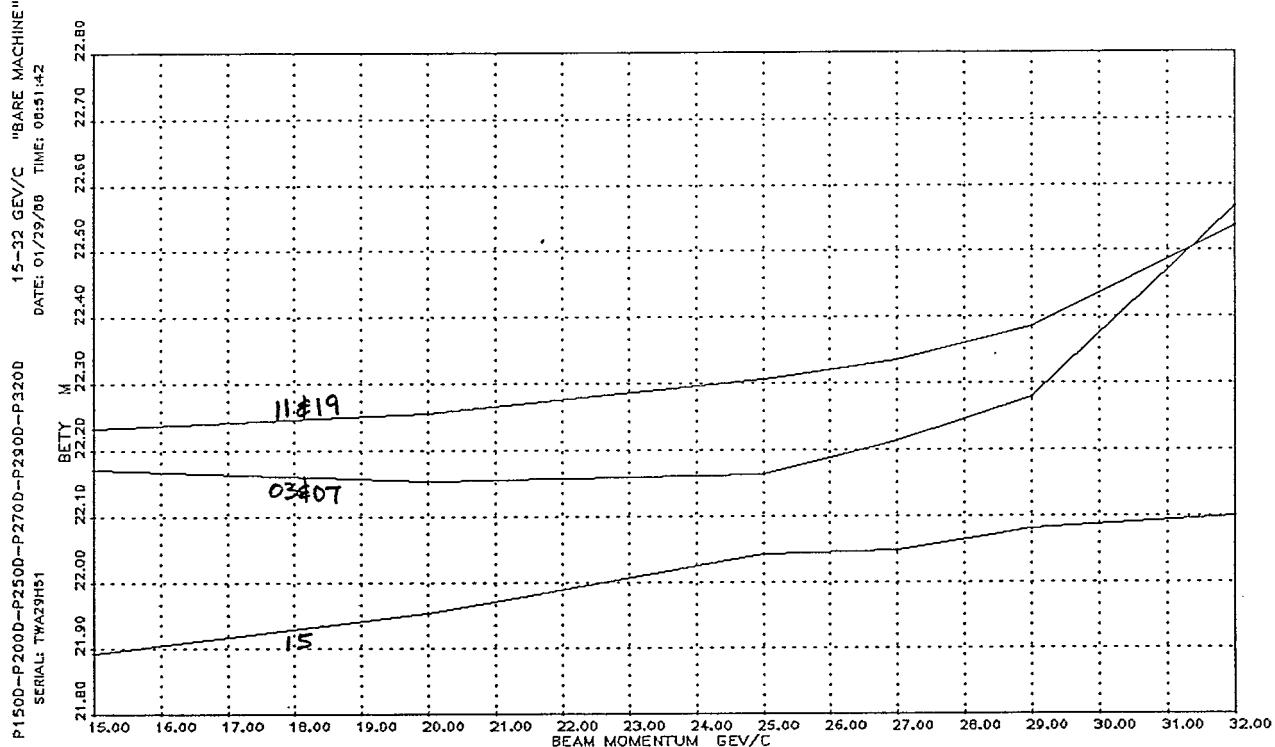


Figure 21. Energy Dependence of the Maxima in Beta-y (in meters) for the D. C. "Bare" Machine (main magnets only) at high fields: 15-32 GeV/c. (Corresponds to Figure 2.) The several maxima are labelled by the machine section in which they occur.

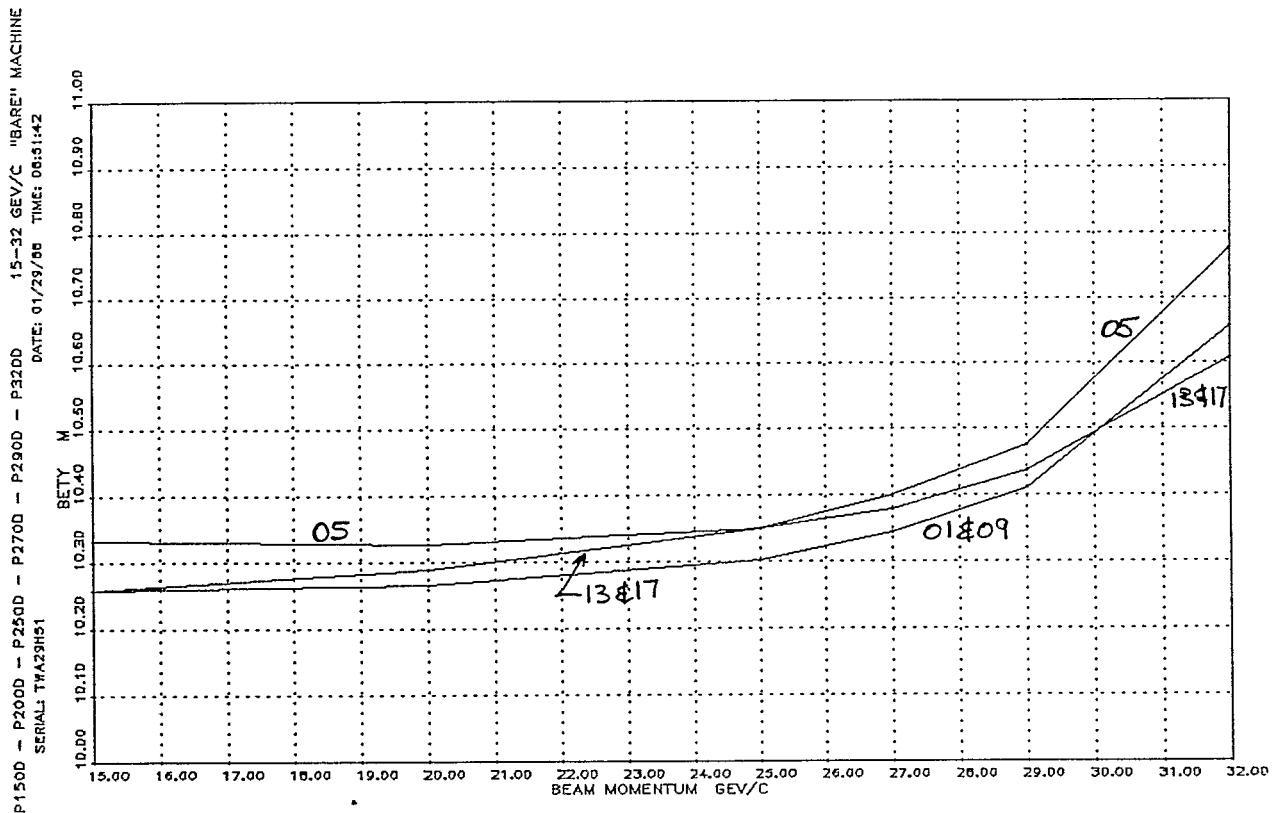


Figure 22. Energy Dependence of the Minima in Beta-y (in meters) for the D. C. "Bare" Machine (main magnets only) at high fields: 15-32 GeV/c. (Corresponds to Figure 2.) The several minima are labelled by the machine section in which they occur.

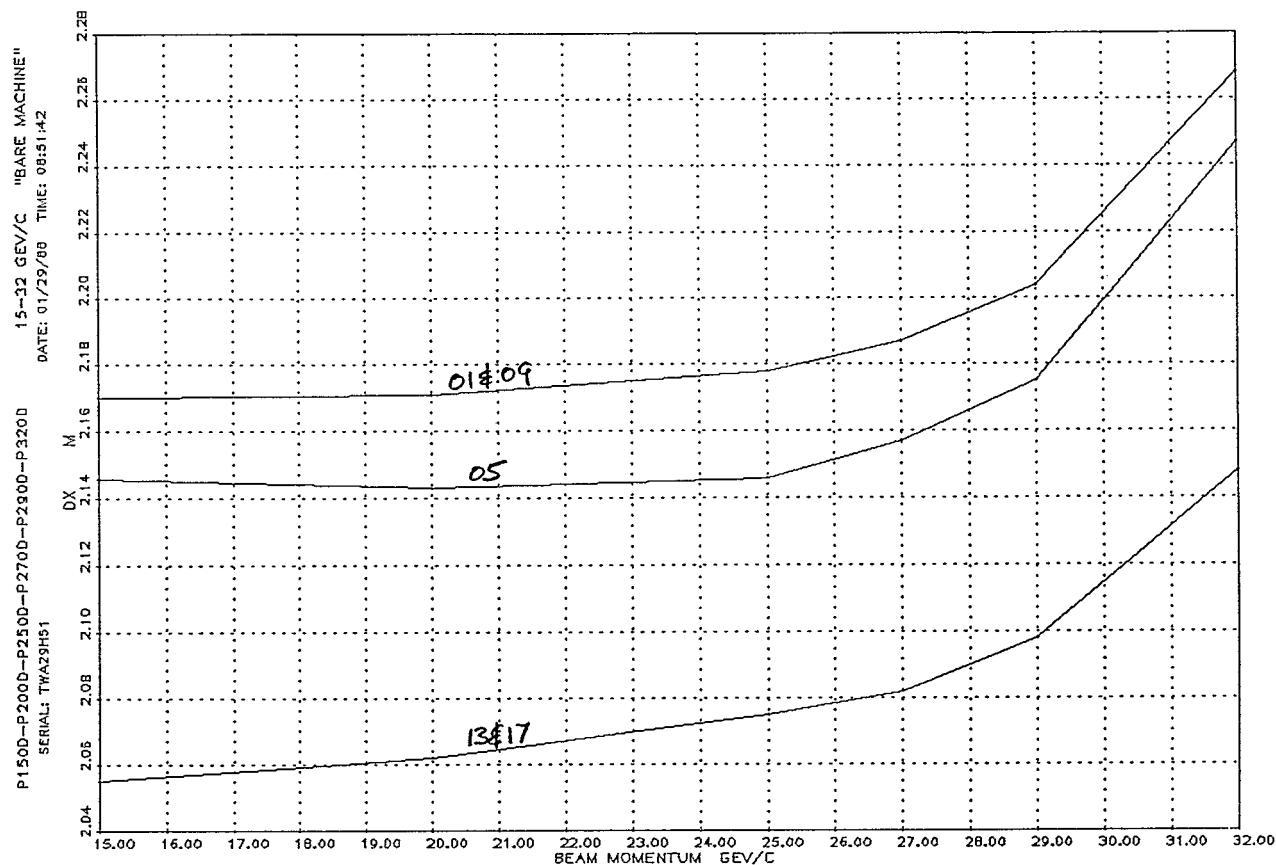


Figure 23. Energy Dependence of the Maxima in Dispersion (in meters) for the D. C. "Bare" Machine (main magnets only) at high fields: 15-32 GeV/c. (Corresponds to Figure 7.) The several maxima are labelled by the machine section in which they occur.

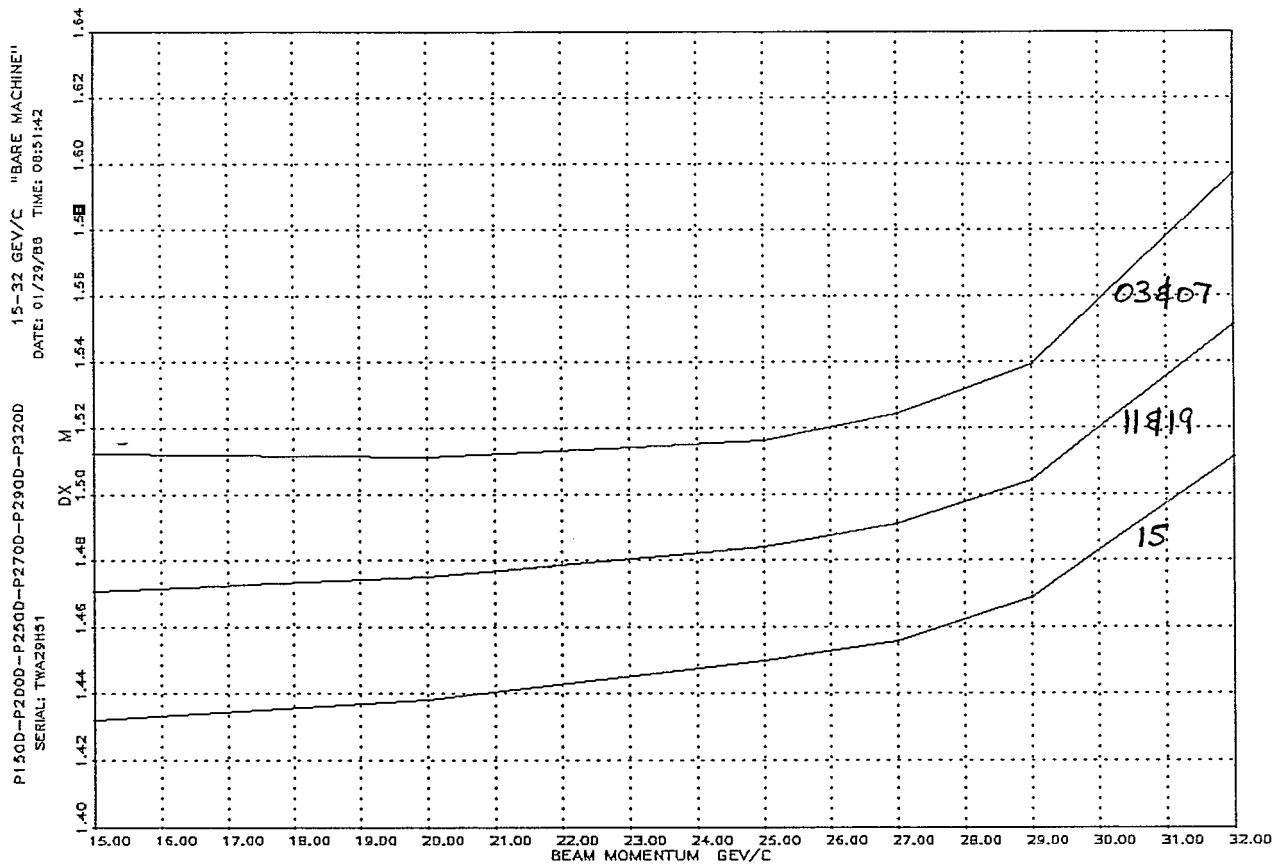


Figure 24. Energy Dependence of the Minima in Dispersion (in meters) for the D. C. "Bare" Machine (main magnets only) at high fields: 15-32 GeV/c. (Corresponds to Figure 7.) The several minima are labelled by the machine section in which they occur.

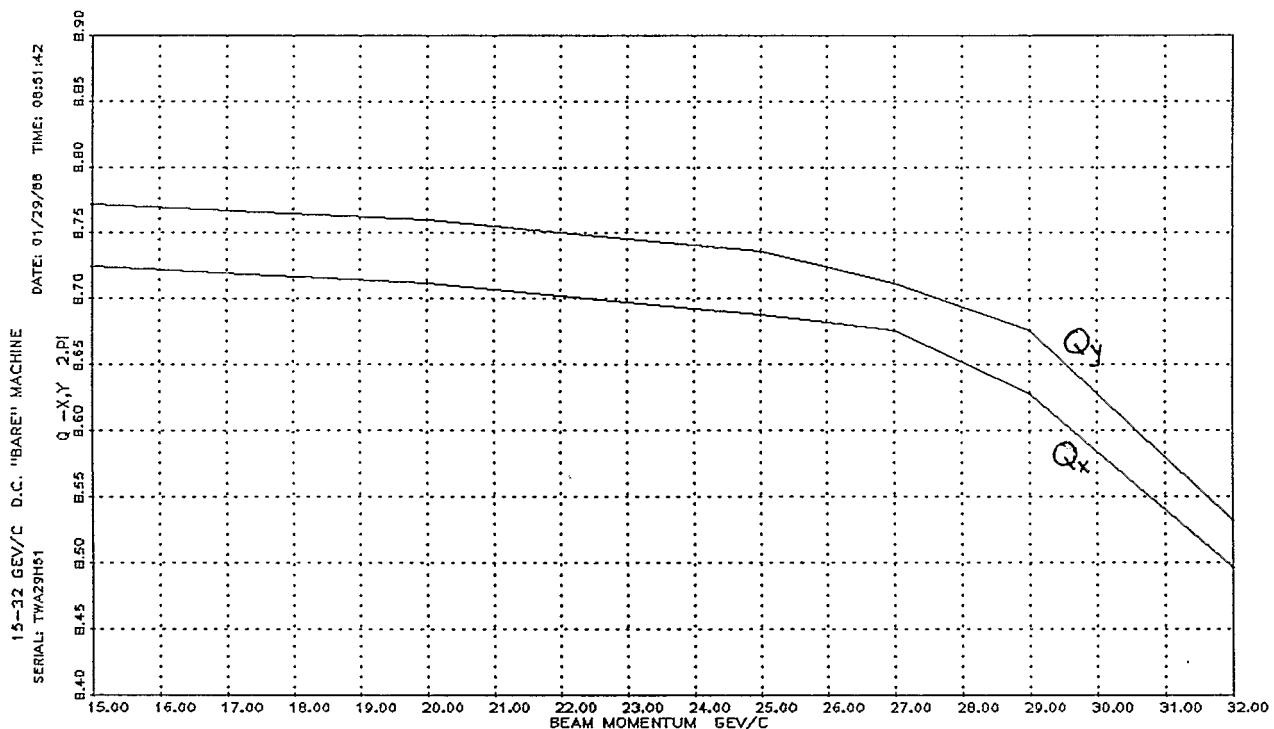


Figure 25. Energy Dependence of the Horizontal Tune,  $Q_x$ , and Vertical Tune,  $Q_y$ , for the D.C. "Bare" Machine (main magnets only) at high fields: 15-32 GeV/c. (Corresponds to Figure 5.) These tunes are exactly 12 times the respective values of  $M_u$  at the end of one superperiod.

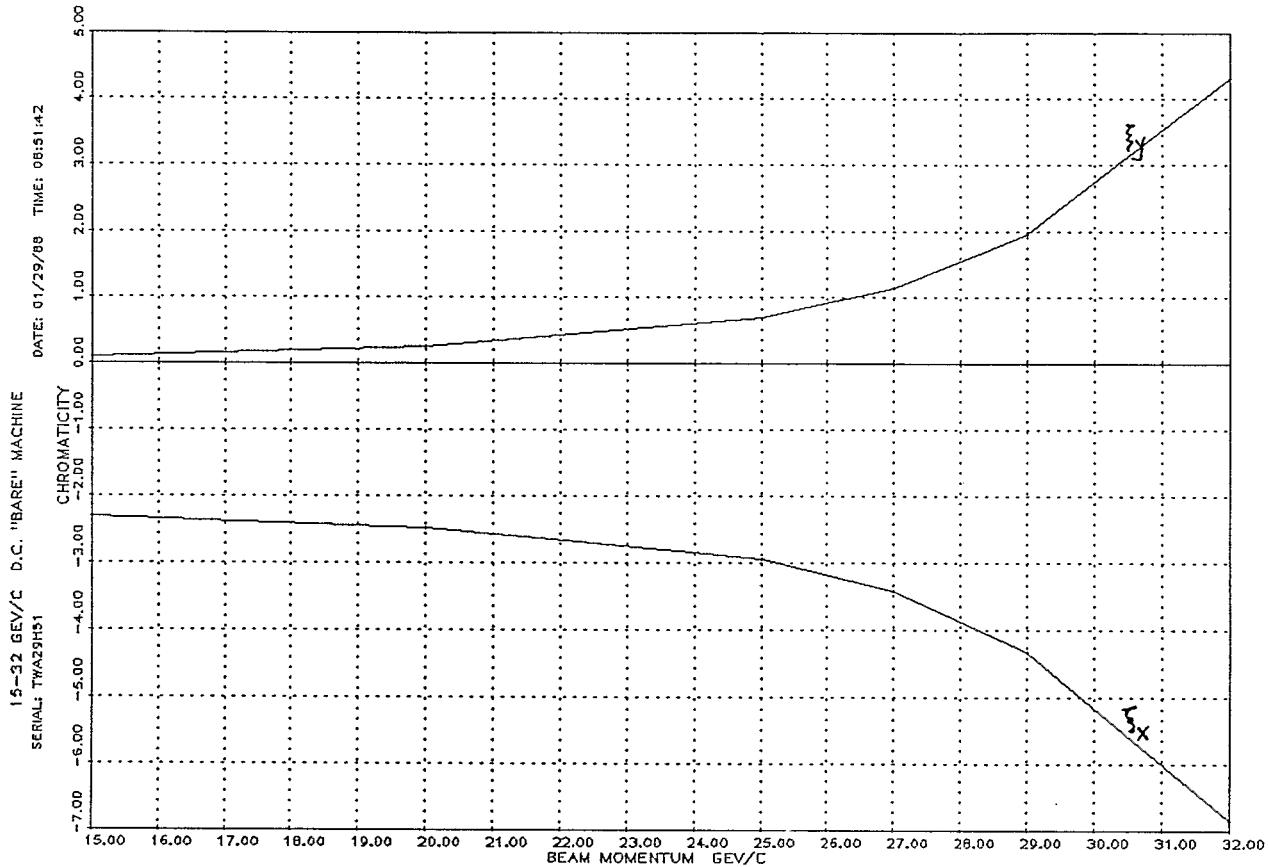


Figure 26. Energy Dependence of the Horizontal and Vertical Chromaticity for the D. C. "Bare" Machine (main magnets only) at high fields: 15-32 GeV/c.

Chromaticity,  $\xi_i = Q'/Q$ , where  $Q' = p \frac{dQ}{dp}$ . Note that the average of the Horizontal and Vertical Tunes is approximately -1.0, the "natural" tune of the machine.

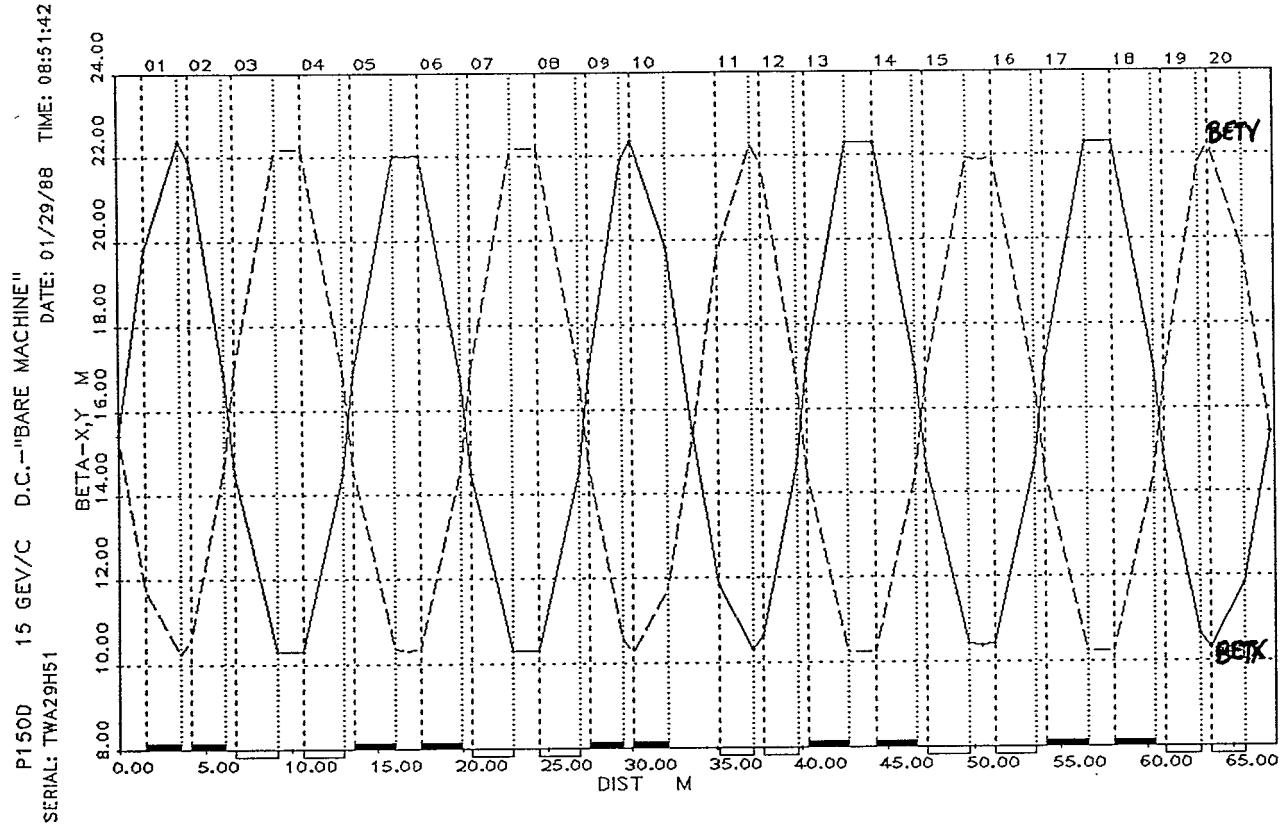


Figure 27. Courant-Snyder Parameters Beta-x and Beta-y (in meters) for the D.C. "Bare" Machine (main magnets only) at 15 GeV/c, shown on the same plot.

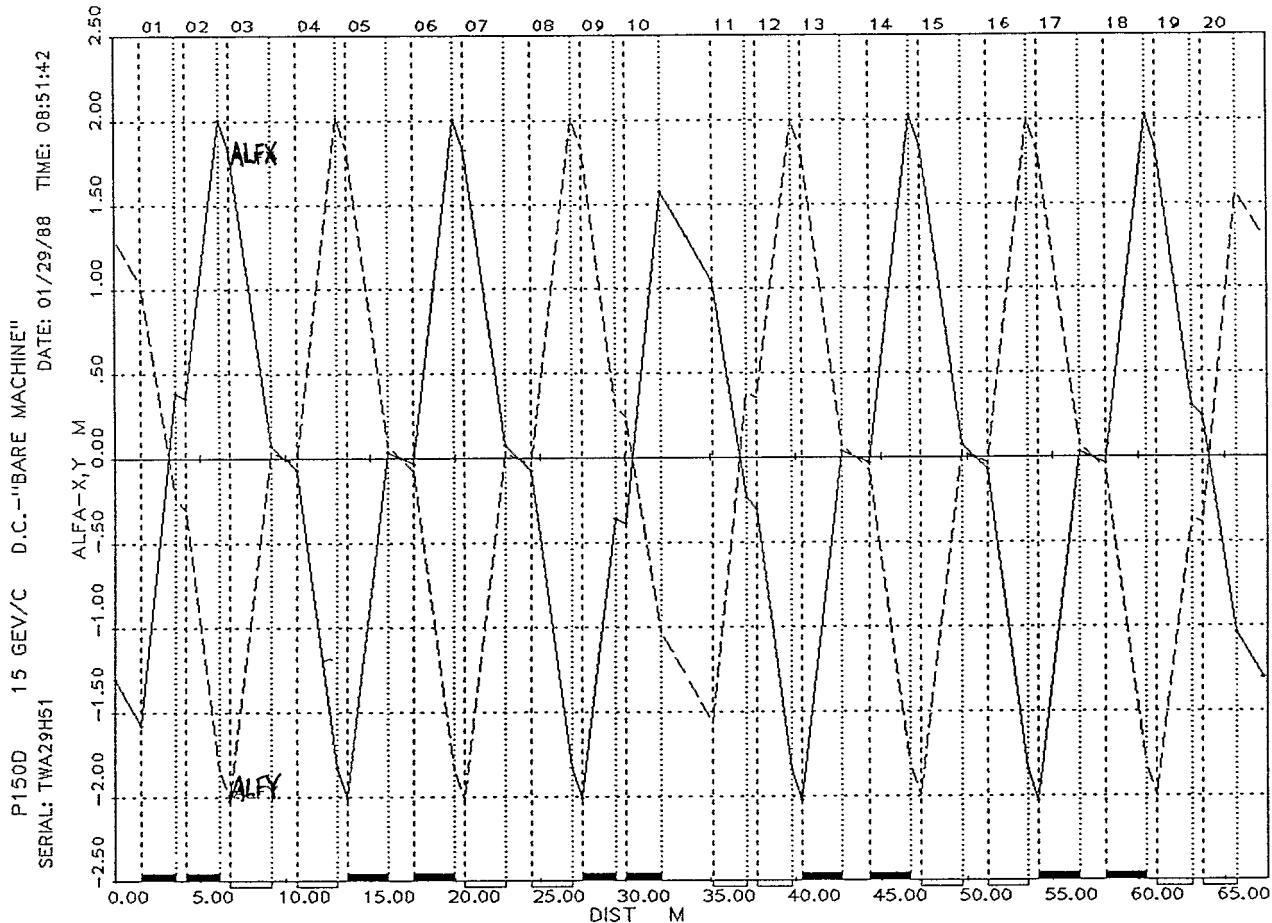


Figure 28. Courant-Snyder Parameters Alpha-x and Alpha-y (dimensionless) for the D.C. "Bare" Machine (main magnets only) at 15 GeV/c, shown on the same plot. Note that Alpha always has a negative slope in a straight section.

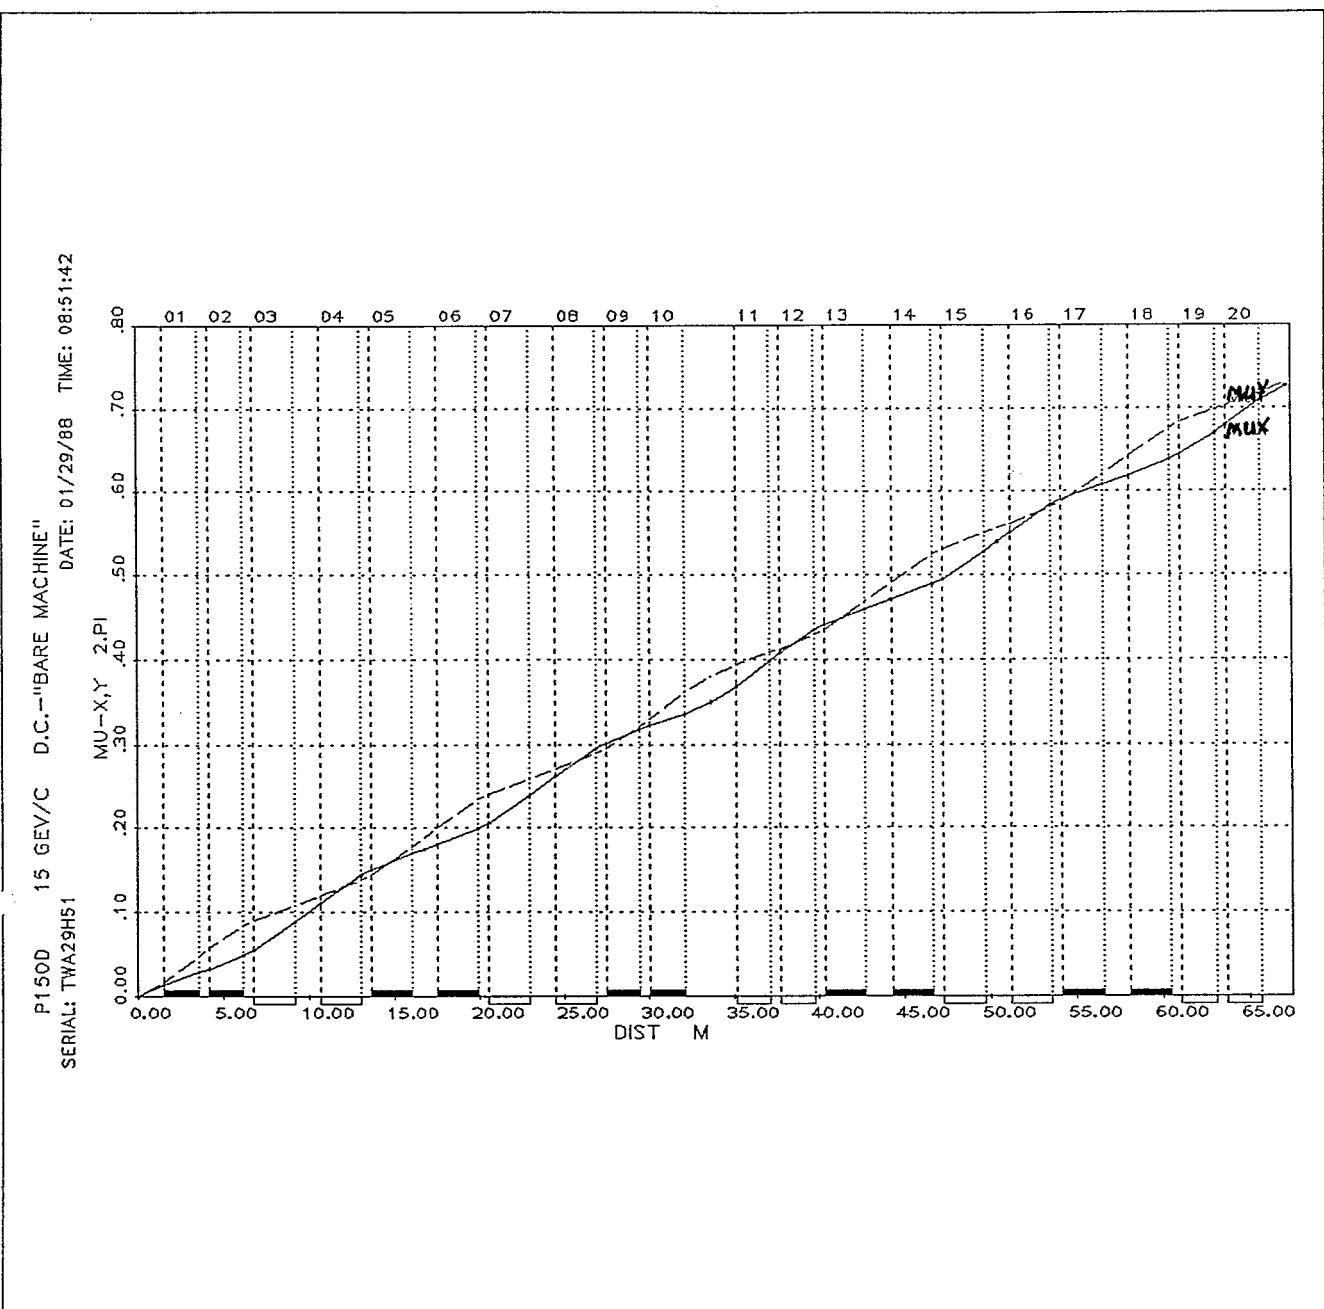


Figure 29. Phase Functions  $\text{Mu}-x$  and  $\text{Mu}-y$  (in units of  $2\pi$  radians) for the D.C."Bare" Machine (main magnets only) at 15 Gev/c, shown on the same plot. Note that only phase advance is meaningful. A different choice of zero-point would result in an upward or downward displacement of  $\text{Mu}-x$  relative to  $\text{Mu}-y$ .

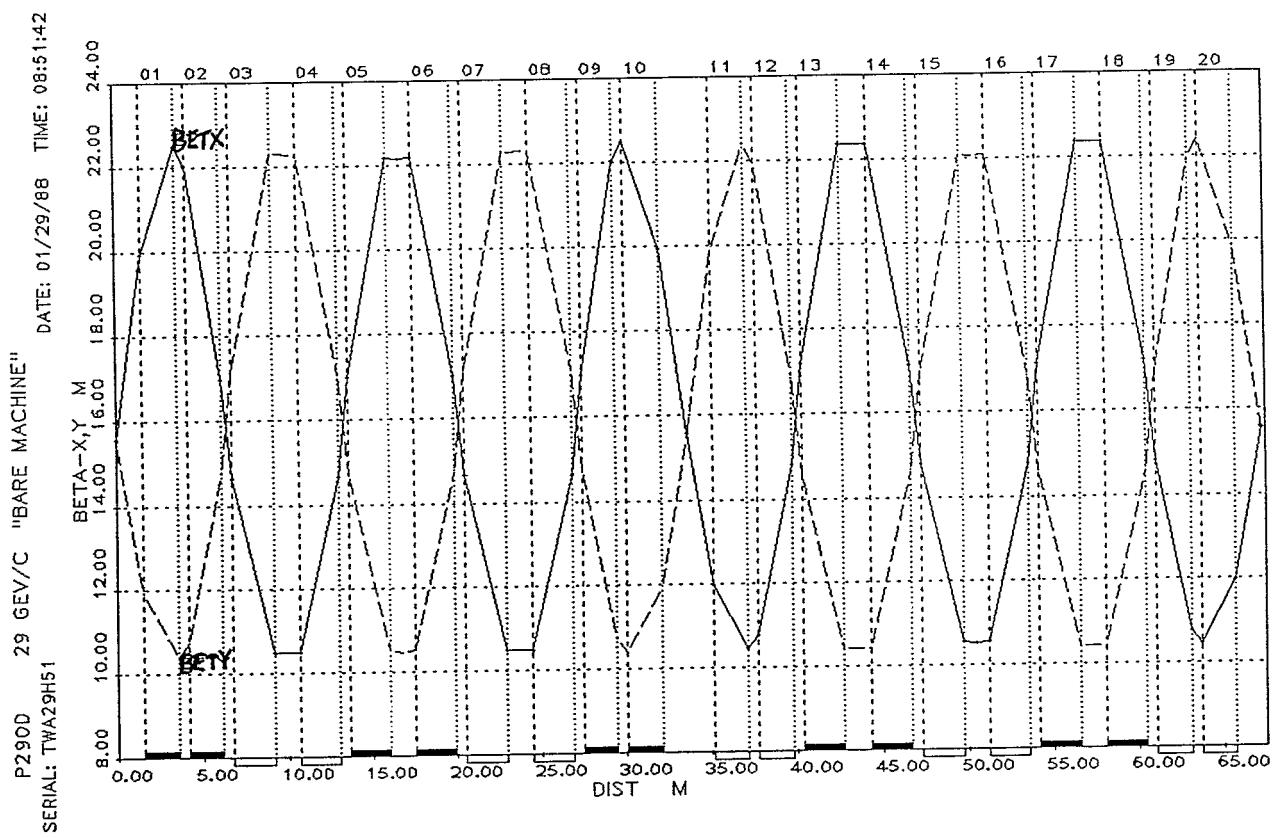


Figure 30. Courant-Snyder Parameters Beta-x and Beta-y (in meters) for the D.C. "Bare" Machine (main magnets only) at 29 GeV/c, shown on the same plot.

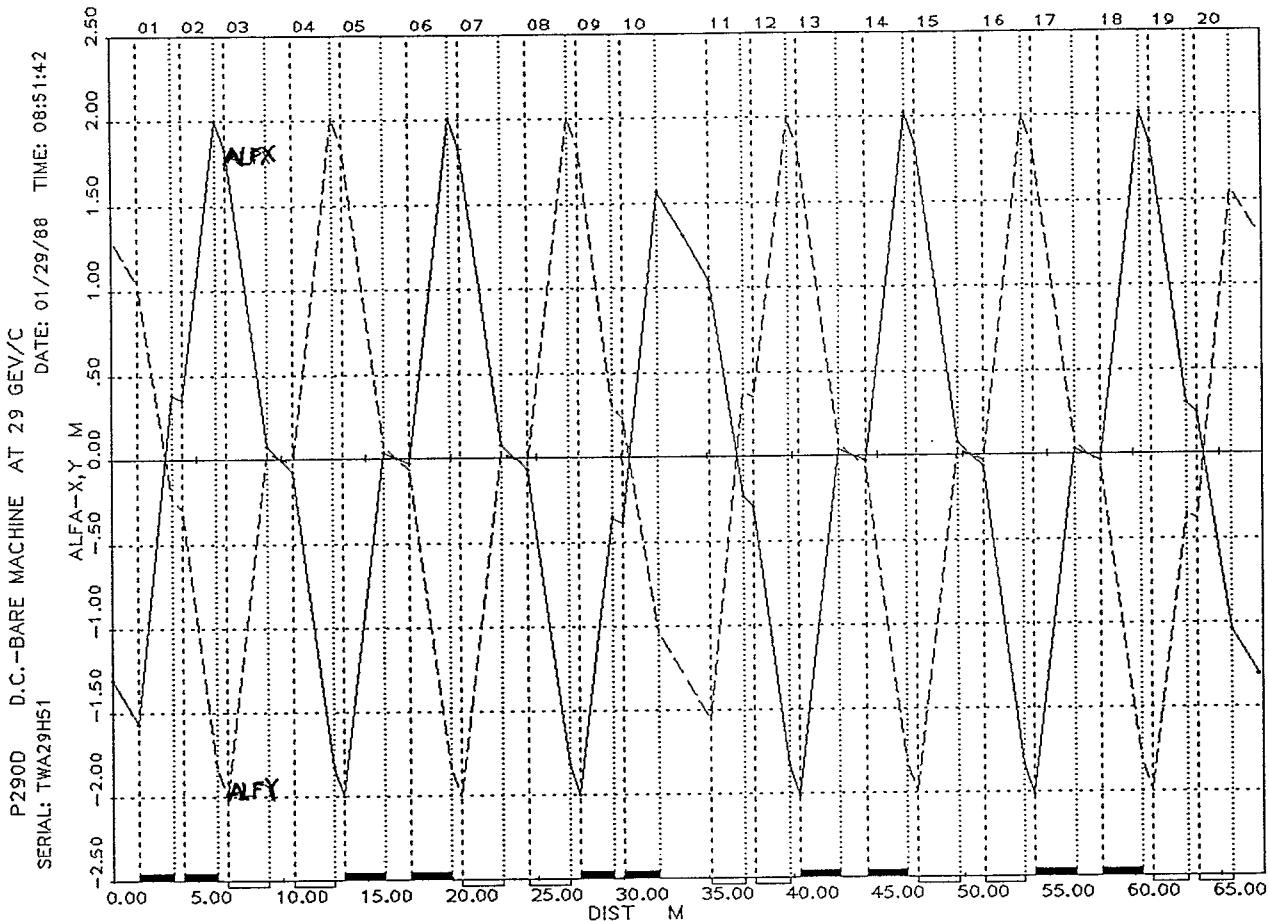


Figure 31. Courant-Snyder Parameters Alpha-x and Alpha-y (dimensionless) for the D.C. "Bare" Machine (main magnets only) at 29 GeV/c, shown on the same plot. Note that Alpha always has a negative slope in a straight section.

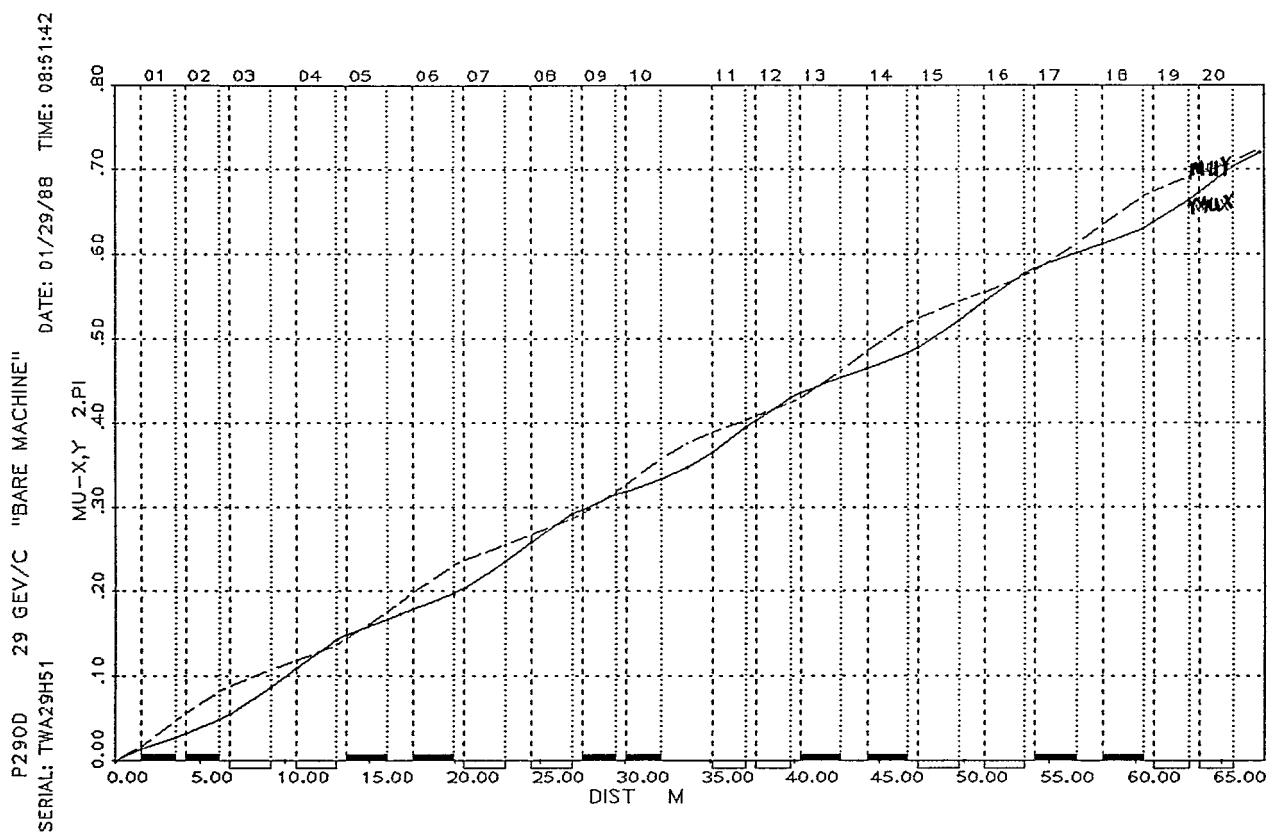


Figure 32. Phase Functions  $\text{Mu-}x$  and  $\text{Mu-}y$  (in units of  $2\pi$  radians) for the D.C."Bare" Machine (main magnets only) at 29 GeV/c, shown on the same plot. Note that only phase advance is meaningful. A different choice of zero-point would result in an upward or downward displacement of  $\text{Mu-}x$  relative to  $\text{Mu-}y$ .

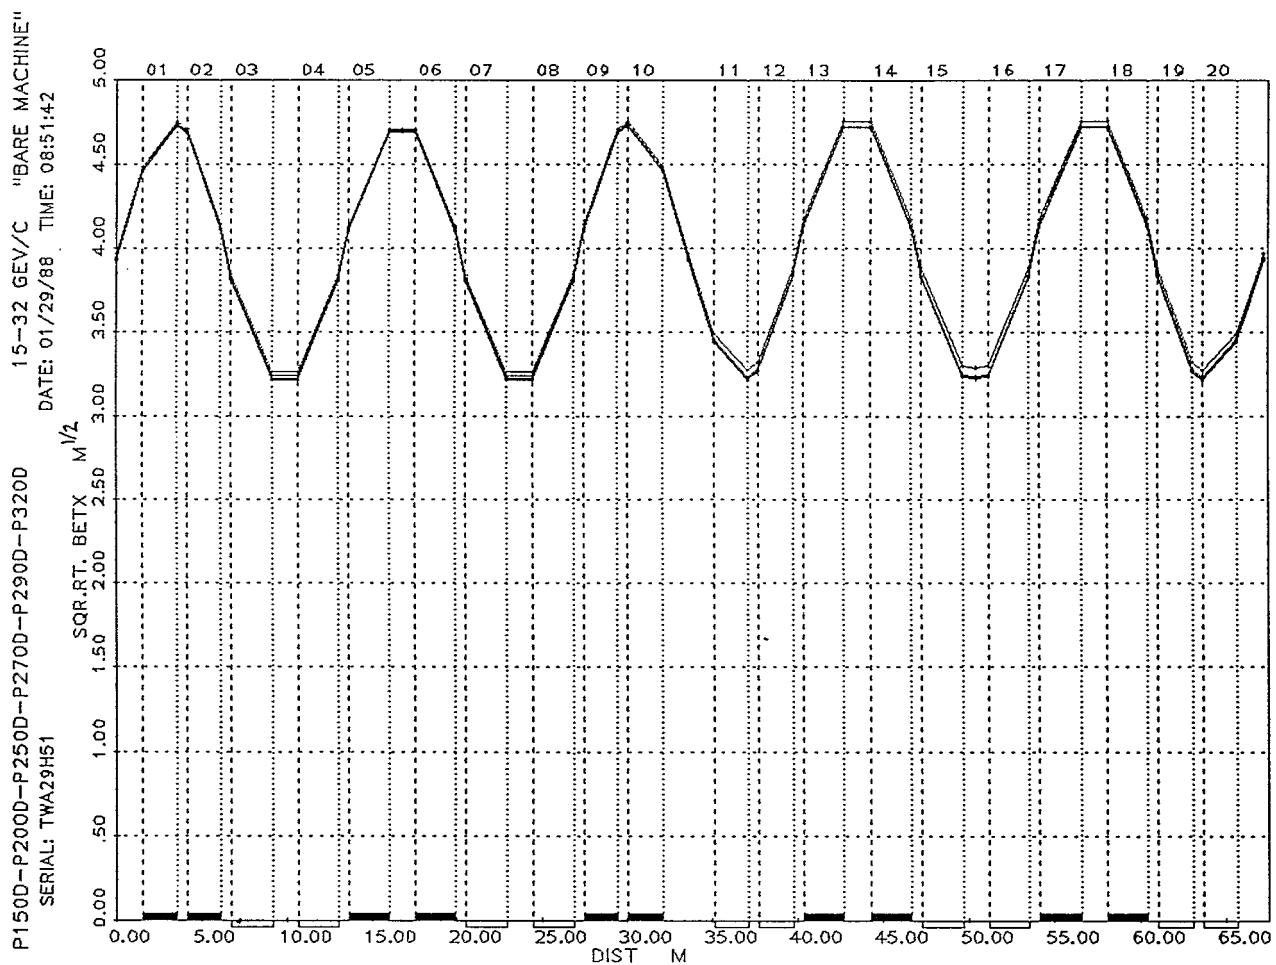


Figure 33. Courant-Snyder Parameter Beta-x shown on a square root scale for the D.C. "Bare" Machine (main magnets only) at high fields: 15-32 GeV/c, given for one superperiod. (Corresponds to Figure 1 which has a linear scale.)

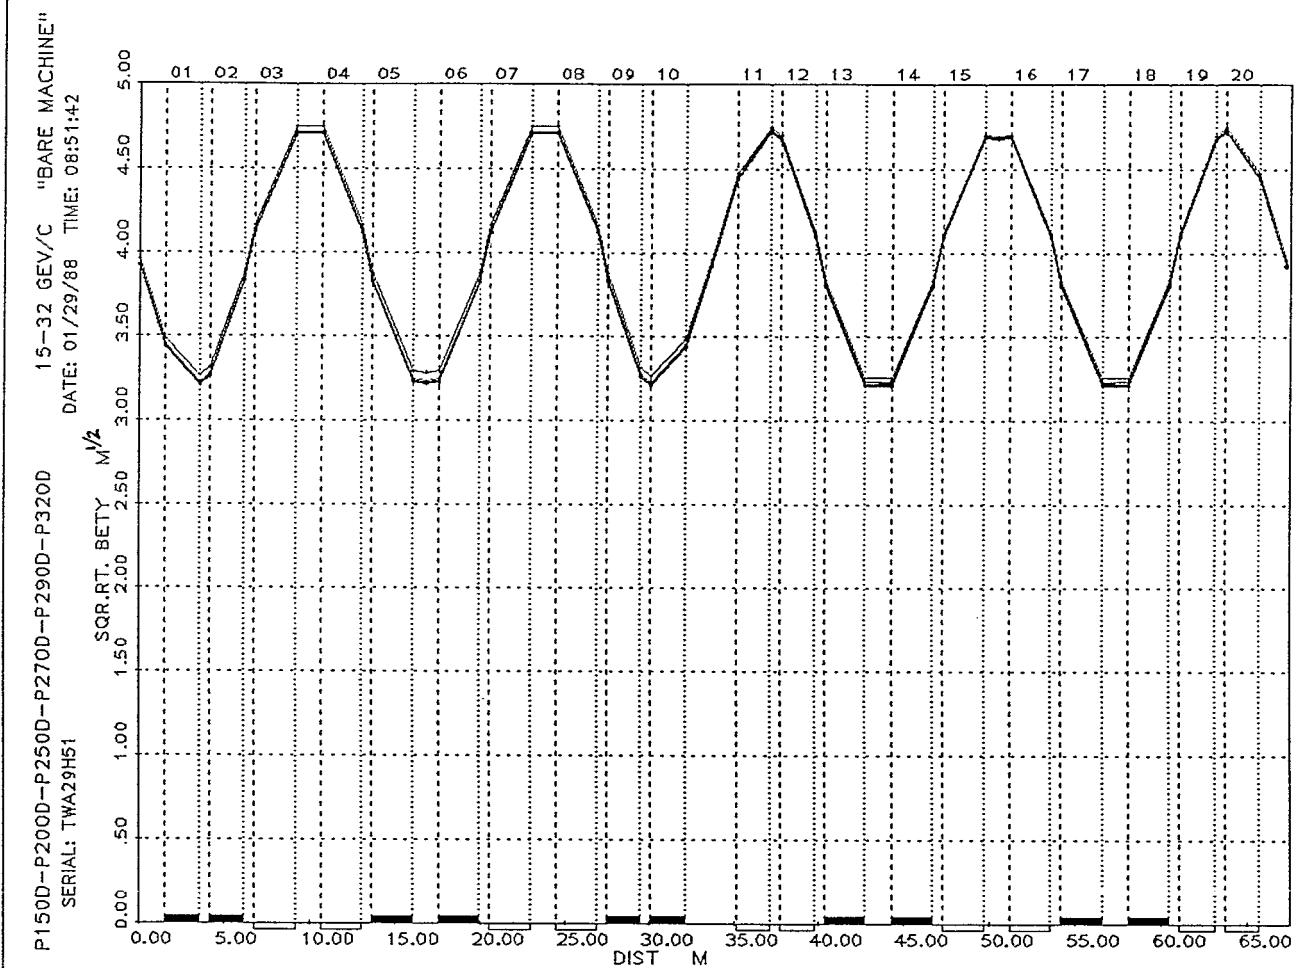


Figure 34. Courant-Snyder Parameter Beta-y shown on a square root scale for the D.C. "Bare" Machine (main magnets only) at high fields: 15-32 GeV/c, given for one superperiod. (Corresponds to Figure 2 which has a linear scale.)

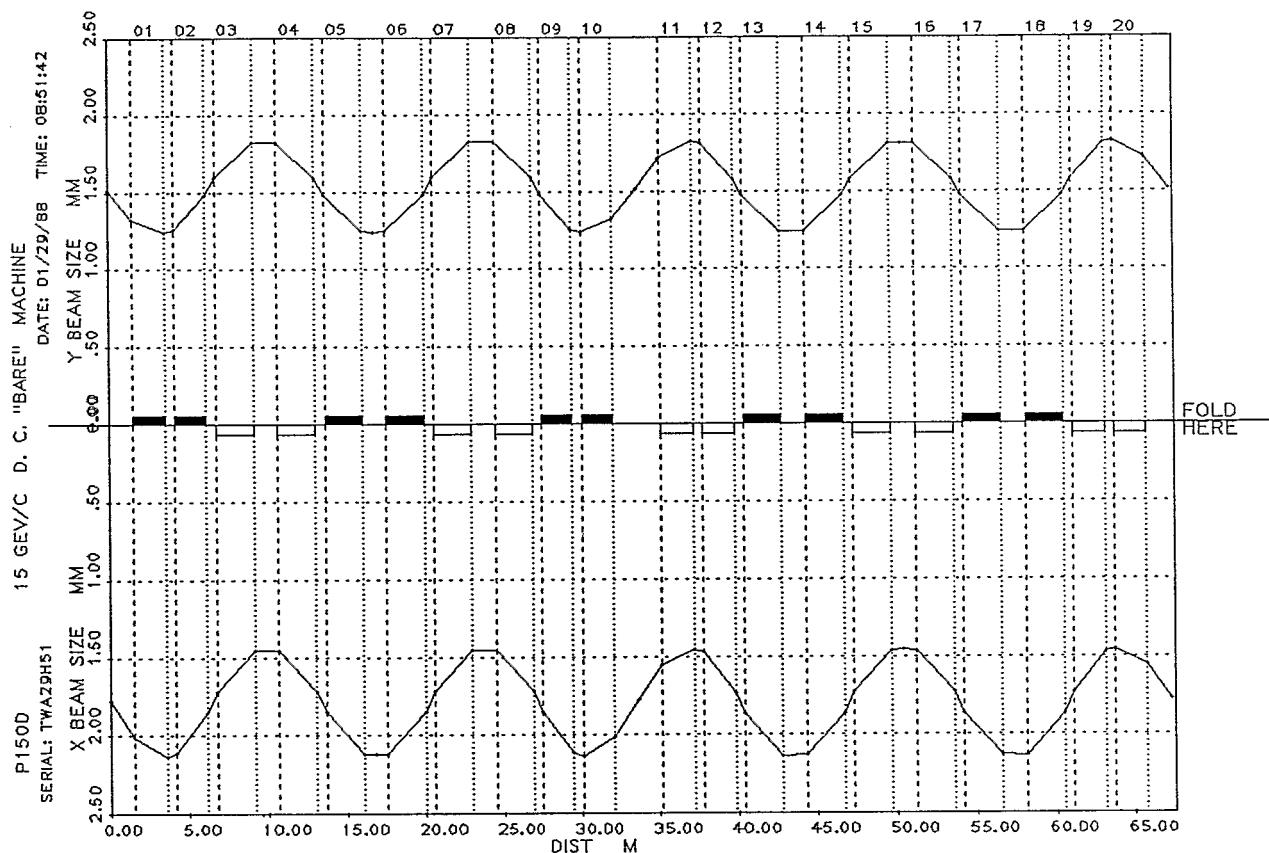


Figure 35. Beam Sizes (in mm) of the D. C. "Bare" Machine at 15 GeV/c, given for one superperiod. The y-direction (with scale increasing upward) appears in the upper half of the panel, while the x-direction (with scale increasing downward) is shown in the lower half of the panel.

[On folding the paper horizontally along the zero-line of the vertical axis, holding the two parts at right angles gives an approximate three-dimensional view of the transverse beam sizes.]