



BNL-99482-2013-TECH

C-A/AP/333;BNL-99482-2013-IR

# RHIC Performance with 56 MHz RF and Gold Ion Beams Pre-cooled at Lower Energy

A. Fedotov

October 2008

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-98CH10886 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

# **RHIC Performance With 56 MHz RF and Gold Ion Beams Pre-cooled at Lower Energy**

Alexei Fedotov



**Collider-Accelerator Department  
Brookhaven National Laboratory  
Upton, NY 11973**

Notice: This document has been authorized by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-98CH10886 with the U.S. Department of Energy. The United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this document, or allow others to do so, for United States Government purposes.

# **RHIC PERFORMANCE WITH 56 MHz RF AND GOLD ION BEAMS PRE-COOLED AT LOWER ENERGY**

Alexei Fedotov  
*C-AD, Brookhaven National Laboratory*

## **Introduction**

Presently there is an R&D ERL under construction at Collider-Accelerator Department (C-AD) at BNL with its commissioning scheduled for FY09-10 [1]. The use of this full energy 21 MeV ERL in RHIC tunnel was recently proposed for a Proof-of-Principle demonstration of Coherent Electron Cooling of gold ions at 40 GeV/nucleon [2].

The purpose of this Note is to summarize numerical studies aimed at understanding the potential improvement of RHIC luminosity by using this R&D ERL for pre-cooling of Au ion beams with conventional electron cooling system at 40 GeV/nucleon. The constraints were such that electron beam parameters should be close to those expected from R&D ERL. Additionally, the cooling section in RHIC should not require major RHIC modification.

As a result of these studies it was found that pre-cooling of gold ion at about 40 GeV/nucleon approximately doubles the average store luminosity of RHIC at top energy of 100 GeV/nucleon compared to the expected luminosity improvement with 56MHz RF upgrade [3, 4]. Significant luminosity improvement may be also gained on top of future expected luminosity performance with combined upgrades of 56MHz RF and all-plane stochastic cooling system with present beam parameters [5]. The electron beam parameters needed for such pre-cooling (see Table 1) are close to those expected from the R&D ERL which is presently under construction at BNL. With electron beam parameters from Table 1 it takes about 20 minutes to cool the transverse emittance of gold ions by a factor of two at 40 GeV/nucleon.

Similar studies were done for protons as well. However, it was found that the electron beam parameters needed for pre-cooling of protons would require a significant upgrade of the present injector of the R&D ERL. Thus, discussion about protons is omitted from the present Note.

## **Performance of Au ions at top energy of 100 GeV/nucleon**

Both transverse and longitudinal emittance of gold ions can be pre-cooled at 40 GeV/nucleon using conventional electron cooling technique. Then the pre-cooled gold beams will be accelerated to the top energy of 100 GeV/nucleon for collisions. We note that pre-cooling of the longitudinal emittance of gold ions results in a stronger IBS growth rate and do not show significant luminosity improvement unless such an enhanced IBS is counteracted at the top energy as well. In addition, longitudinal cooling would require small momentum spread of the electron beam, placing strict requirements on the R&D ERL. On the other hand, pre-cooling of only the transverse emittance offers a potential luminosity improvement at top energy and, at the same time, does not impose strict requirements on the R&D ERL electron beam parameters. Consequently only this latter option is presented here for simplicity.

Figure 1 shows results of simulations using BETACOOOL code [6] for gold ions at 100 GeV/nucleon. Simulations were done assuming planned upgrade of RHIC RF with 56MHz SRF storage cavity with 2.5MV [3]. The four curves shown correspond to two intensities of ion bunch

$1 \times 10^9$  and  $1.5 \times 10^9$  for the case of a typical initial transverse emittance of  $15 \mu\text{m}$  and initial transverse emittance of  $7.5 \mu\text{m}$  (95%, normalized) with initial 95% longitudinal emittance of  $0.8 \text{ eV}\cdot\text{sec}/\text{nucleon}$ . The small emittance of  $7.5 \mu\text{m}$  was obtained by pre-cooling at  $40 \text{ GeV}/\text{nucleon}$  (see next section). Also, for the case of initially pre-cooled emittance of  $7.5 \mu\text{m}$  we choose  $\beta^*=0.5\text{m}$  (since we should not be limited by losses in triplets in this case), while for large initial emittance of  $15 \mu\text{m}$  we use present  $\beta^*=0.8\text{m}$ . The luminosity values are given for 112 bunches.

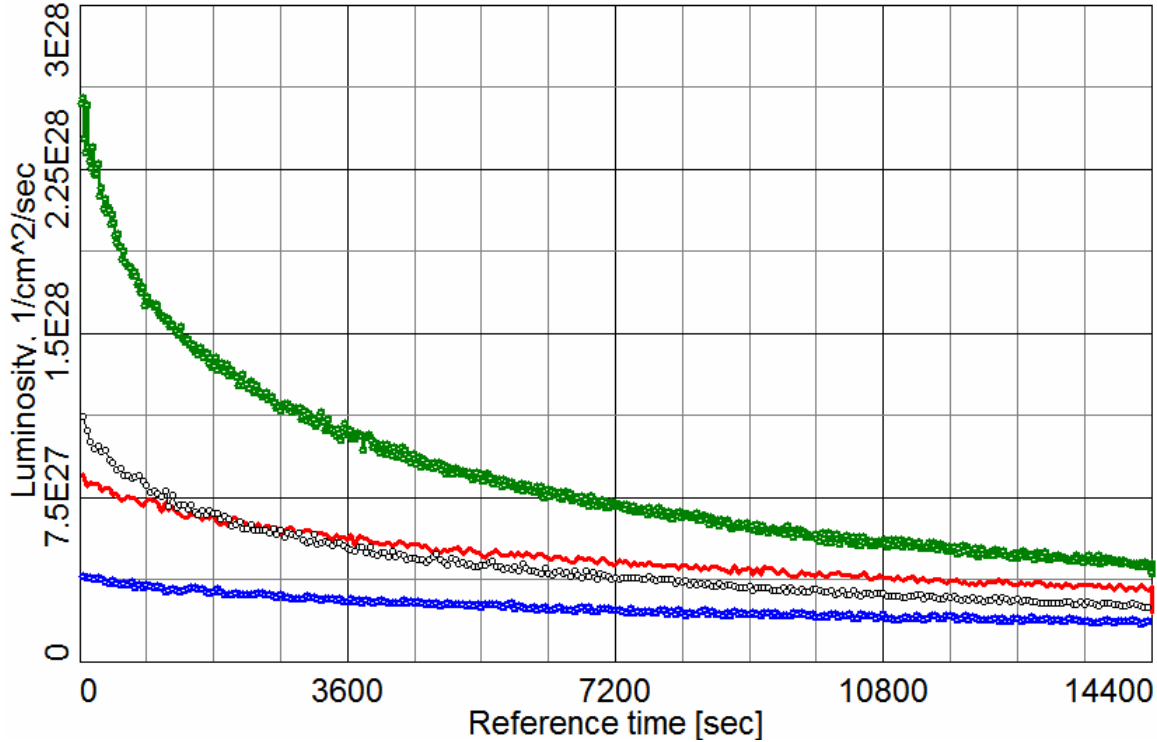


Figure 1. Luminosity of gold ions at  $100 \text{ GeV}/\text{nucleon}$  : 1) green – gold ions bunch intensity  $N=1.5 \times 10^9$ , initial emittance  $\epsilon_x=7.5 \mu\text{m}$  (95%, normalized),  $\beta^*=0.5\text{m}$ ; 2) gray –  $N=1.0 \times 10^9$ , initial pre-cooled  $\epsilon_x=7.5 \mu\text{m}$  (95%, normalized),  $\beta^*=0.5\text{m}$ ; 3) red –  $N=1.5 \times 10^9$ ,  $\epsilon_x=15 \mu\text{m}$  (95%, normalized),  $\beta^*=0.8\text{m}$ ; 4) blue –  $N=1 \times 10^9$ ,  $\epsilon_x=15 \mu\text{m}$  (95%, normalized),  $\beta^*=0.8\text{m}$ .

For the green curve (pre-cooled,  $1.5 \times 10^9$ ) in Fig. 1 the average luminosity (without the vertex cut) is  $1 \times 10^{28} \text{ cm}^{-2}\text{s}^{-1}$  while for the red (base emittance,  $1.5 \times 10^9$ ) and grey (pre-cooled,  $1.0 \times 10^9$ ) curves it is about  $5 \times 10^{27} \text{ cm}^{-2}\text{s}^{-1}$ . The blue curve is for the initial base emittance of  $\epsilon_x=15 \mu\text{m}$  and  $1 \times 10^9$  ions per bunch. As a result, without stochastic cooling, one may expect to get about factor of 2 improvement in average luminosity by pre-cooling at low-energy with R&D ERL.

Note, that without pre-cooling at lower energy and the same intensity per bunch ( $1.5 \times 10^9$ ), one may expect average luminosity of about  $5 \times 10^{27} \text{ cm}^{-2}\text{s}^{-1}$  (full luminosity without the vertex cut) without stochastic cooling but with the planned  $56\text{MHz}$  RF upgrade [4] and up to  $7\text{-}8 \times 10^{27} \text{ cm}^{-2}\text{s}^{-1}$  with an addition of all-plane stochastic cooling system [5]. In other words, stochastic cooling offers at least 60% improvement (possibly more due to the control of bunch length) on top of luminosity with just  $56 \text{ MHz}$  cavity upgrade along. For the case of pre-cooled gold ion beam emittance by a factor of two to  $7.5 \mu\text{m}$  initial, stochastic cooling may provide further luminosity improvement. If one assumes, for example, 60% luminosity improvement with stochastic cooling for such pre-cooled beams it would bring an average luminosity per store to the level of about  $1.6 \times 10^{28} \text{ cm}^{-2}\text{s}^{-1}$ . In such a case, there is a potential two-fold improvement in luminosity compared to the expected luminosity

of about  $6-8 \times 10^{27} \text{ cm}^{-2} \text{ s}^{-1}$  for nominal initial emittance of  $15 \mu\text{m}$  with the 56 MHz RF and full 3D stochastic cooling upgrades [5]. Note that for such high luminosities shorter stores of about 3-4 hours compared to present 5-6-hour stores would be more optimal due to significant beam intensity loss on burn-off process in collisions.

Figures 2-3 show evolution of beam emittance and bunch length for the case of highest bunch intensity of  $N_i = 1.5 \times 10^9$  and longitudinal 95% bunch emittance of 0.8 eV-sec/nucleon. The emittances plotted in Fig. 2 are RMS un-normalized, so that to get a conventional 95% normalized emittance the values in Fig. 2 should be multiplied by  $\beta\gamma \cdot 6 = 642$ , for this case. Note that final values of emittances at the end of 5-hour store are relatively small, which is a consequence of the fact that bunch length with 56MHz RF is relatively long as well as the fact that we used IBS-lattice from Run-8 with  $95^\circ$  phase advance per FODO cell which reduces transverse IBS growth rate [7, 8]. Also note that for such high luminosities significant portion of bunch intensity is lost on burn-off process in collisions which also slows down IBS growth rates.

It is expected that bunch length growth due to IBS will be controlled by stochastic cooling, which was not included in present simulations. Without control of bunch length with cooling, significant part of the luminosity will be outside of the vertex with  $\pm 30 \text{ cm}$ , as well as substantial part of luminosity will be lost on the “hour-glass” effect when RMS bunch length becomes comparable to the  $\beta^*$  value. In Fig. 1 luminosities were quoted without reduction on the hour-glass effect assuming that some control of bunch length will be possible. Otherwise, without control of bunch length growth, for the case of small  $\beta^* = 0.5 \text{ m}$  and bunch length growth shown in Fig. 3, the reduction factor in luminosity will be 0.76, and the highest quoted average over store luminosity value in Fig. 1 would be  $0.76 \cdot 1 \times 10^{28} \text{ cm}^{-2} \text{ s}^{-1}$ .

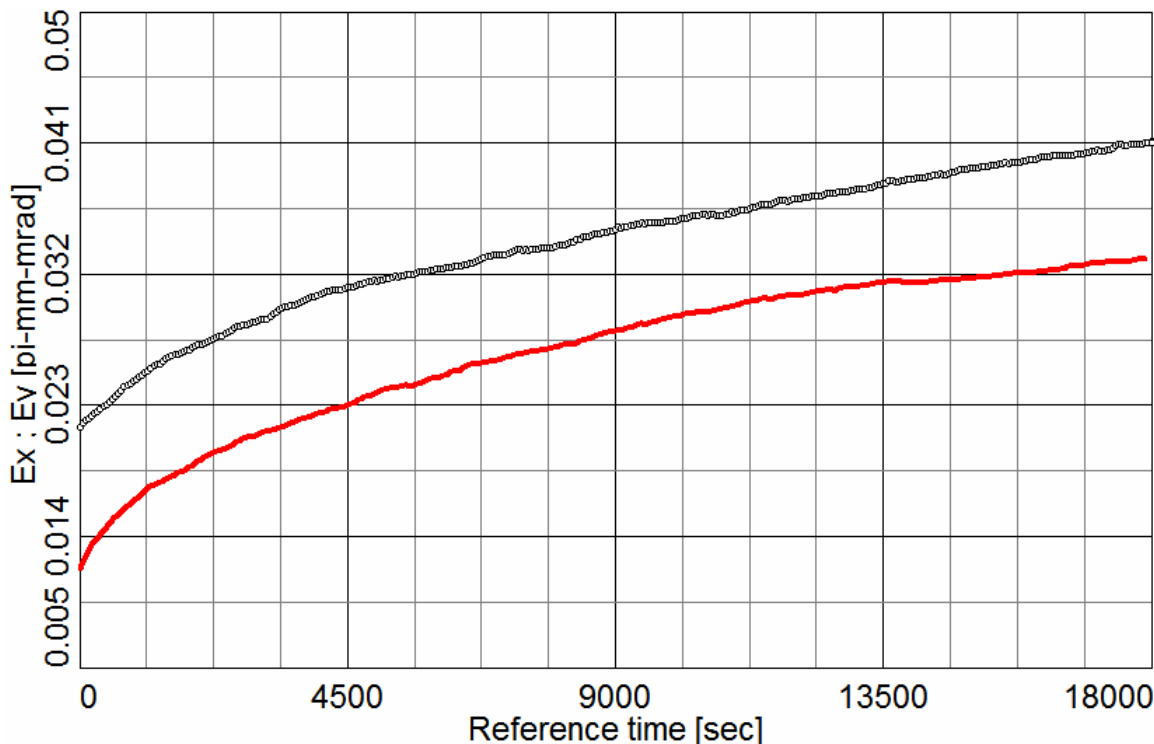


Figure 2. Evolution of RMS un-normalized emittance of Au ions at 100 GeV/nucleon for bunch intensity  $N = 1.5 \times 10^9$ , longitudinal emittance of 0.8 eV-sec/nucleon, 56 MHz RF with 2.5 MV: 1) red curve – pre-cooled beam with initial 95% normalized emittance of  $7.5 \mu\text{m}$ , final emittance  $21 \mu\text{m}$ ; 2) black upper curve – nominal initial emittance of  $15 \mu\text{m}$ , final emittance  $26.3 \mu\text{m}$ .

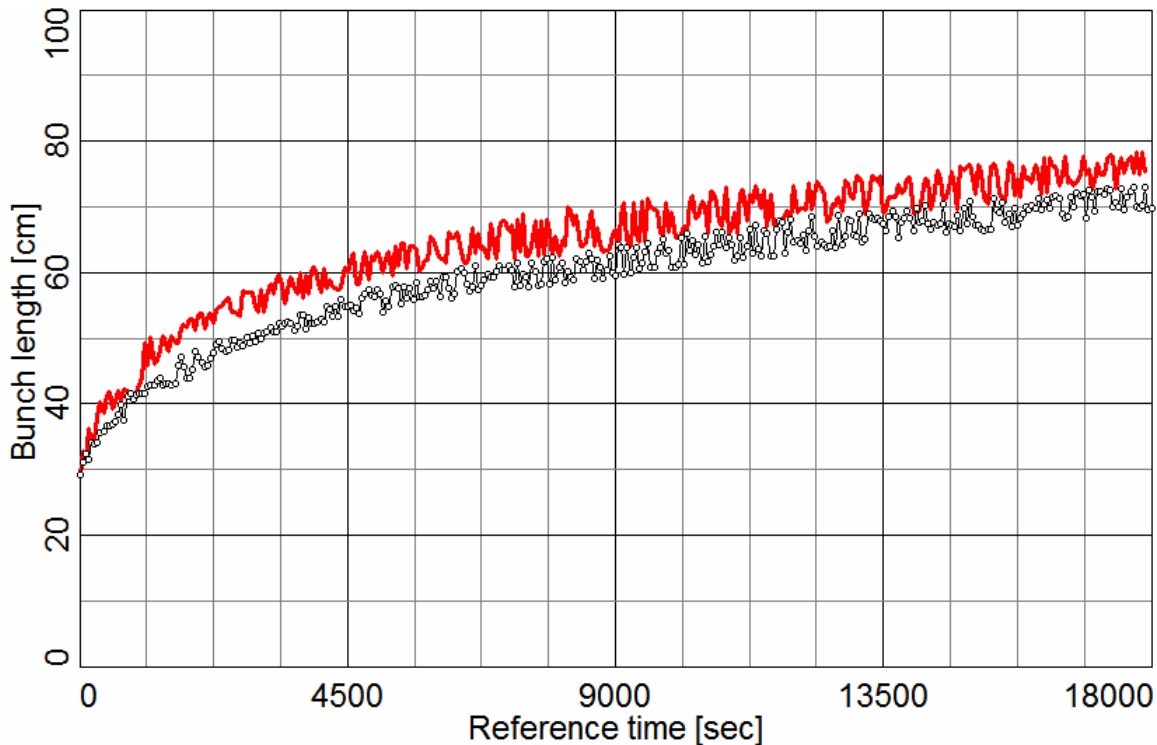


Figure 3. Evolution of RMS bunch length of Au ions at 100 GeV/nucleon for bunch intensity  $N=1.5 \times 10^9$ , longitudinal emittance of 0.8 eV-sec/nucleon, 56 MHz RF with 2.5MV: 1) red curve – pre-cooled beam with initial 95% normalized emittance of  $7.5 \mu\text{m}$ , 2) black upper curve – nominal initial emittance of  $15 \mu\text{m}$ .

To summarise, it appears that pre-cooling of the transverse emittance of gold ions with R&D ERL at lower energies can further improve Au-ion luminosity of RHIC at top energy of 100 GeV/nucleon compared to the expected future RHIC performance with nominal transverse emittances.

### Parameters of electron cooler for pre-cooling

This section briefly summarizes the parameters of the electron cooler used in simulations for pre-cooling of gold ions at 40 GeV/nucleon. The cooler design is based on the high-energy non-magnetized cooling approach developed at BNL for cooling ions at 100 GeV/nucleon [3]. Due to a strong dependence of electron cooling rates on relativistic  $\gamma$ , pre-cooling at 40 GeV/nucleon allowed us to simplify parameters of the cooler significantly, compared to the high-energy cooler for ions at 100 GeV/nucleon. The main goal of these studies was to check whether pre-cooling can be done with parameters of electron beam close to those expected from R&D ERL which can directly benefit to the RHIC program in the nearest future.

To provide fast pre-cooling with relatively short cooling section (20 meters per ring) we used electron bunch trains (similar to the low-energy cooling approach based on 703MHz gun [9] or pre-cooling for eRHIC). In this approach, there are 9 bunches in each electron bunch train (separated by 42 cm, corresponding to 703 MHz RF in ERL). The repetition frequency of these bunch trains is 9.4MHz so that every ion bunch in RHIC is cooled by means of such electron bunch train. For the present simulation we used 1.56nC charge in each electron bunch, similar to the charge expected in R&D ERL. Parameters of electron cooling system can be further optimized in the future, after the

R&D ERL is commissioned and electron beam parameters are established experimentally. Commissioning of the R&D ERL is presently scheduled for FY09-10.

Kinetic energy, MeV	21
Length of cooling section, m	20
Charge per bunch, nC	1.56
Total charge in bunch train (9 bunches), nC	14
RMS momentum spread	0.0008
RMS normalized emittance, $\mu\text{m}$	3
RMS beam radius in cooling section, mm	2.2

Table 1. Parameters of electron beam used in simulations for pre-cooling of gold ions at 40 GeV/nucleon.

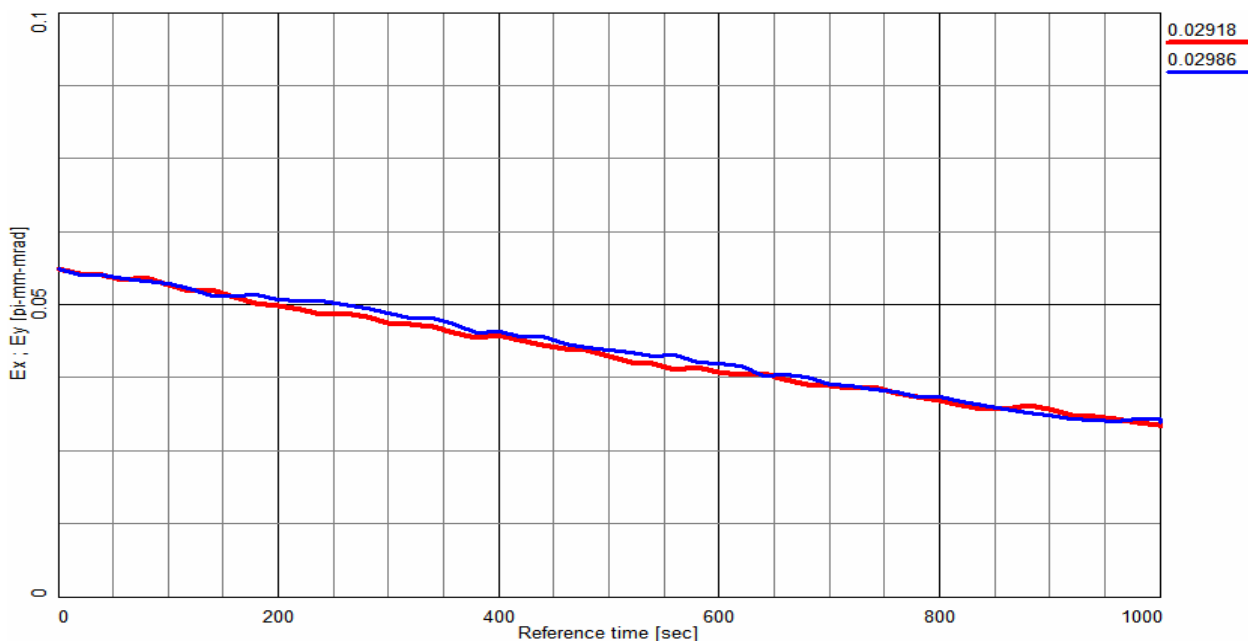


Figure 4. Cooling of the horizontal and vertical emittance (rms, un-normalized) of Au ion beams at 40 GeV/nucleon with electron beam parameters given in Table 1.

Using the parameters of the electron cooler given in Table 1, as shown in Fig. 4, one can cool transverse emittance by a factor of 2 in about 20 minutes. Note, that a 3<sup>rd</sup> harmonic cavity may be needed to get the required energy spread of the electron beam. The parameters of the cooler can be further optimized as required. This would call for a comprehensive electron cooling and electron beam dynamics studies for the design of electron cooling section at this energy.

## Acknowledgement

We would like to thank Ilan Ben-Zvi, Dimitri Kayran and Vladimir Litvinenko for useful discussions on this subject.



## References

- [1] V.N. Litvinenko et al., Proceedings of EPAC08 (Genoa, Italy, 2008), p. 193.
- [2] V.N. Litvinenko and Ya. Derbenev, Proc. of EPAC08 (Genoa, Italy, 2008), p. 2560.
- [3] <http://www.bnl.gov/cad/ecooling>
- [4] A. Fedotov, “IBS and expected luminosity performance for RHIC beams at top energy with 56MHz SRF cavity”, BNL C-AD Tech Note (October 2008).
- [5] M. Blaskiewicz, presentation at RHIC MAC08 (BNL, February 2008).
- [6] BETACOOOL code, <http://lepta.jinr.ru>; A. Sidorin et al., NIM A 558, p. 325 (2006).
- [7] V. Litvinenko et al., Proc. of EPAC08 (Genoa, Italy, 2008), p. 2557.
- [8] A. Fedotov et al., Proc. of HB2008 workshop (Nashville, TN, August 2008).
- [9] A. Fedotov, I. Ben-Zvi, X. Chang, D. Kayran, V. Litvinenko, E. Pozdeyev, T. Satogata, BNL C-AD Tech Note, C-A/AP/307 (April 2008).