



Brookhaven
National Laboratory

BNL-105736-2014-TECH

EP&S No. 20;BNL-105736-2014-IR

Design of an 800 MeV/c separated beam II

J. D. Fox

October 1968

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.AT-30-2-GEN-16 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Accelerator Department
BROOKHAVEN NATIONAL LABORATORY
Associated Universities, Inc.
Upton, L.I., N.Y.

EP & S DIVISION TECHNICAL NOTE

No. 20

J.D. Fox

October 14, 1968

DESIGN OF AN 800 MeV/c SEPARATED BEAM II

A previous paper¹ describes the design of a separated 800 MeV/c beam to be run in parallel with the 0° pion beam from the S95 target in the slow external beam. Some modifications have been made in this design to accommodate the requirements of the 0° beam, to allow cleaner separation of K's from π 's and to utilize as far as possible existing magnets.

A layout of the modified beam is shown in Fig. 1. This is the same basic design as in I except that magnet Q3 has been eliminated. Magnets Q1 and Q2 are N8Q12's which will have to be specially ordered. Magnets Q3 and Q4 are Cosmotron 8Q12's and magnets Q5 and Q6 are 8Q24's. A special septum, denoted 10C20, and 2 standard 18D36 are also required. The limit on momentum is the 10C20. Design studies indicate that this magnet will permit this beam to be operated up to 1.0 GeV/c; higher momentum can be obtained only by going to higher production angles with corresponding degradation of the quality of the vertical image at the mass slit and loss of intensity. The other quadrupoles operate comfortably within their limits. A drawing of the front end of the beam is shown in Fig. 2., compared to the previous design the 10C20 has been moved downstream to permit better clearance for the 0° pion beam. The central production angle remains at 10.5° . The vertical images at the mass slit for 800 MeV K's and pions are shown in Fig. 3. This is a cleaner separation than was obtained in the earlier design. The intensity of the beam has been reduced. Acceptance is now ± 11 mrad vertically. Using

1. EP & S Div. Tech Note #7


the same production data as in I, we expect 1.5×10^5 K^+ /pulse at the second focus for 10^{12} protons incident on a 1 interaction length target.

Several prospective users have expressed interest in the size of the horizontal image at the second focus. The proposed design as shown in Fig. 1 gives a momentum recombined image at the second focus with 0.7:1 magnification; the horizontal image size is shown in Fig. 4. This is about the smallest horizontal spot size that can be obtained and is achieved at the cost of having rather sharply converging rays (± 100 mrad for the off-momentum). Other possibilities for the design of the beam following the mass slit have been investigated and may prove more convenient for some experiments. One design has Q5 and Q6 in front of D3; D3 can then be used as a switching magnet so that two experiments can be set up at the same time. One beam will be partially momentum-recombined giving about 1" width spot while the other leg will be highly momentum-dispersed.

- Distr: Dr. K. Tsipis - MIT
 Prof. G. Giacomelli - Institute di Fisica, Via Irnevio 46, Bologna, Italy
 V.W. Hughes }
 Glen A. Rebka } - Physics Dept. Yale University
 David Jenkins - VARC 12070 Jefferson Ave. Newport News, Va. 23606
 K. Wendell Chen - Palmer Physical Lab, Princeton, N.J. 08540
 R.E. Welsh - College of William & Mary, Williamsburg, Va.
 C.E. Wiegand - Lawrence Radiation Laboratory, Berkeley, Cal.
 B. Barish - Cal Tech, Pasadena, Cal.
 A. Maschke - NAL
 T. Kalogeropoulos - Syracuse University, Syracuse, NY 13210
 E.W. Jenkins - University of Arizona, Tucson, Arizona
 G.T. Zorn - University of Maryland, College Park Md. 20740
 Prof. Alfred K. Mann }
 Prof. E. Beier } University of Pennsylvania, Philadelphia, Pa. 19100
- T. Kycia - BNL
 V. Troisi - AGS


EP & S DIV. TECH NOTE #20

FIG. 1 LAYOUT OF 800 MeV/c BEAM

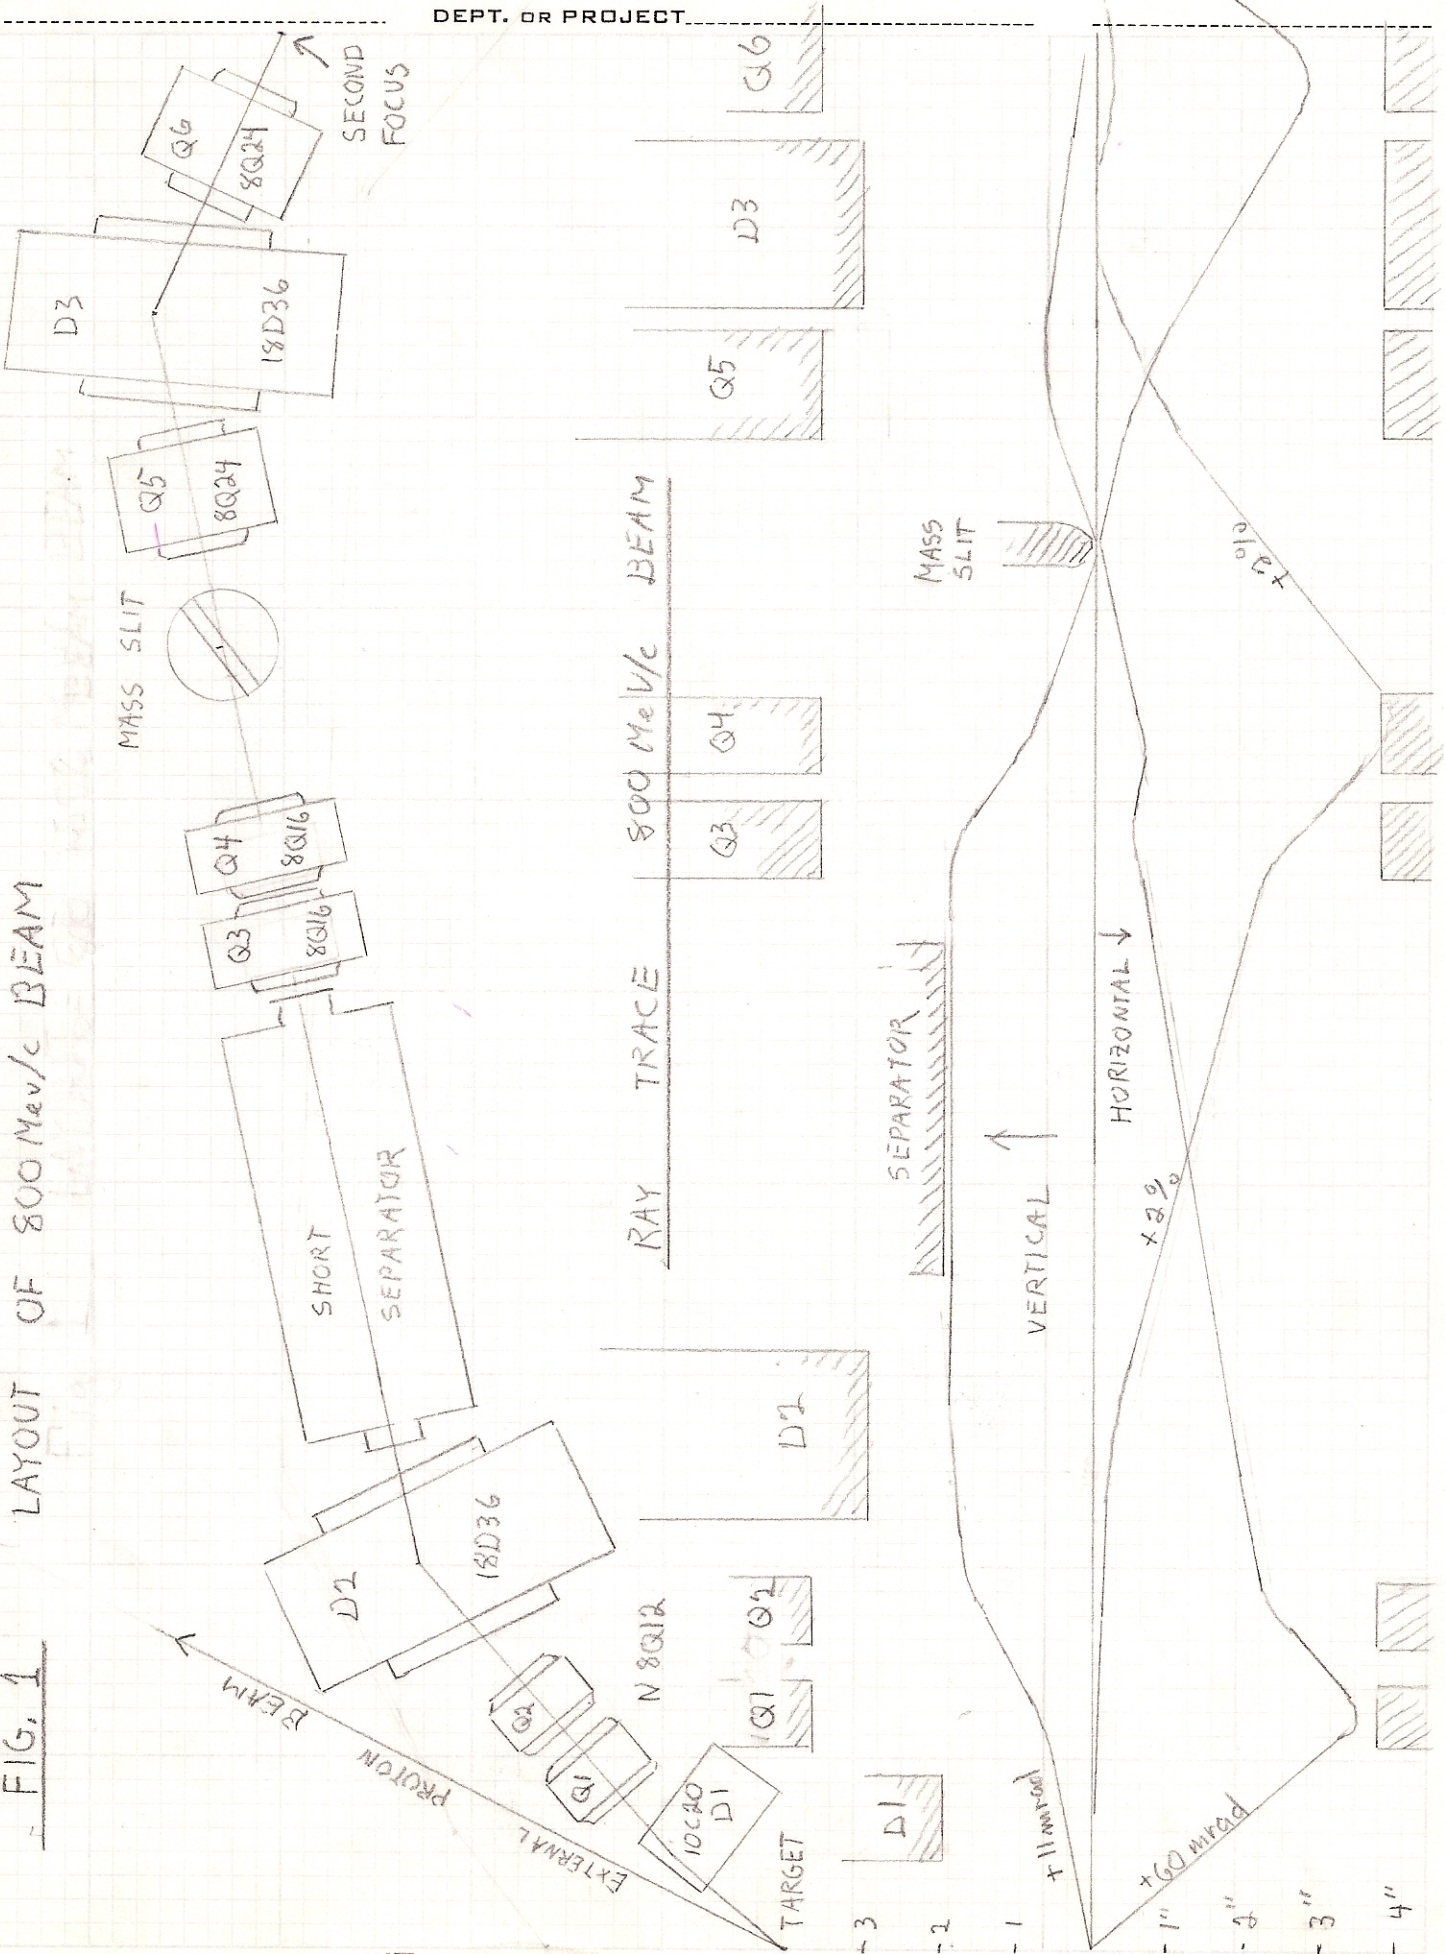

FRONT END OF 800MEV/c BEAM

FIGURE 2

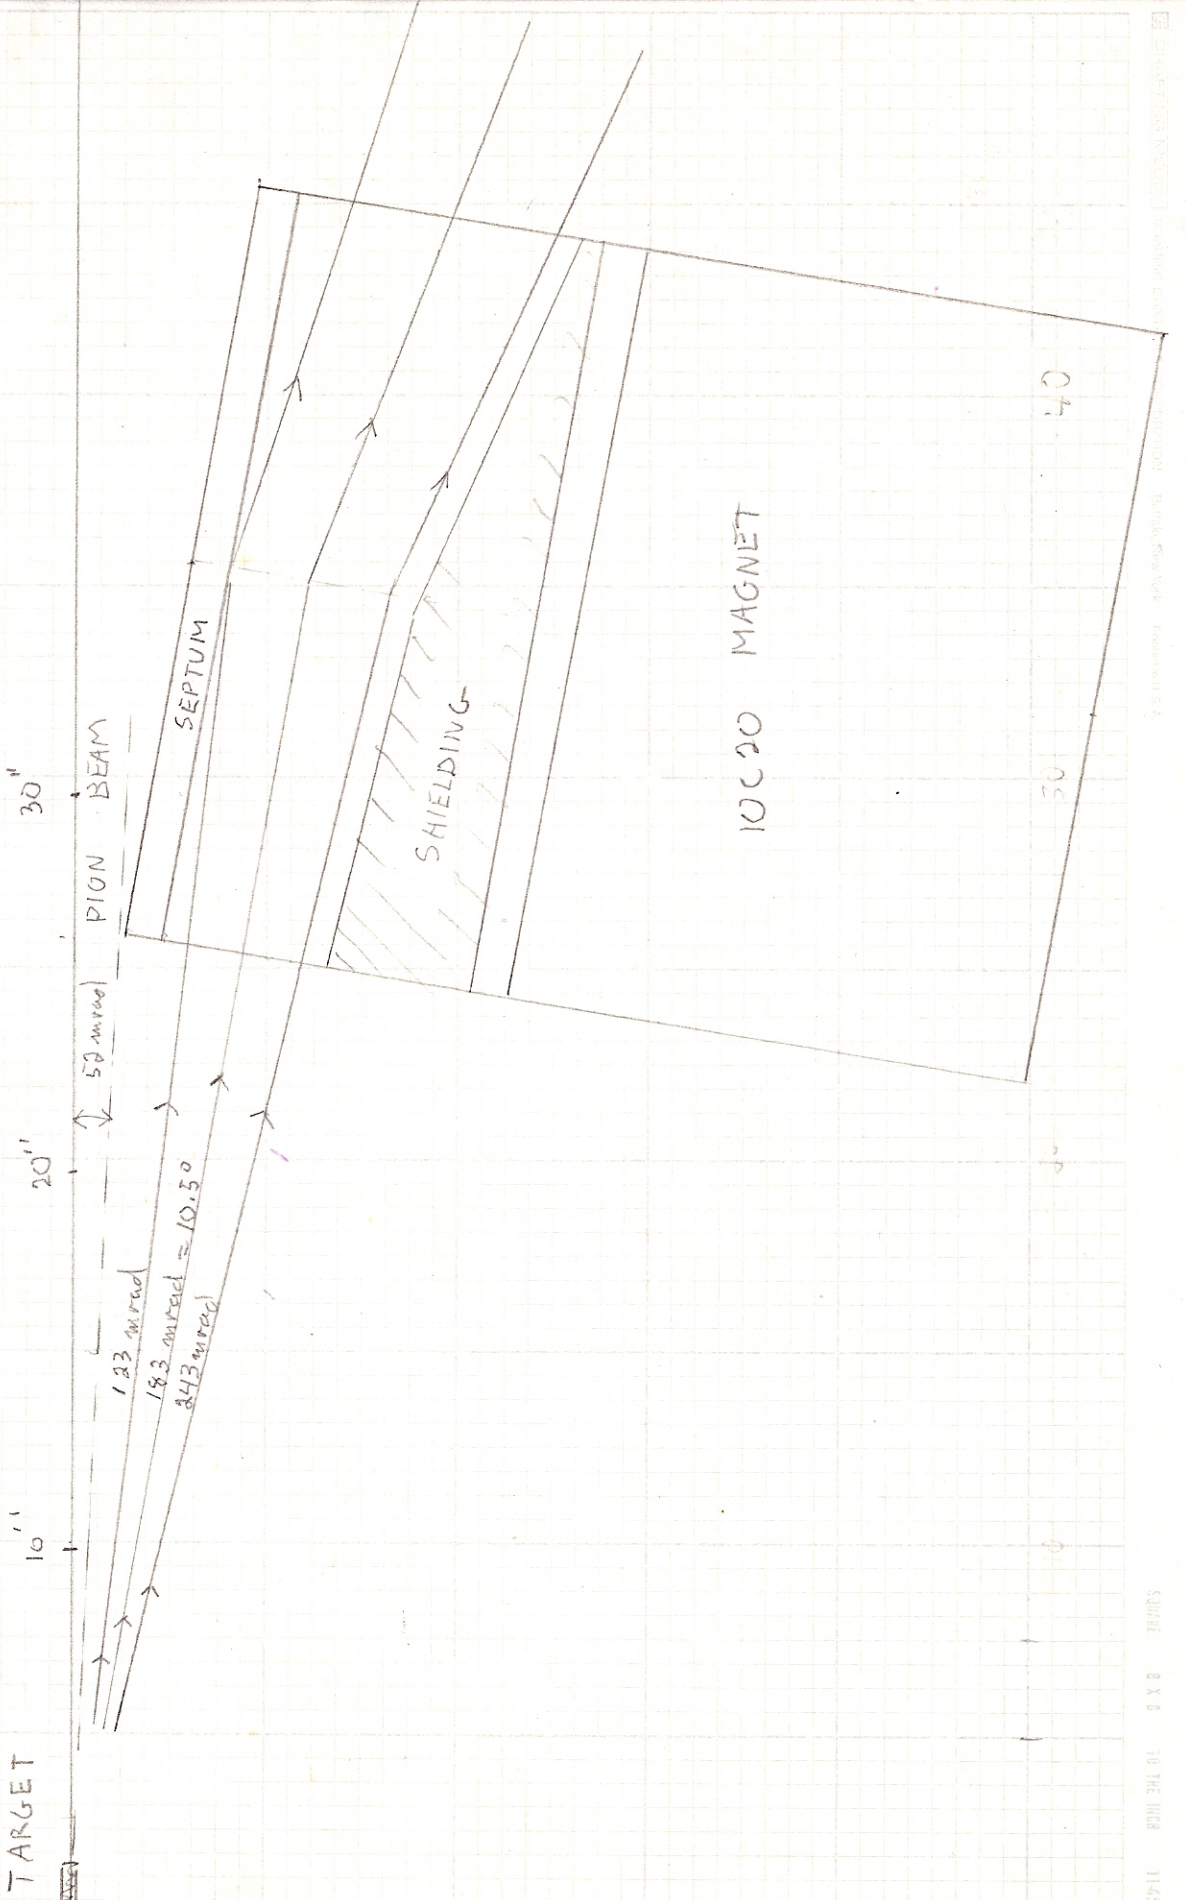

BROOKHAVEN NATIONAL LABORATORY

SHEET NO. OF

JOB NO.

DEPT. OR PROJECT

SUBJECT


CHKD. BY

DATE

FIGURE 3

EP & S DIV. TECH NOTE #20

VERTICAL IMAGE AT MASS SLIT, EQUAL POPULATIONS OF K AND π
 $P = 800 \text{ MeV}/c$ $V = 500 \text{ KV}$ ACROSS $4''$

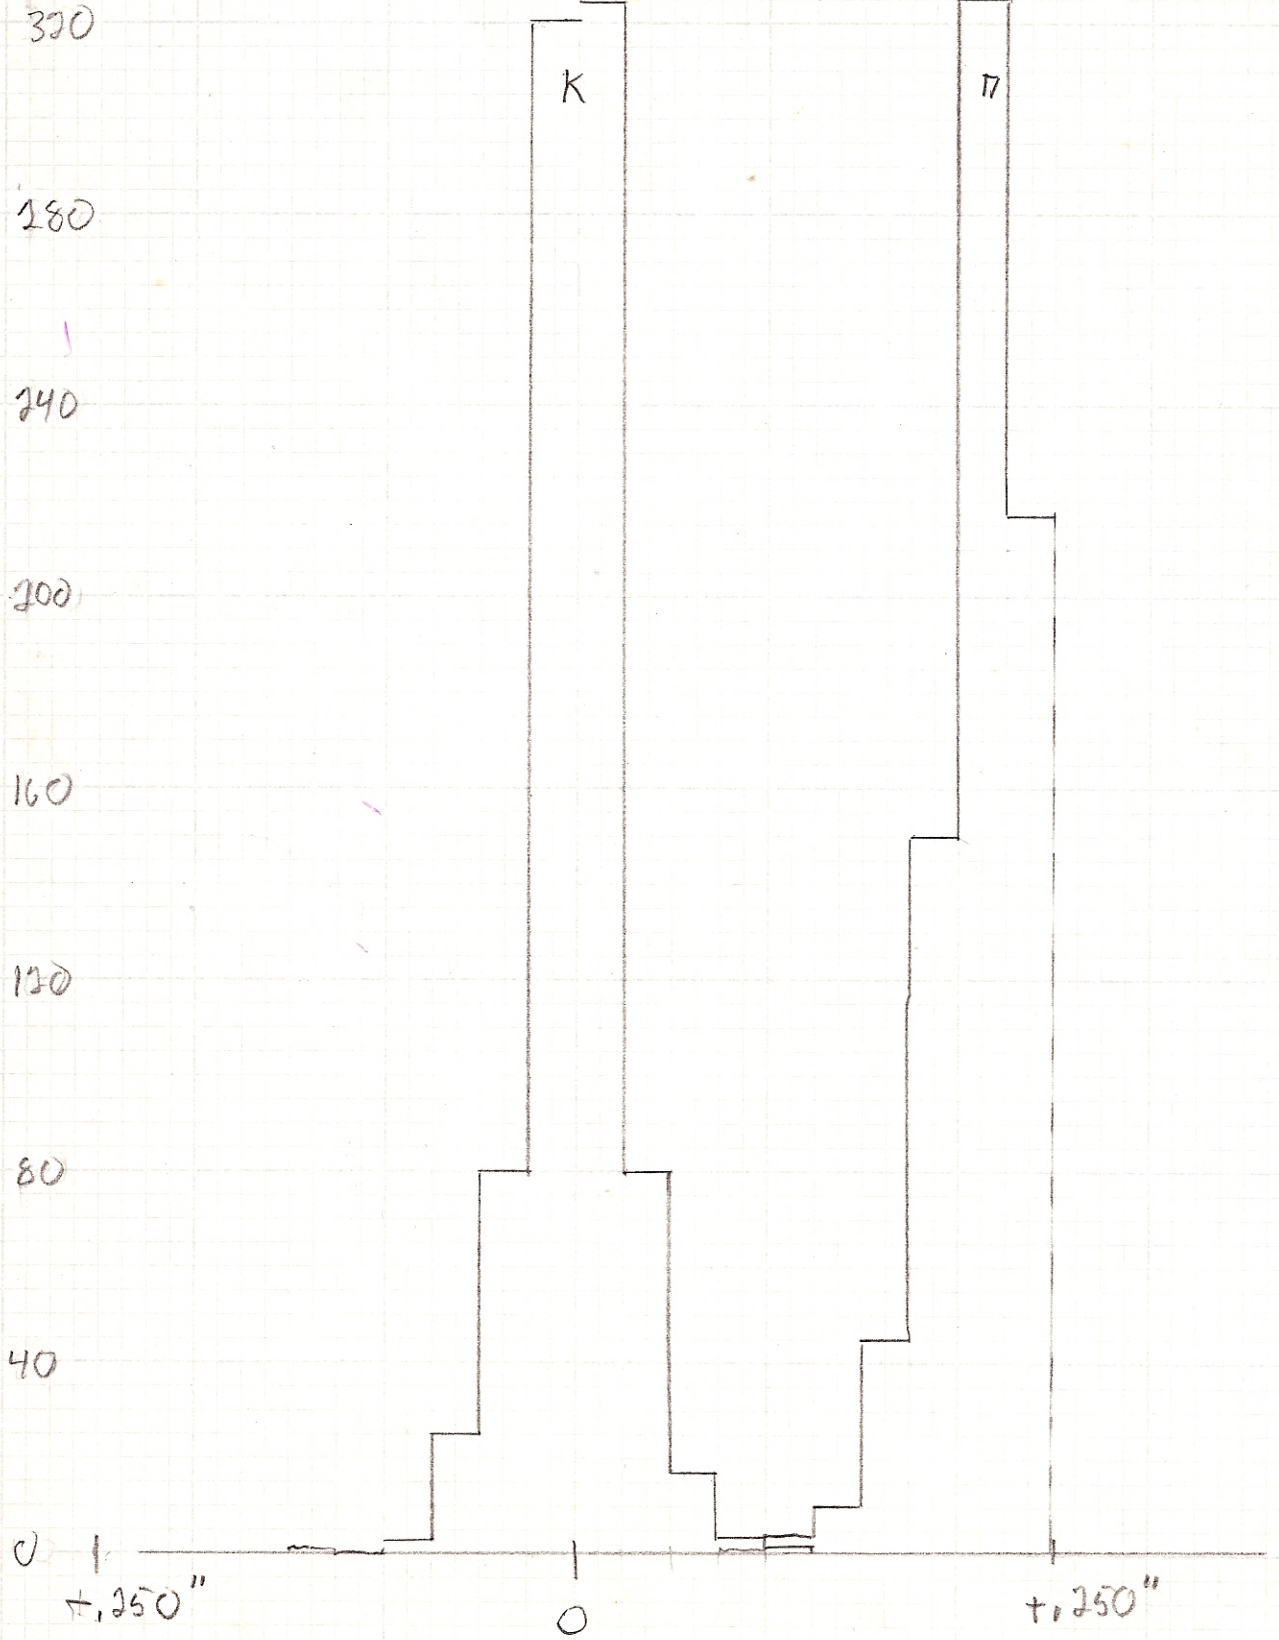


SQUARE 8 X 8 TO THE INCH 11-430-08

DUPLICATE MEDIA - RADIO CONTROLS CORPORATION - BUNTON NEW YORK - PHONED U.S.A.

BY _____ DATE _____ SUBJECT _____ SHEET No. _____ OF _____
CHKD. BY _____ DATE _____ JOB No. _____
DEPT. OR PROJECT _____

EP & S DIV TECH NOTE #20

FIG 4 HORIZONTAL PROFILE AT SECOND FOCUS

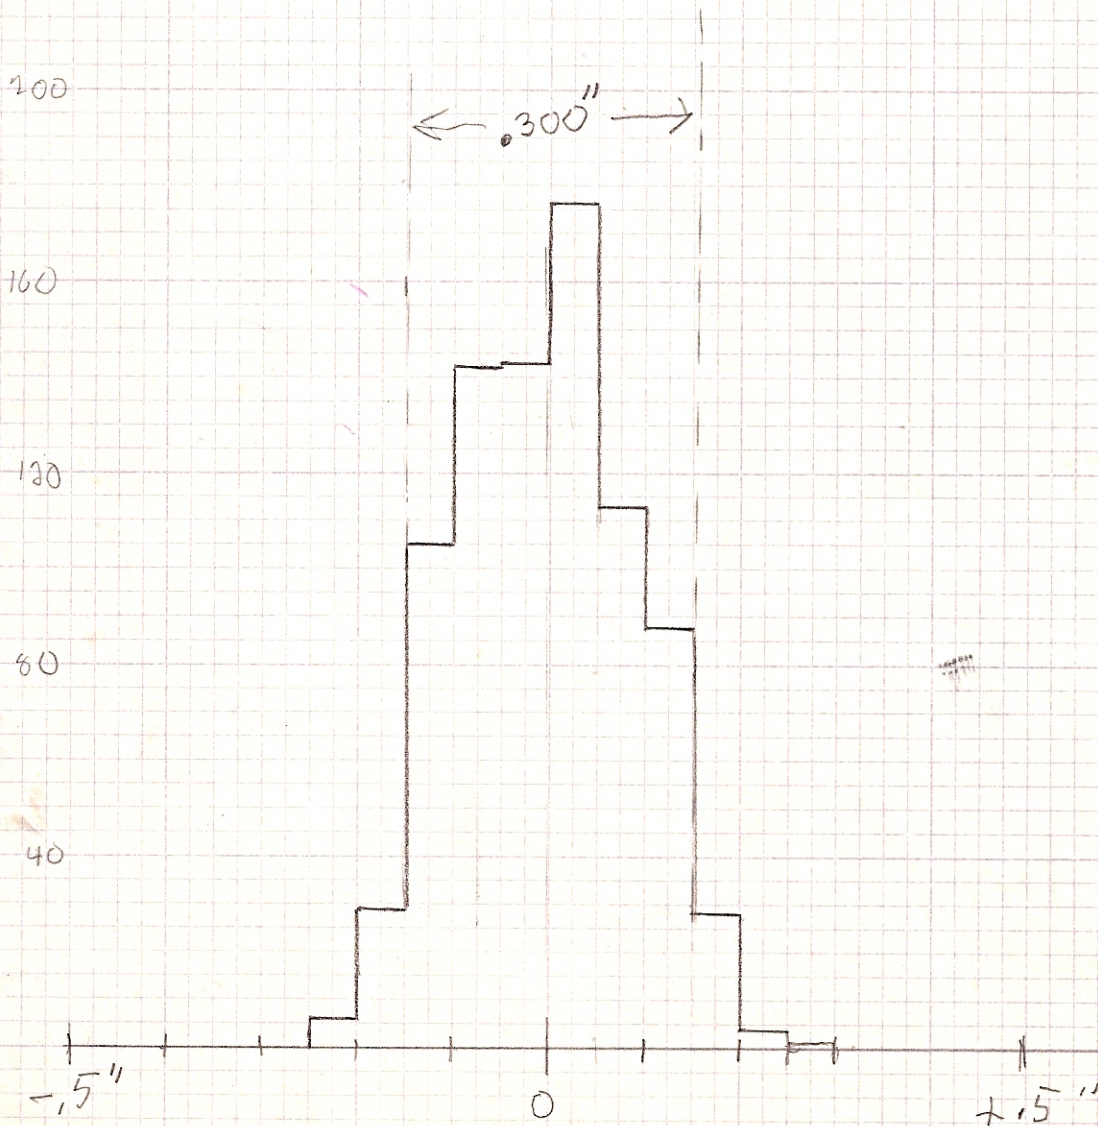

OGILVIE PRESS, INC. BROOKLYN 17 N.Y.
STOCK NO. 450