

## Ideas for a new low energy separated beam

W. J. Willis

August 1973

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.AT(30-1)-16 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Accelerator Department  
Brookhaven National Laboratory  
Associated Universities, Inc.  
Upton, L.I., N.Y.

EP&S DIVISION TECHNICAL NOTE

No. 67

W.J. Willis  
August 22, 1973

IDEAS FOR A NEW LOW ENERGY SEPARATED BEAM

David Berley inspired me to think about a high intensity beam. I will set down here some ideas which might be studied in detail.

The effectiveness of an optical element in a plane containing the axis is proportional to the area of beam it occupies, which suggests that if a very short beam is needed, the transverse dimensions of the beam in the electrostatic deflector should be larger. On the other hand, the amount of horizontal bend needed for momentum selection in such a beam is rather easy to obtain, which suggests that this operation should be carried out near foci.

The use of edge focusing from bending can be very effective in keeping the overall length short in these circumstances, and one should take full use of it. A sketch of a beam laid out on these principles is shown in Fig. 1. Fig. 2 shows the kinds of trajectories which I would try to realize in a detailed design. Note the smooth trajectory in the vertical to minimize chromatism.

A production angle of  $6^\circ$  does not sacrifice much flux, and helps get the beam away from the primary direction. Another  $20^\circ$  of bend results from the first bending magnet with a vertically focusing exit edge. There follows an electrostatic deflection in the vertical plane. A large quadrupole doublet follows, with a small vertical bend magnet in between the two focusing elements. Next, there is another vertical electrostatic deflection and the beam enters a bending magnet through a vertically focusing edge. The double focus and mass slit are at the end of this magnet, with the beam at an angle of  $46^\circ$  to the proton beam. The exit face of this magnet acts as a field lens, focusing in the horizontal plane.


I would follow the mass slit by a large magnet with a substantial deflection, around  $60^\circ$ . By edge focusing and gradients, this magnet would produce a focus near its downstream edge. The pole pieces for this magnet could be changed to alter the characteristics of this focus according to the needs of the experiment. This magnet, rather than the first stage, provides fine momentum resolution.

I believe such a beam, with a maximum momentum of 800 MeV/c, could be 6 - 7 m long with a very large solid angle ( $\sim 20$  msr.).

One problem in building this beam, is that the gap in the electrostatic separator will probably want to be  $\sim 25$  cm. Since one wants to obtain the  $\sim 40$  kv/cm gradients we are used to with 10 cm gaps, the difficult technology of handling voltages of  $\sim \pm \frac{1}{2}$  MV would seem to be required. To avoid this, I would suggest that an electrode on the median plane be introduced, fixed at one polarity with the top and bottom plates at the opposite polarity. One has then to avoid high fields at the ends of this electrode without blocking beam particles. This might be done with a very thin-walled tube of low-Z material (Be) through which the particles may pass as shown in Fig. 3. The vertical deflection magnet must then have a current septum in the median plane, but no particles need strike this since the electrostatic deflection effectively shields it.

Distribution: B1 Limited

Fig 1

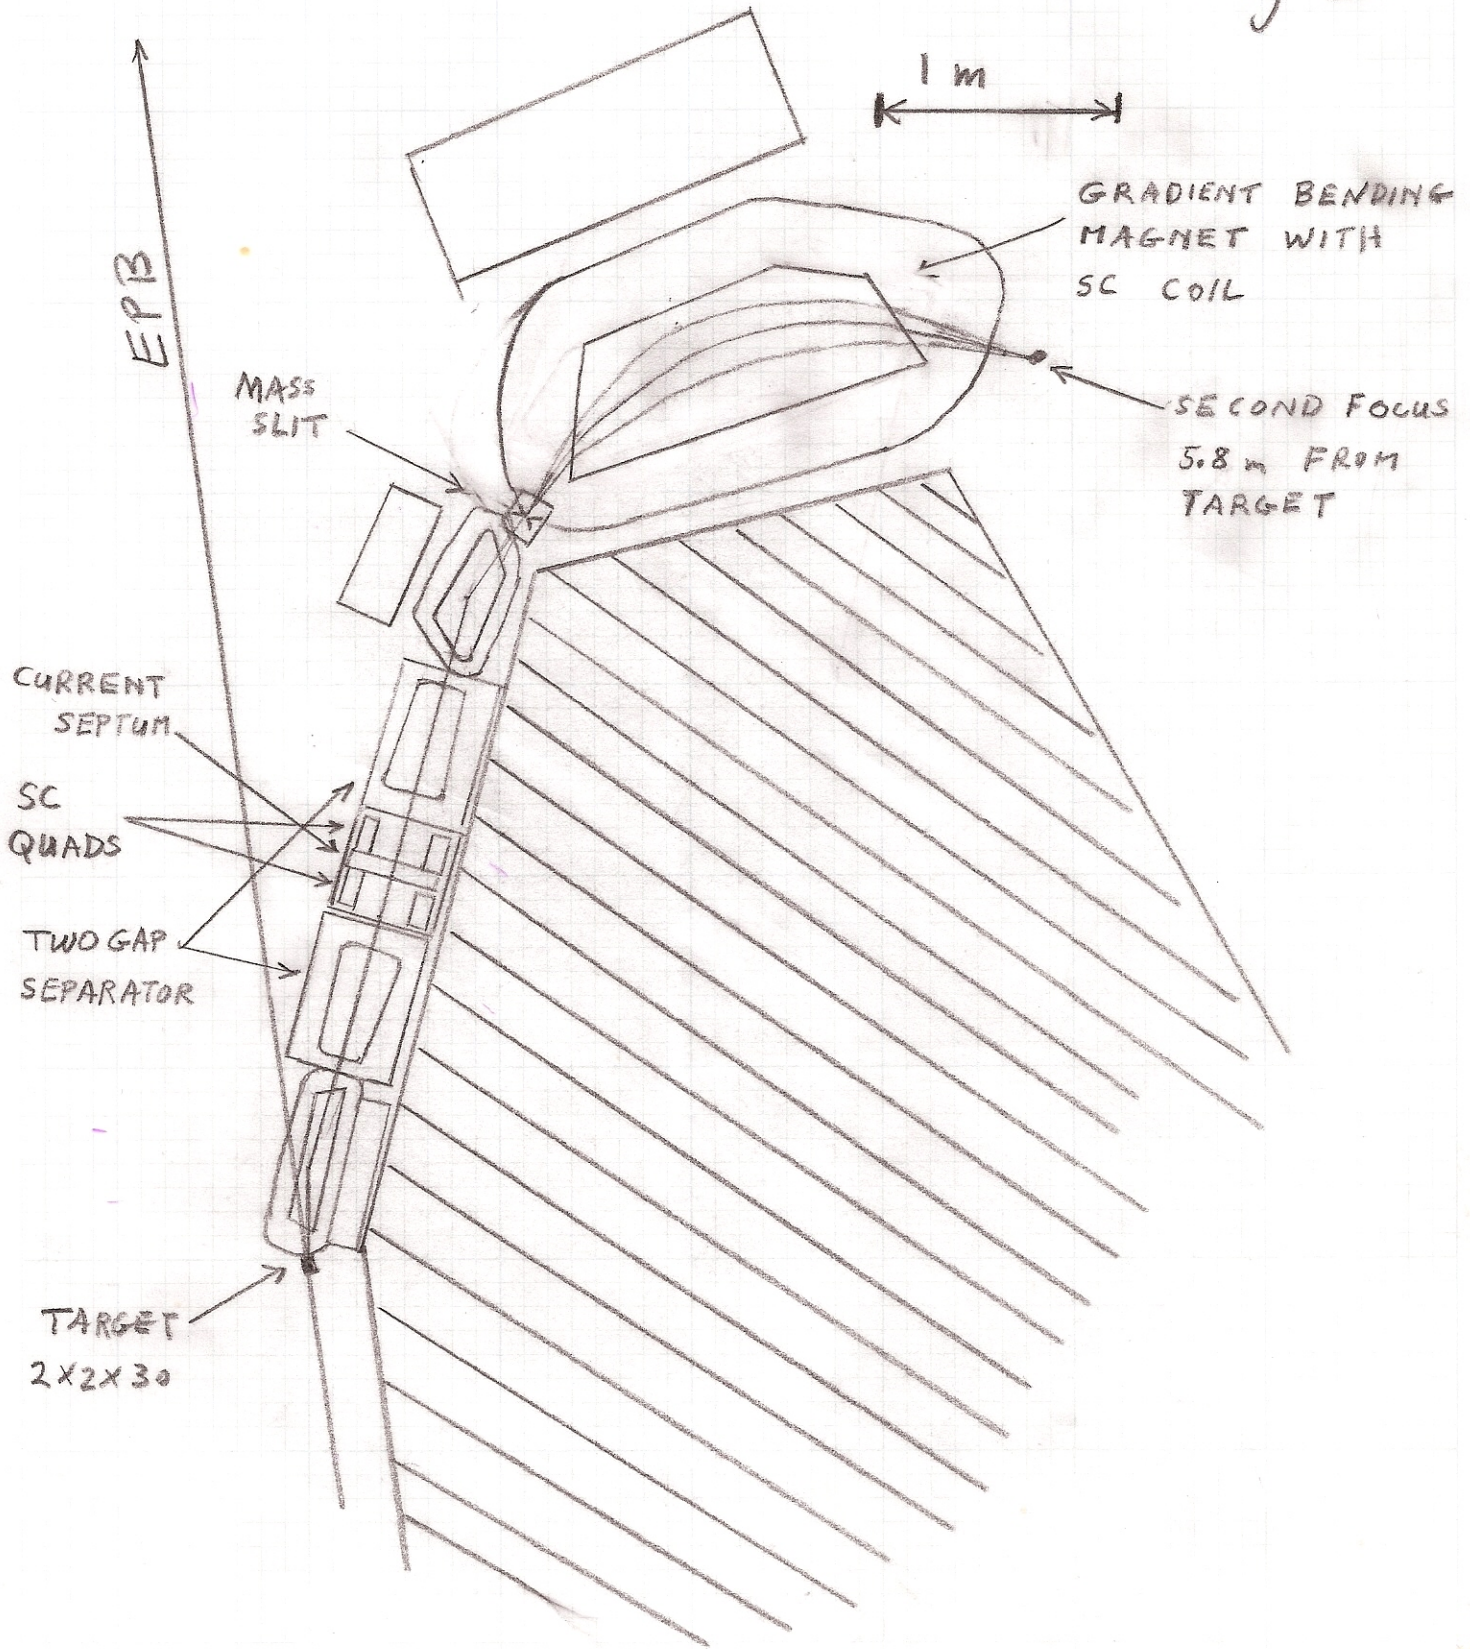

BROOKHAVEN NATIONAL LABORATORY

BY \_\_\_\_\_ DATE \_\_\_\_\_

SUBJECT \_\_\_\_\_

SHEET No. \_\_\_\_\_ OF \_\_\_\_\_

CHKD. BY \_\_\_\_\_ DATE \_\_\_\_\_

DEPT. OR PROJECT \_\_\_\_\_

JOB No. \_\_\_\_\_

Fig. 2

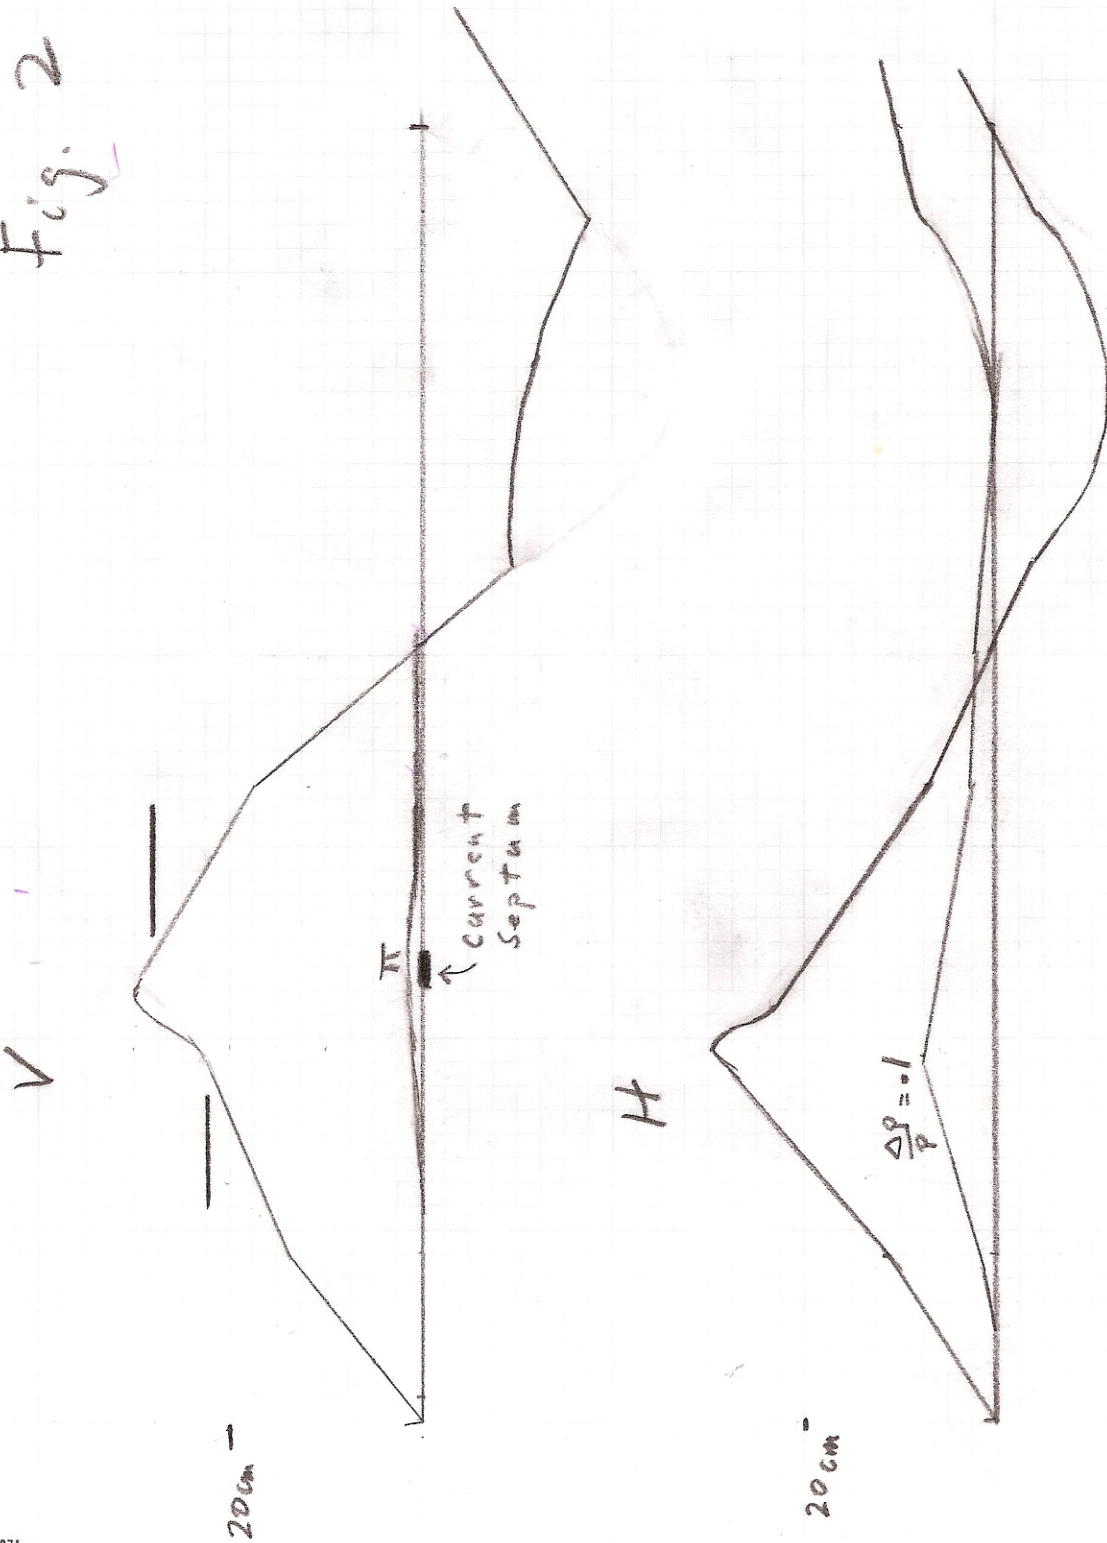


Fig. 3

