



BNL-99217-2013-TECH

C-A/AP/64;BNL-99217-2013-IR

Multi-turn Injection of Heavy-Ions in Booster with the H-Minus Injection Foil Inserted

C. J. Gardner

September 2001

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-98CH10886 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

C-A/AP/64
September 2001

**Multi-turn Injection of Heavy-Ions in Booster with the H-Minus
Injection Foil Inserted**

C. J. Gardner



**Collider-Accelerator Department
Brookhaven National Laboratory
Upton, NY 11973**

Multi-turn Injection of Heavy-Ions in Booster with the H-Minus Injection Foil Inserted

C.J. Gardner

September 14, 2001

When the Booster Application Facility (BAF) becomes operational, we will want to inject and accelerate heavy ion and proton beams in Booster on a ppm (pulse-to-pulse modulation) basis. The heavy ions will be delivered to BAF for biology experiments while protons will be delivered to the experimental hall for high energy physics. One item that potentially stands in the way of ppm operation is the H-minus injection foil. Normally the foil is inserted into the Booster aperture for proton operation and retracted during heavy ion operation. The motorized device that does this can not move the foil in and out fast enough for ppm operation. (Even if it could, one would worry about the lifetime of such a device.) In this note we show that in principle the injection foil can be left in its nominal position for H-minus injection without impinging on the available aperture for the injection and acceleration of heavy ions.

1 The Injection Foils

Five foils are available for H-minus injection. They are mounted on a flat rotatable circular frame that has six equally spaced slots, five of which hold a foil and one which is left open (blank). The plane of the frame is perpendicular to the beam line and is located 0.283 m downstream of dipole DHC5 and 0.712 m upstream of quadrupole QHC6. Each foil is inserted from the radially inward side of the beam pipe by rotating its slot into the Booster aperture. The five foils are identical except for the position of the inserted foil edge with respect to the beam pipe centerline. These positions are listed in Table 1. (Here the minus signs indicate that the foil edges are on the radially inward side of the beam pipe centerline.) The foil material is carbon with a surface density of $200 \mu\text{g}/\text{cm}^2$. The

nominal foil for proton operation is the one in slot 3; its edge is 1 inch to the inside of the beam pipe centerline.

Table 1: H-Minus Injection Foils

Slot	Foil	Foil Edge
1	Blank	(Inches)
2	Carbon	-0.75
3	Carbon	-1.00
4	Carbon	-1.00
5	Carbon	-1.125
6	Carbon	-1.125

2 Clearing the Foil at Injection

With the foil retracted, the horizontal limiting aperture in Booster is the F6 septum magnet and the horizontal acceptance is 184π mm milliradians. This is computed using the MAD code with the Booster tunes set to 4.76. (These are the typical tunes during heavy ion injection.) The resulting acceptance envelope in the region of the foil is shown in **Figure 1**. Here the red curves are the envelope; the vertical green line indicates the aperture at the downstream end of the C3 inflector.

When inserted without any local orbit bumps, the foil becomes the limiting aperture of the machine. With the foil edge 1 inch to the inside of the beam pipe centerline, the horizontal acceptance is reduced to 60π mm milliradians. The resulting acceptance envelope is shown in **Figure 2** where the inserted foil is indicated by the vertical blue line.

2.1 The C6 Three-Bump

In order to increase the available aperture with the foil inserted, the closed orbit must be bumped away from the foil. This can be done with a local three-bump produced by horizontal dipole correctors DHCC4, DHCC6 and DHCC8. The bump is centered on corrector DHCC6 and is called the C6 three-bump. (DHCC6 is 0.287 m downstream of the foil.) With the correctors adjusted so that the position of the bumped orbit at the foil is

21 mm to the outside of the beam pipe centerline, the F6 septum magnet again becomes the limiting aperture and the horizontal acceptance is again 184π mm milliradians. The three-bump and acceptance envelope are shown in **Figure 3**. Here the black curve is the three-bump and the green and blue vertical lines indicate the apertures at the C3 inflector and foil respectively. Note that the envelope comes close to the inflector and foil apertures and nearly reaches the 75 mm aperture in the QHC6 quadrupole; there is not much additional room for the beam at these locations. The angular kicks required in the three correctors are 2.02, -1.36 , and 1.99 milliradians respectively. (Here a positive kick is in the radially outward direction.) The integrated strength of each correction dipole is 0.975×10^{-4} Tm/A as reported by Thern [1], so the currents required in the three dipoles for a beam with 1 Tm rigidity are 20.7, -13.9 , and 20.4 Amps respectively.

During heavy ion injection, the C3 injection bump (produced by fast dipole kickers KDHC1, KDHC3, KDHC7 and KDHD1) initially places the closed orbit near the septum at the downstream end of the inflector. This bump is the black curve shown in **Figure 4**. With the C6 three-bump adjusted so that the circulating beam clears the foil (as in **Figure 3**), one then obtains the superposition of bumps indicated by the blue curve. As the injection bump is collapsed away from the septum, the injected beam is contained in the envelopes indicated by the red curves in **Figures 5, 6, 7** and **8**. The positions of the bumped orbit at the end of the inflector in the figures are respectively 37.5, 24, 10 and 0 mm with respect to the beam pipe centerline. (The septum is 47.5 mm from the centerline.) Here one sees that all of the injected beam clears the foil as the bump collapses. With the injection bump completely collapsed, one is left with only the C6 three-bump as in **Figure 3**.

2.2 The Slow Injection Bump

The so-called “slow injection bump” may also be used to bump the orbit away from the foil. This bump is normally used to center the orbit on the available aperture at the foil during proton operation. It is produced by the flat trim windings on dipoles DHC4, DHC8, and DHD1. (The various windings on the Booster dipoles are described in Reference [2]. The flat trims on DHC4, DHC8, and DHD1 are connected to 50-Amp power supplies.) With the currents in the flat trims adjusted so that the position of the bumped orbit at the foil is 21 mm to the outside of the beam pipe

centerline, the F6 septum magnet is the limiting aperture and the horizontal acceptance is 184π mm milliradians. **Figure 9** shows the bump and the 184π acceptance envelope. Here, as before, the black curve is the bump and the green and blue vertical lines indicate the apertures at the inflector and foil. The currents required in the flat trims are such that the magnetic fields in the DHC4, DHC8 and DHD1 dipoles are decreased by 1.5%, 0.075%, and 1.65% respectively.

3 Clearing the Foil during Acceleration

As the beam is adiabatically accelerated after injection, the horizontal emittance becomes

$$\pi\epsilon = \pi\epsilon_0 p_0/p \quad (1)$$

where p is the momentum of the accelerated beam, and p_0 and $\pi\epsilon_0$ are the momentum and emittance at injection. We assume that the beam completely fills the horizontal acceptance at injection, so $\pi\epsilon_0 = 184\pi$ mm milliradians. The position of the bumped orbit required for the accelerated beam to clear the foil is then

$$X = X_0 - \left\{ \sqrt{\epsilon_0\beta} - \sqrt{\epsilon\beta} \right\} = X_0 - \sqrt{\epsilon_0\beta} \left\{ 1 - \sqrt{p_0/p} \right\} \quad (2)$$

where $X_0 = 21$ mm is the position required at injection and $\beta = 10.82$ m is the lattice beta at the foil. In each of the three-bump dipoles, the current required to give bumped orbit position X is

$$I = I_0 \frac{X}{X_0} \frac{p}{p_0} \quad (3)$$

where I_0 is the current required to give position X_0 at injection momentum p_0 . Defining

$$R = \sqrt{p/p_0}, \quad A = \sqrt{\epsilon_0\beta} \quad (4)$$

we then have

$$I = I_0 \frac{X}{X_0} R^2, \quad X = X_0 - A + \frac{A}{R} \quad (5)$$

$$I = \frac{I_0}{X_0} \left\{ X_0 R^2 - AR^2 + AR \right\} \quad (6)$$

and

$$\frac{dI}{dR} = \frac{I_0}{X_0} \{2RX_0 - 2RA + A\}. \quad (7)$$

Thus we see that if $R \geq 1$ and

$$X_0 < A/2 \quad (8)$$

then

$$2R(X_0 - A) + A < A(1 - R) \leq 0 \quad (9)$$

and derivative dI/dR will be negative for all $p > p_0$. The required current will then decrease as the beam is accelerated. Putting in numbers $\epsilon_0 = 184$ mm milliradians and $\beta = 10.82$ m we find $A = 44.6$ mm. The condition $X_0 < A/2$ is therefore satisfied for $X_0 = 21$ mm, and the currents required in the three-bump dipoles (or in the flat trim windings for the slow injection bump) will decrease as the beam is accelerated.

References

- [1] R. Thern, “Booster Ring Correction Magnets”, Booster Technical Note No. 224, May 20, 1994.
- [2] C.J. Gardner, “The New Booster Dump and Dump Bumps”, Collider-Accelerator Dept. Note C-A/AP/46, March, 2001.

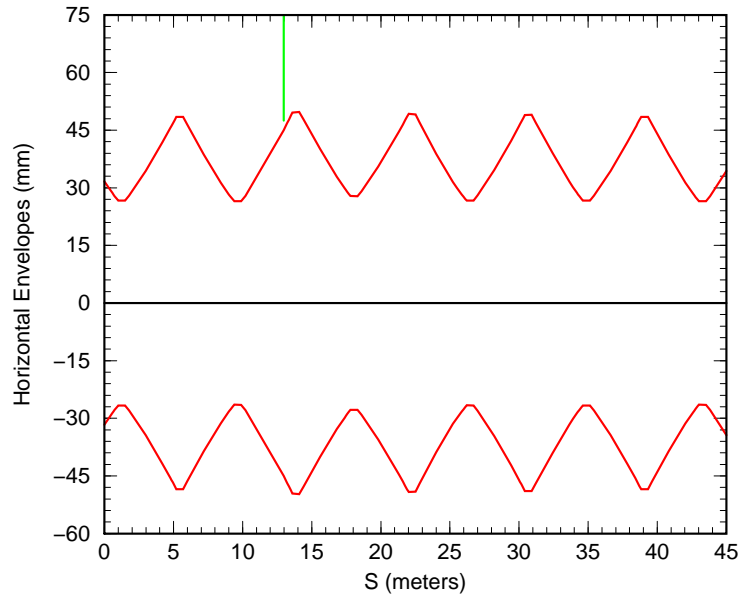


Figure 1: Acceptance Envelope with Foil Retracted

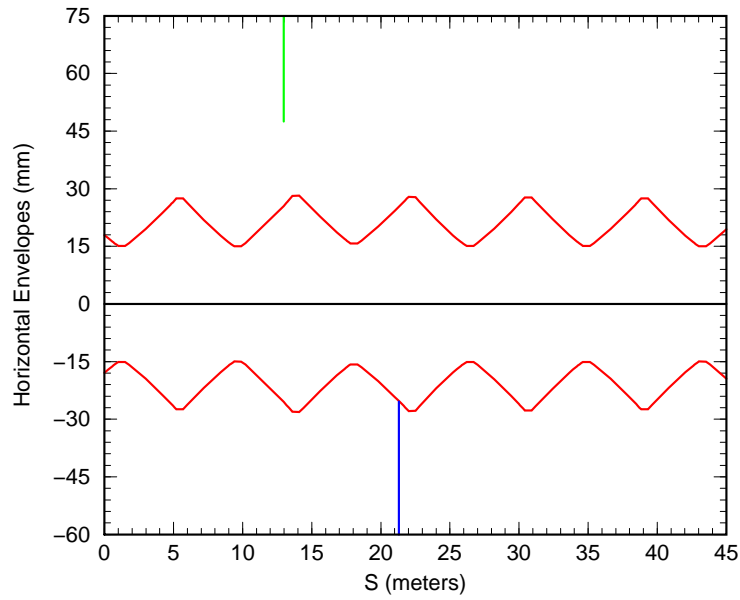


Figure 2: Acceptance Envelope with Foil Inserted

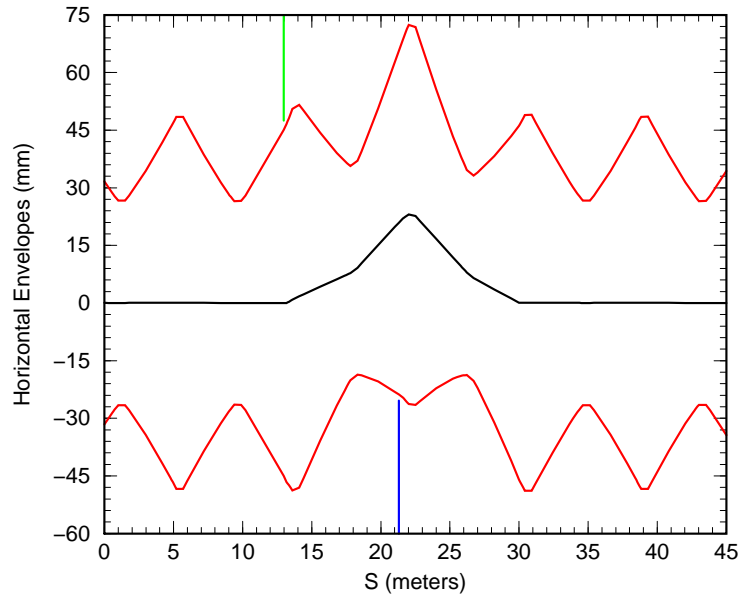


Figure 3: Acceptance Envelope with C6 Three-Bump

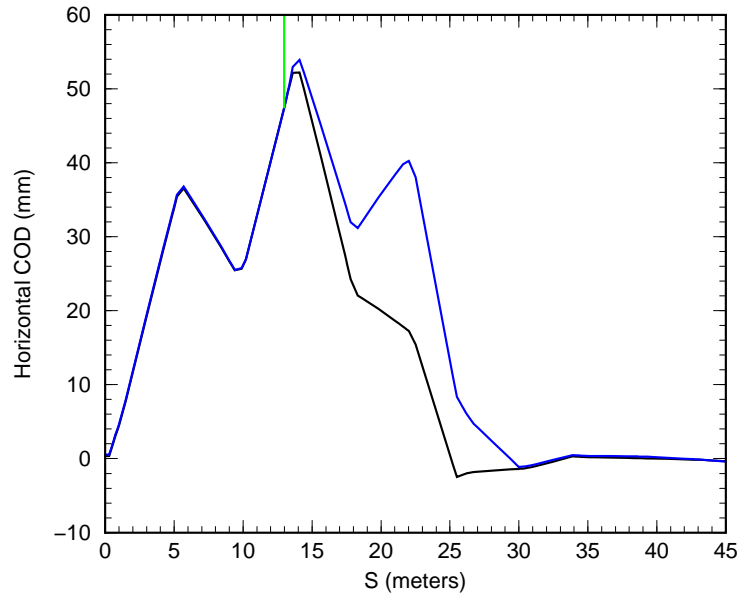


Figure 4: C3 Injection Bump and C6 Three-Bump

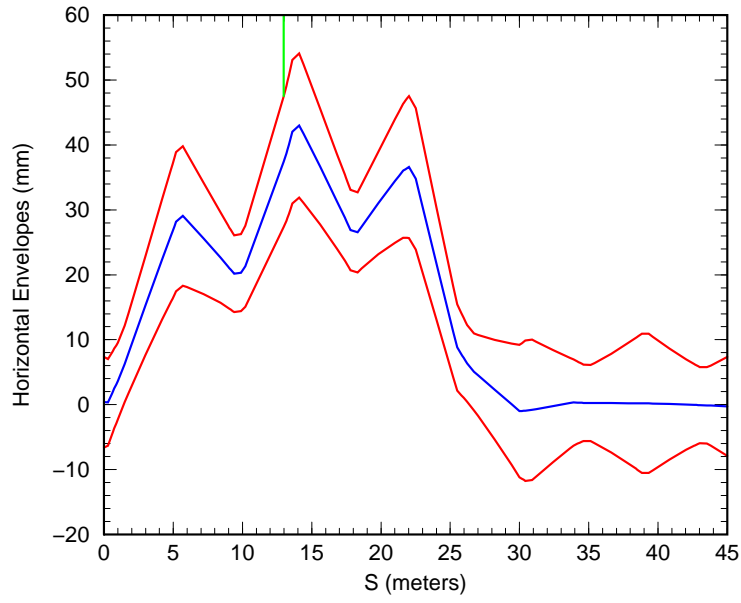


Figure 5: 37.5 mm Injection Bump + Three-Bump with Envelope

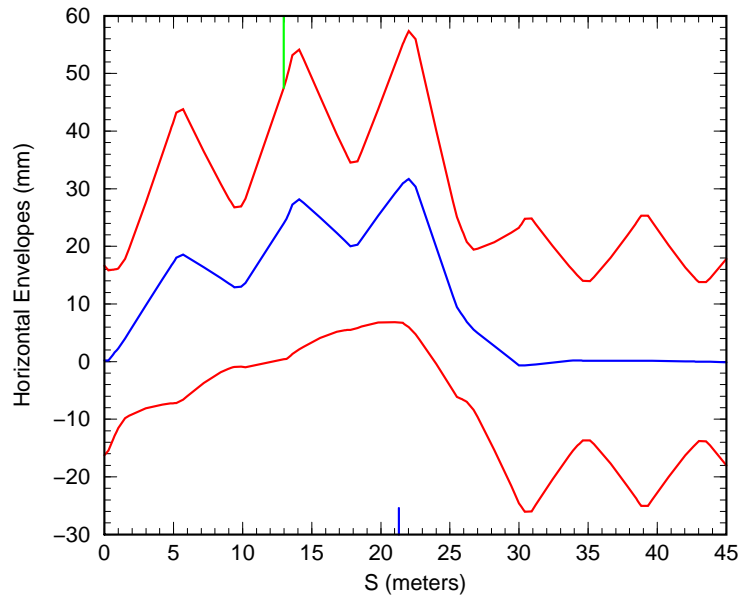


Figure 6: 24.0 mm Injection Bump + Three-Bump with Envelope

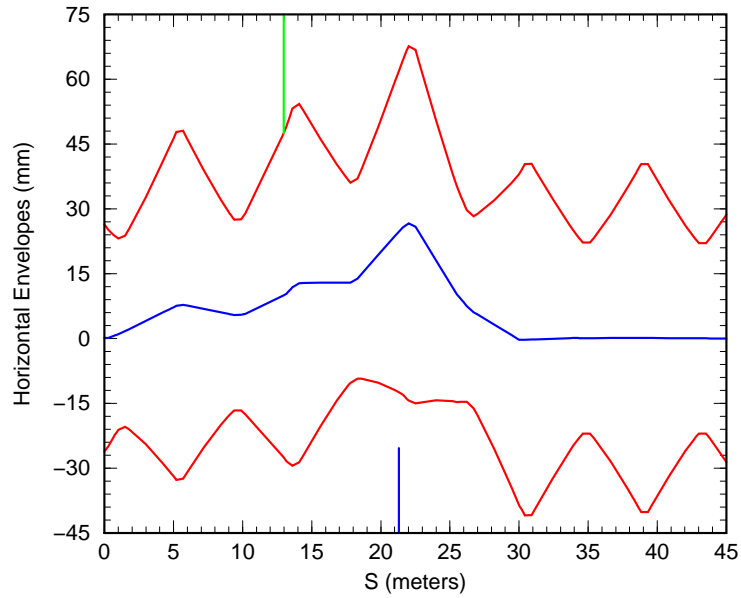


Figure 7: 10.0 mm Injection Bump + Three-Bump with Envelope

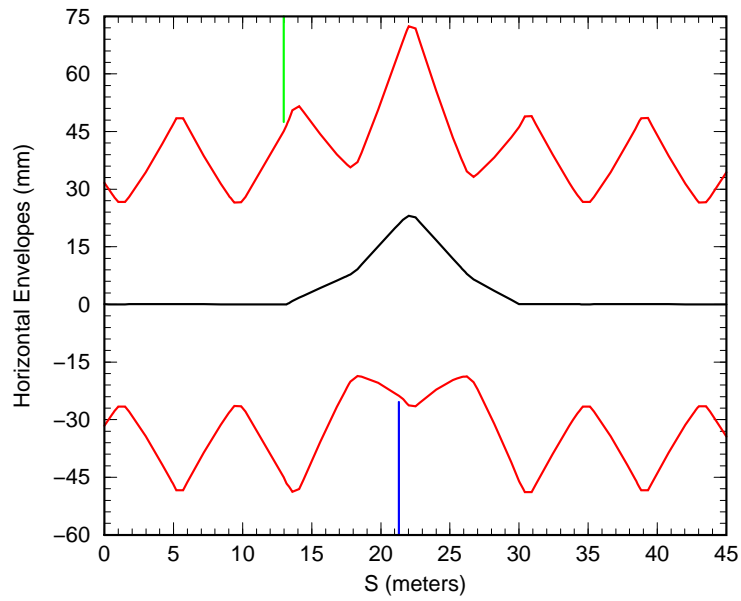


Figure 8: Three-Bump (no injection bump) with Envelope

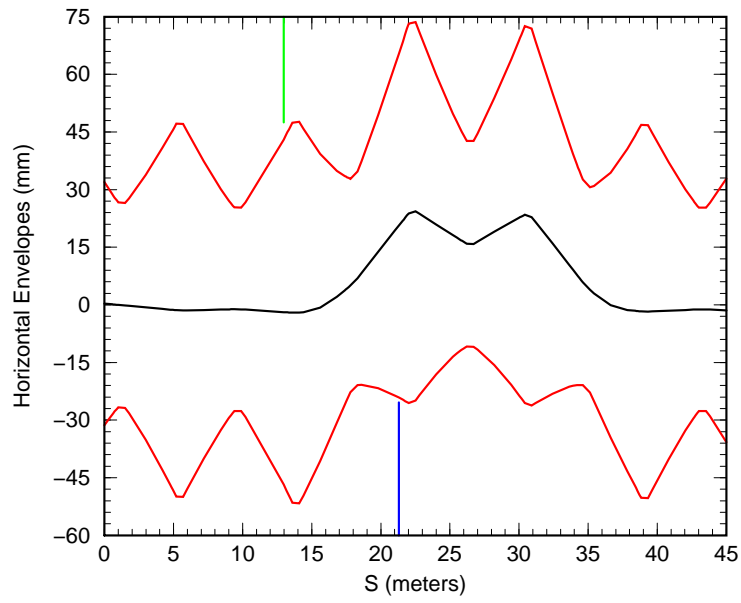


Figure 9: "Slow Injection Bump" with Envelope