

Aperture and vacuum aspects of the PHENIX and STAR detector upgrade beampipe

C. Montag

August 2006

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-98CH10886 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

C-A/AP/#250
August 2006

Aperture and vacuum aspects of the PHENIX and STAR detector upgrade beampipe

C. Montag, H.C. Hseuh, W. Fischer



Collider-Accelerator Department
Brookhaven National Laboratory
Upton, NY 11973

Aperture and vacuum aspects of the PHENIX and STAR detector upgrade beampipe

C. Montag, H.C. Hseuh, W. Fischer

August 17, 2006

1 Introduction

As part of the PHENIX and STAR detector upgrade the installation of new beampipes is planned, with an inner radius smaller than the current 38 mm. Based on aperture requirements, we evaluate the minimum inner radius, and estimate the vacuum pressure in the detector region with the reduced radius.

2 Aperture requirements

We evaluate the necessary aperture based on two requirements. First, a minimum vertical separation is needed at injection and during the ramp to avoid beam-beam interactions. Second, with circulating beam the detector apertures shall always be in the shadow of another existing element in the ring to provide protection in the event of a large beam loss.

2.1 Vertical separation requirement

To avoid beam losses from long-range beam-beam interactions, the beams are vertically separated at injection and during the ramp. Currently, a nominal separation of ± 5 mm, not accounting for orbit errors, is maintained in operation. However, even at this separation long-range beam-beam interactions can induce beam losses [1]. Fig. 1 shows the beam loss as a function of vertical separation of two proton bunches at injection, interacting at $s = 10.5$ m from the IP. In this case, and with a bunch intensity of 2×10^{11} protons in Blue, and 1.8×10^{11} protons in Yellow, beam losses are visible when the separation is reduced below 10 mm. Even if no beam loss is observed, the emittance can be affected by long-range beam-beam interactions. To allow for orbit errors, especially at the beginning of the ramp, ± 7 mm vertical separation should be available in all interaction regions.

2.2 Shadowing requirement

The straight section between the two triplets is optically a drift without focusing elements, if we neglect the small distortion by the DX separator dipole. Therefore, the beam trajectory in this roughly 50 meters long region is optically equivalent to a straight line. As long as the aperture of the detector beampipe is smaller (in rms beam sizes) than that of the beampipe near the triplets, the detector beampipe is protected from any hits from the stored beam.

Since the interaction point (IP) is an optical symmetry point, β -functions at a distance s from the IP are

$$\beta(s) = \beta_{\text{IP}} + \frac{s^2}{\beta_{\text{IP}}}. \quad (1)$$

The largest β -functions within the detector beampipe therefore occur at its two ends at $s_d = \pm 0.4$ m, while in the adjacent beampipe they reach their maximum near the triplets, at $s_t = \pm 25$ m. The beampipe

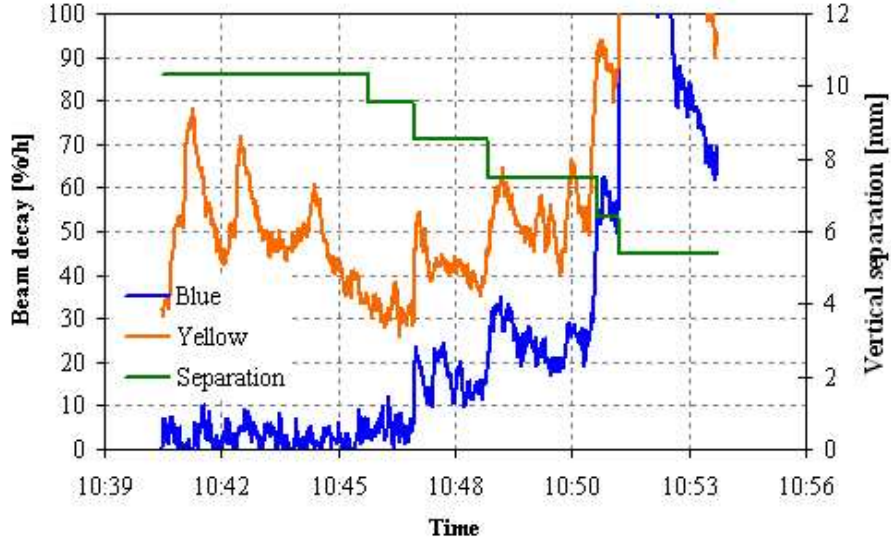


Figure 1: Beam losses induced by the long-range beam-beam interaction at injection. The beam loss increases before 10:45 are caused by changes in the tune.

radii at these two locations are $A_d = 0.02$ m at the detector, and $A_t = 0.06$ m near the triplet. Without orbit errors, for the detector beampipe to be in the shadow of the beampipe near the triplets, the relation

$$\frac{A_d}{\sqrt{\beta_d}} \geq \frac{A_t}{\sqrt{\beta_t}} \quad (2)$$

$$\Leftrightarrow \frac{A_d}{\sqrt{\beta_{\text{IP}} + \frac{s_d^2}{\beta_{\text{IP}}}}} \geq \frac{A_t}{\sqrt{\beta_{\text{IP}} + \frac{s_t^2}{\beta_{\text{IP}}}}} \quad (3)$$

needs to be fulfilled. Solving this expression for β_{IP} and inserting the numbers given above yields

$$\beta_{\text{IP}} \leq 8.8 \text{ m}; \quad (4)$$

so the detector beampipe is shielded from the stored beam during stores with $\beta_{\text{IP}} = 1.0$ m.

Including orbit errors, the worst case scenario occurs when the orbit is parallel shifted by a certain amount Δx ; this amount is the same in the detector beampipe as near the triplets. The free aperture in the plane of the orbit distortion is therefore $A_d - \Delta x$ in the detector beampipe, and $A_t - \Delta x$ near the triplet. In this case, the detector beampipe is in the shadow of the beampipe near the triplet if the condition

$$\frac{A_d - \Delta x}{\sqrt{\beta_d}} \geq \frac{A_t - \Delta x}{\sqrt{\beta_t}} \quad (5)$$

is fulfilled. For stores with $\beta_{\text{IP}} = 1.0$ m, the relevant β -functions are $\beta_d = 1.16$ m and $\beta_t = 626$ m, respectively. The condition given in Eq. (5) is fulfilled for

$$\Delta x \leq 18.2 \text{ mm}, \quad (6)$$

which can be ensure in normal operation.

At injection, however, the condition given in Eq. (4) is not fulfilled. A certain level of protection is provided by aperture limitations elsewhere in the ring, namely the abort kickers in the 10 o'clock IR,

device name	A_x [mm]	A_y [mm]	$\sqrt{\beta_x}$ [$\sqrt{\text{m}}$]	$\sqrt{\beta_y}$ [$\sqrt{\text{m}}$]	$A_x/\sqrt{\epsilon\beta_x}$ [σ]	$A_y/\sqrt{\epsilon\beta_y}$ [σ]
abort kickers	25.4	38.1	6.70	12.00	6.6	5.5
pulsed quadrupole	32.0	12.0	3.16	3.16	17.5	6.6
Lambertson	33.7	33.7	6.48	4.57	9.0	12.8
new detector beampipes (ID = 40 mm)	20.0	13.0	3.16	3.16	11.0	7.1

Table 1: Restricting apertures in RHIC, and β -functions at injection, with $\beta_{IP} = 10$ m in all interaction points. 7 mm vertical separation bumps have been taken into account at the pulsed quadrupole and the detector beampipe, thus reducing the free aperture by 7 mm. For convenience, the free aperture in σ has been calculated assuming a normalized ion beam emittance of $\epsilon_n = 20$ mm·mrad, and $\gamma = 10$ at injection.

the pulsed quadrupole in IP4, and the Lambertson magnets. Tab. 1 lists the apertures of these devices, together with the horizontal and vertical β -functions at their locations.

Since the free aperture in beam- σ for the abort kicker (both planes), the Lambertson (horizontal plane), and the pulsed quadrupole (vertical plane) is smaller than for the proposed detector beampipe, these aperture restrictions provide a certain level of protection during injection. This protection is lost if the detector beampipe becomes the limiting aperture in the machine.

Abort kicker misfires at store lead to single-turn losses. The location of those losses around the perimeter of the ring is determined by the betatron phase advance between kicker and loss area, as well as the β -function and physical aperture at the location of the loss. In RHIC, the abort kickers deflect the beam on the downstream side of IR10; therefore, there is at least one entire arc between these kickers and the PHENIX or STAR detector. Within that arc, there is at least one location where the β -function reaches its maximum of approximately 50 m, while the betatron phase advance between the kickers and this location is close to $n \cdot \pi + \pi/2$. With the beampipe inner radius in the arcs being 35 mm, a particle deflected by a mis-firing abort kicker would hit this area in the arc first, instead of hitting the 20 mm ID detector beampipe, where the β -function is 1.0 m. The aperture ratio in this case is $\sqrt{50/1.0} \cdot 20/35 = 4.0$.

With a 20 mm inner radius beampipe in PHENIX and STAR, the same aperture is available as in IP4 now. If a smaller beampipe would be installed in either experiment, these could become the limiting aperture at injection. kicker.

3 Vacuum considerations

The changes in vacuum pressure inside the new detector beam pipes can be analyzed numerically and compared with that of the present beam pipes. We assume the following conditions for the analysis: First, the desorption rate along the pipe is uniform and independent of the radius; this is a reasonable assumption based on uniform electron density which generates the observed dynamic pressure rise. Second, the desorbed gas flows unidirectionally toward the pumps located 7.5 m from interaction points, such that the pressure profile becomes symmetric around the IP. The beam pipes closer to the ion pumps have a radius of 6.1 cm, transitioned to 3.6 cm towards the IP. The pressure distribution is slightly worse at the 8 o'clock side due to the longer 3.6 cm radius section. We will use the 8 o'clock side in the analysis, which has 4.0 m long 6.1 cm radius pipes and 3.5 m long 3.6 cm radius pipes. In the proposed upgrade, the 3.6 cm radius pipe will be shortened to 3.0 m, with the 0.5 m long section at the IP replaced by a 2.0 cm radius pipe.

The pressure at any location depends on the linear conductance of the beam pipes and the distance

Table 2: Linear conductance Co for present and planned PHENIX and STAR beam pipe configurations.

quantity	unit	values		
R	cm	6.1	3.6	2.0
Co (H ₂)	l·cm/s	$8.4 \cdot 10^4$	$1.7 \cdot 10^4$	$3 \cdot 10^3$
Co (CO)	l·cm/s	$2.2 \cdot 10^4$	$4.6 \cdot 10^3$	$8 \cdot 10^2$

Table 3: Effective pumping speed at IP.

	S(H ₂) [l/sec]	S(CO) [l/sec]
Now	36	10
Upgrade	24	6.6

from the pump. The linear conductance Co (in l·cm/s) is given by

$$Co = 30.5 \cdot R^3 (T/M)^{0.5} \quad (7)$$

where R is the beam pipe radius (in cm), T the ambient temperature (in K), and M molecular weight of the residual gas. In Tab. 2 the linear conductance Co is given for H₂ and CO, and various beam pipe radii R .

The effective pumping speed S (in l/s) from the IP toward the pump, which has an estimated pumping speed of 250 l/sec for CO and 400 l/sec for H₂, respectively, can be obtained by dividing Co by the corresponding section length L , and combining them together, similar to the total resistance of resistors in series. Table 3 lists the resulting total pumping speeds for the present as well as the proposed upgrade configuration, for both H₂ and CO.

This simplified approach gives a 33% reduction in effective pumping speed, and, correspondingly, a 50% increase in pressure at IP, when the beam pipe radius is reduced from its current value to $R = 20$ mm.

This increase may be significant, however, the new PHENIX and STAR central pipes will be NEG coated, resulting in a lower secondary electron yield and a lower electron stimulated desorption coefficients, and therefore a lower dynamic pressure rise.

4 Conclusions

The aperture requirements of new detector beam pipes were evaluated based on the need for a sufficiently large vertical separation to avoid long-range beam-beam interactions, and the requirement that the detector beam pipe aperture is always in the shadow of another existing aperture in the ring. Based on these criteria we recommend not to consider detector beam pipes with an inner radius of less than 20 mm.

With the reduced radius an increase in the vacuum pressure in the detector beam pipe of 50% is expected if no further vacuum improvements are made. The new beam pipes should be NEG coated, and NEG activation at 200°C should be possible. With these improvement we expect the vacuum to be no worse than under the current conditions.

References

- [1] W. Fischer, R. Alforque, H.C. Hseuh, B. Lambiase, C.J. Liaw, G. Miglionico, T. Russo, J.-P. Koutchouk, F. Zimmermann, T. Sen, “Measurement of the long-range beam-beam effect at injection, and design for a compensator in RHIC”, BNL C-A/AP/236 (2006).