



Brookhaven
National Laboratory

BNL-105828-2014-TECH

EP&S No. 113;BNL-105828-2014-IR

791 Primary beam

G. M. Bunce

July 1985

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

For Internal Distribution Only

Alternating Gradient Synchrotron Department
BROOKHAVEN NATIONAL LABORATORY
Associated Universities, Inc.
Upton, New York 11973

EP&S Division Technical Note
No. 113

791 Primary Beam

Gerry M. Bunce

July 3, 1985

The primary beam transport is designed to give a small spot on the production target (1 mm half-width) with a variable pitch angle from 0°-4.5°. Small-aperture quads (and benders) are used, replacing a line that was designed as a large-aperture secondary beam (B1). B1 will also be rebuilt as a primary beam line for heavy ions and can run at half the primary momentum (negatives), parasitic on B5, when B5 uses protons. The pitching magnet in B5 used to steer the beam up (the first magnet in the system which gives variable pitching angle) will be an 18D36 at first. When the desired production angle for B5 is known, this magnet will be replaced. During initial tests of B5, the B1 line will be obstructed by this magnet.

I. Primary Optics

Figure 1 shows the Transport beam envelope for the final beam design. Beam is assumed held on the B-target by a servo system, as it is now. Incident beam parameters were taken from a switchyard write-up and agree with observations on B:

Transport half sizes: $x = .13 \text{ cm}$ $y = .13 \text{ cm}$ $\Delta p/p = .2\%$
 $x' = 1 \text{ mrad}$ $y' = 2 \text{ mrad}$

If all the beam were initially focussed on a 1-interaction length target at B, there would be approximately $\pm 2 \text{ mrad}$ blow-up from multiple-


scattering. The optics for this are shown in Fig. 2 (for $x' = 2.3$ mrad, $y' = 2.8$ mrad). The aperture of Q3 is marginal in Fig. 1 and too small in Fig. 2. Other tunes have been tried to squeeze the beam more, but they give a poor focus at B5.

There is no momentum recombination in the line, so D1 must be ramped $\sim 1\%$ over the spill. In addition, the horizontal tweaker just upstream of Q3 will be tied to a servo loop. At the target, without ramping, $\Delta x = .5 \Delta p/p$ with Δx in cm and $\Delta p/p$ in percent.

Table I gives the magnet coordinates (to centers-number is reset at each bend center).

II. Variable Production Angle

The beam will be pitched up by an 18D36, then restored to the production target at a variable angle from 0° to 4.5° by two 18D72 dipoles. The three dipoles will be run in series so that small deviations in current will not affect the position of the beam at the target. Referring to the following figure,

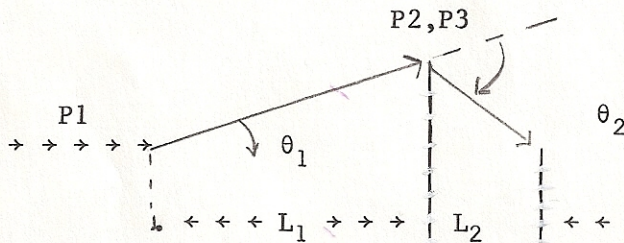

$$y = \theta_1(L_1+L_2) - \theta_2 L_2$$
$$\Delta y = \frac{\Delta I}{I} (y) \quad (y \approx 0)$$

(This works perfectly if it is not necessary to shunt any current around P1, and the magnet gaps can be adjusted to come close to this condition.) If the dipoles were not in series, the required stability for each one would be 1 part in 2000.

There is no effect on Δy from $\Delta p/p$, due to the same considerations as for current variations.

The quads Q3/Q4 and tweaker (H and V) will be mounted on a platform (I-beam) which will be adjusted to center them on the selected beam line. (A few positions will be surveyed before beam is brought down.)

III. Adjustments

The horizontal tweaker will be just upstream of Q3 and will be a dynamic dipole (2" laminations) so that it can be used to servo the beam on target. At this point the beam width is $2x'_{\text{intercept}} = .15$ mrad. For a 500 amp current, $\Delta x' = 3.1$ mrad from the dipole. At the target, this is a translation of about 4 cm.

The vertical tweaker, located between Q3/4, will be capable of moving the beam by 1.5 cm at the target. ($2y'_{\text{intercept}} = .40$ mrad between Q3/4).

Figure 4 shows the field vs. current for a 3X7D22, which will be the horizontal tweaker.

IV. Instrumentation

Standard target packages (in air) will be at B and B5, with SWICs, flags, SEC, and STIC (for servoing). We will also have a flag/instrument box upstream of Q3 so that the Q1/2 focusing can be monitored, and the vertical pitch angle from P1. Loss monitors will be placed along the line.

At the target we also want a 90° monitor telescope, as is used at other target stations.

V. Servo System

I am concerned that the servo at B5 might react on "old" information due to the relative phase of the servo at the B-target. This can be avoided if one or the other has a very different response time.

Table I


BEAM B5 EXP. NO. 791 DATE 4-30-85
 REF. D'W'G. NOS. _____ BY R.M. ORIG. _____

BEAM COMPONENTS					COORDINATES	
SYMBOL	TYPE	BEARING	ANGLE	DISTANCE	NORTH	EAST
"0" STATION		22.3234°	22°19'24"		14955.726	14139.549
B5BA1	Beam Abs.			219."		
B5Q1	N3Q36-12			274."		
B5Q2	N3Q36-13			413."		
B5D1	6D75-	2.07°	2°4'12"	504."		
		24.3934°	24°23'36"			
B5P1	8D75 18D36			201."		
B5C1	ADJ. COLL.			264."		
B5D38	3x7D22-	(Hor)		550.5"		
B5Q3	N3Q36-18			595.5"		
B5P95	3x7D22-	(Vert.)		633.75"		
		d. Hermit magnet?				
B5Q4	N3Q48-			672."		
B5P2	M739			757."		
B5P3	M733			853."		
B, TARGET				944."		
B5P4	18D72 Mod.			48."		
B5C2	Coll.			213.5"		
B5P5	8D92-1			321.33"		
B5D2	48D45-			811.4"		
B5D3	96D40			935.4"		

$\pi^- p \rightarrow \rho^- p$ { Δ ~~6~~ 6 GeV scaled to 10 GeV
 \blacktriangle This expt, 10 GeV

$\pi^- p \rightarrow \pi^- p$ { \circ Owen et al.
 \bullet This expt, 10 GeV

XP=1 MRAD, YP=2 MRAD, DP/P=.2%
 2-JUL-85 12:37
 ← quad apertures

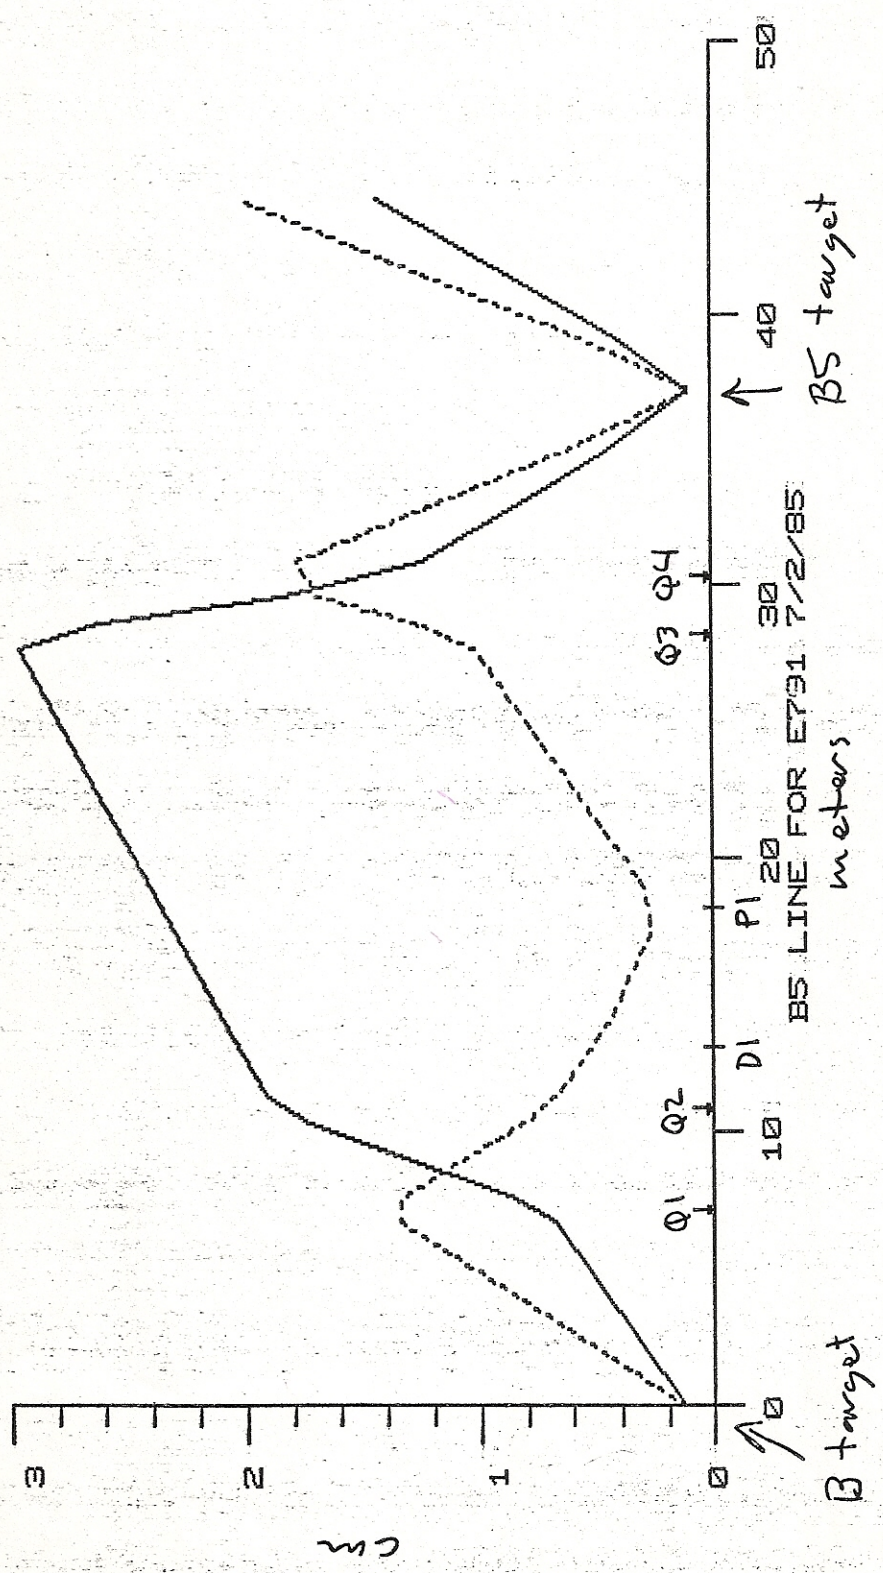

(BST1.DAT)

Figure 1a

B5TI.DAT


"B5 LINE FOR E791 7/2/85					
DRIFT 3:	6.64000	0.00000	0.00000	0.00000	0.00000
QUAD* 5:	0.95000	-7.32000	0.00000	2.54000	-3.31800
DRIFT 3:	2.71000	0.00000	0.00000	0.00000	0.00000
QUAD* 5:	0.95000	3.50100	0.00000	2.54000	7.42000
DRIFT 3:	0.87000	0.00000	0.00000	0.00000	0.00000
ROTAT 2:	1.93000	17.78000	0.00000	0.00000	0.00000
BEND* 4:	1.03500	0.00000	0.00000	0.00000	2.06800
ROTAT 2:	3.37000	0.00000	0.00000	0.00000	0.00000
DRIFT 3:	1.55000	0.00000	0.00000	0.00000	0.00000
BEND* 4:	8.77000	0.00000	0.00000	0.00000	0.00000
DRIFT 3:	0.95000	7.52200	0.00000	0.00000	0.00000
QUAD* 5: 0 1	1.25000	0.00000	0.00000	2.54000	3.54200
DRIFT 3:	1.25000	-7.58900	0.00000	0.00000	0.00000
QUAD* 5: 0 1	2.00000	0.00000	0.00000	0.00000	-2.34800
DRIFT 3:	2.24000	0.00000	0.00000	0.00000	0.00000
DRIFT 3:	1.00010	0.00000	0.00000	0.00000	0.00000
FIT 10:	3.00030	0.05000	0.00000	0.00000	0.00000
FIT 10:	2.00000	0.05000	0.00000	0.00000	0.09860
DRIFT 3:	5.00000	0.00000	0.00000	0.00000	0.00000
DRIFT 0:	0.00000	0.00000	0.00000	0.00000	0.00000

Figure 1b

(2)

XP=2.3 MRAD, YP=2.8 MRAD, DP/P=.2%

2-JUL-85 12:44

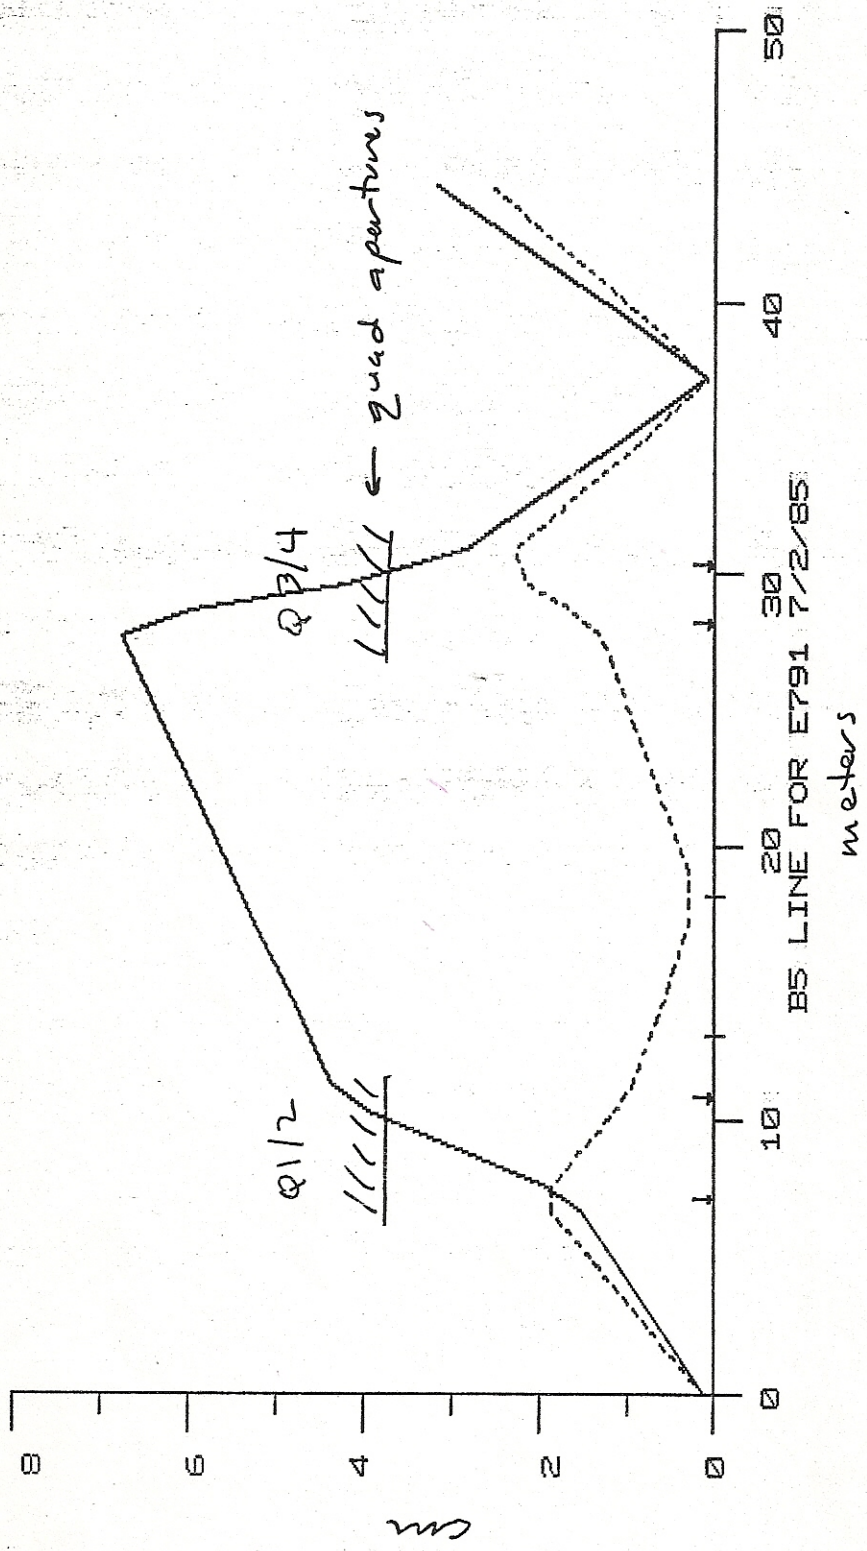

XP=2.3 MRAD, YP=2.8 MRAD, DP/P=.2%

2-JUL-85 12:44

B5T2.DAT

This shows the effect of multiple scattering in the B target (1 interaction length).

Figure 2a

BST2. 1T

"BS LINE FOR E791.7/2/85	6.640000	0.000000	0.000000	0.000000	0.000000
DRIFT 3:	0.950000	-7.320000	2.540000	-3.318000	0.000000
QUAD* 5:	2.710000	0.000000	0.000000	0.000000	0.000000
DRIFT 3:	0.950000	3.501000	2.540000	7.420000	0.000000
QUAD* 5:	0.870000	0.000000	0.000000	0.000000	0.000000
DRIFT 3:	1.035000	0.000000	0.000000	0.000000	0.000000
ROTAT 2:	1.930000	17.780000	0.000000	2.068000	0.000000
BEND* 4:	1.035000	0.000000	0.000000	0.000000	0.000000
ROTAT 2:	3.370000	0.000000	0.000000	0.000000	0.000000
DRIFT 3:	1.550000	0.000000	0.000000	0.000000	0.000000
BEND* 4:	0.770000	0.000000	0.000000	0.000000	0.000000
DRIFT 3:	0.950000	7.528000	2.540000	3.539000	0.000000
QUAD* 5: 0 1	1.000000	0.000000	0.000000	0.000000	0.000000
DRIFT 3:	1.250000	-7.620000	2.540000	-2.337000	0.000000
QUAD* 5: 0 1	2.000000	0.000000	0.000000	0.000000	0.000000
DRIFT 3:	2.000000	0.000000	0.000000	0.000000	0.000000
DRIFT 3:	2.240000	0.000000	0.000000	0.000000	0.000000
FIT 10:	1.000010	0.050000	0.010000	0.098600	0.000000
FIT 10:	3.000030	0.050000	0.010000	0.100000	0.000000
DRIFT 3:	2.000000	0.000000	0.000000	0.000000	0.000000
DRIFT 3:	5.000000	0.000000	0.000000	0.000000	0.000000
0:	0.000000	0.000000	0.000000	0.000000	0.000000

2-JUL-85 12:44

XP=2.3 MRAD, YP=2.8 MRAD, DP/P=.2%

Figure 26