

The Beam_Optics at the Extraction Region of SNS Ring: Revisited

N. Tsoupas

February 2005

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-98CH10886 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.



The Beam_Optics at the Extraction Region of SNS Ring: Revisited

BNL/SNS TECHNICAL NOTE

NO. 141

N. Tsoupas, M. Hemmer, Y.Y. Lee, C. Pai, J. Rank, J. Mi, D. Raparia, S. Tepikian,
J. Tuozzolo, J. Wei, W. Zhang

February 28, 2005

COLLIDER-ACCELERATOR DEPARTMENT
BROOKHAVEN NATIONAL LABORATORY
UPTON, NEW YORK 11973

The Beam_Optics at the Extraction Region of SNS ring; Revisited

N. Tsoupas, M. Hemmer, Y. Y. Lee, C.-I. Pai, J. Rank, J. L. Mi, D. Raparia,
S. Tepikian, J.E.Tuozzolo, J. Wei, and, Wu Zhang

Abstract

The optics of the beam extraction section of SNS ring has been published in Ref. [1] where we show that by optimizing the aperture and locations of the extraction kickers, we can accomplish both, first the elimination of the beam losses for the circulating and extracted beam, and second the minimization of the required voltage applied to the coil of the extraction kickers which deflect the beam vertically to the correct location to clear the extraction septum[2]. Also a number of papers have been published [2,3...10] to discuss the extraction devices (Kickers and Extraction Septum) of the SNS ring. Mechanical constraints however at the location of the SNS extraction kickers required that all fourteen extraction kickers be moved downstream in the ring by five centimeters. In this Technical Note we present the new optics of the SNS extraction region. The results of the study show that the placements of all the extraction kickers by five centimeters downstream can generate the required beam extraction conditions by simply raising the voltage of some of the kickers by about 2% of their original settings.

Introduction

The beam_extraction region[1] of the SNS ring is located in one of the four straight sections of the SNS ring. The beam extraction process, which is designed to extract the single circulating beam bunch in one turn, is based in kicking the beam downwards by $Y'_{\text{cod}} \sim 13.3$ mrad with the fourteen kickers, shown in Figure 1, (seven kickers are placed upstream of the two narrow quads NQ1 and NQ2 of the SNS ring and seven kickers are placed downstream of the narrow quads) into the Lambertson septum magnet which deflects the beam by 16.8° into the RTBT line. The vertical displacement of the extracted beam at the entrance of the Extraction Septum magnet is $Y_{\text{cod}} = 167.0$ mm.

A schematic diagram of the extraction kickers and the extraction septum is shown in Figure 1. In the same figure the vertical displacement of the central orbit (Y_{cod}) resulted from exciting all fourteen kickers is also shown.

The location and inductance of each of the kickers was optimized to minimize the required voltage applied on each kicker to extract the beam into the septum magnet. The aperture of each kicker was also optimized to eliminate the beam losses of the circulating beam and the extracted beam.

Mechanical constraints at the location of the extraction region, required that each of the kicker assemblies is moved downstream by five centimeters from their previously chosen optimum location. In the next section of this technical note we discuss the beam optics of the extracted beam under the new placement of the extraction kickers, and we compare the required voltages applied on the kickers before and after the kicker displacement, under the condition of lossless beam extraction.

Y_{cod} vs Dist. during beam Extraction

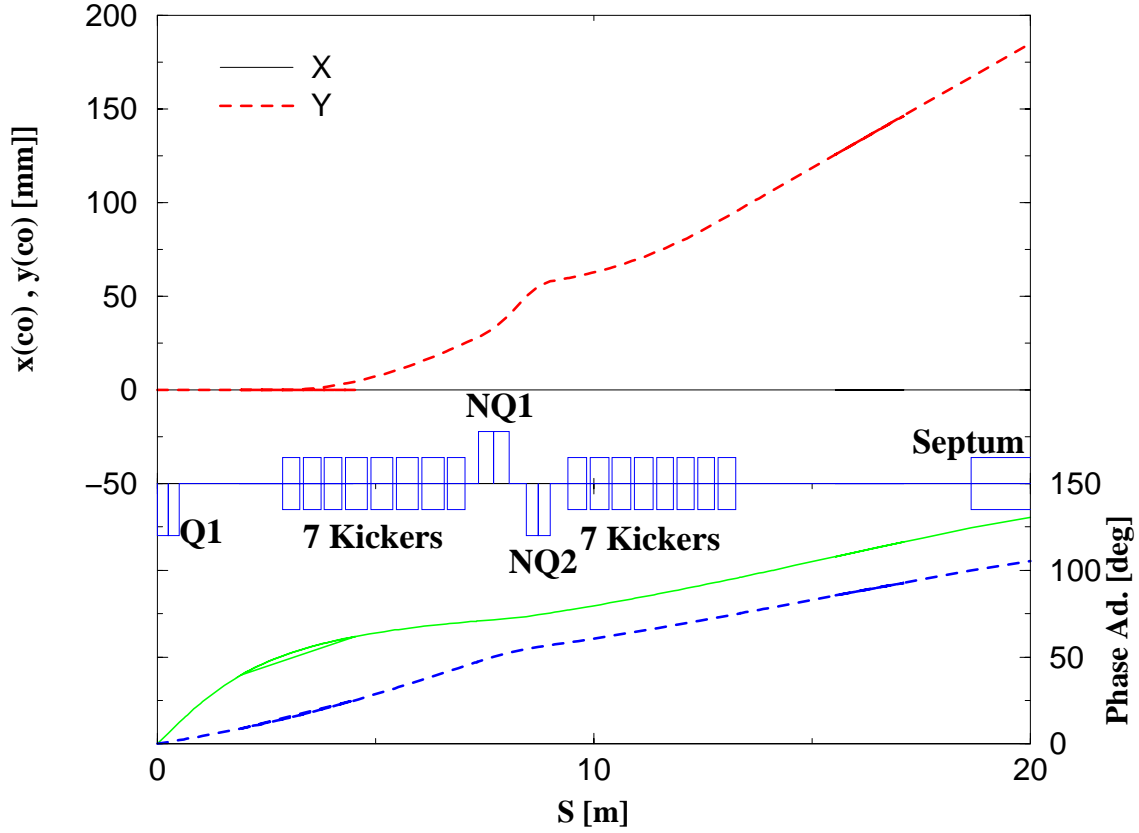


Figure 1. Schematic diagram showing the location of the extraction kickers relative to the narrow quads (NQ1,NQ2) of the SNS straight section. The last element is the septum magnet. The same figure also shows the plot of the vertical displacement of the central orbit (Y_{cod}) when all fourteen kickers fire. The beam displacement is below the median plane of the ring.

Beam Optics of the Extraction Region

The single beam bunch circulating in the SNS ring is extracted in one turn, upon firing all fourteen extraction kickers. Subsequently the beam bunch is deflected downwards into the main field region of the Lambertson septum magnet which deflected the beam horizontally by 16.8° into the RTBT beam transfer line.

An optimized beam extraction system requires that the kickers have large enough acceptance to accommodate the $480\pi[\text{mm.mrad}]$ emittance of the circulating beam and the $400\pi[\text{mm.mrad}]$ of the extracted beam. The beam size at the location of the each kicker is determined from the beam emittance and the $\beta_{x,y}$ functions at the location of the kickers. In addition the vertical aperture of the kicker should allow for the vertical

displacement of the beam during extraction. The rise time of the voltage of each kicker should be ~ 90 nsec therefore the rise time of the Voltage of each kicker which depends on the inductance of the kicker sets an upper limit in the geometrical length of the kicker. The characteristics of each kicker, that depend on the beam optics are tabulated in Table I. A description of the columns that appear in Table I follows:

Column#	Description
1	Name of the Kicker
2	Distance of the center of the Kicker from the center of the quadrupole Q1 (see Fig. 1) The quadrupole Q1 is the first quadrupole of the straight section.
3	The maximum value of β_x over the length of the kicker.
4	The maximum value of β_y over the length of the kicker.
5	The maximum horizontal beam_size of the circulating beam over the length of the kicker. Horizontal Emittance of the circulating beam $\epsilon_x=480\pi[\text{mm.mrad}]$ $x_size(480\pi)=2(\epsilon_x \cdot \beta_x)^{1/2}$
6	The maximum vertical beam_size of the circulating beam over the length of the kicker. Vertical Emittance of the circulating beam $\epsilon_y=480\pi[\text{mm.mrad}]$ $y_size(480\pi)=2(\epsilon_y \cdot \beta_y)^{1/2}$
7	The maximum vertical half_beam_size of the extracted beam over the length of the kicker. Vertical Emittance of the extracted beam $\epsilon_y=400\pi[\text{mm.mrad}]$ $y_size(400\pi)=2(\epsilon_y \cdot \beta_y)^{1/2}$
8	The vertical displacement of the central orbit (Y_{cod}) of the extracted beam. The value of Y_{cod} is obtained from the output of the MAD_model of the extraction section (See APPENDIX 1)
9	The vertical aperture of the kicker calculated from: $V_size=\{y_size(480\pi)+y_size(400\pi)\}/2 + Y_{cod}$
10	The Horizontal aperture of the kicker. $H_size=x_size(480\pi)$
11	The Maximum vertical aperture of the kicker. It is determined by the $\text{Max}\{V_size(\text{column \#9}), y_size(480\pi)\}$
12	The Final Horizontal aperture of the spare kickers. Six sets of spare kickers were selected. The sets of the spare kickers can satisfy the beam constraints at extraction for all “working points” selected. The four working points are: $(Q_x, Q_y) = (6.23, 6.20)$, $(6.23, 5.24)$, $(6.30, 5.8)$, $(6.40, 6.30)$
13	Same as column 12 but for the Vertical aperture of the actual kickers
14	The length of the actual kickers.
15	The vertical distance of the inner_top_aperture of the kicker from the center line of the ring.

The results tabulated in Table 1 show that the acceptance of the extraction region does not limit either the circulating or extracted beam.

Parameters of the Kickers

The extraction kickers, when energized, kick in a one turn, the single beam bunch circulating in the SNS ring, vertically down into the main field region of the septum magnet which deflects the beam by 16.8° to the left to the RTBT beam_transfer_line. Each extraction kicker has to satisfy the following constraints:

1. The acceptance of the kicker should allow for zero beam losses for both the circulating and extracted beam.
2. The voltage rise time should be ~ 90 nsec
3. An upper limit for the kicker voltage is set to 35 kVolts.

The content of the columns of Table 2 is explained below.

Column#	Description
1	Name of the kicker
2	Kick of the kicker
3	Physical length of the kicker
4	Horizontal aperture of the kicker
5	Vertical aperture of the kicker
6	The integrated dipole field of the kicker ($\int \text{Bydz}$) given as the product of the value of the kicker's kick in radians and the beam rigidity of 1 GeV protons .
7	The approximate strength of the dipole field of the kicker calculated as: $(\int \text{By} \cdot \text{dz})/(\text{Length_of_Kicker})$
8	The current of the kickers's coil required to produce the dipole magnetic field.
9	The voltage of the kicker required to produce the required current.
10	The Inductance of the kicker as calculated from the geometrical parameters of the kicker.

Conclusions

The displacement of each the fourteen beam extraction kickers of the SNS ring , by 5 cm downstream, can satisfy the same beam extraction condition as the non_displaced kickers by adjusting the voltage of the kickers as follows:

Kicker_Name	Change[%]	Kicker_Name	Change[%]
K1	+0.3	K8	+1.9
K2	+0.6	K9	+1.9
K3	+0.6	K10	+1.9
K4	+0.6	K11	+1.9
K5	+0.6	K12	-3.0
K6	+0.3	K13	-3.0
K7	+0.3	K14	-3.0

KICKER	S	β_x	β_y	Beam x- size for 480π	Beam y- size for 480π	Beam y- size for 400π	y_{cod} in kicker	V- size of kicker	H- size of kicker	Max V- size of kicker	H- size of SP kicker	V- size of SP kicker	Length	Vertical Placement of Kicker
	[m]	[m]	[m]	[cm]	[cm]	[cm]	[mm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]
K1-1	2.860	7.500	9.315	12.00	13.37	12.21	0.349	12.83	12.00	13.37	12.00	13.59	40.00	6.69
K1-2	3.340	9.111	8.793	13.23	12.99	11.86	1.476	12.57	13.23	12.99	14.45	13.19	40.00	6.50
K1-3	3.820	10.934	8.337	14.49	12.65	11.55	3.296	12.43	14.49	12.65	14.45	13.19	40.00	6.33
K1-4	4.353	13.444	7.908	16.07	12.32	11.25	6.386	12.42	16.07	12.42	17.79	12.67	50.50	6.16
K1-5	4.938	16.269	7.530	17.67	12.02	10.98	10.343	12.53	17.67	12.53	17.79	12.67	50.50	6.01
K1-6	5.523	19.409	7.251	19.30	11.80	10.77	15.113	12.80	19.30	12.80	21.13	13.33	50.50	5.90
K1-7	6.108	22.865	7.069	20.95	11.65	10.64	20.615	13.20	20.95	13.20	21.13	13.33	50.50	5.83
K2-1	9.414	13.410	14.683	16.05	16.79	15.33	62.021	22.26	16.05	22.26	16.22	23.34	42.75	8.40
K2-2	9.921	12.891	14.235	15.73	16.53	15.09	65.116	22.32	15.73	22.32	16.22	23.34	42.75	8.27
K2-3	10.429	12.421	13.830	15.44	16.30	14.88	68.868	22.47	15.44	22.47	16.22	23.34	42.75	8.15
K2-4	10.936	12.001	13.467	15.18	16.08	14.68	73.277	22.71	15.18	22.71	16.22	23.34	42.75	8.04
K2-5	11.425	11.643	13.158	14.95	15.89	14.51	77.964	23.00	14.95	23.00	15.10	24.30	39.00	7.95
K2-6	11.895	11.342	12.899	14.76	15.74	14.37	83.258	23.38	14.76	23.38	15.10	24.30	39.00	7.87
K2-7	12.365	11.083	12.675	14.59	15.60	14.24	89.158	23.84	14.59	23.84	15.10	24.30	39.00	7.80

Table 1: Detailed explanation of the content of this Table is given in the text.

KICKER	Kick of kicker	Length	H-size of SP kicker	V- size of SP kicker	Bp.kick	B	Curr	Volt	Induct
	[mrad]	[cm]	[cm]	[cm]	[G.m]	[Gauss]	[kA]	[kV]	[μH]
K1-1	1.745	40.00	12.00	13.59	98.72	246.81	2.36	33.7	0.57
K1-2	1.445	40.00	14.45	13.19	81.75	204.38	2.35	33.6	0.46
K1-3	1.445	40.00	14.45	13.19	81.75	204.38	2.35	33.6	0.46
K1-4	1.490	50.50	17.79	12.67	84.30	166.92	2.36	33.8	0.45
K1-5	1.490	50.50	17.79	12.67	84.30	166.92	2.36	33.8	0.45
K1-6	1.250	50.50	21.13	13.33	70.72	140.04	2.35	33.6	0.40
K1-7	1.250	50.50	21.13	13.33	70.72	140.04	2.35	33.6	0.40
K2-1	1.295	42.75	16.22	23.34	73.26	171.38	2.21	31.6	0.77
K2-2	1.295	42.75	16.22	23.34	73.26	171.38	2.21	31.6	0.77
K2-3	1.295	42.75	16.22	23.34	73.26	171.38	2.21	31.6	0.77
K2-4	1.295	42.75	16.22	23.34	73.26	171.38	2.21	31.6	0.77
K2-5	1.290	39.00	15.10	24.30	72.98	187.13	2.25	32.1	0.79
K2-6	1.290	39.00	15.10	24.30	72.98	187.13	2.25	32.1	0.79
K2-7	1.290	39.00	15.10	24.30	72.98	187.13	2.25	32.1	0.79

Table 2: Parameters of the extraction kickers. For detailed explanation please refer to the text.

References

- [1] Beam Extraction from the SNS Ring and Design of Extraction Kickers
N. Tsoupas, M. Blaskiewicz, Y. Y. Lee, J. L. Mi, A. Soukas, J. G. Wang, J. Wei, and, S. Y. Zhang BNL, EPAC2000, p. 2270, Vienna, Austria 2000
- [2] Design of Beam-Extraction Septum Magnet for the SNS
N. Tsoupas, Y.Y. Lee, J. Rank, J.E.Tuozzolo BNL
PAC2001,Chicago,Illinois,June18-22, 2001
- [3] Beam Coupling Phenomena in Fast Kicker Systems
W. Zhang, L.A. Ahrens, J.W. Glenn, J. Sandberg, N. Tsoupas, BNL
PAC2001,Chicago,Illinois,June18-22, 2001
- [4] A New Conceptual Design of the SNS Full Turn Fast Extraction Kicker Power Supply System. W. Zhang, R. Lambiase, J.L. Mi, T. Nehring, C. Pai, J. Sandberg, N. Tsoupas, J.E. Tuozzolo, D. Warburton BNL, PAC2001,Chicago,Illinois,June18-22, 2001

- [5] SNS Extraction Kicker System and First Article BPFN Test
J.-L. Mi, D. Davino, H. Hahn, R.F. Lambiase, Y.-Y. Lee, W. Meng, C.-I. Pai, J. Sandberg, N. Tsoupas, D. Warburton, W. Zhang, BNL, Upton, Long Island, New York
EPAC 2002 Paris, France, June 2, 2002
- [6] SNS Extraction-Fast-Kicker System Development.
W. Zhang, et. al., 14th IEEE International Pulsed Power Conference, Dallas, TX, June 15-19, 2003
- [7] SNS Extraction Fast Kicker Pulsed Power System
W. Zhang et al. EPAC 2004 Lucerne, Switzerland July 5-9 2004
- [8] SNS Extraction Kicker Power Supply Manufacture Status
J.-L. Mi, et. al. EPAC 2004 Lucerne, Switzerland July 5-9 2004
- [9] Preliminary Study of the Magnetic Field of the SNS Lambertson-type Extraction Septum Magnet
N. Tsoupas, J. Browdoski, Y.Y.Lee, J. Tuozzolo BNL SNS-54 12/22/98
- [10] Design of Beam-Extraction Septum Magnet for the SNS
N. Tsoupas, Y.Y. Lee, J. Rank, J.E.Tuozzolo BNL
PAC2001, Chicago, Illinois, June 18-22, 2001

APPENDIX

This appendix contains the MAD_input file which was used to optimize the beam optics of the extraction region of the SNS ring. This file corresponds to the working point (Q_x, Q_y) (6.23, 6.20).

```

ANG:= 2*PI/32
EE := ANG/2
Brho := 5.6575    ! for 1 GeV for 1.3 GeV: factor 1.1980
!   Brho := 6.7777
lbnd := 1.5
lq := 0.5
!   lqd := 0.75
!matching value
BEXD := 2.428
BEYD := 13.047
OZ : DRIFT, L = 0.0
OQ1 : DRIFT, L = 0.0
OQ2 : DRIFT, L = 0.0
OQ3 : DRIFT, L = 0.0
BL:  Sbend, L=lbnd/2, Angle=EE, E1=0., E2=0.
BR:  Sbend, L=lbnd/2, Angle=EE, E1=0., E2=0.
BND: Sbend, L=lbnd, Angle=ANG, E1=0.0, E2=0.0
!for achromat in both planes
KF:= 3.938313    ! Arc Quad
KD:=-4.375665    ! Arc Quad
QH:=6.3

```

```

QV:=5.8
MUH:=QH/4.0
MUV:=QV/4.0
QDH      : QUADRUPOLE, L = lq/2, K1 = KD/Brho
QF        : QUADRUPOLE, L = lq, K1 = KF/Brho      ! Arc Quad
QFH       : QUADRUPOLE, L = lq/2, K1 = KF/Brho
QD        : QUADRUPOLE, L = lq, K1 = KD/Brho      ! Arc Quad
OARC      : DRIFT, L = 1
DM         : DRIFT, L = 3.8
          KMAT := -2.997089      ! Matching Quad
          KS2  :=  3.561087      ! Staight Section Quad
          KS3  := -3.838722      ! Staight Section Quad
lq1 := 0.25/2
lq2 := 0.7/2
lq3 := 0.55/2
O1      : DRIFT, L = 6.85
O11     : DRIFT, L = O1[L]/4
O2      : DRIFT, L = 0.4
O3      : DRIFT, L = 6.25
O31     : DRIFT, L = O3[L]/5
QMAT    : QUADRUPOLE, L = lq/2, K1 = KMAT/Brho
Q2      : QUADRUPOLE, L = lq2, K1 = KS2/Brho
Q3      : QUADRUPOLE, L = lq3, K1 = KS3/Brho
!
LK11:= 0.20
LK12:= 0.20
LK13:= 0.20
LK14:= 0.2525
LK15:= 0.2525
LK16:= 0.2525
LK17:= 0.2525
LK18:= 0.20
!
LK21:= 0.21375
LK22:= 0.21375
LK23:= 0.21375
LK24:= 0.21375
LK25:= 0.195
LK26:= 0.195
LK27:= 0.195
LK28:= 0.20
!
!      EXTRACTION KICKERS AS DIPOLES
!
DA11:    SBEND, L=2*LK11, ANGLE=0.0, E1=0.0, E2=0.0
!
DS11:    SBEND, L=2*LK11, ANGLE=0.0, E1=0.0, E2=0.0
DS12:    SBEND, L=2*LK12, ANGLE=0.0, E1=0.0, E2=0.0
DS13:    SBEND, L=2*LK13, ANGLE=0.0, E1=0.0, E2=0.0
DS14:    SBEND, L=2*LK14, ANGLE=0.0, E1=0.0, E2=0.0
DS15:    SBEND, L=2*LK15, ANGLE=0.0, E1=0.0, E2=0.0
DS16:    SBEND, L=2*LK16, ANGLE=0.0, E1=0.0, E2=0.0
DS17:    SBEND, L=2*LK17, ANGLE=0.0, E1=0.0, E2=0.0
DS18:    SBEND, L=2*LK18, ANGLE=0.0, E1=0.0, E2=0.0
!
DS21:    SBEND, L=2*LK21, ANGLE=0.0, E1=0.0, E2=0.0
DS22:    SBEND, L=2*LK22, ANGLE=0.0, E1=0.0, E2=0.0

```

```

DS23:  SBEND, L=2*LK23, ANGLE=0.0, E1=0.0, E2=0.0
DS24:  SBEND, L=2*LK24, ANGLE=0.0, E1=0.0, E2=0.0
DS25:  SBEND, L=2*LK25, ANGLE=0.0, E1=0.0, E2=0.0
DS26:  SBEND, L=2*LK26, ANGLE=0.0, E1=0.0, E2=0.0
DS27:  SBEND, L=2*LK27, ANGLE=0.0, E1=0.0, E2=0.0
DS28:  SBEND, L=2*LK28, ANGLE=0.0, E1=0.0, E2=0.0
!
HK11:  DRIFT, L=LK11
HK12:  DRIFT, L=LK12
HK13:  DRIFT, L=LK13
HK14:  DRIFT, L=LK14
HK15:  DRIFT, L=LK15
HK16:  DRIFT, L=LK16
HK17:  DRIFT, L=LK17
HK18:  DRIFT, L=LK18
!
HK21:  DRIFT, L=LK21
HK22:  DRIFT, L=LK22
HK23:  DRIFT, L=LK23
HK24:  DRIFT, L=LK24
HK25:  DRIFT, L=LK25
HK26:  DRIFT, L=LK26
HK27:  DRIFT, L=LK27
HK28:  DRIFT, L=LK28
!
!      EXTRACTION KICKERS
!
KS11:  VKICK, KICK=0.0
KS12:  VKICK, KICK=0.0
KS13:  VKICK, KICK=0.0
KS14:  VKICK, KICK=0.0
KS15:  VKICK, KICK=0.0
KS16:  VKICK, KICK=0.0
KS17:  VKICK, KICK=0.0
KS18:  VKICK, KICK=0.0
!
KS21:  VKICK, KICK=0.0
KS22:  VKICK, KICK=0.0
KS23:  VKICK, KICK=0.0
KS24:  VKICK, KICK=0.0
KS25:  VKICK, KICK=0.0
KS26:  VKICK, KICK=0.0
KS27:  VKICK, KICK=0.0
KS28:  VKICK, KICK=0.0
!
!
!
KS11_1: VKICK, KICK=0.0
KS12_1: VKICK, KICK=0.0
KS13_1: VKICK, KICK=0.0
KS14_1: VKICK, KICK=0.0
KS15_1: VKICK, KICK=0.0
KS16_1: VKICK, KICK=0.0
KS17_1: VKICK, KICK=0.0
KS18_1: VKICK, KICK=0.0
!
KS21_1: VKICK, KICK=0.0

```

```

KS22_1:  VKICK, KICK=0.0
KS23_1:  VKICK, KICK=0.0
KS24_1:  VKICK, KICK=0.0
KS25_1:  VKICK, KICK=0.0
KS26_1:  VKICK, KICK=0.0
KS27_1:  VKICK, KICK=0.0
KS28_1:  VKICK, KICK=0.0
!
!      septum SECTION
!
LSEPT:  Sband, L=2.44, Angle=0.0, E1=0.0, E2=0.0
!
acd      : line = (QDH,OARC,BND,OARC,QFH)
acf      : line = (QFH,OARC,BND,OARC,QDH)
acfl     : line = (QFH,OARC,BND,OARC)
ac       : line = (acd,acf)
arc      : line = (ac,ac,ac,ac)
!
insert   : line = (sc,OZ,-sc)
sc       : line = (QMAT,QMAT,O11,O11,O11,O11,Q2,OQ2,Q2,O2,Q3,&
OQ3,Q3,O31,O31,O31,O31,O31)
!
S150: DRIFT, L = 1.5
S112: DRIFT, L = 1.12
S100: DRIFT, L = 1.0
S96:  DRIFT, L = 0.96
S80:  DRIFT, L = 0.80
S64:  DRIFT, L = 0.64
S60:  DRIFT, L = 0.60
S50:  DRIFT, L = 0.50
S42:  DRIFT, L = 0.42
S40:  DRIFT, L = 0.40
S35:  DRIFT, L = 0.35
S32:  DRIFT, L = 0.32
S22:  DRIFT, L = 0.22
S20:  DRIFT, L = 0.20
S15:  DRIFT, L = 0.15
S10:  DRIFT, L = 0.10
S08:  DRIFT, L = 0.08
S05:  DRIFT, L = 0.05
S04:  DRIFT, L = 0.04
S03:  DRIFT, L = 0.03
S025: DRIFT, L = 0.025
S02:  DRIFT, L = 0.02
S01:  DRIFT, L = 0.01
!
DIS1: DRIFT, L = 0.0
!
LDBK:=  0.08
DBK:  DRIFT, L = LDBK
SUBK: DRIFT, L=-8.0*LDBK
AUBK: DRIFT, L=-7.0*LDBK
SRD:  DRIFT, L =1.64-8.0*LDBK-2.0*LK11-2.0*LK12-2.0*LK13-2.0*LK14 &
-2.0*LK15-2.0*LK16-2.0*LK17-2.0*LK18
!
SC1:line = (QMAT,QMAT,1*S10,2*S04,7*S05,7*S50,SRD,10*S10,&
HK11,KS11,HK11,&

```

```

        DBK,      &
HK12,KS12,HK12,&
        DBK,      &
HK13,KS13,HK13,&
        DBK,      &
HK14,KS14,HK14,&
        DBK,      &
HK15,KS15,HK15,&
        DBK,      &
HK16,KS16,HK16,&
        DBK,      &
HK17,KS17,HK17,&
        DBK,      &
HK18,KS18,HK18,&
        DBK,1*S10,8*S01,&
        Q2,OQ2,Q2,O2,Q3,OQ3,Q3, &
2*S10,1*S20,S05, &
        HK21,KS21,HK21,&
        DBK,      &
        HK22,KS22,HK22,&
        DBK,      &
        HK23,KS23,HK23,&
        DBK,      &
        HK24,KS24,HK24,&
        DBK,      &
        HK25,KS25,HK25,&
        DBK,      &
        HK26,KS26,HK26,&
        DBK,      &
        HK27,KS27,HK27,&
        DBK,      &
        HK28,KS28,HK28,1*S05&
        3*S02,7*S10)
!
!
!
SC1_1:line = (QMAT,QMAT,1*S10,2*S04,7*S05,7*S50,SRD,10*S10,&
        HK11,KS11_1,HK11,&
        DBK,      &
        HK12,KS12_1,HK12,&
        DBK,      &
        HK13,KS13_1,HK13,&
        DBK,      &
        HK14,KS14_1,HK14,&
        DBK,      &
        HK15,KS15_1,HK15,&
        DBK,      &
        HK16,KS16_1,HK16,&
        DBK,      &
        HK17,KS17_1,HK17,&
        DBK,      &
        HK18,KS18,HK18,&
        DBK,1*S10,8*S01 &
        Q2,OQ2,Q2,O2,Q3,OQ3,Q3, &
2*S10,1*S20,S05, &
        HK21,KS21_1,HK21,&
        DBK,      &

```

```

HK22,KS22_1,HK22,&
    DBK,&
HK23,KS23_1,HK23,&
    DBK,&
HK24,KS24_1,HK24,&
    DBK,&
HK25,KS25_1,HK25,&
    DBK,&
HK26,KS26_1,HK26,&
    DBK,&
HK27,KS27_1,HK27,&
    DBK,&
HK28,KS28,HK28,1*S05&
3*S02,7*S10)
!
!
SL: DRIFT, L=1.15-8.0*LDBK
SC1_D:line = (QMAT,QMAT,1*S10,2*S04,6*S05,7*S50,SRD,10*S10,&
    DS11,&
    DBK,&
    DS12,&
    DBK,&
    DS13,&
    DBK,&
    DS14,&
    DBK,&
    DS15,&
    DBK,&
    DS16,&
    DBK,&
    DS17,&
    DBK,&
    DS18,DBK,1*S10,1*S05,8*S01&
    Q2,OQ2,Q2,O2,Q3,OQ3,Q3,&
    2*S10,1*S20,&
    DS21,DBK,&
    DS22,DBK,&
    DS23,DBK,&
    DS24,DBK,&
    DS25,DBK,&
    DS26,DBK,&
    DS27,DBK,&
    DS28,3*S02,7*S10,2*S05)
!
SAD: DRIFT, L = 1.70+0.56-7.0*LDBK-2.0*LK21-2.0*LK22-2.0*LK23-
2.0*LK24- &
    2.0*LK25-2.0*LK26-2.0*LK27-2.0*LK28
!
SC2: LINE =
(6*S50,SAD,2*S100,S112,LSEPT,S42,Q3,OQ3,Q3,O2,Q2,OQ2,Q2,4*O11,&
    QMAT,QMAT)
!
INSERT1: LINE =(SC1,SC2)
INSERT1_1: LINE =(SC1_1,SC2)
INSERT1_D: LINE =(SC1_D,SC2)
!
SP: line = (insert,-acfl,-acd,ac,ac,acd,acfl)

```

```

SP_XDIP: LINE = (INSERT1_D,-acfl,-acd,ac,ac,acd,acfl)
SP1_XTR: LINE = (INSERT1,-acfl,-acd,ac,ac,acd,acfl)
SP1_1_XTR: LINE = (INSERT1_1,-acfl,-acd,ac,ac,acd,acfl)
!
    ring : line = (4*SP)
!
! the ring with kickers in the staight sections and a 5th superperiod
    ring_kick : line = (SP1_XTR,3*SP,SP1_1_XTR)
!
    Use, SP
SELECT, OPTICS, RANGE = #S/#E
OPTICS,FILENAME = "sp_wp-623-620_displ.optics",&
    COLUMNS = NAME, KEYWORD, S, L, K1L, BETX,DX, BETY,DY
PRINT, FULL
!
PRINT, FULL
TWISS, TAPE
!
!
    Use, SP_XDIP
SELECT, OPTICS, RANGE = #S/#E
OPTICS,FILENAME = "sp_14-dip_wp-623-620_displ.optics",&
    COLUMNS = NAME, KEYWORD, S, L, K1L, BETX,DX,X, BETY,DY,Y
PRINT, FULL
!
PRINT, FULL
TWISS, TAPE
!
    use, ring
SELECT, OPTICS, RANGE = #S/#E
OPTICS,FILENAME = "ring_wp-623-620_displ.optics",&
    COLUMNS = NAME, KEYWORD, S, L, K1L, BETX,DX, BETY,DY
PRINT, FULL
TWISS, TAPE
!
!
!      EXTRACTION KICKERS
!
KS11:  VKICK, KICK=0.001745    !0.0 !0.0015    !0.00175
KS12:  VKICK, KICK=0.001445    !0.0 !0.0015    !0.00175
KS13:  VKICK, KICK=0.001445    !0.0015    !0.00180
KS14:  VKICK, KICK=0.001490    !0.0 !0.0015    !0.00170
KS15:  VKICK, KICK=0.001490    !0 !0.0015    !0.00170
KS16:  VKICK, KICK=0.001250    !0.0 !0.0014    !0.00155
KS17:  VKICK, KICK=0.001250    !0.0 !0.0014    !0.00155
KS18:  VKICK, KICK=0.0         !0.00262 !0.00
!
KS21:  VKICK, KICK=0.001295    !0.0 !0.00125    !0.00155
KS22:  VKICK, KICK=0.001295    !0.0 !0.00125    !0.00155
KS23:  VKICK, KICK=0.001295    !0.0 !0.00125    !0.00145
KS24:  VKICK, KICK=0.001295    !0.0 !0.00125    !0.00145
KS25:  VKICK, KICK=0.001290    !0.0 !0.00125    !0.00145
KS26:  VKICK, KICK=0.001290    !0.0 !0.00125    !0.00145
KS27:  VKICK, KICK=0.001290    !0.0 !0.00125    !0.00145
KS28:  VKICK, KICK=0.00
!
!

```



```

    Use, SP1_XTR
!
SELECT, OPTICS, RANGE = #S/#E
OPTICS, BETX=2.476, ALFX=0.577, MUX=0.0, &
    BETY=12.529, ALFY=-2.446, MUY=0.0, &
    DX=0.0, DPX=0.0, DY=0.00, DPY=0.00, &
    FILENAME = "spl_xtr_14kick_wp-623-620_displ.optics",&
    COLUMNS = NAME, KEYWORD, S, L, K1L, BETX,DX,X,MUX BETY,DY,Y,MUY
PRINT, FULL
!
PRINT, FULL
TWISS, BETX=2.476, ALFX=0.577, BETY=12.529, ALFY=-2.446,&
    DX=0.0, DPX=0.0, DY=0.0, DPY=0.0, DELTAP=0.000
!
STOP
END
stop
end

```