

BNL-105688-2014-TECH

BNL/SNS Technical Note No. 119;BNL-105688-2014-IR

Labeling of Magnet Coil Leads in Accordance with SNS Magnet Polarity Conventions

W. J. McGahern

November 2002

Collider Accelerator Department Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-98CH10886 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.



Labeling of Magnet Coil Leads in accordance with SNS Magnet Polarity Conventions

BNL/SNS Technical Note No. 119

> W. J. McGahern November 14, 2002

Collider-Accelerator Department Brookhaven National Laboratory Upton, New York #11973

Labeling of Magnet Coil Leads in accordance with SNS Magnet Polarity Conventions

W. J. McGahern November, 2002

Introduction:

References (1) and (2) define the convention that has been established for the determination of magnet polarities in the HEBT and Ring/RTBT beam lines.

In keeping with these established conventions, SNS main magnets have their coil leads labeled to provide clear identification to help ease confusion during electrical hook-ups in the field.

For SNS Ring and Transport System, all main magnets have their coil leads labeled as either #1 or #2. This labeling is used to indicate that the magnet will be in "A" polarity, *as viewed from the lead/connection end of the magnet*, when terminal #1 is connected to the positive (+) leg/terminal of the power supply.

This identification also holds true for the trim corrector windings when their polarity is viewed from the lead/connection end of the main (quadrupole) magnet.

Field Layout (reprinted from (2)):

The magnetic field lines for the multipoles are shown in the following schematics. The skew multipoles are obtained by rotating regular multipoles in the clockwise direction. The coordinate system is shown in Fig. 1, where X is the radial direction, Y is the vertical direction and Z is along the beam. Fig. 2 shows the regular and skew dipoles, Fig. 3 shows the quadrupoles, Fig. 4 shows the sextupole fields and finally, Fig. 5 shows the octupoles.




Figure 1: The coordinate system used. X is radial, away from the center of the ring. Z is into the paper in the clockwise direction around the accumulator ring.

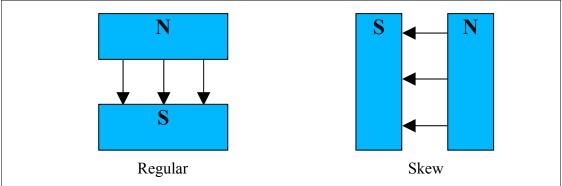


Figure 2: The field directions for the Horizontal (regular) and Vertical (skew) bending dipoles when the magnet is powered with polarity A. Skew dipole: Clockwise rotation of 90°.



Figure 3: The regular and skew field lines for the quadrupoles in the accumulator ring. These field lines for polarity A. Skew quadrupole: Clockwise rotation of 45°.


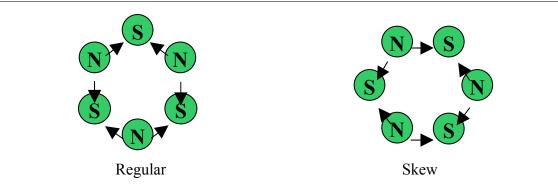


Figure 4: Sextupole field lines for regular and skew magnets. As above, these field lines are for polarity A. Skew sextupole: Clockwise rotation of 30°.

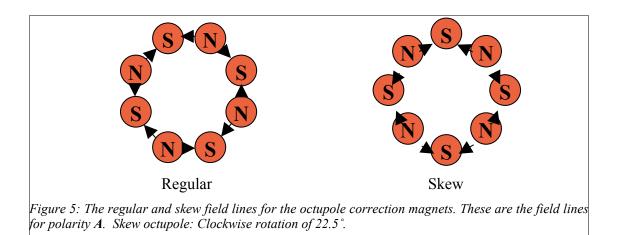

Acknowledgments:

A special thanks to Steve Tepikian, Y.Y. Lee, Deepak Raparia, Joe Tuozzolo and Bob Lambiase for all their help on the issues related to magnet/power supply hook-ups and polarities.

Biography:

- (1) J. Wei, SNS Tech Note #8, SNS Convention on Coordinate Systems, Console Display and Magnet Polarity, July 2001.
- (2) S. Tepikian & C. J. Gardner, SNS Tech Note #114, Multipole Polarities for the SNS Accumulator Ring, July 2002.