



BNL-101550-2014-TECH

RHIC/PG/7;BNL-101550-2013-IR

Optimization Of The Lattice For Intrabeam Scattering For Short Bunches Operation Mode (90 Degree Advance Cell)

A. G. Ruggiero

November 1983

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

OPTIMIZATION OF THE LATTICE
FOR INTRABEAM SCATTERING
FOR
SHORT BUNCHES OPERATION MODE
(90° PHASE ADVANCE CELL)

A.G. Ruggiero

(BNL, November 21, 1983)

①

Same procedure as in RHIC-6

Same beam bunch parameters

This time we assume a regular FODO cell with 90° phase advance.

For the quadrupole gradient B'

$$\frac{B' l_Q}{B \rho} L = \sqrt{2} \quad (1)$$

The symbols here and in the following having the same meaning as in RHIC-6.

Also

$$\begin{aligned} \beta_{\max} &= (2 + \sqrt{2}) L \\ \beta_{\min} &= (2 - \sqrt{2}) L \end{aligned} \quad (2)$$

$$\begin{aligned} \eta_{\max} &= (2 + 1/\sqrt{2}) L \theta \\ \eta_{\min} &= (2 - 1/\sqrt{2}) L \theta \end{aligned} \quad (3)$$

with the average values

$$\bar{\beta} = 2 L \quad (4)$$

$$\bar{\eta} = 2 L \theta \quad (5)$$

(2)

As in RHIC-6, the number of half-cells is

$$N = 2\pi R_0 / L \quad (R_0 = 381.2325 \text{ m})$$

and the bending angle per half regular cell

$$\theta = 2\pi / N$$

Hence eq. (5) can be replaced with

$$\bar{\eta} = 2 \frac{L^2}{R_0} \quad (5)$$

The results, as in RHIC-6, are given in the Table at the end of the paper -

In this table we have marked with a star our choice which corresponds to a luminosity lifetime well in excess of one hour and a full cell length

$$2L = 30 \text{ m}$$

For this cell length

$$\beta_{\max} = 51 \text{ m}$$

$$\eta_{\max} = 1.6 \text{ m}$$

Also

$$N = 160$$

$$\theta = 39.27 \text{ mrad}$$

Again we take the same parameters as in RHIC-6 at 5 GeV/A, the maximum beam full height is

$$a_v = 12.8 \text{ mm}$$

and the maximum full width is

$$a_H = 13.2 \text{ to } 16.0 \text{ mm}$$

These numbers corresponds to about 5 standard deviations.

We show in a second table the same calculation for an initial rms energy spread $\sigma_E/E = 2 \times 10^{-4}$ - as one can see the luminosity lifetime is reduced down to $\frac{1}{3}$ of the previous value and the allowable coupling impedance is down to $\frac{1}{4}$ of the original value.

Sketch of a Regular Cell (Approximated)

Take $L = 15 \text{ m}$

Quadrupole length $l_q = 1.5 \text{ m}$

$B\rho$ for Gold at $100 \text{ GeV/A} = 800 \text{ T-m}$

Quadrupole Gradient = 50.3 T/m

Bore Radius = 4 cm

Field at Pole Tip = 2.0 T

$N = 160$ half-cells


$\theta = 39.27 \text{ mrad}$, bending angle / half-cell

Take $B = 3.0 \text{ T}$

Make \geq dipoles per half a cell

then $2 l_B = \text{~~10.472 m~~ } 10.472 \text{ m}$

that is $l_B = 5.236 \text{ m}$

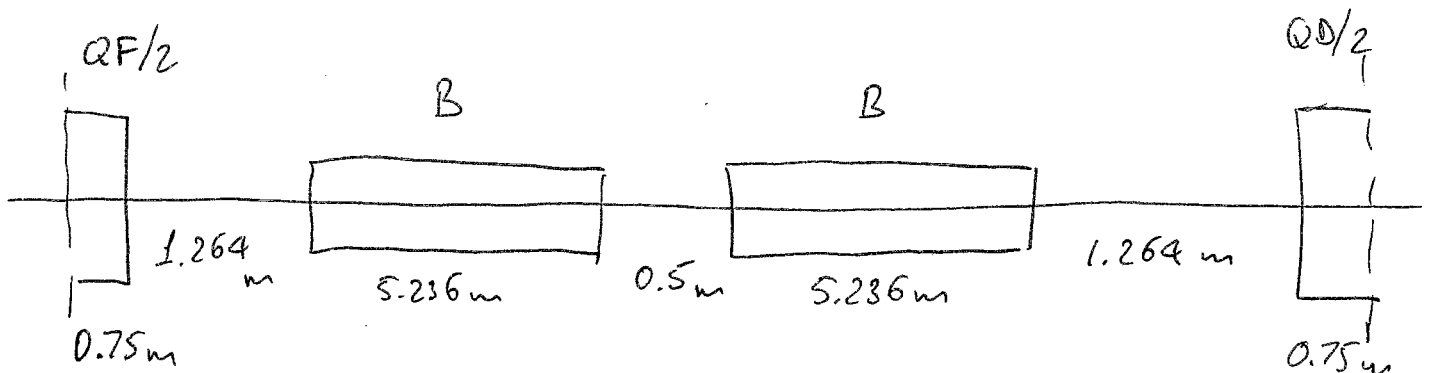

$$\sigma_E/E = 4 \times 10^{-4}$$

(5)

L	$\bar{\beta}$	$\bar{\eta}$	α_E^{-1}	α_β^{-1}	t_L	δ_T	Z/n	
m	m	m	h^{-1}	h^{-1}	hours		ohm	
2.5	5	0.033	-	-	-	136	0.77	
5.	10	0.131	-	-	-	68	2.	
7.5	15	0.295	-	-	-	45	6.6	
10.	20	0.525	.0036	.0020	1.5	34	13	
12.5	25	0.82	.0028	.0013 / .0051	2. / 1.0	27.3	21	
15.	30	1.18	.0024	.0037	1.37	22.7	31	*
17.5	35	1.61	.0020	.0060	1.0	19.5	42	
20.	40	2.10	.0017	.0078	0.9	17.	56	
22.5	45	2.66	.0014	.0092	0.8	15.	73	
25.	50	3.28	.0011	.0120	0.64	13.6	89	

$$\sigma_E/E = 2 \times 10^{-4}$$

(6)

L	$\bar{\beta}$	$\bar{\eta}$	τ_E^{-1}	τ_B^{-1}	t_L	γ_T	Z/n	
m	m	m	h^{-1}	h^{-1}	hours		ahms	
2.5	5	0.83	-	-	-	136	0.19	
5	10	0.181	-	-	-	68	0.5	
7.5	15	0.295	-	-	-	45	1.7	
10	20	0.525	0.0195	0.0027	0.4	34	3.2	
12.5	25	0.82	0.0162	0.0018 / 0.0074	0.5 / 0.35	27.3	5.2	
15	30	1.18	0.0144	0.0055	0.4	22.7	7.7	*
17.5	35	1.61	0.0123	0.0092	0.4	19.5	10.5	
20	40	2.10	0.0107	0.0126	0.36	17	14	
22.5	45	2.66	0.0094	0.0154	0.34	15	18.2	
25	50	3.28	0.0081	0.0178 / 0.0229	0.32 / 0.27	13.6	22.2	