

Simulation Result Phase Jump Mistiming

C. Tang

May 1999

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-98CH10886 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Simulation Result of Phase Jump Mistiming

Chunmei Tang, Jie Wei

May 11,1999

Since the transition jump quads will not be ready until November, in the run of May to July, the timing of the RF phase jump is critical in the transition crossing.

Simulation result of the beam loss for different mis-timings of the RF phase jump without γ_T jump is obtained by TIBETAN.

Parameters of the run:

RF peak voltage is 300000 V. Phase $\phi = 0.1585 = 9.086^\circ$, so the energy gain $\Delta\gamma$ for one turn is 2.04×10^{-5} , time for one turn is $1.28 \times 10^{-5} \text{sec}$, so the $d\gamma/dt = 1.6 \text{s}^{-1}$.

In the simulation the total number of maroc particles is 2000. Initial bunch has a gaussian distribution in the momentum.

Simulation result shows that at the 'correct' phase jump time when γ is exact nominal value, the crossing transition is 81 percent. But if phase jump time is ahead of the 'correct' time a little bit, say 3-5 ms, it will give a larger crossing transition efficiency.

In the mistiming range of -10 to +5 ms, the crossing efficiency can reach above 80 percent.

Simulation results is shown in the following table and graph:

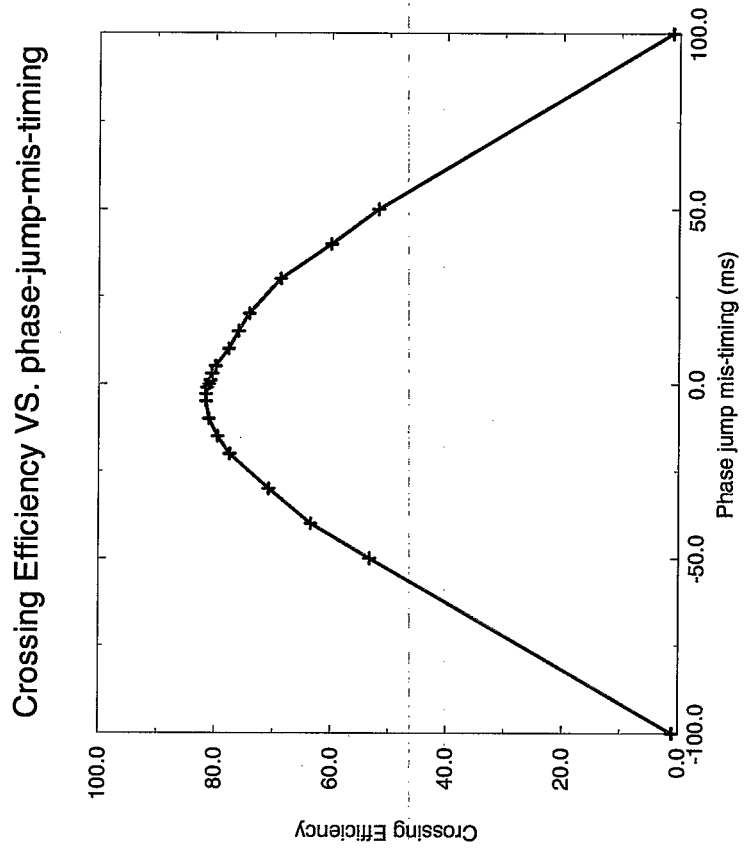


Figure 1: Crossing efficiency at different RF jump mis-timing.

Table 1: Crossing efficiency at different phase jump time

Delay time of RF jump (ms)	Crossing efficiency(%)
-100	1.1
-50	53.3
-40	63.5
-30	70.7
-20	77.5
-15	79.6
-10	81.1
-5	81.6
-3	81.6
-1	81.4
0	81.0
1	80.8
3	80.5
5	79.9
10	77.7
15	76.0
20	74.1
30	68.7
40	60.0
50	51.9
100	1.2